



UPI

API and Data
Documentation



Table of Contents

Contents

Request and Response Field Conventions and formatting	5
Common Request Parameters.....	5
Following are the Parameters which are common in all the API.	5
Common Result Fields	8
Common Response Code List.....	9
Sample Application Flow and API Usage	10
Device Registration flow	10
Add Account.....	10
Pay to VPA.....	11
Collect from VPA	11
Pay to Global Address	11
Single Pay to handle VPA & Global Address	13
Pay to Merchant VPA.....	13
Merchant Refund.....	13
Collect Auth.....	14
Collect Merchant	14
Balance Inquiry	14
Change MPIN	14
RESET MPIN	15
Utility API	16
List Keys.....	16
List PSP.....	18
List Account Provider	20
Device Registration and Profile Setup	24
Get Token	24
List PSP keys	26
Get Profile Details	29
Get Profile ID based on Mobile number.	31
Update User Mobile	33
Update User Device.....	35
Deregister Profile	37
Account Management API	41
Virtual Address Availability.....	41
Generate OTP	43
List Accounts.....	46
Register Mobile Number	52
Store Account Details.....	62
List Virtual Addresses	66
List Verified Addresses Entries.....	68
All Verified Addresses	70
List Customer Accounts	72
Change Primary Account.....	76
Pay to contact.....	79

Transaction API.....	84
Validate Virtual Address.....	84
Pay to Virtual Account (VPA)	87
Pay Request Global Address	97
Common Pay Request	107
Collect Request	128
Get Pending Request	134
Approve/Reject Pending Collect Request.....	137
Transaction Status.....	146
Balance Inquiry.....	149
Mini Statement.....	155
Change MPIN.....	159
Pay to Merchant VPA.....	164
TransactionsPull.....	178
Merchant Transaction API	181
Merchant Store Account Details	181
Merchant collect Request	186
Merchant Refund Request	194
API.....	196
Manage Verified Addresses.....	196
Get Auto created VPA.....	200
Device Binding.....	203
Reclaim VPA.....	205
Block Unblock Customer	208
Pull SMS Request	209
Get VPA Details	211
Get Transaction Details	213
Get Transaction History	215
Blocked Unblocked VPA	218
Blocked VPA List	220
UDIR API's	223
Get Complaint Reason Codes	223
Raise Transaction Complaint.....	224
Get Complaint List.....	227
Check Transaction / Complaint / Dispute status.....	229
Request Dispute (for Back-office use only).....	236
Mandate API's	239
Manage Mandate.....	239
Get Pending Mandates.....	246
Approve/Reject pending mandates	248
Get All Mandates	251
Mandate History (History of financial mandates only)	255
Initiate Mandate Collect.....	257
Sample Callback	261
Getupinumber.....	263
manageupinumber.....	269
listupinumber.....	277

Gateway Error Codes	279
---------------------------	-----

Request and Response Field Conventions and formatting

- All the RESTful APIs are provided with HTTP POST method.
- Post the request parameter as JSON. Request content type should be “application/json”
- Response content type will be “application/json”

Common Request Parameters

Following are the Parameters which are common in all the API.

Field	Type	Description
device-id	Alphanumeric	Unique device ID. Device ID will be used by NPCI common library for creating challenge/token, encrypted MPIN. Use device id / android id for the for the device id parameter. Ideally value should not change for the device lifetime. If channel is unable to populate the device ID, need to send mobile number as the value in this parameter. Note: if device id used while setting MPIN and used while transaction are different then transaction will be rejected at NPCI end. Please check NPCI common library documentation for usage of the device id parameter.
mobile	Mobile number	10-digit Mobile Number
seq-no	Alphanumeric	Transaction Sequence Number. Unique transaction id created by the mobile application. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. Sequence Number used for encryption and send in the "seq-no" field must be same.

		Otherwise transaction will be rejected at the NPCI end. Please check NPCI common library documentation for usage of the sequence number parameter. Value can be generated using java.util.UUID class. Append 3 character bank sequence prefix Shared by bank.
channel-code	String	Channel code shared by the bank. The code for the source application from which the transaction will be initiated.
geocode	Alphanumeric	Geo code of the device
Location	String	Location of the device
ip	Alphanumeric	IP address of the device
deviceType	String	Type of the device
os	Alphanumeric	Operating system of the device
app	Alphanumeric	App id
capability	Alphanumeric	Device capability
institution-type	Alphanumeric	Only these two modes of payment type is admissible. 1.MTO- Money Transfer Operator 2.BANK
institution-route	Alphanumeric	Only these two modes of payment route is admissible. 1.MTSS-Money transfer service scheme 2.RDA- Rupee Drawing Arrangement
institution-name	Alphanumeric	Name of the institution
institution-acnum	Alphanumeric	Acc number for the institution
purpose-code	Alphanumeric	Institution code
purpose-note	Alphanumeric	Note
originator-name	Alphanumeric	Name of the institution
originator-type	Alphanumeric	Type of the institution
originator-refno	Alphanumeric	Reference number
originator-location	Alphanumeric	Location
originator-city	Alphanumeric	City
originator-country	Alphanumeric	Country of the institution
originator-geocode	Alphanumeric	Geocode of the institution
bene-name	Alphanumeric	Beneficiary name
telecom	String	Telecom operator name
ref-url	Alphanumeric	This is optional param, if any api contains this param switch will populate this value in refurl tag and will send it to npc. If channel does not send this param then switch will pick default ref-url which is configured in sysconfig table and will populate in ref-url tag.

Common Result Fields

Field	Type	Description
success	Boolean	Denotes if API call has successfully completed on the UPI server. true – Check response field value for the actual result. false - API is failed to process. Check response field value for the actual error code.
response	Number	API Response code. Denotes various success and error codes. 0 – API is successful. Nonzero – check result code description. Refer common response code. API specific error codes listed in API documentation.
message	String	Descriptive message denoting API result. Should be only used for logging and debugging purpose. Note: Actual value returned can be different than sample dump.
UpiTranlogId	Number	Internal ID generated on the Switch. UPI will return this value for each transaction processed in the switch.
BankRRN	Number	The Reference number of the transaction.
SeqNo	Alphanumeric	seq-no input parameter will be echoed back.
UserProfile	Number	If present in the response, denotes Profile ID of the user. Returned in the of Register Mobile API/ Store Account Details API.
MobileAppData	String	If present in the response, denotes the API specific information. API having MobileAppData field will documented specifically. Specific format and description will defer for each API. NOTE: MobileAppData value will be always “STRING”. Depending on the format application need to parse value. RAW Text - Either ‘ ’ Or ‘=’ separated value. XML– Stringified XML

		JSON – Stringified JSON. For the readability purpose, in the most API. MobileAppData is shown as JSON object rather than Stringified JSON.
ValidationSummary	JSON Object	If present in the response, denotes validation error.

Using “success”, “response” fields will give actual API result. “MobileAppData” field details will vary depending on the API.

Common Response Code List

Field “success”	Field “response”	Description
true	0	API Successful, check API description for details.
false	1	User profile not found
false	2	OTP not matched
false	3	ICICI OTP engine not available
false	4	Response parsing error
false	5	Virtual address already exists
false	6	UPI user already present
false	7	OTP request rejected
false	8	Mobile registration rejected
false	9	Transaction rejected
false	10	Insufficient data
false	11	Invalid data
false	12	Invalid device ID
false	13	Invalid Channel Code
false	14	Sequence Number not present
false	15	Original record not found
false	16	Record not found in va-account mapping
false	17	Key not present
false	18	RIB request Failed
false	23	Input Format Error. Check Validation Summary array in JSON response.
false	5	UPI Server internal error.
false	6	UPI Switch Error ** Only for financial transaction.
false	91	Transaction Initiated

Validation Error: For all the APIs the following would be the format for validation/Input format errors

Sample Application Flow and API Usage

Mobile application flow described here is only for demonstrative purpose. It shows different API which needs to call for supporting UPI feature. Review all documented API before actual implementation.

Colour Conventions

API Call	
Application Flow	
NPCI Common Library Flow	

Device Registration flow

- 1

Get Challenge (Initial)
- 2

Get Token
- 3

Register App
- 4

Store Token in Secure Storage

Using NPCI common library, application can get different type of Challenge (Initial, Rotate, Reset). Please check NPCI common library documentation for the details.

Application should check if locally stored token is expired and then initiate Device Registration flow with rotate token.

Add Account

- 1

Input: Virtual Address (alternatively Select existing VPA)
- 2


Check VPA Availability (Required in case of New VPA)
- 3

List Account Provider
- 4

Select Account Provider
- 5


List Accounts
- 6

Select Account, Check MPIN for Account

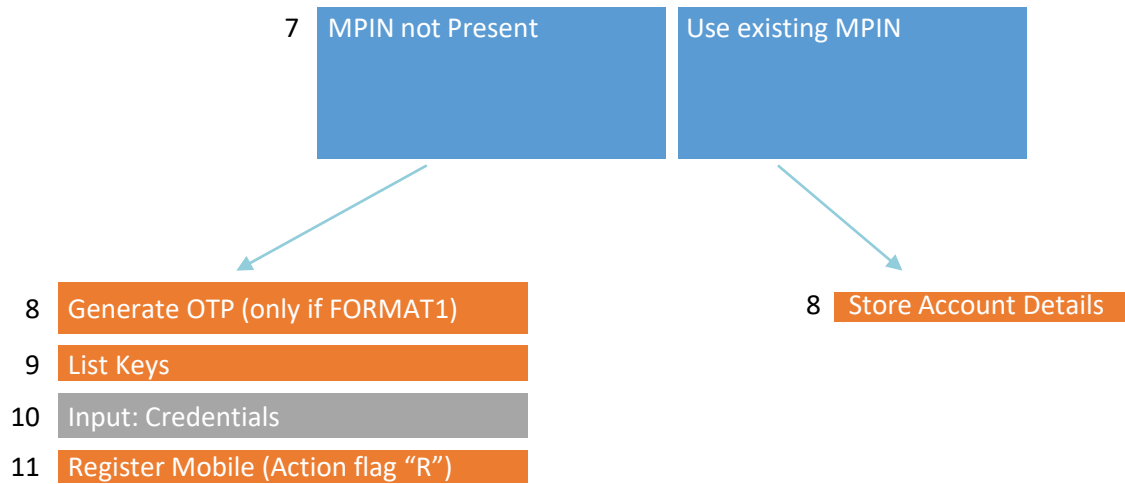


Suggestion: Application could call the List Keys on start-up and cache Keys locally in memory. Response of the List Keys is required input for NPCI common library. Henceforth List Keys in not included before "Input:Credentials" assuming key data is available locally. If not application need to call List Keys.

Pay to VPA

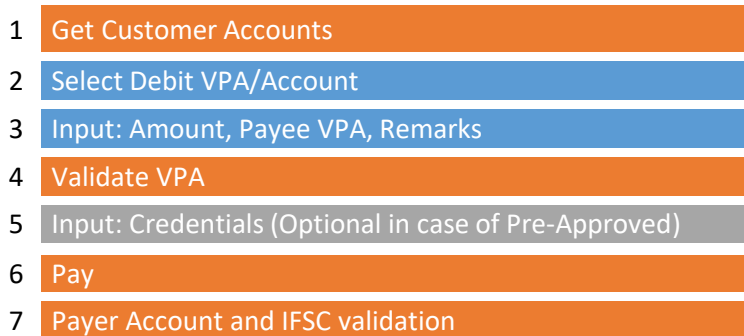

Collect from VPA

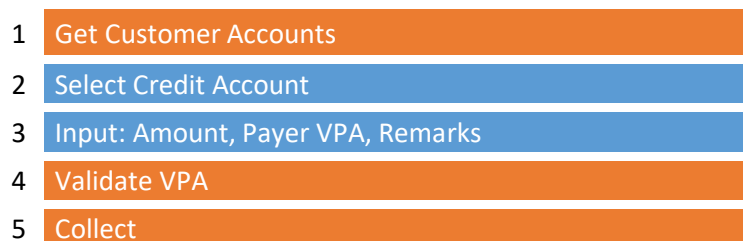

Pay to Global Address



2	Select Debit VPA/Account
3	Input: Select Global Address Type
4	Input: Global Address Type, Amount, Remarks
5	Validate VPA
6	Input: Credentials (Optional in case of Pre-Approved)
7	Pay Global

Single Pay to handle VPA & Global Address

- 1 Get Customer Accounts
- 2 Select Debit VPA/Account
- 3 Input: Select Global Address Type
- 4 Input: Global Address Type, Amount, Remarks
- 5 Validate VPA
- 6 Input: Credentials (Optional in case of Pre-Approved)
- 7 Pay / Pay Global


Pay to Merchant VPA

- 1 Get Customer Accounts
- 2 Select Debit VPA/Account
- 3 Input: Select Global Address Type
- 4 Input: Global Address Type, Amount, Remarks
- 5 Validate VPA
- 6 Input: Credentials (Optional in case of Pre-Approved)
- 7 Pay to Merchant VPA


Merchant Refund

- 1 Merchant Refund (Refund details population)
- 2 Merchant Online Refund


Collect Auth

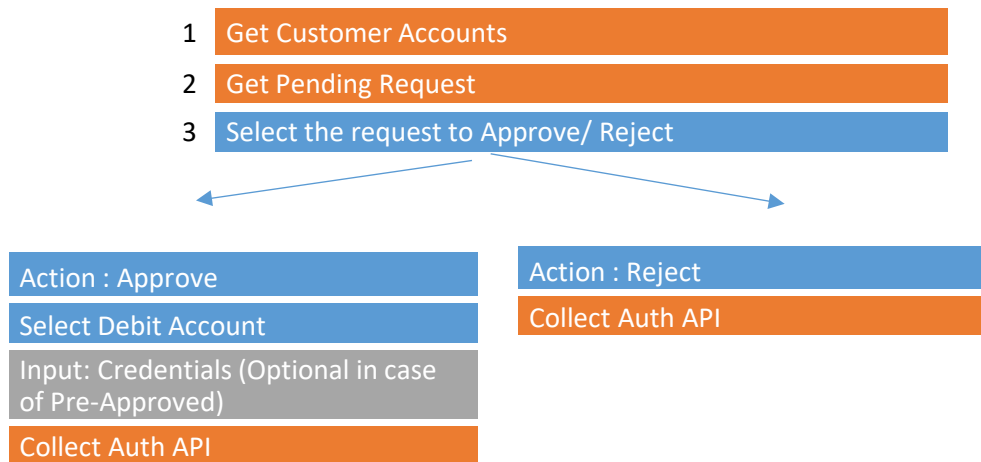


Collect Merchant

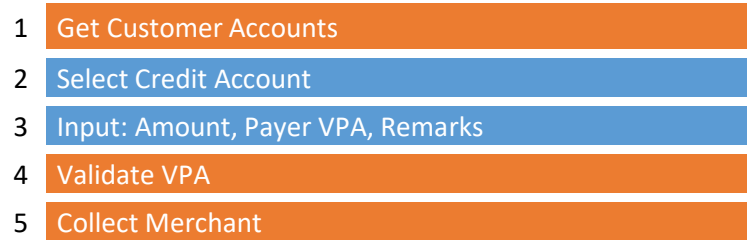

Balance Inquiry

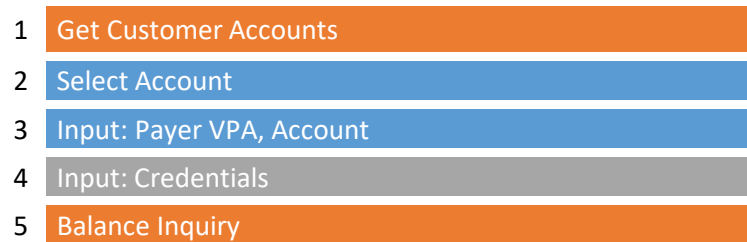

Change MPIN

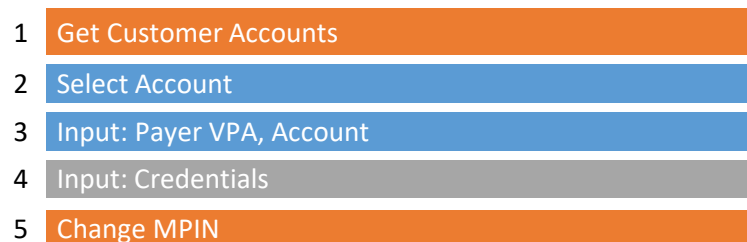

RESET MPIN

- 1 Get Customer Accounts
- 2 Select Account
- 3 Input: Payer VPA, Account, Action-Flag = M, Card details
- 4 Input: Credentials
- 5 Request OTP
- 6 Register Mobile (Action flag "P")

Utility API

List Keys

This API will return the list of encryption key for NPCI common library. Mobile application can call API once app instance is started and cache the Keys in memory.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListKeys>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ListKeys>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement
2	mobile	M	10	F	N	Refer Common Parameter mobile
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "604313532377",
  "UpiTranlogId": "733",
  "UserProfile": "",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "<?xml version='1.0' encoding='UTF-8' standalone='no'?'><upi:RespListKeysxmlns:ns2='http://npci.org/upi/schema/'><Head msgId='1GRDBknsP0wrkckXWkra' orgId='NPCi' ts='2016-02-11T11:05:47+05:30' ver='1.0'/'><Resp reqMsgId='4ed9a379cbee40d5a5593a10a99a63a6aaa' result='SUCCESS'/'><Txn id='e52b1e08d8514e339184bc4dcebc2d8aaa' note='Account provider Listing' refId='' refUrl='' ts='2016-02-11T11:05:31+05:30' type='ListKeys'/'><keyList><key code='NPCi' ki='20150822' owner='NPCi' type='PKI'/'><keyValue xmlns:xs='http://www.w3.org/2001/XMLSchema' xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance' xsi:type='xs:string'>MIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEArIIEHkJ2TYgO/JUJQI/sxDgbDEAIuy9uTf4DItWeIMsG9Auiloj9R+dwAv8S6/9No/z0csw4UnsHQG1ALVixFznLizMjaVJTJ+yTS9C9bYEFaKrQh8b4jje7SC7rZ9/DtZGsaWaCaDTyuZ9dMHrgcmJjeklRKxl4YVmQJpzYlRk4z0pyY+INPBqs+aiwJa53ZogcUGBhx/nIXfDDvV0tKzNb/08U7dZuXoiY0/McQ7xEiFcEtMpEJw5EB4o3Rhe9j/IQ0vc7l/BfD85+YQ5rJGk4HUB6GrQXHzfHvIOF53l1Yb0IX4v9q7HiAyOdgg0+PVzXMSbrCFBrEjGZD7QIDAQAB</keyValue></key></keyList><Signature xmlns='http://www.w3.org/2000/09/xmldsig#'><SignedInfo><CanonicalizationMethodAlgorithm='http://www.w3.org/TR/2001/REC-xml-c14n-20010315'/'><SignatureMethodAlgorithm='http://www.w3.org/2001/04/xmldsig-morse-sha256'/'><Reference URI=''><Transforms><TransformAlgorithm='http://www.w3.org/2000/09/xmldsig#envelopedsignature'/'></Transforms><DigestMethodAlgorithm='http://www.w3.org/2001/04/xmldsig-sha256'/'><DigestValue>UblzXfyKml1wF5ynC6E+aL+yS7IAE4092oK7WBkJiAg=</DigestValue></Reference></SignedInfo><SignatureValue>f7e1PI0jTMRt0+gprC/pI80Pi4ABlFEIP+dE00ruki6mngriRjBU20y5ZrhHT8g/lqP5aXcgvYFX\n+ukRDJQazkTeDCmBwQqODInlUv88TD5iEa0XSkRhuZ1jIFth4dT/emR11eF70NPi9yiy4AS5DmI1\np0NV1b19j\nza7Up1mfr63AyrePfrmJ8lGz5v4JmzEVCLjURnIfxA7Hn2FmpUPzNduGUT4j6tOHDz\nni4zT8GyhguqXEX2EkS2WodQL2l/gCEK/Nwaeu2r0+yREFA+IIejWH3XYt3YWwmsgox80aXf13BQd\nnd/Bjb4sqddr42rE5y5mZLzs/IV/3pkb98xqSCg==</SignatureValue><KeyInfo><KeyValue><RSAKeyValue><Modulus>01DqzBsJTyMHT2S9MK5AIyFXNU646kwi0K3uymXIy9EW0nRKNKRkeIRTlGwX4wEnymGtGgX5B/Ij\nn1e1kL N4VJ9Gp1DV+wF0Lp2i2q4E6uRiWiZsq42MCQgv8Fq/IPjqPbeP9yh/8YPmBiMehBmhQd3\nnqz177C03k6d0yBIO5q/zXneTK9uFBNEL5yNpukrLGBcf3b9VHsjXpEaQrxGSMHCgNwPQgXpEcBr5\nn0J0/XxWbgMCZMlkYe1d6gswjuCRZ/xxJwEfbS05AsnPTYqXSIjyhgi9REtYnzaWw0BN4JCqt0pM\nnL0ja23lUwVJUwW
```

```
kwNGKBXvkGoXUln8Sf7PIv7w==</Modul us><Exponent>AQAB</Exponent></RSAKeyValue></ KeyValue></KeyInfo>
></Signature></upi:ResplListKeys>"
}
```

NOTE: Value in the MobileAppData field is need to send as input to NPCI common library. Please check NPCI guidelines for uses of the MobileAppData field. Sometimes Mobile add data will be having unnecessary newline characters. Remove newlines before passing data to NPCI common library.

Response Code

List Keys	
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	invalid channel code
0014	sequence no not present
0017	keys not present
0031	mobile no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0091	Transaction Initiated
9999	UPI Technical Error

List PSP

This API will return the list of the Payment System Player(PSP).

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListPSP>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ListPSP>

Method Name : POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user

3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

Sample Request with dummy Values

```
Request {
  "mobile":"9028909024",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605614035665",
  "UpiTranlogId": "1476",
  "UserProfile": "",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": {
    "details": {
      "psp": [
        {
          "id": "4",
          "name": "HDFC Bank"
        },
        {
          "id": "5",
          "name": "ICICI Bank"
        },
        {
          "id": "6",
```

```

    "name": "SBI"
  }
]
}
}
}

```

MobileAppData will be JSON field containing PSP array in MobileAppData.details.psp
Field.Response Code

Response Code

List PSP	
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0031	mobile no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0091	Transaction Initiated
9999	UPI Technical Error

List Account Provider

Returns the list of Banks live on NPCI-UPI. This list will be updated as more banks get live on the platform.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListAccountProvider>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ListAccountProvider>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

Sample Request with dummy Values

```
Request {
  "mobile":"9028909024",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "605614917663",
  "UpiTranlogId": "1475",
  "UserProfile": "",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
}
```

```

"MobileAppData": {
  "details": {
    "providers": [
      {
        "id": "3",
        "reg-mob-format": "FORMAT1",
        "iin": "901344",
        "account-provider": "AxIS"
      },
      {
        "id": "4",
        "reg-mob-format": "FORMAT2",
        "iin": "901344",
        "account-provider": "BOB"
      },
      {
        "id": "81",
        "reg-mob-format": "FORMAT1",
        "iin": "901345",
        "account-provider": "HDFC"
      },
      {
        "id": "2",
        "reg-mob-format": "FORMAT1",
        "iin": "901346",
        "account-provider": "ICICI"
      },
      {
        "id": "121",
        "reg-mob-format": "FORMAT1",
        "iin": "901359",
        "account-provider": "IDBI"
      },
      {
        "id": "64",
        "reg-mob-format": "FORMAT1",
        "iin": "701333",
        "account-provider": "YES"
      }
    ]
  }
}

```

MobileAppData will be JSON field containing Account Providers array in [MobileAppData.details.providers](#) Field.

Account fields

Field	Description
-------	-------------

id	Account Provider ID as stored in the UPI system. UPI System identifies Account Provider with this value. All the API hereafter where “account-provider” is input field, should use this value.
reg-mob-format	Value of this field will denote credentials required for this account provider. FORMAT1: Add account – OTP and Set MPIN Transaction - MPIN FORMAT2: Add account – ATM PIN and Set MPIN Transaction – MPIN
iin	IIN of the account provider.
account-provider	Account Provider Name

Response Code

List Account Provider	
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0031	mobile no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0091	Transaction Initiated
9999	UPI Technical Error

Device Registration and Profile Setup

Get Token

This API will return the token from NPCI to be sent in the List Key API.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetToken>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetToken>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	app-id	M	255	V	AN	Application ID generated by the channel.

6	sub-type	M	20	V	A	Type of Token E.g. as per NPCI : initial,reset,rotate
7	challenge	M	1024	V	A	Get Challenge: Call the Get Challenge service to receive a challenge from Common Library. Format: <code,ki,base64 encoded encrypted challenge>

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "lmobile",
  "app-id": "ghjuyu678854346",
  "sub-type": "rotate",
  "challenge": "<code,ki,base64 encoded encrypted challenge>"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "604313532377",
  "UpiTranlogId": "733",
  "UserProfile": "",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "<?xml version='1.0' encoding='UTF-8'><Head msgId='1GRDpegBbA554cutoILT' orgId='NPCI' ts='2016-04-01T16:15:11+05:30' ver='1.0'><Resp reqMsgId='4af378aa295445e1b7e62b40135ee4c5aaa' result='SUCCESS'><Txn id='11102e13fca45f18946815646a2c 874zzz' note='GetToken' refId='11102e13fca45f18946815646a2c 874zzz' refUrl='https://psp.ref.url' ts='2016-04-01T16:18:09+05:30' type='GetToken'><keyList><key code='NPCI' ki='20150822' owner='NPCI' type='CLF'><keyValue xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance' xsi:type='xs:string'>U++lwbgtvsbqEEp9foYG ejYC1eBwzY1WoA9MQD1VpHs=</keyValue></key></keyList><Signature xmlns='http://www.w3.org/2000/09/xmldsig#'><SignedInfo><CanonicalizationMethod Algorithm='http://www.w3.org/TR/2001/REC-xm1-c14n-20010315'><SignatureMethod Algorithm='http://www.w3.org/2001/04/xmldsig-more#rsa-sha256'><Reference URI=''><Transforms><Transform Algorithm='http://www.w3.org/2000/09/xmldsig#enveloped-signature'></Transforms><DigestMethod Algorithm='http://www.w3.org/2001/04/xmldsig#sha256'><DigestValue>2 Km85JoKkYutiTt0CcyTgBGHl+CzEA6XvIthMrOa3jg=</DigestValue></Reference></SignedInfo><SignatureValue>FkM 55 OlpdSA0qVsMeDYPP1/zWxHovEpc arj6rM9+j/N47SBjK4RIGM38PqEmHix7s0SsupeUCXrMyUdq UNTG7ZJ1FMHcdsLGIaD cFsju1q0TIT61sf0KJBi/iSx3lQq7Hvr3WkHg/yZgXXORRIZI1pev+ho WDNWyiM7sKU9</SignatureValue></Signature></Head><Body><Token value='<code,ki,base64 encoded encrypted challenge>'></Token></Body></Resp></Transaction></Head></MobileAppData>"
}
```

```

0ZQumIRkSrWgkeq YXnY/rgjr66D L1stRSDlj8fuAhEbPej9YhVvzfa/5FhfJ0xaI7BIgCONJJRF8GvAL /7VklXPH53TnD
00P0jnSBiXmj/JuFJfvwNMe9yMaySv N4kv bU+Du9+Vmv6ewYax6a2hvv0JrAWauZ CiCg22vaj PqrQATw==</Signatur
eValue><K eyInfo><KeyValue><R SAKeyValue>< Modulus>01DqzBsJTyMHT2S9MK5AIyFXNU646kwi0K3uymXIy9EW0
nRK NKRkeIRTlGwX4wEnymGtGgX5B/Ij1e1kLN4VJ9 GplDV+wf0Lp2i2q4E6uRiWIsqq42MCQgv8Fq/IPqjq PbeP9yh/8
YPmBiMehBmhQd3qz177C03k 6d0yBIO5q/zXneTK9uFBN EL5yNpukrLGBcf3b9VHsjXpEaQrxGSMHCgNwpQgXpEcBr50J0/
XxWbgM CZMlkYe1d6gswjuCRZ /xxJwEfbS05AsnPTYqXSIjy hgEi9REtYnzakW0BN4JCqt0pML0ja23lUwVJUwkwNGKBX
vkGoXUln8Sf7PIv7w==</Mo dulus><Expo nent>AQAB</Expo nent></RSAKeyValue></KeyValue></KeyInfo ></S
ignature></ns2:RespListKeys>"
}

```

Please check NPCI guidelines for uses of the value of MobileAppData field. MobileAppData value will be in XML format. Applications should parse XML and pass token form XPATH **keylist.key.keyvalue**.

Response Code

Get Token	
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0031	mobile no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0091	Transaction Initiated
0040	key token not received
9999	UPI Technical Error

List PSP keys

This API will return the token from NPCI to be sent in the List Key API.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListPSP>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ListPSP>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	app-id	M	255	V	AN	Application ID generated by the channel.
6	pspOrgId	M	06	F	AN	Org ID which is present in the signed intent/QR code.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "app-id": "ghjuyu678854346",
  "pspOrgId": "156901"
}
```

Response

```
{
  "success": true,
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "825014001052",
  "UpiTranlogId": "1052",
  "UserProfile": "",
  "SeqNo": "ssYTMc57785bAAAAAAAAA1515510867358",
  "MobileAppData": {
    "details": {
      "key": [
        {
          "code": "700001",
          "type": "CLF",
          "owner": "xxx",
          "ki": "yyyymmdd",
          "key-value": "Token|Encrypted/base64 encoded certificate"
        }
      ]
    }
  }
}
```

Please check NPCI guidelines for uses of the value of MobileAppData field. MobileAppData value will be in XML format. Applications should parse XML and pass token form XPATH **keylist.key.keyvalue**.

Response Code

List PSP Keys	
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0031	mobile no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0091	Transaction Initiated
0040	Keys not received
9999	UPI Technical Error

Get Profile Details

API will return all the details regarding that user profile identified by device id and mobile. Details include profile details, account and its VPA. If same account is mapped to multiple VPA then account will be having multiple entries.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetProfileDetails>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetProfileDetails>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the deviceID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "605612478026",
  "UpiTranlogId": "1419",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": {
    "details": {
      "accounts": [
        {
          "mmid": "9229251",
          "default-debit": "Y",
          "default-credit ": "Y",
          "account": "7574353948754",
          "va": "nupur2@ICICI",
          "ifsc": "ICIC0000003"
        },
        {
          "mmid": "xxxx",
          "default-debit": "N",
          "default-credit ": "N",
          "account": "784125655710",
          "va": "nupur@ICICI",
          "ifsc": "ICIC0000101"
        }
      ]
    },
    "email": "prashant.takale@sarvatra.in",
    "name": "Prashant Takale",
    "mobile": "9921797047"
  }
}
```

Response Code

Get Profile Details	
0000	Success
0001	user profile not found

0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	invalid channel code
0014	sequence no not present
0031	mobile no not present
0037	Invalid Virtual address
0038	Mobile number and profile Id doesn't belong to same User
0039	duplicate seq no from channel
0091	Transaction Initiated
9999	UPI Technical Error

Get Profile ID based on Mobile number.

API will return the UPI profile ID based on the mobile number of the user.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetProfileID>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetProfileID>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user

3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "604413809446",
  "UpiTranlogId": "788",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": ""
}
```

Response Code

Get Profile ID based on Mobile number	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel

0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
0001	user profile not found
9999	UPI Technical Error

Update User Mobile

API will update the mobile number of the existing user profile.

UPI System assumes that, Channel has already verified/authenticated new mobile number and confirm that belong to same user.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/UpdateMobile>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/UpdateMobile>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	This mobile number will be updated against the profile ID.

3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

Sample Request with dummy Values

```
DATA {
  "mobile": "9028909024",
  "device-id": "84521654864135 ",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3 ",
  "channel-code": "Imobile",
  "name": "abc",
  "email": "abc@gmail.com",
  "aadhar": "845212542365",
  "address": "Pune",
  "profile-id": "10"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "604313532377",
  "UpiTranlogId": "733",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": ""
}
```

Response Code

Update User Mobile	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
0038	Mobile number and profile Id doesn't belong to same User
0001	user profile not found
9999	UPI Technical Error

Update User Device

This API will update the mobile number of the existing user.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/UpdateDevice>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/UpdateDevice>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement. This device ID will be updated/overwritten against the profile ID.
2	Mobile	M	10	F	N	Mobile Number of the user

3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "new-device-id": "845216548641256"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "604313532377",
  "UpiTranlogId": "733",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": ""
}
```

Response Code

Update User Device	
0000	Success

0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0001	user profile not found
0038	Mobile number and profile Id doesn't belong to same User

Deregister Profile

API work in two flows - depending on the value of "delete-va-flag" API will either delete specific VPA or deregister complete profile altogether.

When "delete-va-flag" is false

This API will deregister the user based on the profile ID. All the accounts and VPAs associated with the profile will be deactivated and cannot be used further.

When "delete-va-flag" is true

Virtual Address specified in the virtual-address field will be deleted.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/DeregisterProfile>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/DeregisterProfile>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data Type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.

2	Mobile	M	10	F	N	This mobile number will be updated against the profile ID.
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
6	Reason	M	100	V	A	Reason for which the user wishes to delete virtual address
7	virtual-address	O	255	V	A	Virtual address which needs to be deleted. In case of RESTRICTED channels, it will be hashed value for other channels it will be clear value for VPA E.g. <va:name>@<yourpsp:name>
8	delete-va-flag	M	10	V	A	Value should be true if virtual-address entered is to be deleted.
9	Delete Specific VPA					Value should be true if virtual-address entered is to be deleted.

Sample requests with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "lmobile",
```

```

"profileid":"10",
"reason":"not in use",
"virtaul-address":"xyz@imobile",
"delete-va-flag":"true"
}

```

De-register complete profile.

```

Request {
  "mobile":"9028909024",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profileid":"10",
  "reason":"not in use",
  "delete-va-flag":"true"
}

```

Response

```

{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "604313532377",
  "UpiTranlogId": "733",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0ec a5fdecc37ff23f3",
  "MobileAppData": ""
}

```

Response Code

De-Register Profile	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0001	user profile not found
0038	Mobile number and profile Id doesn't belong to same User

Account Management API

Virtual Address Availability

This API will check if the entered provided address is available for use. If available user can add virtual address.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/VirtualAddressAvailability>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/VirtualAddressAvailability>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	virtual-address	M	255	V	AN	Alias name with which the user can be identified by his registered entity. E.g. <va:name>@<yourpsp:name>

Sample Request with dummy Values

```
Request {
  "Data mobile": "9028909024",
```

```

"device-id":"84521654864135",
"seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"channel-code":"Imobile",
"virtual-address":"abc@icici"
}

```

Response:

Scenario	Field "success"	Field "response"	Field "UserProfile"	Meaning
1	True	0	Not Present	Virtual address can be used.
2	True	0	Present	Virtual address is already mapped to current customer UPI profile. Virtual address can be used.
3	False	5		Virtual address cannot be used.

Scenario 1: Virtual is available for use.

```

{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "604611519030",
  "UpiTranlogId": "818",
  "UserProfile": "",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "Virtual Address can be used"
}

```

Scenario 2: Virtual is already mapped to current user, can be used.

```

{
  "success": true,
  "response": 0,
  "message": " Transaction Successful",
  "BankRRN": "604611519030",
  "UpiTranlogId": "818",
  "UserProfile": "1",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "Virtual Address can be used"
}

```

Scenario 3: Virtual address is not available.

```

{
  "success": false,
  "response": 5,
  "message": " Virtual Address already exists",
  "BankRRN": "604611519030",
  "UpiTranlogId": "818",
  "UserProfile": "",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
}

```

```
"MobileAppData": ""
}
```

Response Code

Virtual Address Availability	
ActCode	Response
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0031	mobile no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0055	virtual address already exist
0091	Transaction Initiated
9999	UPI Technical Error

Generate OTP

For mapping account to customer VPA, as a authentication purpose issuing bank will validate One Time Password (OTP). UPI system will initiate generate OTP request to NPCI, which in turn call issuing Bank service.

NOTE: This API should only be called if account provider is supporting "Format 1".

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GenerateOTP>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GenerateOTP>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user

3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	ifsc	O	11	F	AN	Ifsc code of the account. This parameter is not required for PPI Channel.
7	account-number	O	20	V	AN	Account Number for which the OTP should be generated. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
8	payer-name	O	50	V	AN	Name of the payer *System will not verify/validate the authenticity of the parameter.
9	payer-va	O	255	V	AN	Virtual Address of the payer. *System will not verify/validate the authenticity of the parameter.
10	profile-id	O	10	V	N	This parameter needs to be populated when the user is already registered. This is Mandatory In case of RESTRICTED channels.

Sample Request with dummy Values

```
Request {
  "mobile":"9028909024",
  "account-provider":"1",
  "device-id":"84521654864135",
```

```

"seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"channel-code":"Imobile",
"accountnumber":"652045212536",
"ifsc":"HDFC00006520",
"payer-name":"ABC",
"payer-va":"ABC@icici"
}

```

Response

```

{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "600111961117",
  "UpiTranlogId": "12",
  "UserProfile": "",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "SUCCESS"
}

```

Application can ignore MobileAppData field value.

Response Code

Generate OTP	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated

9999	UPI Technical Error
00ZR	INVALID / INCORRECT OTP
00ZS	OTP EXPIRED
00ZT	OTP TRANSACTION LIMIT EXCEEDED
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgId mismatch
0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available

List Accounts

Returns customer accounts for given account provider registered with provided mobile number.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListAccounts>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ListAccounts>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	payer-name	O	255	V	AN	Name of customer
7	link-type	O	10	V	AN	MOBILE/AADHAAR
8	aadhaar-consent	O	1	F	AN	Y-Yes, N-No

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "account-provider": "1",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605616025076",
  "UpiTranlogId": "1503",
  "UserProfile": "",
  "MobileAppData": {
    "details": {
      "accounts": [
        {
          "mbeba": "N",
          "mmid": "",
          "name": "DIKHIL CAMESH XXXSALE",
          "aeba": "N",
          "account": "XXXXXXXXX44016",
          "CredsAllowed": {
            "Child": [
              {
                "CredsAllowedSubType1": "MPIN",
                "dLength1": "4",
                "CredsAllowedDLength1": "4",
                "CredsAllowedType1": "PIN",
                "CredsAllowedDType1": "Numeric"
              },
              {
                "CredsAllowedSubType2": "ATMPIN",
                "CredsAllowedDLength2": "6",
                "CredsAllowedType2": "PIN",
                "CredsAllowedDType2": "Numeric",
                "dLength2": "6"
              }
            ]
          }
        }
      ],
      "accRefNumber": "05410100044016",
      "ifsc": "BARB0SHIPOO"
    }
  },
}
```

```

{
  "mbeba": "Y",
  "mmid": "",
  "name": "DIKHIL CAMESH XXXSALE",
  "aeba": "N",
  "account": "XXXXXXXXX04100",
  "CredsAllowed": {
    "Child": [
      {
        "CredsAllowedSubType1": "MPIN",
        "dLength1": "4",
        "CredsAllowedDLength1": "4",
        "CredsAllowedType1": "PIN",
        "CredsAllowedDType1": "Numeric"
      },
      {
        "CredsAllowedSubType2": "ATMPIN",
        "CredsAllowedDLength2": "4",
        "CredsAllowedType2": "PIN",
        "CredsAllowedDType2": "Numeric",
        "dLength2": "4"
      }
    ]
  },
  "accRefNumber": "22110100004100",
  "ifsc": "BARB0GENPUN"
}
]
}
},
"SeqNo": "123ahdkjsadbknbggiudkjdnsakjndecctw"
}

```

MobileAppData will be JSON field containing Account array in [MobileAppData.details.account](#) field.

Account JSON object details

Field	For ICICI Account	For Non ICICI Account
account	Masked account number	Value received from NPCI response
accRefNumber	Actual account number	Value received from NPCI response
Mmid	Default mmid (9229000)	Value received from NPCI response
mbeba (Mobile enabled Bank Account)	"Y" (hard coded)	Value received from NPCI response
aeba (Aadhaar enabled Bank Account)	""	Value received from NPCI response
CredsAllowed	Credentials block details	Credentials block details

Credentials block details (Check NPCI Common library document)

Field	Description
CredsAllowedType	Credential Type PIN, OTP
CredsAllowedSubType	PIN => MPIN or ATM OTP => SMS
CredsAllowedDType	Credential Data type
CredsAllowedDLength	Credential Data length
dLength	Credential Data length (if CredsAllowedDLength field not present) ICICI => 4 NON ICICI => Received in response

CredsAllowed value need to send as input as string to Register Account and Store Account API. This value need to use for capturing credentials from NPCI common library.

Response Code

ListAccounts	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
101	CAR Incorrect Parameters
102	CAR Your Account has been deactivated, Please Contact CSO
103	CAR Incorrect TPIN
104	CAR Authentication Successful, Now Please Change your TPIN
105	CAR New TPIN cannot be same as old TPIN
106	CAR TPIN Changed Successfully
108	CAR Incorrect Processing Code
109	CAR Exceeded the maximum number of incorrect tries
110	CAR Invalid Account Number
111	CAR Invalid Authorization Number

112	CAR Please Enter 4 digit TPIN
113	CAR Max tries exceeded CRN Locked
114	CAR Entered correct TPIN but status is Locked
124	CAR Network Connectivity Errors - Continuous Stream in MSG Logs
124	CAR DB Connectivity Errors OR DB Down - Continuous Stream in MSG Logs
124	CAR DB SQL Unknown Exception – Rare Individual occurrence mixed with continuous stream of other Action Codes
125	CAR Unsuccessful Manual Authentication - Please send correct processing code
126	CAR Please send 2 different parameters
127	CAR Socket Timeout
131	CAR Incorrect No of Column tag
132	CAR Incorrect Sal tag
133	CAR Invalid Reference No
134	CAR Invalid Holding Pattern
135	CAR Invalid xml Data
136	CAR IP Address Not Registered
137	CAR No Matching Accounts Found For The Search
141	CAR Account is Present in CAR, but not registered for BANK@HOME
142	CAR FSID is not 2 for the searching Account
150	CAR Invalid Passwords
151	CAR Invalid CRN -(922Msg)/Invalid Debit Card No/Invalid A/C No - Customer Name -(924 Msg)
950	CAR No Response from backend within specific time period
951	CAR N.A
952	CAR Due to incorrect request ISO message or if the proccode or IP is not registered
953	CAR Due to incorrect response ISO message format
954	CAR Could not connect to backend
955	CAR Internal EAI timeout due to issue in any of its services or if the request/response packet is not as per the schema.
956	CAR N.A
957	CAR N.A
958	CAR Due to incorrect request XML message
959	CAR Due to incorrect response XML message
960	CAR Error in configuration file due to incorrect format
961	CAR Biztalk or MSMQ service cannot be accessed or down
962	CAR Proccode application name or information not entered in config file
963	CAR N.A
964	CAR Proccode template envelope format is incorrect
965	CAR Due to incorrect MessageType & Proccode value in the request/response packet
966	CAR The template does not exist for the proccode in the templates folder
967	CAR Received from Base24 when frontend sends an invalid key in the request message

968	CAR When the process of STAN key being fetched from Base24 application is not complete
970	CAR On start of EAI Base24 service when connection between the service and the Base24 application cannot be established
0U17	PSP is not registered
00XH	Account does not exist
00XC	Member bank not found Rc
0U01	The request is duplicate
0U07	Validation error
0018	RIB Request Failed
0019	CAR Request Failed
0045	RIB Request Timedout
0046	RIB Request Timedout
P01	Payer not present
P02	Payer.Addr must be valid VPA maxlength 255
P03	Payer.Name alphanumeric minlength 1 maxlength 99
P04	Payer.SeqNum numeric minlength 1 maxlength 3
P05	Payer.Type must be present/valid
P06	Payer.Code numeric of length 4
0Z02	Ver numeric/decimal Min length 1 Max length 6
0Z03	Ts must be ISO_ZONE format
0U52	PSP orgId not found
0U17	PSP is not registered
0Z06	MsgId must be present maxlength 35

Register Mobile Number

Register the mobile number with the PSP, validate customer with OTP or MPIN, set MPIN for selected account. In case of other bank account holders channels should invoke register mobile API to authenticate the user based on CardDigits, ExpDate and set MPIN. One record will be created in UPI switch for mapping VA with verified account.

This API will also create a user profile against the mobile number entered, after successful registration. This profile will be used by UPI switch for internal use. The profile id will be returned in response which is expected as input as per the respective API requirement.

Same API will be used for RESET MPIN with action flag as "P"

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/RegisterMobileNumber>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/RegisterMobileNumber>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user.
						The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.

6	Otp	M	1024	V	AN	The OTP would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted otp> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be</i>
---	-----	---	------	---	----	--

						<i>routed to NPCI for decryption. (To be discussed)</i>
7	account-number	M	20	V	AN	Account Number to be mapped to the VA. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
8	mpin	M	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted otp> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be routed to NPCI for decryption. (To be discussed)</i>

9	atmpin	O	1024	V	AN	The ATMMPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted otp> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format,</i>
---	--------	---	------	---	----	--

*then the request will have to be routed to NPCI for decryption.
(To be discussed)*

10	card-digits	M	6	F	N	The last 6 digits of the card mapped to the account registered.
11	expiry-date	M	4	F	N	Expiry date of the card in the format mmyy
12	profile-id	O	10	V	N	For first account registration this parameter will be blank/will not be present. This parameter needs to be populated when the user is already registered and is adding another account.
13	virtual-address	M	255	V	AN	Alias name with which the user can be identified by his registered entity. E.g. <va:name>@<yourpsp:name>
14	ifsc	C	11	F	AN	IFSC code of the account. In case of RESTRICTED channels it is optional for other channels it is mandatory. This parameter is not required for PPI Channel.
15	mmid	O	7	F	N	MMID of the account to which the virtual address will be mapped.
15	account-type	M	20	V	A	Account type of the mapped account
16	name	O	100	V	A	Name of the user. In case of RESTRICTED channels it is optional for other channels it is mandatory.
17	default-debit	M	1	F	A	Flag 'D' to denote to set this account as the default debit account. Value other than 'D' will not set the default debit account.
18	default-credit	M	1	F	A	Flag 'D' to denote to set this account as the default credit account. Value other than 'D' will not set the default credit account.

19	action-flag	M	1	F	A	This flag denotes which action needs to be taken for this API. When the value is R : The profile will be created as per register mobile functionality. If value is P : Only Set Mpin functionality would be initiated.
20	hashed-virtual-address	C	255	V	AN	In case of RESTRICTED channels, it contain Hashed value for the value passed in 'virtual-address' parameter. For other channels this parameter is not required.

*NOTE: The flags for default account are optional. The first account added for the VA will be set as default debit and default credit.

Sample Request with dummy Values

```
Request {
  "otp":"NPCl%2C2015082%2C1.0%7$base64date$",
  "account-provider":"5",
  "mpin":"NPCl,2015082,1.0|$base64data$",
  "mobile":"9028909024",
  "card- digits":"5456",
  "expiry-date":"1117",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel -code":"lmobile",
  "account- number":"87542154623",
  "virtual-address":"abc@icici",
  "name":"abc",
  "default-debit":"D",
  "default-credit":"D",
  "action-flag":"R"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful",
  "BankRRN": "605015273962",
  "UpiTranlogId": "1086",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": ""
}
```

Response Code

Register Mobile/Change MPIN	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00ZR	INVALID / INCORRECT OTP
00ZS	OTP EXPIRED
00ZT	OTP TRANSACTION LIMIT EXCEEDED
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch
0L05	Technical Issue, please try after some time

0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input
0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input
0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input
0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input
0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values
0L20	Trust is not valid
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0U66	Device Fingerprint mismatch
0U48	Transaction id not present
0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	TransactionId or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request
0U57	Payee Amount differs from original request
0U58	Payer Amount differs from original request
0U59	Payee Address differs from original request
0U60	Payer Address differs from original request
0U61	Payee Info differs from original request
0U62	Payer Info differs from original request
0U63	Device registration failed in UPI
0U64	Data tag should contain 4 parts during device registration

0U65	Creds block should contain correct elements during device registration
0U27	No response from PSP
0U28	PSP not available
F01	RegDetails must be present <ReqRegMob/>
F02	RegDetails.Detail must be present
F03	RegDetails.Detail name/value should be present name,value
F04	RegDetails.Detail name not valid
F05	RegDetails.Cred not present
F06	RegDetails.Cred data is wrong
F07	RegDetails.Cred.Otp must be present
F08	RegDetails.Cred.Pin must be present
F09	RegDetails.Cred.Data must be present
F10	RegDetails.Cred.Data encrypted authentication must be present
00ZM	INVALID MPIN
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00XL	EXPIRED CARD, DECLINE (REMITTER)
00XN	NO CARD RECORD (REMITTER)
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XR	RESTRICTED CARD, DECLINE (REMITTER)
00XM	EXPIRED CARD, DECLINE (BENEFICIARY)
00XO	NO CARD RECORD (BENEFICIARY)
00XQ	TRANSACTION NOT PERMITTED TO CARDHOLDER (BENEFICIARY)
00XS	RESTRICTED CARD, DECLINE (BENEFICIARY)
00XU	CUT-OFF IS IN PROCESS (BENEFICIARY)
00XW	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (BENEFICIARY)
00Y1	BENEFICIARY CBS OFFLINE
00YB	LOST OR STOLEN CARD (BENEFICIARY)
00YD	DO NOT HONOUR (BENEFICIARY)
00YF	BENEFICIARY ACCOUNT BLOCKED/FROZEN
00RN	Registration is temporary blocked due to maximum no of attempts exceeded
0U11	Credentials is not present

Store Account Details

For ICICI account, application should only invoke this API to map customer VPA with respective account in UPI switch. It is assumed that, the MPIN for the ICICI account will be already set/present in IMPS. So, this API will not call IMPS set MPIN functionality. Also, other bank account holders, adding a new /other VA to an existing account should invoke this API.

This API will also create a user profile against the mobile number entered, after successful store account details. This profile will be used by UPI switch for internal use. The profile id will be returned in response which is expected as input as per the respective API requirement.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/StoreAccountDetails>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/StoreAccountDetails>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	ifsc	C	11	F	AN	IFSC code of the account. In case of RESTRICTED channels it is optional for other channels it is mandatory. This parameter is not required for PPI Channel.
7	account-number	M	20	V	AN	Account Number selected by the user. In case of RESTRICTED channels it is hashed value.

						This parameter is not required for PPI Channel.
8	Mmid	O	7	F	N	MMID of the account to which the virtual address will be mapped.
9	virtual-address	M	255	V	AN	Alias name with which the user can be identified by his registered entity. E.g. <va:name>@<yourpsp:name>
10	account-type	M	20	V	A	Account type of the mapped account
11	profile-id	O	10	V	N	For first account registration this parameter will be blank/will not be present. This parameter needs to be populated when the user is already registered and is adding a another account.
12	name	M	100	V	A	Name of the user
13	default-debit	M	1	F	A	Flag 'D' to denote to set this account as the default debit account. Value other than 'D' will not set the default debit account.
14	default-credit	M	1	F	A	Flag 'D' to denote to set this account as the default credit account. Value other than 'D' will not set the default credit account.
15	hashed-virtual-address	C	255	V	AN	In case of RESTRICTED channel, it contain Hashed value for the value passed in 'virtual-address' parameter. For other channels this parameter is not required.

*NOTE: The flags for default account are optional. The first account added for the VA will be set as default debit and default credit.

Sample Request with dummy Values

```
Request {
  "device-id":"84521654864135",
  "seq-no":" ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel- code":"Imobile",
  " mobile":"9028909024",
  "account- provider":"5",
  "account-number":"87542154623",
  " ifsc":"ICIC5421544",
  "mmid":"9229001",
  "virtual-address":"xyz@psp",
  "account- type":"Saving",
  "name":"abc",
  "default-debit":"D",
  "default-credit":"D"
}
```

Response

Scenario: Store account is successful.

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "604916025241",
  "UpiTranlogId": "1006",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": ""
}
```

Scenario: Account already exists for the same VPA

```
{
  "success": false,
  "response": 30,
  "message": "Account already mapped to same VA",
  "BankRRN": "604916025241",
  "UpiTranlogId": "1006",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": ""
}
```

Response Code

Store Account Details	
0000	Success
0011	invalid data

0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

List Virtual Addresses

API will return all the virtual addresses mapped to the user's profile(mobile). Application can use this API if only VPA list expected without other details.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListVirtualAddresses>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ListVirtualAddresses>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user

3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	O	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

Sample Request with dummy Values

```
DATA {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605617674574",
  "UpiTranlogId": "1504",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0ec a5fdecc37ff23f3",
  "MobileAppData": {
    "details": {
      "valist": [
        {
          "va": "nikhiladdVA@ICICI"
        }
      ]
    }
  }
}
```

```

    {
      "va": "nikhil@ICICI"
    },
    {
      "va": "nikhil3@ICICI"
    },
    {
      "va": "nikhil3@ICICI"
    },
    {
      "va": "nikhil@ICICI"
    },
    {
      "va": "testStoreAcc@ICICI"
    }
  ]
}

```

MobileAppData will be JSON field containing VPA array in [MobileAppData.details.valist](#) field.

Response Code

List Virtual Addresses	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

List Verified Addresses Entries

API will return all the verified address entries. Verified address are the Merchant addresses which are verified and managed by NPCI.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListVerifiedAddressesEntries>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ListVerifiedAddressesEntries>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq- no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	O	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
6	virtual-address	O	255	V	AN	VPA to search E.g. <va:name>@<yourpsp:name>

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "lmobile",
```

```
"profile-id":"10"
}
```

Response:

All Verified Addresses

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful",
  "BankRRN": "605617674574",
  "UpiTranlogId": "1504",
  "UserProfile": "10",
  "MobileAppData": {
    "details": {
      "vaelist": [
        {
          "name": "LIC MERCHANE",
          "va": "LicMerchant@IMOBILE",
          "logo": "base64 image data",
          "url": "www.lic.in",
          "merchant-certificate": "<code>,<type>,<ki>,<base64 encoded certificate>"
        },
        {
          "name": "LIC MERCHANE",
          "va": "LicMerchant2@IMOBILE",
          "logo": "base64 image data",
          "url": "www.lic.in",
          "merchant-certificate": "<code>,<type>,<ki>,<base64 encoded certificate>"
        },
        {
          "name": "LIC MERCHANE",
          "va": "Nikhil.Bhosale@Imobile",
          "logo": "base64 image data",
          "url": "www.lic.in",
          "merchant-certificate": "<code>,<type>,<ki>,<base64 encoded certificate>"
        },
        {
          "name": "FLIPKART",
          "va": "abc@imobile",
          "logo": "base64 image data",
          "url": "www.lic.in",
          "merchant-certificate": "<code>,<type>,<ki>,<base64 encoded certificate>"
        },
        {
          "name": "IRCTC",
          "va": "irctc@icici",
          "logo": "base64 image data",
          "url": "www.lic.in",

```

```

        "merchant-certificate": "<code>,<type>,<ki>,<base64 encoded certificate>"
    }
}
},
"SeqNo": "1201ggg8000134567890123458889012348"
}

```

Single Verified Address

```

{
  "success": true,
  "response": 0,
  "message": " Transaction Successful",
  "BankRRN": "605617674574",
  "UpiTranlogId": "1504",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0ec a5fdecc37ff23f3",
  "MobileAppData": {
    "details": {
      "vaelist": {
        "name": "LIC",
        "va": "lic@hdfc",
        "logo": "base64 image data",
        "url": "www.lic.in",
        "merchant-certificate": "<code>,<type>,<ki>,<base64 encoded certificate>"
      }
    }
  }
}

```

Response Code

List Verified Addresses Entries	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

List Customer Accounts

This API will return all the accounts mapped to the user. If same account is mapped to multiple account then multiple entries of same account will be present in the result.

API supports filter "virtual-address" which will return accounts which returns user accounts mapped to given VPA.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListCustomerAccounts>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ListCustomerAccounts>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user.
						The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

5	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
6	virtual-address	O	255	V	AN	In case of RESTRICTED channels, it will be hashed value for other channels it will be clear value for VPA E.g. <va:name>@<yourpsp:name>

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "virtual-address": "xyz@psp"
}
```

Response

Scenario 1: Without virtual address filter

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605612874078",
  "UpiTranlogId": "1422",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": {
    "details": {
      "accounts": [
        {
          "mmid": "xxxx",
          "default-debit": "Y",
          "default-credit": "Y",
          "account": "111111155743",
          "va": "nikhiladdVA@ICICI",
          "ifsc": "HDFC0000101"
        },
        {
          "mmid": "xxxx",
          "default-debit": "N",

```

```

        "default-credit ": "N",
        "account": "784125655710",
        "va": "nikhil@ICICI",
        "ifsc": "SBI00000101"
    },
    {
        "mmid": "xxxx",
        "default-debit": "N",
        "default-credit ": "N",
        "account": "784125655710",
        "va": "nikhil3@ICICI",
        "ifsc": "SBI00000101"
    },
    {
        "mmid": "xxxx",
        "default-debit": "N",
        "default-credit ": "N",
        "account": "784125655710",
        "va": "nikhil3@ICICI",
        "ifsc": "SBI00000101"
    },
    {
        "mmid": "xxxx",
        "default-debit": "N",
        "default-credit ": "N",
        "account": "784125655710",
        "va": "nikhil@ICICI",
        "ifsc": "HDFC0000101"
    },
    {
        "mmid": "9229001",
        "default-debit": "N",
        "default-credit ": "N",
        "account": "87542154623",
        "va": "xyz@psp",
        "ifsc": "ICIC5421544"
    },
    {
        "mmid": "9229001",
        "default-debit": "N",
        "default-credit ": "N",
        "account": "121212121212",
        "va": "testStoreAcc@ICICI",
        "ifsc": "ICIC0000004"
    }
]
}
}
}
}

```

Scenario 2: With virtual address filter

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605612969656",
  "UpiTranlogId": "1421",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0ec a5fdecc37ff23f3",
  "MobileAppData": {
    "details": {
      "accounts": [
        {
          "mmid": "xxxx",
          "default-debit": "Y",
          "default-credit": "Y",
          "account": "784125655710",
          "va": "nikhil3@ICICI",
          "ifsc": "SBI00000101"
        },
        {
          "mmid": "xxxx",
          "default-debit": "N",
          "default-credit": "N",
          "account": "784125655710",
          "va": "nikhil3@ICICI",
          "ifsc": "SBI00000101"
        }
      ]
    }
  }
}
```

Response Code

List Customer Accounts	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

Change Primary Account

API will change the Primary Account for Virtual address. UPI system supports two type of Default accounts for given Virtual address – Primary Credit Account (or Default Credit Account) and Primary Debit Account (Default Debit Account).

If default-<type> flag is set to “D” then, only default account is changed to provided account.

If default-<type> flag is set to “N” then, existing account will not change.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ChangePrimaryAccount>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ChangePrimaryAccount>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

5	ifsc	C	11	F	AN	IFSC code of the account. In case of RESTRICTED channels it is optional for other channels it is mandatory. This parameter is not required for PPI Channel.
6	account-number	M	20	V	AN	Account Number which needs to be changed to primary account. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
7	virtual-address	M	255	V	AN	In case of RESTRICTED channels, it will be hashed value for other channels it will be clear value for VPA E.g. <va:name>@<yourpsp:name>
8	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
9	default-debit	M	1	F	A	Flag 'D' to denote to set this account as the default debit account. Value 'N' will not set the default debit account.
10	default-credit	M	1	F	A	Flag 'D' to denote to set this account as the default credit account. Value 'N' will not set the default credit account.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "account-number": "87542154623",
  "ifsc": "ICIC5421544",
  "virtual-address": "xyz@psp",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "default-debit": "D",
  "default-credit": "D"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "603612325160",
  "UpiTranlogId": "656",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "Now primary account is 87542154623"
}
```

Ignore MobileAppData field value.

Response Code

Change Primary Account	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address

0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

Pay To Contact

API will return Payee VPA list based on the beneficiary Mobile number.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/PayToContact>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/PayToContact>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user.

						The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	source-mobile	M	10	F	N	10 digit beneficiary Mobile No for which list of VPA to be fetch from application
6	Source	O	10	V	AN	Accepted values are REG / IPR / IPE / EVR / EVB or it can be blank as well. In case of blank, API will return the VPAs recorded through all the sources.

Sample Request with dummy Values

```

DATA {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "lmobile",
  "Source-mobile": "9898989898",
  "Source": "REG"
}

```

Response for Internal Channel

```

{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "121500048847",
  "UpiTranlogId": "48847",
  "UserProfile": "",
  "MobileAppData": {
    "details": {
      "EVR": [
        {
          "accountIfsc": "9860234321,PAYT00000001",
          "vpa": "vpa.9860234321@okicici",
          "maskedVPA": "vpXXXXXXXXXX21@okicici",
          "timestamp": "2021-03-01 21:35:54"
        }
      ],
      "EVB": [
        {
          "accountIfsc": "9860234321,PAYT00000001",
          "vpa": "vpa.9860234321@okicici",
          "maskedVPA": "vpXXXXXXXXXX21@okicici",
          "timestamp": "2021-03-01 20:38:21"
        }
      ],
      "PRB": [
        {
          "accountIfsc": "9860234321,PAYT00000001",
          "vpa": "vpa.9860234321@okicici",
          "maskedVPA": "vpXXXXXXXXXX21@okicici",
          "timestamp": "2021-03-01 21:36:01"
        }
      ],
      "REG": [
        {
          "accountIfsc": "9860234321,PAYT00000001",
          "vpa": "vpa.9860234321@okicici",
          "maskedVPA": "vpXXXXXXXXXX21@okicici",
          "timestamp": "2021-02-18 17:04:04"
        },
        {
          "accountIfsc": "002034440444,ICIC00000020",
          "vpa": "9860234321@masspay",
          "maskedVPA": "98XXXXXX21@masspay",
          "timestamp": "2017-01-12 18:48:41"
        },
        {
          "accountIfsc": "9860234321,PAYT00000001",
          "vpa": "vpa.9860234321@imobile",

```

Response With specific source

```
{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "028711039828",
  "UpiTranlogId": "39828",
  "UserProfile": "485",
  "MobileAppData": {
    "details": {
      "REG": [
        {
          "accountIfsc": "9860234321,PAYT0000001",
          "vpa": "vpa.9860234321@okicici",
          "maskedVPA": "vpXXXXXXXXXX21@okicici",
          "timestamp": "2021-02-18 17:04:04"
        },
        {
          "accountIfsc": "002034440444,ICIC0000020",
          "vpa": "9860234321@masspay",
          "maskedVPA": "98XXXXXXXX21@masspay",

```

Response for External Channel

```
{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "121500048868",
  "UpiTranlogId": "48868",
  "UserProfile": "",
  "MobileAppData": {
    "details": {
      "source-mobile": "9767589852",
      "ptclist": [
        {
          "vpa": "fc0a525d5bf8c5fb76c88284ec3801599072e540bea29d1d7b4c915a803823fb",
          "maskedVPA": "vpXXXXXXXXXX52@okicici",
          "timestamp": "2021-02-18 17:28:29"
        },
        {
          "vpa": "6859bf45b69c626504689e5d3b52afb42d948ea62635ff56fa1093b0be2f1c27",
          "maskedVPA": "97XXXXXX52@masspay",
          "timestamp": "2017-01-12 19:13:35"
        },
        {
          "vpa": "8659efb334eed2809f35f1058eff144c8bedfcbbcbefcb0e302f61432fd43dca8",
          "maskedVPA": "98XXXXXXXX21@masspay",
          "timestamp": "2017-01-11 15:57:06"
        }
      ]
    }
  }
}
```

```

        "vpa": "fc0a525d5bf8c5fb76c88284ec3801599072e540bea29d1d7b4c915a803823fb",
        "maskedVPA": "vpXXXXXXXXXX52@okicici",
        "timestamp": "2021-03-01 21:34:34"
    },
    {
        "vpa": "fc0a525d5bf8c5fb76c88284ec3801599072e540bea29d1d7b4c915a803823fb",
        "maskedVPA": "vpXXXXXXXXXX52@okicici",
        "timestamp": "2021-03-01 21:35:53"
    },
    {
        "vpa": "fc0a525d5bf8c5fb76c88284ec3801599072e540bea29d1d7b4c915a803823fb",
        "maskedVPA": "vpXXXXXXXXXX52@okicici",
        "timestamp": "2021-03-01 20:21:36"
    },
    {
        "vpa": "fc0a525d5bf8c5fb76c88284ec3801599072e540bea29d1d7b4c915a803823fb",
        "maskedVPA": "vpXXXXXXXXXX52@okicici",
        "timestamp": "2021-03-01 21:36:01"
    },
    {
        "vpa": "fc0a525d5bf8c5fb76c88284ec3801599072e540bea29d1d7b4c915a803823fb",
        "maskedVPA": "vpXXXXXXXXXX52@okicici",
        "timestamp": "2021-03-01 20:21:47"
    }
]
},
"SeqNo": "ef1e92b4a01d4618a0eca5fdecc23ff23f4"
}

```

Rejected Response

```

{
    "response": "1034",
    "ActCode": "1034",
    "message": "pay to contact record not found",
    "Response": "pay to contact record not found",
    "BankRRN": "028711039830",
    "UpiTranlogId": "39830",
    "UserProfile": "485",
    "MobileAppData": "",
    "SeqNo": "www12345678901234567890123456789012"
}

```

Transaction API

Validate Virtual Address

This API will be used by the application customer wants to add a beneficiary within PSP application (for sending & collecting money) OR at the time of transaction when initiating Pay to ad-hoc VPA / Collect from ad-hoc VPA request.

Validate address API can be used with VPA of any PSP and UPI system will pass request to NPCI for ONUS request.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ValidateAddress>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ValidateAddress>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

5	virtual-address	M	255	V	AN	Alias name with which the user can be identified by his registered entity. E.g. <va:name>@<yourpsp:name>
6	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
7	payee-name	O	99	V	A	Name of the payee to whom the VA belongs and which needs to be validated.
8	ptc-mobile	O	10	F	N	Pay To Contact Mobile No. Optional: when Channel-code belongs to Internal Channel Mandatory: when Channel-code belongs to External Channel ptc-mobile parameter does have value, then the value received in VPA will be treated as HASHED for pay to contact transaction

Sample Request with dummy Values

```

DATA {
  "mobile":"9028909024",
  "device-id":"84521654864135",
  "seq-no":" ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile",
  "profile-id":"10",
  "virtual- address":"xyz@psp",
  "payee-name":"rohit patekar",
  "ptc-mobile":"9898989898"
}

```

Response

VPA is found

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "604413809446",
  "UpiTranlogId": "788",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "SUCCESS,maskName=rohit   patekar,initiators spamCount=0,is_blocked=0 "
}
```

MobileAppData will be string in format "SUCCESS,maskName=<Customer Name>,initiators spamCount=<Spam counter of initiator of Collect request>

Response Code

Validate Virtual Address	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception

0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch
0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0U48	Transaction id not present
0U49	Request message id is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	Transaction Id or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U27	No response from PSP
0U28	PSP not available

Pay to Virtual Account (VPA)

API will initiate a pay request to virtual address.

Debiting account will be identified by Virtual address (VPA). If Use Default flag is "D" then default debit account configured will be use. Otherwise Account, IFSC mapped to VPA need required fields.

Channel can initiate Pre-Approved request (MPIN is not required to validate the customer) by setting pre-approved flag as "A". If pre-approved flag is "M" then MPIN is required field.

Pre-approved flag is "M" then MPIN must be captured using common library.

In case Use Default flag is not set and Account details are provided, API also support feature to set given account as default credit and/or default debit.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/PayRequest>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/PayRequest>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	ifsc	C	11	F	AN	Ifsc code of the account. Optional: when use-default-acc flag has value 'D'. Mandatory : when use-default-acc flag has value 'N' In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.

7	account-number	O	20	V	AN	Account Number from which the amount should be debited. Optional: when use-default-acc flag has value 'D'. This parameter is not required for PPI Channel.
8	mpin	O	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted mpin> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be routed to NPCI for decryption. (To be discussed)</i> If pre-approved flag is M then this MPIN will be mandatory else optional.
9	payee-va	M	255	V	N	Alias name with which the payee can be identified by his registered entity.
10	payer-va	M	255	V	N	Alias name with which the payer can be identified by his registered entity.
11	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
12	amount	M	14	V	N	Amount to be debited. (In Rupees , Integer value with 2 decimal)
13	account-type	O	20	V	A	Account type of the mapped account

14	note	M	50	V	AN	Remarks entered by the payer for his reference.
15	pre-approved	M	1	F	A	A=Pre-approved, M=MPIN required. Value of this parameter always should be 'A' for PPI channel.
16	use-default-acc	O	1	F	A	D=Use default acc for transaction N=Use account No and IFSC provided in request for the transaction. Value of this parameter always should be 'D' for PPI channel.
17	default-debit	M	1	F	A	Flag 'D' to denote to set this account as the default debit account. Value 'N' will not set the default debit account. When use-default-acc flag has value 'D', this flag should have value N When this value is populated as D then the entered account will be set to default debit account.
18	default-credit	M	1	F	A	Flag 'D' to denote to set this account as the default credit account. Value 'N' will not set the default credit account. When use-default-acc flag has value 'D', this flag should have value N When this value is populated as D then the entered account will be set to default credit account.
19	payee-name	O	100	V	A	Name of the Payee

20	purpose	M	02	F	AN	The purpose field is specially used for SEBI txn 00-DEFAULT, 01-SEBI, 02- AMC 03- Travel, 04- Hospitality, 05- Hospital, 06- Telecom, 07- Insurance, 08- Education, ,09- Gifting, 10- Others
21	initiation-mode	C	2	F	N	00=Default 01=QR Code 02=Secure QR Code 03=Bharat QR Code 04=Intent 05=Secure Intent 06=NFC(Near Field Communication) 07=BLE (Bluetooth) 08=UHF(Ultra High Frequency) 09=Aadhaar 10=SDK (Software Development Kit) 11=UPI-Mandate 12= FIR (Foreign Inward Remittance) 13= QR Mandate 14= BBPS. If the initiation mode is 12 then institution details mentioned in the common parameter list are mandatory

22	ptc- mobile	O	10	F	N	Pay To Contact Mobile No. Optional: when Channel- code belongs to Internal Channel Mandatory : when Channel- code belongs to External Channel ptc-mobile parameter does have value, then the value received in payee VPA will be treated as HASHED for pay to contact transaction
----	----------------	---	----	---	---	--

Sample Requests with dummy Values

Transaction with MPIN

```
Request {
  "account-provider":"1",
  "mpin":"<base64encodedString>",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile",
```

```

"profile-id":"10",
"account-type":"Saving",
"ifsc":"HDFC5421544",
"account-number":"8976376573767",
"pre-approved":"M",
"use-default-acc":"N",
"default-debit":"D",
"default-credit":"N",
"payee-name":"ABC",
"ptc-mobile":"9898989898"
}

```

Pre-Approved Transaction

DATA

```

{
  "account-provider":"1",
  "mpin":"",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"ICIC5421544",
  "account-number":"8976376573767",
  "pre-approved":"A",
  "use-default-acc":"N",
  "default-debit":"D",
  "default-credit":"Npayee-name=ABC",
  "ptc-mobile":"9898989898"
}

```

Using Default Debit Account configured

```

DATA {
  "account-provider":"1",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile",
  "profile-id":"10",

  "account-type":"Saving",
  "ifsc":"",
  "account-number":"",
  "mpin":"",
  "pre-approved":"A",
  "use-default-acc":"D",
  "default-debit":"N",
  "default-credit":"N",
  "payee-name":"XYZ",
  "ptc-mobile":"9898989898"
}

```

Response

```

{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "603415867949",
  "UpiTranlogId": "592",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "SUCCESS"
}

```

Response Code

Pay to VPA	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present

0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch
0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input
0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input
0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input

0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input
0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values
0L20	Trust is not valid
0U66	Device Fingerprint mismatch
0U48	Transaction id not present
0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	TransactionId or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request
0U57	Payee Amount differs from original request
0U58	Payer Amount differs from original request
0U59	Payee Address differs from original request
0U60	Payer Address differs from original request
0U61	Payee Info differs from original request
0U62	Payer Info differs from original request
0U63	Device registration failed in UPI
0U64	Data tag should contain 4 parts during device registration
0U65	Creds block should contain correct elements during device registration
0U27	No response from PSP
0U28	PSP not available
F01	RegDetails must be present <ReqRegMob/>
F02	RegDetails.Detail must be present
F03	RegDetails.Detail name/value should be present name,value
F04	RegDetails.Detail name not valid
F05	RegDetails.Cred not present
F06	RegDetails.Cred data is wrong
F07	RegDetails.Cred.Otp must be present
F08	RegDetails.Cred.Pin must be present
F09	RegDetails.Cred.Data must be present
F10	RegDetails.Cred.Data encrypted authentication must be present
00ZM	INVALID MPIN
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00XL	EXPIRED CARD, DECLINE (REMITTER)

00XN	NO CARD RECORD (REMITTER)
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XR	RESTRICTED CARD, DECLINE (REMITTER)
00XM	EXPIRED CARD, DECLINE (BENEFICIARY)
00XO	NO CARD RECORD (BENEFICIARY)
00XQ	TRANSACTION NOT PERMITTED TO CARDHOLDER (BENEFICIARY)
00XS	RESTRICTED CARD, DECLINE (BENEFICIARY)
00XU	CUT-OFF IS IN PROCESS (BENEFICIARY)
00XW	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (BENEFICIARY)
00Y1	BENEFICIARY CBS OFFLINE
00YB	LOST OR STOLEN CARD (BENEFICIARY)
00YD	DO NOT HONOUR (BENEFICIARY)
00YF	BENEFICIARY ACCOUNT BLOCKED/FROZEN
00RN	Registration is temporary blocked due to maximum no of attempts exceeded
0U11	Credentials is not present
00XY	REMITTER CBS OFFLINE
00ZM	Invalid MPIN
00AM	MPIN not set by customer
00ZA	collect Auth rejected by customer
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
00BT	ACQUIRER/BENEFICIARYUNAVAILABLE(TIMEOUT)
00RB	CREDIT REVERSAL TIMEOUT(REVERSAL)
00RR	DEBIT REVERSAL TIMEOUT(REVERSAL)
00RP	PARTIAL DEBIT REVERSAL TIMEOUT
U29	Address resolution is failed
U30	Debit has been failed
U31	Credit has been failed
U32	Credit revert has been failed
U33	Debit revert has been failed
U34	Reverted
U66	Device Fingerprint mismatch
U67	Debit TimeOut
U68	Credit TimeOut
U69	Collect Expired
U70	Received Late Response

Pay Request Global Address

This API will initiate a pay request to global address.

Debiting account will be identified by Virtual address (VPA). If Use Default flag is "D" then default debit account configured will be use. Otherwise Account, IFSC mapped to VPA need required fields.

Channel can initiate Pre-Approved request (MPIN is not required to validate the customer) by setting pre-approved flag as "A". If pre-approved flag is "M" then MPIN is required field.

Pre-approved flag is “M” then MPIN must be captured using common library

In case Use Default flag is not set and Account details are provided, API also support feature to set given account as default credit and/or default debit.

Global address can be Account + IFSC, Mobile + MMID, Aadhaar + IIN. Parameter "global-address-type" will identify the type of the global address.

Global Address Type	Fields Required to Process Transaction	Common Library Salt Parameter (payeeAddr)
MOBILEMMID	payee-mobile payee-mmid	<mobile>@<mmid>.mmid.npci
ACCOUNTIFSC	payee-ifsc payee-account	<account>@<ifsc>.ifsc.npci
AADHAR	payee-aadhar payee-iin	<aadhaar>@<iin>.iin.npci

Check details of NPCI common library for salt parameter payeeAddr. Application should create payee address value passed to Common library as documented in above table. Replace type specific parameter value in payeeAddr <mobile>, <mmid>, <account>, <ifsc>, <aadhaar>, <iin>.

e.g. for MOBILEMMID – Mobile 9860234321 and mmid 9229000, Payee address value for Common library will be 9860234321@9229000.mmid.npci

NOTE: Before passing value to NPCI common library covert value to lowercase.

API also supports paying to Merchant.

Mode	Field merchant-type	Field mcc
Pay to Person (Non-merchant)	PERSON	0000
Pay to Merchant	ENTITY	Actual Merchant MCC

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/PayRequestGlobal>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/PayRequestGlobal>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user

3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	ifsc	C	11	F	AN	Ifsc code of the account. Optional : when use-default-acc flag has value 'D'. Mandatory : when use-default-acc flag has value 'N' In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
7	account-number	O	20	V	AN	Account Number from which the amount should be debited. Optional: when use-default-acc flag has value 'D'. Mandatory: when use-default-acc flag has value 'N'. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
8	mpin	O	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted mpin> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines.

						If the customer / account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be routed to NPCI for decryption. (To be discussed)</i> If pre-approved flag is M then this MPIN will be mandatory else optional.
9	payer-va	M	255	V	N	Alias name with which the payer can be identified by his registered entity.
10	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
11	amount	M	14	V	N	Amount to be debited. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12
12	account-type	O	20	V	A	Account type of the mapped account
13	note	M	50	V	AN	Remarks entered by the payer for his reference.
14	pre-approved	M	1	F	A	A=Pre-approved, M=MPIN required
						Value of this parameter always should be 'A' for PPI channel.
15	use-default-acc	O	1	F	A	D=Use default acc for transaction N=Use account No and IFSC provided in request for the transaction. Value of this parameter always should be 'D' for PPI channel.
16	default-debit	M	1	F	A	Flag 'D' to denote to set this account as the default debit account. Value 'N' will not set the default debit account. When use-default-acc flag has value 'D', this flag should have value N When this value is populated as D then the entered account will be set to default debit account.
17	default-credit	M	1	F	A	Flag 'D' to denote to set this account as the default credit account. Value 'N' will not set the default credit account.

						When use-default-acc flag has value 'D', this flag should have value N When this value is populated as D then the entered account will be set to default credit account.
18	global-address-type	M	20	V	A	Type of Global Address e.g. MOBILEMMID/ACCOUNTIFSC/AADHAR
19	payee-account	C	20	V	AN	Payee Account is a conditional parameter. Mandatory when the global-address-type is ACCOUNTIFSC.
20	payee-ifsc	C	11	F	AN	Payee IFSC is a conditional parameter. Mandatory when the global-address-type is ACCOUNTIFSC.
21	payee-name	M	50	V	N	Name of the payee.
22	mcc	M	4	F	N	Merchant Category Code Please send mcc as "0000" if payee is person. Else mcc should be merchant code for payee as a merchant.
23	merchant-type	M	50	V	A	For Merchant Transactions merchant type should be ENTITY. Else the merchant type should be PERSON
24	payee-mobile	C	10	F	N	Payee Mobile is a conditional parameter. Mandatory when the global-address-type is MOBILEMMID.
24	payee-mmids	C	7	F	N	Payee MMID is a conditional parameter. Mandatory when the global-address-type is MOBILEMMID.
25	payee-aadhar	C	20	V	N	Payee Aadhaar is a conditional parameter. Mandatory when the global-address-type is AADHAR.
26	payee-iin	C	10	V	N	Payee IIN is the beneficiary bank iin. It is a conditional parameter. Mandatory when the global-address-type is AADHAR.

Sample Requests with dummy Values for Payee Type "MOBILEMMID"

Pre-Approved Transaction

```
Request {
  "account-provider":"1",
  "mpin":"",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"ICIC5421544",
  "account-number":"8976376573767",
  "pre-approved":"A",
  "use-default-acc":"N",
  "default-debit":"D",
  "default-credit":"N",
  "global-address-type":"MOBILEMMID",
  "payee-mobile":"8149148725",
  "payee-mmids":"9229005",
  "payee-name":"XYZ",
  "mcc":"4814",
  "merchant-type":"ENTITY"
}
```

Using Default Debit Account configured

```
Request {
  "account-provider":"1",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "amount":"100.00",
  "note":"taxi-bill",
```

```

"device-id":"84521654864135",
"seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"channel-code":"Imobile",
"profile-id":"10",
"account-type":"Saving",
"ifsc":"",
"account-number":"",
"mpin":"",
"pre-approved":"A",
"use-default-acc":"D",
"default-debit":"N",
"default-credit":"N global-address-type=MOBILEMMID",
"payee-mobile":"8149148725",
"payee-mmids":"9229005 payee-name=XYZ",
"mcc":"4814",
"merchant-type":"ENTITY"
}

```

Response

```

{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "603415867949",
  "UpiTranlogId": "592",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "SUCCESS"
}

```

Response Code

Pay/Collect/Collect-Auth/Pay to Global	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)

00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch
0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input
0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input
0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input
0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input
0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values

0L20	Trust is not valid
0U66	Device Fingerprint mismatch
0U48	Transaction id not present
0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	TransactionId or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request
0U57	Payee Amount differs from original request
0U58	Payer Amount differs from original request
0U59	Payee Address differs from original request
0U60	Payer Address differs from original request
0U61	Payee Info differs from original request
0U62	Payer Info differs from original request
0U63	Device registration failed in UPI
0U64	Data tag should contain 4 parts during device registration
0U65	Creds block should contain correct elements during device registration
0U27	No response from PSP
0U28	PSP not available
F01	RegDetails must be present <ReqRegMob/>
F02	RegDetails.Detail must be present
F03	RegDetails.Detail name/value should be present name,value
F04	RegDetails.Detail name not valid
F05	RegDetails.Cred not present
F06	RegDetails.Cred data is wrong
F07	RegDetails.Cred.Otp must be present
F08	RegDetails.Cred.Pin must be present
F09	RegDetails.Cred.Data must be present
F10	RegDetails.Cred.Data encrypted authentication must be present
00ZM	INVALID MPIN
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00XL	EXPIRED CARD, DECLINE (REMITTER)
00XN	NO CARD RECORD (REMITTER)
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XR	RESTRICTED CARD, DECLINE (REMITTER)
00XM	EXPIRED CARD, DECLINE (BENEFICIARY)
00XO	NO CARD RECORD (BENEFICIARY)
00XQ	TRANSACTION NOT PERMITTED TO CARDHOLDER (BENEFICIARY)
00XS	RESTRICTED CARD, DECLINE (BENEFICIARY)
00XU	CUT-OFF IS IN PROCESS (BENEFICIARY)

00XW	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (BENEFICIARY)
00Y1	BENEFICIARY CBS OFFLINE
00YB	LOST OR STOLEN CARD (BENEFICIARY)
00YD	DO NOT HONOUR (BENEFICIARY)
00YF	BENEFICIARY ACCOUNT BLOCKED/FROZEN
00RN	Registration is temporary blocked due to maximum no of attempts exceeded
0U11	Credentials is not present
00XY	REMITTER CBS OFFLINE
00ZM	Invalid MPIN
00AM	MPIN not set by customer
00ZA	collect Auth rejected by customer
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
00BT	ACQUIRER/BENEFICIARYUNAVAILABLE(TIMEOUT)
00RB	CREDIT REVERSAL TIMEOUT(REVERSAL)
00RR	DEBIT REVERSAL TIMEOUT(REVERSAL)
00RP	PARTIAL DEBIT REVERSAL TIMEOUT
U29	Address resolution is failed
U30	Debit has been failed
U31	Credit has been failed
U32	Credit revert has been failed
U33	Debit revert has been failed
U34	Reverted
U66	Device Fingerprint mismatch
U67	Debit TimeOut
U68	Credit TimeOut
U69	Collect Expired
U70	Received Late Response

Common Pay Request

This common API will support to initiate a pay request to virtual address and Global recipients (IFSC + Account no / Mobile + MMD / Aadhaar + IIN).

Debiting account will be identified by Virtual address (VPA). If Use Default flag is "D" then default debit account configured will be use. Otherwise Account, IFSC mapped to VPA need required fields.

Channel can initiate Customer Pre-Approved request (MPIN is not required to validate the customer) by setting pre-approved flag as "A". If pre-approved flag is "M" then MPIN is required field in case of Customer transactions. In case of Merchant transaction (M2P) if pre-approved flag is 'P' then it MPIN is not required.

Pre-approved flag is "M" then MPIN must be captured using common library.

In case Use Default flag is not set and Account details are provided, API also support feature to set given account as default credit and/or default debit.

Global address can be Account + IFSC, Mobile + MMID, Aadhaar + IIN. Parameter "global-address-type" will identify the type of the global address.

Global Address Type	Fields Required to Process Transaction	Common Library Salt Parameter (payeeAddr)
MOBILEMMID	payee-mobile payee-mmids	<mobile>@<mmid>.mmid.npci
ACCOUNTIFSC	payee-ifsc payee-account	<account>@<ifsc>.ifsc.npci
AADHAR	payee-aadhar payee-iin	<aadhaar>@<iin>.iin.npci

Check details of NPCI common library for salt parameter payeeAddr. Application should create payee address value passed to Common library as documented in above table. Replace type specific parameter value in payeeAddr <mobile>, <mmid>, <account>, <ifsc>, <aadhaar>, <iin>.

e.g. for MOBILEMMID – Mobile 9860234321 and mmid 9229000, Payee address value for Common library will be 9860234321@9229000.mmids.npci

NOTE: Before passing value to NPCI common library covert value to lowercase.

**NOTE: If the initiation-mode = 12 then the institution tag is mandatory, details of the same are available in the common request parameters section.

Resource URL

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/CommonPayRequest>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/CommonPayRequest>

Method Name: POST

#	Paramarter Name	Required	Length	Fixed/ Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. Upi switch will not be validating the device ID. It will just be

						forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	ifsc	C	11	F	AN	Ifsc code of the account. Optional: when use-default-acc flag has value 'D'. Mandatory: when use-default-acc flag has value 'N'. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
7	account-number	O	20	V	AN	Account Number from which the amount should be debited. Optional: when use-default-acc flag has value 'D'. Mandatory : when use-default-acc flag has value 'N' This parameter is not required for PPI Channel.
8	Mpin	O	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted mpin> These values are the same used at the time of encryption using the NPCI Common lib.

						Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be routed to NPCI for decryption. (To be discussed)</i> If pre-approved flag is M then this MPIN will be mandatory else optional.
9	payee-va	C	255	V	N	Alias name with which the payee can be identified by his registered entity. This is optional in case of Global Pay request.
10	payer-va	M	255	V	N	Alias name with which the payer can be identified by his registered entity. In case of RESTRICTED channels it is hashed value.
11	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
12	amount	M	14	V	N	Amount to be debited. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12
13	account-type	O	20	V	A	Account type of the mapped account
14	Note	M	50	V	AN	Remarks entered by the payer for his reference.
15	pre-approved	M	1	F	A	A=Customer Pre-approved, M=MPIN required, P=Merchant2Person pre-approved. Value of this parameter always should be 'A' for PPI channel.
16	use-default-acc	O	1	F	A	D=Use default account for transaction N=Use account No and IFSC provided in request for the transaction. Value of this parameter always should be 'D' for PPI channel.

17	default-debit	M	1	F	A	Flag 'D' to denote to set this account as the default debit account. Value 'N' will not set the default debit account. When use-default-acc flag has value 'D', this flag should have value N
----	---------------	---	---	---	---	---

						When this value is populated as D then the entered account will be set to default debit account.
18	default-credit	M	1	F	A	Flag 'D' to denote to set this account as the default credit account. Value 'N' will not set the default credit account. When use-default-acc flag has value 'D', this flag should have value N When this value is populated as D then the entered account will be set to default credit account.
19	payee-name	O	100	V	A	Name of the Payee
20	Mcc	O	4	F	N	Merchant Category Code
21	merchant-type	O	50	V	A	For Merchant Transactions merchant type should be ENTITY.
22	ref-id	O	99	V	AN	Ref-id of the transaction whose status is required. Length increased from 35 to 99.
23	global-address-type	C	20	V	A	Type of Global Address e.g. MOBILEMMID/ACCOUNTIFSC/AADHAR This parameter needed only if beneficiary is global (Pay to Global)
24	payee-account	C	20	V	AN	Payee Account is a conditional parameter. Mandatory when the global-address-type is ACCOUNTIFSC. Mandatory if payToContactType = REFUND Mandatory if txn-type is payToSelfVpa.
25	payee-ifsc	C	11	F	AN	Payee IFSC is a conditional parameter. Mandatory when the global-address-type is ACCOUNTIFSC. Mandatory if payToContactType = REFUND Mandatory if txn-type is payToSelfVpa.
26	payee-mobile	C	10	F	N	Payee Mobile is a conditional parameter. Mandatory when the global-address-type is MOBILEMMID.
27	payee-mmids	C	7	F	N	Payee MMID is a conditional parameter. Mandatory when the global-address-type is MOBILEMMID.

28	payee-aadhar	C	20	V	N	Payee Aadhaar is a conditional parameter. Mandatory when the global-address-type is AADHAR.
29	payee-iin	C	10	V	N	Payee IIN is the beneficiary bank IIN. It is a conditional parameter. Mandatory when the global-address-type is AADHAR.
30	txn-type	M	50	V	A	If "payRequest" then pay to VA will be initiated. If "payMerchantRequest" then pay to merchant will be initiated. If "paytoGlobal" the global pay transaction will be initiated. If "payToSelfVpa" the pay to self account txn will be initiated.
31	min-amount	C	14	V	N	Min amount which the payee needs to pay for the transaction
32	currency	C	3	F	A	Currency code for the transaction, if not passed by default INR would be taken.
33	ref-url	C	255	V	AN	Reference URL of the QR code transactions. This should be a URL when clicked provides customer with further transaction details like complete bill details, bill copy, order copy, ticket details, etc. This can also be used to deliver digital goods such as mp3 files etc. after payment. This URL, when used, MUST BE related to the particular transaction and MUST NOT be used to send unsolicited information that are not relevant to the transaction. url should initiate with http or https.
34	mid	C	100	V	AN	Merchant – ID
35	sub-mid	C	100	V	AN	Sub Merchant – ID
36	m-txnid	C	100	V	AN	Merchant Transaction ID

37	sub- mername	C	100	V	AN	Sub Merchant Name
38	initiation- mode	C	2	F	N	00=Default 01=QR Code 02=Secure QR Code 03=Bharat QR Code 04=Intent 05=Secure Intent 06=NFC(Near Field Communication) 07=BLE (Bluetooth) 08=UHF(Ultra High Frequency) 09=Aadhaar 10=SDK (Software Development Kit) 11=UPI-Mandate 12= FIR (Foreign Inward Remittance) 13= QR Mandate 14= BBPS. If the initiation mode is 12 then institution details mentioned in the common parameter list are mandatory
39	org-id	O	6	F	N	If the transaction is initiated by any PSP app then the respective orgID needs to be passed. For merchant initiated/created intent/QR '000000' will be used
40	card-cred	O	1024	V	AN	The cvv1/cvv2/emv details would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted data> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If pre-approved flag is M then this MPIN will be mandatory else optional.
41	otp-cred	O	1024	V	AN	The SMS/EMAIL/HOTP/TOTP details would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted data> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines.

						If pre-approved flag is M then this MPIN will be mandatory else optional.
42	aadhaar-cred	O	1024	V	AN	The AADHAAR-BIO-FP/AADHAAR-BIO-IRIS/AADHAAR-BIO-OTP details would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted data> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If pre-approved flag is M then this MPIN will be mandatory else optional.
43	msid	O	15	V	A	Store Id of the merchant
44	mtid	O	20	V	A	Merchant Terminal ID
45	pay-to-contact-flag	O	1	F	A	Y/N if Y then the pay transaction would be treated as pay to contact transaction
46	pay-to-contact-type	C	10	V	A	Mandatory if pay-to-contact-flag = Y. Probable values CLAIM/REFUND
47	pay-to-contact-txn-id	C	35	V	AN	Original pay to contact transaction ID.
48	purpose	M	02	F	AN	The purpose field is specially used for SEBI txn 00- DEFAULT, 01-SEBI, 02-AMC 03- Travel, 04- Hospitality, 05- Hospital, 06- Telecom, 07- Insurance, 08- Education, ,09- Gifting, 10- Others
49	institution-type	C	100	V	AN	Institution type from institution block. This is a conditional parameter. It is mandatory for FIR transactions , but optional for other transactions
50	route	O	100	V	AN	Defines the route of the fir transaction

51	name-value	O	100	V	AN	Name of the bank/MTO
52	purpose-code	O	100	V	AN	Purpose Code
53	originator-name	O	100	V	AN	Name of the payer
54	originator-type	O	100	V	AN	Individual/Bank
55	ref-no	O	100	V	AN	Reference number of the transaction
56	address-location	O	100	V	AN	Address location
57	country	O	100	V	AN	Originating country
58	city	O	100	V	AN	City
59	merchant-category-identifier	O	100	V	AN	It is a flag/value which denotes what type of merchant is initiating the transaction. This flag is configurable For FIR transactions the value will be FIR.
60	qr-ver	O	15	V	N	Version of UPI QR
61	qr-medium	O	2	V	AN	Creation source of QR. 00 - DEFAULT 01 - PICK FROM GALLERY 02 - APP 03 - POS 04 - PHYSICAL 05- ATM 06 - WEB The QR tag shall be populated ONLY in ReqPay type "DEBIT" and "PAY".
62	qr-ts	O	14	F	N	Format: ddMMyyyyHHmmss E.g. 09032016235603
63	qr-expire-ts	O	14	F	N	Format: ddMMyyyyHHmmss E.g. 09032016235603
64	qr-query	O	100	V	A	Parameter in query string

65	pin-code	O	6	F	N	PIN / Postal code of the merchant
66	payer-consent-name	M	100	V	A	Merchant should have GSTIN to get the benefit. This will have static value 'GST'. 'NOT GST' not in scope for now.
67	payer-consent-type	O	100	V	A	This will have static value 'PAN' for now. Other is not in scope.
68	gst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
69	cgst	O	14	V	N	It should be in INR. Integer with 2 decimal value.

70	sgst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
71	cess	O	14	V	N	It should be in INR. Integer with 2 decimal value.
72	igst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
73	gst-incentive	O	14	V	N	It should be in INR. Integer with 2 decimal value.
74	gst-pct	O	14	V	N	It should be in INR. Integer with 2 decimal value.
75	gsttin	O	100	V	AN	This will have GSTIN number
76	payee-consent-name	O	100	V	A	Merchant should have GSTIN to get the benefit. This will have static value 'GST'. 'NOT GST' not in scope for now.
77	payee-consent-type	O	100	V	A	This will have static value 'GSTIN'.
78	payee-consent-value	O	100	V	AN	This will have GSTIN number in this attribute. If above 'payee-consent-type' is blank then this value is optional.
79	invoice-name	O	100	V	AN	Customer name for the invoice is generated
80	invoice-no	O	100	V	AN	Bill invoice number
81	invoice-date	O	8	F	N	Format: ddMMyyyy E.g. 09032016
82	ptc-mobile	O	10	F	N	Pay To Contact Mobile No. Optional: when Channel-code belongs to Internal Channel Mandatory : when Channel-code belongs to External Channel ptc-mobile parameter does have value, then the value received in payer VPA will be treated as HASHED for pay to contact transaction

Sample Requests with *Use of MPIN transaction*

```
Request {
  "account-provider":"1",
  "mpin":"<base64encodedString>",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
```

```

"device-id":"84521654864135",
"seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"channel-code":"Imobile",
"profile-id":"10",
"account-type":"Saving",
"ifsc":"HDFC5421544",
"account-number":"8976376573767",
"pre-approved":"M",
"use-default-acc":"N",
"default-debit":"D",
"default-credit":"N",
"payee-name":"ABC",
"txn-type":"payRequest",
"min-amount":"1.00",
"currency":"INR",
"ref-url":"www.npci.org.in",
"ptc-mobile":"9898989898"
}

```

Sample Request with *Use of pre-approved transaction*

```

Request {
  "account-provider":"1",
  "mpin":"",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"ICIC5421544",
  "account-number":"8976376573767",
  "pre-approved":"A",
  "use-default-acc":"N",
  "default-debit":"D",
  "default-credit":"N",
  "payee-name":"ABC",
  "txn-type":"payRequest",
  "min-amount":"1.00",
  "currency":"INR",
  "ref-url":"www.npci.org.in",
  "institutionType":"MTO",
  "route":"MTSS",
  "nameValue":"UAE Exchange Centre",
  "purposeCode":"S1301",

```

```

"originatorName":"Sarthak Choudhary",
"originatorType":"INDIVIDUAL",
"refNo":"A23674",
"addressLocation":"Queensland",
"city":" Goldcoast",
"merchantCategoryIdentifier":"FIR",
"country":"Australia",
"channelCode":"imobile",
"geocode":"19.01.72, 84.032",
"initiationMode":"12",
"mcc":"4412",
"qr-ver": "1.0",
"qr-medium":"00",
"qr-ts":"09032016235603",
"qr-expire-ts":"09032016235603",
"pin-code":"111111",
"payer-consent-name":"GST",
"payer-consent-type":"PAN",
"cgst":"2.50",
"sgst":"2.50",
"Cess":"1".00",
"lgst":"1.00",
"gst-incentive":"1.00",
"gst-pct":"1.00",
"Gstin":"22AAAAA0000A1Z5",
"payee-consent-name":"GST",
"payee-consent-type":"GSTIN",
"payee-consent-value","22AAAAA0000A1Z5"
"invoice-name":"ABC",
"invoice-no":"12244566",
"invoice-date":"09032016"
"ptc-mobile":"9898989898"
}

```

Sample Request with *'use-default-acc'*

Request

```

{
  "account-provider":"1",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee- va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"",
  "account-number":"",
  "mpin":"",
  "pre-approved":"A",
  "use-default-acc":"D",

```

```

"default-debit":"N",
"default-credit":"N",
"payee-name":"ABC",
"txn-type":"payRequest",
"min-amount":"1.00",
"currency":"INR",
"ref-url":"www.npci.org.in",
"qr-ver": "1.0",
"qr-medium":"00",
"qr-ts":"09032016235603",
"qr-expire-ts":"09032016235603",
"pin-code":"111111",
"payer-consent-name":"GST",
"payer-consent-type":"PAN",
"cgst":"2.50",
"sgst":"2.50",
"Cess":"1".00",
"Igst":"1.00",
"gst-incentive":"1.00",
"gst-pct":"1.00",
"Gstin":"22AAAAA0000A1Z5",
"payee-consent-name":"GST",
"payee-consent-type":"GSTIN",
"payee-consent-value","22AAAAA0000A1Z5"
"invoice-name":"ABC",
"invoice-no":"12244566",
"invoice-date":"09032016"
"ptc-mobile":"9898989898"
}

```

Sample Request with '*global-address-type*' **MOBILEMMID**

```

Request {
  "account-provider":"1",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"",
  "account-number":"",
  "mpin":"",
  "pre-approved":"A",
  "use-default-acc":"D",
  "default-debit":"N",
  "default-credit":"N",
  "payee-name":"ABC",

```

```

"payee-mmId":"9229147",
"payee- mobile":"7845568923",
"global-address-type":"MOBILEMMID",
"txn-type":"paytoGlobal",
"min-amount":"1.00",
"currency":"INR",
"ref-url":"www.npci.org.in",
"qr-ver": "1.0",
"qr-medium":"00",
"qr- ts":"09032016235603",
"qr-expire-ts":"09032016235603",
"pin-code":"111111",
"payer- consent-name":"GST",
"payer-consent- type":"PAN",
"cgst":"5.0",
"sgst":"2.50",
"Cess":"1".00",
"lgt":"1.00",
"gst-incentive":"1.00",
"gst- pct":"1.00",
"Gstin":"22AAAAA0000A1Z5",
"payee-consent-name":"GST",
"payee-consent- type":"GSTIN",
"payee-consent-value","22AAAAA0000A1Z5"
"invoice-name":"ABC",
"invoice-no":"12244566",
"invoice-date":"09032016",
"ptc-mobile":"9898989898"
}

```

Sample Request with '*global-address-type*' **ACCOUNTIFSC**

```

Request {
  "account-provider":"1",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"",
  "account-number":"",
  "mpin":"",
  "pre-approved":"A",
  "use-default-acc":"D",
  "default- debit":"N",
  "default-credit":"N",
  "payee-name":"ABC",

```

```

"payee-ifsc":"ICIC9229147",
"payee-account":"896325568923",
"global-address-type":"ACCOUNTIFSC",
"txn-type":"paytoGlobal",
"min-amount":"1.00",
"currency":"INR",
"ref-url":"www.npci.org.in",
"qr-ver": "1.0",
"qr-medium":"00",
"qr-ts":"09032016235603",
"qr-expire-ts":"09032016235603",
"pin-code":"111111",
"payer-consent-name":"GST",
"payer-consent-type":"PAN",
"cgst":"5.0",
"sgst":"2.50",
"Cess":"1".00",
"lgst":"1.00",
"gst-incentive":"1.00",
"gst-pct":"1.00",
"Gstin":"22AAAAA0000A1Z5",
"payee-consent-name":"GST",
"payee-consent-type":"GSTIN",
"payee-consent-value";"22AAAAA0000A1Z5"
"invoice-name":"ABC",
"invoice-no":"12244566",
"invoice-date":"09032016",
"ptc-mobile":"9898989898"
}

```

Sample Request with '**global-address-type**' **AADHAR**

```

Request {
  "account-provider":"1",
  "mobile":"9028909024",
  "payer-va":"abc@icici",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"",
  "account-number":"",
  "mpin":"",
  "pre-approved":"A",
  "use-default-acc":"D",
  "default-debit":"N",
  "default-credit":"N",
  "payee-name":"ABC",

```

```

"payee-aadhar":"784525824584",
"payee- iin":"745896",
"global-address-type":"AADHAR",
" txn-type":"paytoGlobal",
"min- amount":"1.00",
"currency":"INR",
"ref-url":"www.npci.org.in"
"qr-ver": "1.0",
"qr-medium":"00",
"qr- ts":"09032016235603",
"qr-expire-ts":"09032016235603",
"pin-code":"111111",
"payer- consent-name":"GST",
"payer-consent- type":"PAN",
"cgst":"2.50",
"Sgst":"2.50",
"Cess":1".00",
"Igst":"1.00",
"gst-incentive":"1.00",
"gst- pct":"1.00",
"Gstin":"22AAAAA0000A1Z5",
"payee-consent-name":"GST",
"payee-consent- type":"GSTIN",
"payee-consent-value";"22AAAAA0000A1Z5"
"invoice-name":"ABC",
"invoice-no":"12244566",
"invoice-date":"09032016",
"ptc-mobile":"9898989898"
}

```

Response

```

{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "603415867949",
  "UpiTranlogId": "592",
  "UserProfile": "10",
  "SeqNo" : "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": "SUCCESS"
}

```

Response Code

Pay (VPA / Global)	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request

0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch
0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input
0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input

0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input
0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input
0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values
0L20	Trust is not valid
0U66	Device Fingerprint mismatch
0U48	Transaction id not present
0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	Transaction Id or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request
0U57	Payee Amount differs from original request
0U58	Payer Amount differs from original request
0U59	Payee Address differs from original request
0U60	Payer Address differs from original request
0U61	Payee Info differs from original request
0U62	Payer Info differs from original request
0U63	Device registration failed in UPI
0U64	Data tag should contain 4 parts during device registration
0U65	Creds block should contain correct elements during device registration
0U27	No response from PSP
0U28	PSP not available
F01	RegDetails must be present <ReqRegMob/>
F02	RegDetails.Detail must be present
F03	RegDetails.Detail name/value should be present name,value
F04	RegDetails.Detail name not valid
F05	RegDetails.Cred not present
F06	RegDetails.Cred data is wrong
F07	RegDetails.Cred.Otp must be present
F08	RegDetails.Cred.Pin must be present
F09	RegDetails.Cred.Data must be present
F10	RegDetails.Cred.Data encrypted authentication must be present
00ZM	INVALID MPIN
00XH	ACCOUNT DOES NOT EXIST (REMITTER)

00XJ	REQUESTED FUNCTION NOT SUPPORTED
00XL	EXPIRED CARD, DECLINE (REMITTER)
00XN	NO CARD RECORD (REMITTER)
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XR	RESTRICTED CARD, DECLINE (REMITTER)
00XM	EXPIRED CARD, DECLINE (BENEFICIARY)
00XO	NO CARD RECORD (BENEFICIARY)
00XQ	TRANSACTION NOT PERMITTED TO CARDHOLDER (BENEFICIARY)
00XS	RESTRICTED CARD, DECLINE (BENEFICIARY)
00XU	CUT-OFF IS IN PROCESS (BENEFICIARY)
00XW	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (BENEFICIARY)
00Y1	BENEFICIARY CBS OFFLINE
00YB	LOST OR STOLEN CARD (BENEFICIARY)
00YD	DO NOT HONOUR (BENEFICIARY)
00YF	BENEFICIARY ACCOUNT BLOCKED/FROZEN
00RN	Registration is temporary blocked due to maximum no of attempts exceeded
0U11	Credentials is not present
00XY	REMITTER CBS OFFLINE
00ZM	Invalid MPIN
00AM	MPIN not set by customer
00ZA	collect Auth rejected by customer
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
00BT	ACQUIRER/BENEFICIARYUNAVAILABLE(TIMEOUT)
00RB	CREDIT REVERSAL TIMEOUT(REVERSAL)
00RR	DEBIT REVERSAL TIMEOUT(REVERSAL)
00RP	PARTIAL DEBIT REVERSAL TIMEOUT
U29	Address resolution is failed
U30	Debit has been failed
U31	Credit has been failed
U32	Credit revert has been failed
U33	Debit revert has been failed
U34	Reverted
U66	Device Fingerprint mismatch
U67	Debit TimeOut
U68	Credit TimeOut
U69	Collect Expired
U70	Received Late Response

Collect Request

API will initiate a Collect request from the virtual address. Amount will be credited to the Account mapped to VPA which is identified by Account + IFSC.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/CollectRequest>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/CollectRequest>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.

6	ifsc	C	11	F	AN	IFSC code of the account. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
7	account-number	M	20	V	AN	Account Number of the payer. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
8	payee-va	M	255	V	N	Alias name with which the payee can be identified by his registered entity. In case of RESTRICTED channels it is hashed value.
9	payer-va	M	255	V	N	Alias name with which the payer can be identified by his registered entity.
10	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
11	Amount	M	14	V	N	Amount to be collected. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12
12	account-type	O	20	V	A	Account type of the mapped account
13	Note	M	50	V	AN	Remarks entered by the payer for his reference.
14	expire-after	M	10	V	N	Minutes after which the transaction will expire.
15	payer-name	O	100	V	A	Name of the Payer
16	ptc-mobile	O	10	F	N	Pay To Contact Mobile No.
						Optional: when Channel- code belongs to Internal Channel
						Mandatory: when Channel- code belongs to External Channel
						ptc-mobile parameter does have value, then the value

received in payer VPA will be treated as HASHED for pay to contact transaction

Sample Requests with dummy Values

```
Request {
  "account-provider":"5",
  "mobile":"9028909024",
  "payer-va":"abc@xyz",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "expire-after":"10 ",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"ICIC5421544",
  "account-number":"8976376573767",
  "payer-name":"ABC",
  "ptc- mobile":"9898989898"
}
```

In case of restricted channel:

```
Request {
  "account-provider":"5",
  "mobile":"9028909024",
  "payer-va":"abc@xyz",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "expire-after":"10 ",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"ICIC5421544",
  "account-number":"XXXXXXXXXX3767",
  "payer-name":"ABC",
  "ptc- mobile":"9898989898"
}
```

Response

```
{
  "success": true,
```

```

"response": 91,
"message": "Transaction Initiated",
"BankRRN": "605417966281",
"UpiTranlogId": "1273",
"UserProfile": "10",
"MobileAppData": "",
"SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3"
}

```

Response Code

Collect	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered

0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch
0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input
0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input
0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input
0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input
0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values
0L20	Trust is not valid
0U66	Device Fingerprint mismatch
0U48	Transaction id not present
0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	Transaction Id or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request
0U57	Payee Amount differs from original request
0U58	Payer Amount differs from original request
0U59	Payee Address differs from original request
0U60	Payer Address differs from original request
0U61	Payee Info differs from original request
0U62	Payer Info differs from original request
0U63	Device registration failed in UPI
0U64	Data tag should contain 4 parts during device registration
0U65	Creds block should contain correct elements during device registration

0U27	No response from PSP
0U28	PSP not available
F01	RegDetails must be present <ReqRegMob/>
F02	RegDetails.Detail must be present
F03	RegDetails.Detail name/value should be present name,value
F04	RegDetails.Detail name not valid
F05	RegDetails.Cred not present
F06	RegDetails.Cred data is wrong
F07	RegDetails.Cred.Otp must be present
F08	RegDetails.Cred.Pin must be present
F09	RegDetails.Cred.Data must be present
F10	RegDetails.Cred.Data encrypted authentication must be present
00ZM	INVALID MPIN
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00XL	EXPIRED CARD, DECLINE (REMITTER)
00XN	NO CARD RECORD (REMITTER)
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XR	RESTRICTED CARD, DECLINE (REMITTER)
00XM	EXPIRED CARD, DECLINE (BENEFICIARY)
00XO	NO CARD RECORD (BENEFICIARY)
00XQ	TRANSACTION NOT PERMITTED TO CARDHOLDER (BENEFICIARY)
00XS	RESTRICTED CARD, DECLINE (BENEFICIARY)
00XU	CUT-OFF IS IN PROCESS (BENEFICIARY)
00XW	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (BENEFICIARY)
00Y1	BENEFICIARY CBS OFFLINE
00YB	LOST OR STOLEN CARD (BENEFICIARY)
00YD	DO NOT HONOUR (BENEFICIARY)
00YF	BENEFICIARY ACCOUNT BLOCKED/FROZEN
00RN	Registration is temporary blocked due to maximum no of attempts exceeded
0U11	Credentials is not present
00XY	REMITTER CBS OFFLINE
00ZM	Invalid MPIN
00AM	MPIN not set by customer
00ZA	collect Auth rejected by customer
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
00BT	ACQUIRER/BENEFICIARY UNAVAILABLE (TIMEOUT)
00RB	CREDIT REVERSAL TIMEOUT (REVERSAL)
00RR	DEBIT REVERSAL TIMEOUT (REVERSAL)
00RP	PARTIAL DEBIT REVERSAL TIMEOUT
U29	Address resolution is failed
U30	Debit has been failed
U31	Credit has been failed
U32	Credit revert has been failed

U33	Debit revert has been failed
U34	Reverted
U66	Device Fingerprint mismatch
U67	Debit TimeOut
U68	Credit TimeOut
U69	Collect Expired
U70	Received Late Response

Get Pending Request

API returns all the Pending collect requests for given Mobile profile.

API returns both "As Payer" and "As Payee" pending requests in same response, identified by the value of JSON field "direction".

Field direction	Meaning
INITIATED	Collect Request has been initiated by this customer. (Customer is Payee)
RECEIVED	Collect Request is received for Approval. Customer is Payer.

Also "upiTranlogId" of the Collect request JSON object need to send in the "Collect Auth (Approve or Reject)" API.

Send 'payeeMccCode' and 'payeeMccType' in response. This change is Channel specific. Column SEND_MCC_TYPE_GTPENDING should be marked as enable ('Y') for particular channel in UPI_SOURCE_CHANNELS table where mentioned 2 parameters expected in response. For other channels, these parameters will not be populated in response.

API supports filter "virtual-address" which will return pending collect request specific to provided VPA.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetPendingRequest>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetPendingRequest>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn- id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	virtual-address	O	255	V	AN	Alias name with which the user can be identified by his registered entity. In case of RESTRICTED channels, it will be hashed value for other channels it will be clear value for VPA. E.g. <va:name>@<yourpsp:name>
6	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
7	payer-consent	M	1	F	A	This will have 'Y/N'

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "virtual-address": "xyz@psp",
  "payer-consent": "Y"
}
```

Response

```
{
  "success": true,
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "712512014982",
  "UpiTranlogId": "82466",
  "UserProfile": "1204",
  "SeqNo": "ICI8764ab8e31ac4e8892d960dd1c458805",
  "MobileAppData": {
    "details": {
      "pending": {
        "date": "20201008100014",
        "note": "Sourav-test",
        "amount": 100,
        "seqNo": "ICI60329916072075459220160720110712",
        "payeeMccType": "PERSON",
        "expireAfter": "2020-10-0811:10:22",
        "payeeVa": "ppd2@icici",
        "type": "COLLECT",
        "payeeName": "Sourav UAT",
        "upiTranlogId": 68276514,
        "payerVa": "sivawipro@icici",
        "refUrl": "https://www.icicibank.com",
        "payeeMccCode": "0000",
        "direction": "RECEIVED",
        "status": "PENDING",
        "PayeeVerifiedMerchant": "YES"
      }
    }
  }
}
```

Response Code

Get Pending Request	
0000	Success

0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

Approve/Reject Pending Collect Request

This API will approve or reject Collect request initiated by some Payee to user identified by Mobile Debiting account will be identified by Account + IFSC mapped to VPA.

Channel can initiate Pre-Approved request (MPIN is not required to validate the customer) by setting pre-approved flag as "A". If pre-approved flag is "M" then MPIN is required field.

Pre-approved flag is "M" then MPIN must be captured using common library.

Channel

Action	Meaning
A	Approve pending transaction.
R	Reject pending transaction.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/CollectAuth>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/CollectAuth>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.

2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	ifsc	C	11	F	AN	IFSC code of the account. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
7	account-number	M	20	V	AN	Account Number for which user needs to check balance. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
8	mpin	O	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted mpin> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If pre-approved flag is M then this MPIN will be mandatory else optional.

9	payee-va	M	255	V	N	Alias name with which the payee can be identified by his registered entity.
10	payer-va	M	255	V	N	Alias name with which the payer can be identified by his registered entity. In case of RESTRICTED channels it is hashed value.
11	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
12	amount	M	14	V	N	Amount to be debited. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12

13	account-type	M	20	V	A	Account type of the mapped account
14	note	M	50	V	AN	Remarks entered by the payer for his reference.
15	payer-amount	M	10	V	N	Amount accepted by the payer to be debited. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12
16	upi-tranlog-id	M	25	V	N	In case of collect request UPI switch will send collect notification to mobile app. In this notification switch will send upi-tranlog-id. User will approve or reject the request, and hence in collect-auth request same upi-tranlog-id will be required as input.
17	action	M	1	F	A	A=Approve, R=Reject, B=Block, S=Spam
18	pre-approved	M	1	F	A	A=Pre-approved, M=MPIN required. Value of this parameter always should be 'A' for PPI channel.
19	aadhaar-cred	O	1024	V	AN	The AADHAAR-BIO-FP/AADHAAR-BIO-IRIS/AADHAAR-BIO-OTP details would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted data> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If pre-approved flag is M then this MPIN will be mandatory else optional.

20	mandate-cred	O	1024	V	AN	base-64 encoded digitally signedUPI-Mandate <code,ki,ver base64 encoded encrypted data> Please check NPCI guidelines. This cred blockis applicable only for the UPI-mandate txn
21	payer- consent- name	M	100	V	A	Merchant should have GSTIN to get the benefit. This will have static value 'GST'. 'NOT GST' not in scope for now.
22	payer- consent- type	O	100	V	A	This will have static value 'PAN for now. Other is not in scope.
23	block-days	C	4	V	N	This value should present if action=B. This value is for how many days payee-vpa need to block. If action=B and block-days is blank then payee-vpa will blocked for infinite time till user will unblock it

Sample Requests with dummy Values
Values Approve with Transaction

```
Request {
  "account-provider":"5",
  "mpin":"<base64encodedString>",
  "mobile":"9028909024",
  "payer- va":"abc@xyz",
  "payee-va":"lmn@xyz",
  " amount":"100.00",
```

```

"note":"taxi-bill",
"device-id":"84521654864135",
"seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"channel-code":"Imobile",
"profile-id":"10",
"account-type":"Saving",
"ifsc":"ICIC5421544",
"payer-amount":"100.00",
"upi-tranlog-id":"12345",
"action":"A",
"pre-approved":"M",
"account-number":"8976376573767",
"payer-consent-name":"GST",
"payer-consent-type":"PAN",
"block-days":"7"
}

```

Approve with Pre-Approved Transaction

```

Request {
  "account-provider":"5",
  "mpin":"",
  "mobile":"9028909024",
  "payer-va":"abc@xyz",
  "payee-va":"lmn@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "account-type":"Saving",
  "ifsc":"ICIC5421544",
  "payer-amount":"100.00",
  "upi-tranlog-id":"12345",
  "action":"A",
  "pre-approved":"A",
  "account-number":"8976376573767",
  "payer-consent-name":"GST",
  "payer-consent-type":"PA",
  "block-days":"7"
}

```

Response

```

{
  "success": true,
  "response": 92,
  "message": "Transaction Initiated",
  "BankRRN": "603417064918",
  "UpiTranlogId": "604",
}

```

```

"UserProfile": "10",
"SeqNo": "ef1e92b4a01d4618a0ec a5fdecc37ff23f3",
"MobileAppData": "SUCCESS,Action=A"
}

```

Response Code

Collect-Auth	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch

0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input
0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input
0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input
0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input

0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values
0L20	Trust is not valid
0U66	Device Fingerprint mismatch
0U48	Transaction id not present
0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	TransactionId or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request
0U57	Payee Amount differs from original request
0U58	Payer Amount differs from original request
0U59	Payee Address differs from original request
0U60	Payer Address differs from original request
0U61	Payee Info differs from original request
0U62	Payer Info differs from original request
0U63	Device registration failed in UPI
0U64	Data tag should contain 4 parts during device registration
0U65	Creds block should contain correct elements during device registration
0U27	No response from PSP
0U28	PSP not available
F01	RegDetails must be present <ReqRegMob/>
F02	RegDetails.Detail must be present
F03	RegDetails.Detail name/value should be present name,value
F04	RegDetails.Detail name not valid
F05	RegDetails.Cred not present
F06	RegDetails.Cred data is wrong
F07	RegDetails.Cred.Otp must be present
F08	RegDetails.Cred.Pin must be present
F09	RegDetails.Cred.Data must be present
F10	RegDetails.Cred.Data encrypted authentication must be present
00ZM	INVALID MPIN
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00XL	EXPIRED CARD, DECLINE (REMITTER)

00XN	NO CARD RECORD (REMITTER)
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XR	RESTRICTED CARD, DECLINE (REMITTER)
00XM	EXPIRED CARD, DECLINE (BENEFICIARY)
00XO	NO CARD RECORD (BENEFICIARY)
00XQ	TRANSACTION NOT PERMITTED TO CARDHOLDER (BENEFICIARY)
00XS	RESTRICTED CARD, DECLINE (BENEFICIARY)
00XU	CUT-OFF IS IN PROCESS (BENEFICIARY)
00XW	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (BENEFICIARY)
00Y1	BENEFICIARY CBS OFFLINE
00YB	LOST OR STOLEN CARD (BENEFICIARY)
00YD	DO NOT HONOUR (BENEFICIARY)
00YF	BENEFICIARY ACCOUNT BLOCKED/FROZEN
00RN	Registration is temporary blocked due to maximum no of attempts exceeded
0U11	Credentials is not present
00XY	REMITTER CBS OFFLINE
00ZM	Invalid MPIN
00AM	MPIN not set by customer
00ZA	collect Auth rejected by customer
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
00BT	ACQUIRER/BENEFICIARY UNAVAILABLE(TIMEOUT)
00RB	CREDIT REVERSAL TIMEOUT(REVERSAL)
00RR	DEBIT REVERSAL TIMEOUT(REVERSAL)
00RP	PARTIAL DEBIT REVERSAL TIMEOUT
U29	Address resolution is failed
U30	Debit has been failed
U31	Credit has been failed
U32	Credit revert has been failed
U33	Debit revert has been failed
U34	Reverted
U66	Device Fingerprint mismatch
U67	Debit TimeOut
U68	Credit TimeOut
U69	Collect Expired
U70	Received Late Response

Transaction Status

API will return the status of the transaction based on the “seq-no” of the original transaction.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/TransactionStatus>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/TransactionStatus>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data Type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	ori-seq-no	M	255	V	AN	Value passed in this parameter is depend on 'mandate-txn-flag' parameter. Seq No of the original transaction to be passed for which status to be retrieved.
6	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
7	mandate-txn-flag	O	1	F	A	To identify if its mandate transaction. It accepts (Y/N).

8	Umn	O	255	V	AN	Unique Mandate Number. Value to be in case update/revoke/suspend/reactivate mandate status check
---	-----	---	-----	---	----	--

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "ori-seq-no": "ef1e92b4annnb618a0eca5fdecc37ff23f3",
  "mandate-txn-flag": "Y",
  "umn": "3f0b6af843724437aeb619cd2ec481e9@imobile"
}
```

Response

```
{
  "success": true,
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "102817799234",
  "UpiTranlogId": "303799234",
  "UserProfile": "2994433",
  "SeqNo": "ICI60322016pp1bb1071220160720110712",
  "MobileAppData": "SUCCESS",
  "PayerRespCode": "00"
}
```

Response Code

Transaction Status	
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	invalid channel code
0014	sequence no not present
0017	keys not present
0031	mobile no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0091	Transaction Initiated
9999	UPI Technical Error

Balance Inquiry

API will return the balance details of the Account +IFSC mapped to VPA. Same API will cater to give Customer existence.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/BalanceEnquiry>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/BalanceEnquiry>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.

6	ifsc	C	11	F	AN	IFSC code of the account. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
7	account-number	M	20	V	AN	Account Number for which user needs to check balance. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
8	virtual-address	M	255	V	AN	Alias name with which the user can be identified by his registered entity. In case of RESTRICTED channels, it will be hashed value for other channels it will be clear value for VPA. E.g. <va:name>@<yourpsp:name>
9	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
10	account-type	O	20	V	A	Account type of the mapped account
11	mpin	M	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted otp> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be routed to NPCI for decryption. (To be discussed)</i>

12	show-status	O	1	F	A	Flag to show the status of the customer. This parameter should have 'Y' = show status (SUCCESS/FAILURE), " (blank)= show balance and 'N' = show balance of the customer OR in case of absence of parameter it will return the balance.
13	validate-balance	O	1	F	A	If validate balance flag is Y then the transaction amount would be validated, and balance will not be displayed to channel, if the same is N then the API will function normally.
14	transaction-amount	C	14	V	N	If the validate-balance = Y then this parameter should be present in the request.

Sample Requests with dummy Values

```
Request {
  "mobile":"9028909024",
  "account-provider":"5",
  "account- number":"87542154623",
  "ifsc":"ICIC5421544",
  "account-type":"Saving",
  "device- id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "mpin":"<base64encodedString>",
  "virtual-address":"abc@icici",
  "show-status":"Y"
}
```

```
Request {
  "mobile":"9028909024",
  "account-provider":"5",
  "account- number":"87542154623",
  "ifsc":"ICIC5421544",
  "account-type":"Saving",
  "device- id":"84521654864135",
  "seq-no":" ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "mpin":"<base64encodedString>",
  "virtual-address":"abc@icici",
}
```

```
"show-status":"N"
}
```

```
Request {
  "mobile":"9028909024",
  "account-provider":"5",
  "account- number":"87542154623",
  "ifsc":"ICIC5421544",
  "account-type":"Saving",
  "device- id":"84521654864135",
  "seq-no":" ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel- code":"Imobile",
  "profile-id":"10",
  "mpin":"<base64encodedString>",
  "virtual-address":"abc@icici",
  "show-status":""
}
```

```
Request {
  "mobile":"9028909024",
  "account-provider":"5",
  "account- number":"87542154623",
  "ifsc":"ICIC5421544",
  "account-type":"Saving",
  "device- id":"84521654864135",
  "seq-no":" ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "profile-id":"10",
  "mpin":"<base64encodedString>",
  "virtual-address":"abc@icici"
}
```

Response (in case of show-status = 'N', '' (blank) or absence of parameter)

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0ec a5fdecc37ff23f3",
  "MobileAppData": "5000"
}
```

Response (in case of show-status = 'Y')

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0ec a5fdecc37ff23f3",
  "MobileAppData": "SUCCESS"
}
```

Response (in case of validate-balance = 'Y')

```
{
  "success": true,
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "808610023505",
  "UpiTranlogId": "23505",
  "UserProfile": "1041",
  "SeqNo": "ICIL42111a1bAAAAAAAAAA1522127794752",
  "MobileAppData": "SUCCESS",
  "ValidateBalanceStatus": "00"
}
```

Response Code

Balance Inquiry	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)

00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgId mismatch
0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input
0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input
0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input
0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input
0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values
0L20	Trust is not valid
0U66	Device Fingerprint mismatch
0U48	Transaction id not present

0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	TransactionId or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request

Mini Statement

API will return transaction history of the user profile within the specified date range.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/MiniStatement>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/MiniStatement>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference

4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
---	--------------	---	----	---	---	---

5	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
6	from-date	M	8	F	N	Format : ddMMyyyy E.g. 09032016
7	to-date	M	8	F	N	Format : ddMMyyyy E.g. 11032016

Sample Request with dummy Values

```
DATA {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "lmobile",
  "profile-id": "10",
  "from-date": "09032016",
  "to-date": "11032016",
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "605616612043",
  "UpiTranlogId": "1600",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": {
    "details": {
      "transactions": [
        {
          "date": "2016-02-16",
          "type": "PAY",
          "txn-type": "CREDIT",
          "rrn": "625210798414",
          "note": " Restaurant Bill",
          "amount": "200.00",
          "payer": "abc@icici",
          "payee": "xyz@pockets",
          "status": "SUCCESS"
        },
        {
          "date": "2016-02-14",
          "type": "COLLECT",

```

```

"txn-type": "CREDIT",
"rrn": "txn-type": "CREDIT",
"rrn": "625210798414",
"note": "Taxi Bill",
"amount": "200.00",
"payer": "abc@icici",
"payee ": "lmn@pockets",
"status": "SUCCESS"
},
{
  "date": "2016-02-12",
  "type": "PAY",
  "txn-type": "CREDIT",
  "rrn": "625210798414",
  "note": "Birthday Party",
  "amount": "200.00",
  "payer": "abc@icici",
  "payee ": "pqr@pockets",
  "status": "SUCCESS"
}
]
}
}
}
}

```

Response Code

Mini Statement	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

Change MPIN

API will change account MPIN. Account will be identified by Account + IFSC mapped to VPA.

Old MPIN and New MPIN will be captured using NPCI common library.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ChangeMPIN>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ChangeMPIN>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.

6	ifsc	C	11	F	AN	IFSC code of the account. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
7	account-number	M	20	V	AN	Account Number for which user needs to change MPIN. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
8	old-mpin	M	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted otp> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be routed to NPCI for decryption. (To be discussed)</i>
9	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
10	virtual-address	M	255	V	AN	Alias name with which the user can be identified by his registered entity. In case of RESTRICTED channels, it will be hashed value for other channels it will be clear value for VPA. E.g. <va:name>@<yourpsp:name>
11	account-type	M	20	V	A	Account type of the mapped account

12	new-mpin	M	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted MPIN> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines.
----	----------	---	------	---	----	--

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "account-provider": "5",
  "account-number": "87542154623",
  "ifsc": "ICIC5421544",
  "virtual-address": "xyz@psp",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "account-type": "Saving",
  "old-mpin": "NPCI,2015082,1.0|<Base64data>",
  "new-mpin": "NPCI,2015082,1.0|<Base64data>"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "10",
  "MobileAppData": "",
  "SeqNo": "ef1e92b4a01d4618a0ec a5fdecc37ff23f3"
}
```

Response Code

Change MPIN	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code

0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00ZR	INVALID / INCORRECT OTP
00ZS	OTP EXPIRED
00ZT	OTP TRANSACTION LIMIT EXCEEDED
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch
0L05	Technical Issue, please try after some time
0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input

0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input
0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input
0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input
0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values
0L20	Trust is not valid
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0U66	Device Fingerprint mismatch
0U48	Transaction id not present
0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	Transaction Id or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request
0U57	Payee Amount differs from original request
0U58	Payer Amount differs from original request
0U59	Payee Address differs from original request
0U60	Payer Address differs from original request
0U61	Payee Info differs from original request
0U62	Payer Info differs from original request
0U63	Device registration failed in UPI
0U64	Data tag should contain 4 parts during device registration
0U65	Creds block should contain correct elements during device registration
0U27	No response from PSP
0U28	PSP not available
F01	RegDetails must be present <ReqRegMob/>
F02	RegDetails.Detail must be present
F03	RegDetails.Detail name/value should be present name,value
F04	RegDetails.Detail name not valid

F05	RegDetails.Cred not present
F06	RegDetails.Cred data is wrong
F07	RegDetails.Cred.Otp must be present
F08	RegDetails.Cred.Pin must be present
F09	RegDetails.Cred.Data must be present
F10	RegDetails.Cred.Data encrypted authentication must be present
00ZM	INVALID MPIN
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00XL	EXPIRED CARD, DECLINE (REMITTER)
00XN	NO CARD RECORD (REMITTER)
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XR	RESTRICTED CARD, DECLINE (REMITTER)
00XM	EXPIRED CARD, DECLINE (BENEFICIARY)
00XO	NO CARD RECORD (BENEFICIARY)
00XQ	TRANSACTION NOT PERMITTED TO CARDHOLDER (BENEFICIARY)
00XS	RESTRICTED CARD, DECLINE (BENEFICIARY)
00XU	CUT-OFF IS IN PROCESS (BENEFICIARY)
00XW	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (BENEFICIARY)
00Y1	BENEFICIARY CBS OFFLINE
00YB	LOST OR STOLEN CARD (BENEFICIARY)
00YD	DO NOT HONOUR (BENEFICIARY)
00YF	BENEFICIARY ACCOUNT BLOCKED/FROZEN
00RN	Registration is temporary blocked due to maximum no of attempts exceeded
0U11	Credentials is not present

Pay to Merchant VPA

This API will initiate a pay request to Merchant virtual address.

Debiting account will be identified by Virtual address (VPA). If Use Default flag is "D" then default debit account configured will be use. Otherwise Account, IFSC mapped to VPA need required fields.

Channel can initiate Pre-Approved request (MPIN is not required to validate the customer) by setting pre-approved flag as "A". If pre-approved flag is "M" then MPIN is required field.

Pre-approved flag is "M" then MPIN must be captured using common library.

In case Use Default flag is not set and Account details are provided, API also support feature to set given account as default credit and/or default debit.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/PayMerchantRequest>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/PayMerchantRequest>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	ifsc	C	11	F	AN	IFSC code of the account. Optional: when use-default-acc flag has value 'D'. Mandatory: when use-default-acc flag has value 'N'. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel

7	account-number	O	20	V	AN	Account Number from which the amount should be debited. Optional: when use-default-acc flag has value 'D'. Mandatory : when use-default-acc flag has value 'N'. This parameter is not required for PPI Channel.
8	Mpin	O	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted MPIN> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If pre-approved flag is M then this MPIN will be mandatory else optional.
9	payee-va	M	255	V	AN	Alias name with which the payee can be identified by his registered entity.
10	payer-va	M	255	V	AN	Alias name with which the payer can be identified by his registered entity.
11	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
12	Amount	M	14	V	N	Amount to be debited. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12

13	account-type	O	20	V	A	Account type of the mapped account
14	Note	M	50	V	AN	Remarks entered by the payer for his reference.
15	pre-approved	M	1	F	A	A=Pre-approved, M=MPIN required. Value of this parameter always should be 'A' for PPI channel.
16	use-default-acc	O	1	F	A	D=Use default acc for transaction N=Use account No and IFSC provided in request for the transaction. Value of this parameter always should be 'D' for PPI channel.
17	default-debit	M	1	F	A	Flag 'D' to denote to set this account as the default debit account. Value 'N' will not set the default debit account. When use-default-acc flag has value 'D', this flag should have value N When this value is populated as D then the entered account will be set to default debit account.
18	default-credit	M	1	F	A	Flag 'D' to denote to set this account as the default credit account. Value 'N' will not set the default credit account. When use-default-acc flag has value 'D', this flag should have value N When this value is populated as D then the entered account will be set to default credit account.
19	Mcc	M	4	F	N	Merchant Category Code

20	merchant-type	M	50	V	A	For Merchant Transactions merchant type should be ENTITY.
21	ref-id	M	35	V	AN	Reference id of the transaction whose status is required
22	payee-name	O	100	V	A	Name of the Payee
23	min-amount	C	14	V	N	Min amount which the payee needs to pay for the transaction
24	ref-url	C	100	V	AN	Reference URL of the QR code transactions
25	Mid	C	100	V	AN	Merchant ID
26	sub-mid	C	100	V	AN	Sub merchant ID
27	m-txnid	C	100	V	AN	Merchant Transaction ID
28	sub-mername	C	100	V	AN	Sub Merchant Name
29	Mtid	O	20	V	A	Merchant Terminal ID

30	initiation-mode	C	2	F	N	00=Default 01=QR Code 02=Secure QR Code 03=Bharat QR Code 04=Intent 05=Secure Intent 06=NFC(Near Field Communication) 07=BLE (Bluetooth) 08=UHF(Ultra High Frequency) 09=Aadhaar 10=SDK (Software Development Kit) 11=UPI-Mandate 12= FIR (Foreign Inward Remittance) 13= QR Mandate 14= BBPS. If the initiation mode is 12 then institution details mentioned in the common parameter list are mandatory
31	msid	O	15	V	A	Store Id of the merchant
32	qr-ver	O	15	V	N	Version of UPI QR
33	qr-medium	O	2	V	AN	Creation source of QR. 00 - DEFAULT 01 - PICK FROM GALLERY 02 - APP 03 - POS 04 - PHYSICAL 05- ATM 06 - WEB The QR tag shall be populated ONLY in ReqPay type "DEBIT" and "PAY".
34	qr-ts	O	14	F	N	Format : ddMMyyyyHHmmss

						E.g. 09032016235603
35	qr-expire-ts	O	14	F	N	Format : ddMMyyyyHHmmss E.g. 09032016235603
36	qr-query	O	100	V	A	Parameter in querystring
37	pin-code	O	6	F	N	PIN / Postal code of the merchant
38	payer-consent-name	M	100	V	A	Merchant should have GSTIN to get the benefit. This will have static value 'GST'. 'NOT GST' not in scope for now.
39	payer-consent-type	O	100	V	A	This will have static value 'PAN for now. Other is not in scope.
40	Gst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
41	Cgst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
42	Sgst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
43	Cess	O	14	V	N	It should be in INR. Integer with 2 decimal value.
44	Igst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
45	gst-incentive	O	14	V	N	It should be in INR. Integer with 2 decimal value.
46	gst-pct	O	14	V	N	It should be in INR. Integer with 2 decimal value.
47	Gstin	O	100	V	AN	This will have GSTIN number
48	payee-consent-name	O	100	V	A	Merchant should have GSTIN to get the benefit. This will have static value 'GST'. 'NOT GST' not in scope for now.
49	payee-consent-type	O	100	V	A	This will have static value 'GSTIN'.
50	payee-consent-value	O	100	V	AN	This will have GSTIN number in this attribute. If above 'payee-consent-type' is blank then this value is optional.
51	invoice-name	O	100	V	AN	Customer name for the invoice is generated
52	invoice-no	O	100	V	AN	Bill invoice number
53	invoice-date	O	8	F	N	Format: ddMMyyyy E.g. 09032016
54	ptc-mobile	O	10	F	N	Pay To Contact Mobile No. Optional: when Channel-code belongs to Internal Channel

Sample requests with dummy Values

Transaction with MPIN

Request	
	<pre>{ "account-provider":"1", "mpin": "<base64encodedString>", "mobile": "9028909024", "payer-va": "abc@icici", "payee-va": "lmn@xyz", "amount": "100.00", "note": "taxi-bill", "device-id": "84521654864135", "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3", "channel-code": "lmobile", "profile-id": "10", "account-type": "Saving", "ifsc": "HDFC5421544", "account-number": "8976376573767", "pre-approved": "M", "use-default-acc": "N", "default-debit": "D", "default-credit": "N", "mcc": "4814", "merchant-type": "ENTITY", "ref-id": "ghyf452178542536514kjljiuhngty12345", "payee-name": "ABC", "min-amount": "1.00", "currency": "INR", "ref-url": "www.npci.org.in", "qr-ver": "1.0", "qr-medium": "00", "qr-ts": "09032016235603", "qr-expire-ts": "09032016235603", "qr-query": "", "pin-code": "111111", "payer-consent-name": "GST", "payer-consent-type": "PAN", "Gst": "5.00", "Cgst": "2.50", }</pre>

```

"sgst": "2.50",
"Cess": "1.00",
"lgst": "1.00",
"gst-incentive": "1.00",
"gst- pct": "1.00",
"Gstin": "22AAAAA0000A1Z5",
"payee-consent-name": "GST",
"payee-consent- type": "GSTIN",
"payee-consent-value": "22AAAAA0000A1Z5",
"invoice-name": "ABC",
"invoice- no": "12244566",
"invoice-date": "09032016",
"ptc-mobile": "9898989898"
}

```

Pre-Approved Transaction

```

Request {
  "account-provider": "1",
  "mpin": "",
  "mobile": "9028909024",
  "payer-va": "abc@icici",
  "payee- va": "lmn@xyz",
  "amount": "100.00",
  "note": "taxi-bill",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "account- type": "Saving",
  "ifsc": "ICIC5421544",
  "account-number": "8976376573767",
  "pre-approved": "A",
  "use- default-acc": "N",
  "default-debit": "D",
  "default-credit": "N",
  " mcc": "4814",
  "merchant-type": "ENTITY",
  "ref- id": "ghyf452178542536514kljiuhngty12345",
  "payee-name": "ABC",
  "min- amount": "1.00",

```

```

"currency": "INR",
"ref-url": "www.npci.org.in",
  "qr-ver": "1.0",
  "qr-medium": "00",
  "qr-ts": "09032016235603",
  "qr-expire-ts": "09032016235603",
  "qr-query": " ",
  "pin-code": "111111",
  "payer-consent-name": "GST",
  "payer-consent-type": "PAN",
  "Gst": "5.00",
  "Cgst": "2.50",
  "sgst": "2.50",
  "Cess": "1.00",
  "Igst": "1.00",
  "gst-incentive": "1.00",
  "gst-pct": "1.00",
  "Gstin": "22AAAAA0000A1Z5",
  "payee-consent-name": "GST",
  "payee-consent-type": "GSTIN",
  "payee-consent-value": "22AAAAA0000A1Z5",
  "invoice-name": "ABC",
  "invoice-no": "12244566",
  "invoice-date": "09032016",
  "ptc-mobile": "9898989898"
}

```

Using Default Debit Account configured

```

Request {
  "account-provider": "1",
  "mobile": "9028909024",
  "payer-va": "abc@icici",
  "payee-va": "lmn@xyz",
  "amount": "100.00",
  "note": "taxi-bill",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "account-type": "Saving",

```

```

"ifsc": "",
"account-number": "",
"mpin": "",
"pre-approved": "A",
"use-default-acc": "D",
"default-debit": "N",
"default-credit": "N",
"mcc": "4814",
"merchant-type": "ENTITY",
"ref-id": "ghyf452178542536514kjljiuhngty12345",
"payee-name": "ABC",
"min-amount": "1.00",
"currency": "INR",
"ref-url": "www.npci.org.in",
"qr-ver": "1.0",
"qr-medium": "00",
"qr-ts": "09032016235603",
"qr-expire-ts": "09032016235603",
"qr-query": "",
"pin-code": "111111",
"payer-consent-name": "GST",
"payer-consent-type": "PAN",
"Gst": "5.00",
"Cgst": "2.50",
"sgst": "2.50",
"Cess": "1.00",
"lgst": "1.00",
"gst-incentive": "1.00",
"gst-pct": "1.00",
"Gstin": "22AAAAA0000A1Z5",
"payee-consent-name": "GST",
"payee-consent-type": "GSTIN",
"payee-consent-value": "22AAAAA0000A1Z5",
"invoice-name": "ABC",
"invoice-no": "12244566",
"invoice-date": "09032016",
"ptc-mobile": "9898989898"
}

```

Response

```

{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "603415867949",
  "UpiTranlogId": "592",
  "UserProfile": "10",

```

```

"SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"MobileAppData": "SUCCESS"
}

```

Response Code

Pay to Merchant VPA	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
00XF	FORMAT ERROR (INVALID FORMAT) (REMITTER)
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00ZD	VALIDATION ERROR
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XV	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (REMITTER)
00YC	DO NOT HONOUR (REMITTER)
00YE	REMITTING ACCOUNT BLOCKED/FROZEN
00XK	REQUESTED FUNCTION NOT SUPPORTED
00XB	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (REMITTER)
00XC	INVALID TRANSACTION OR IF MEMBER IS NOT ABLE TO FIND ANY APPROPRIATE RESPONSE CODE (BENEFICIARY)
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U16	Risk threshold exceeded
0U17	PSP is not registered
0U28	PSP not available
0U51	PSP orgId not found
0U55	Message integrity failed due to orgid mismatch
0L05	Technical Issue, please try after some time

0L16	Unknown error occurred
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0L05	Technical Issue, please try after some time
0L06	Key Code has not been provided in input
0L07	Error while parsing Key Code from input
0L08	XML Payload has not been provided in input
0L09	Error while parsing XML Payload from input
0L10	Error while parsing Controls from input
0L11	Error while parsing Configuration from input
0L12	Salt has not been provided in input
0L13	Error while parsing Salt from input
0L14	Error while parsing Pay Info from input
0L15	Error while parsing Locale from input
0L16	Unknown error occurred
0L17	Trust has not been provided
0L18	Mandatory salt values have not been provided
0L19	Error while parsing mandatory salt values
0L20	Trust is not valid
0U66	Device Fingerprint mismatch
0U48	Transaction id not present
0U49	Request message id is not present
0U50	IFSC is not present
0U51	PSP orgId not found
0U52	Request refund is not found
0U53	PSP Request Pay Debit Acknowledgement not received
0U54	TransactionId or Amount in credential block does not match with that in ReqPay
0U55	Message integrity failed due to orgid mismatch
0U56	Number of Payees differs from original request
0U57	Payee Amount differs from original request
0U58	Payer Amount differs from original request
0U59	Payee Address differs from original request
0U60	Payer Address differs from original request
0U61	Payee Info differs from original request
0U62	Payer Info differs from original request
0U63	Device registration failed in UPI
0U64	Data tag should contain 4 parts during device registration
0U65	Creds block should contain correct elements during device registration
0U27	No response from PSP
0U28	PSP not available
F01	RegDetails must be present <ReqRegMob/>

F02	RegDetails.Detail must be present
F03	RegDetails.Detail name/value should be present name,value
F04	RegDetails.Detail name not valid
F05	RegDetails.Cred not present
F06	RegDetails.Cred data is wrong
F07	RegDetails.Cred.Otp must be present
F08	RegDetails.Cred.Pin must be present
F09	RegDetails.Cred.Data must be present
F10	RegDetails.Cred.Data encrypted authentication must be present
00ZM	INVALID MPIN
00XH	ACCOUNT DOES NOT EXIST (REMITTER)
00XJ	REQUESTED FUNCTION NOT SUPPORTED
00XL	EXPIRED CARD, DECLINE (REMITTER)
00XN	NO CARD RECORD (REMITTER)
00XP	TRANSACTION NOT PERMITTED TO CARDHOLDER (REMITTER)
00XR	RESTRICTED CARD, DECLINE (REMITTER)
00XM	EXPIRED CARD, DECLINE (BENEFICIARY)
00XO	NO CARD RECORD (BENEFICIARY)
00XQ	TRANSACTION NOT PERMITTED TO CARDHOLDER (BENEFICIARY)
00XS	RESTRICTED CARD, DECLINE (BENEFICIARY)
00XU	CUT-OFF IS IN PROCESS (BENEFICIARY)
00XW	TRANSACTION CANNOT BE COMPLETED. COMPLIANCE VIOLATION (BENEFICIARY)
00Y1	BENEFICIARY CBS OFFLINE
00YB	LOST OR STOLEN CARD (BENEFICIARY)
00YD	DO NOT HONOUR (BENEFICIARY)
00YF	BENEFICIARY ACCOUNT BLOCKED/FROZEN
00RN	Registration is temporary blocked due to maximum no of attempts exceeded
0U11	Credentials is not present
00XY	REMITTER CBS OFFLINE
00ZM	Invalid MPIN
00AM	MPIN not set by customer
00ZA	collect Auth rejected by customer
00UT	REMITTER/ISSUER UNAVAILABLE (TIMEOUT)
00BT	ACQUIRER/BENEFICIARY UNAVAILABLE (TIMEOUT)
00RB	CREDIT REVERSAL TIMEOUT (REVERSAL)
00RR	DEBIT REVERSAL TIMEOUT (REVERSAL)
00RP	PARTIAL DEBIT REVERSAL TIMEOUT
U29	Address resolution is failed
U30	Debit has been failed
U31	Credit has been failed
U32	Credit revert has been failed
U33	Debit revert has been failed
U34	Reverted

U66	Device Fingerprint mismatch
U67	Debit TimeOut
U68	Credit TimeOut
U69	Collect Expired
U70	Received Late Response

TransactionsPull

API will return transactions happened for the payee vpa (merchant vpa) within the specified date range and within last 24 hours only.

UAT: [https://apibankingonesandbox.icicibank.com/api/v1/upi2/ TransactionsPull](https://apibankingonesandbox.icicibank.com/api/v1/upi2/TransactionsPull)

Production: [https://apibankingone.icicibank.com/api/v1/upi2/ TransactionsPull](https://apibankingone.icicibank.com/api/v1/upi2/TransactionsPull)

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	vpa	M	255	V	AN	Alias name with which the payee can be identified by his registered entity.

3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class.
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	from-timestamp	M	14	F	N	Format : YYYYMMDDHHMMSS E.g. 20210121160001
6	to-timestamp	M	14	F	N	Format : YYYYMMDDHHMMSS E.g. 20210122154100

Sample Request with dummy Values

```
Request {
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "vpa":"testmerchant@icici",
  "channel-code":"GOOGLE",
  "from-timestamp":"20210121160001",
  "to-timestamp":"20210122154100"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": " Transaction Successful ",
  "BankRRN": "605616612043",
  "UpiTranlogId": "1600",
```

```

"UserProfile": "10",
"SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"MobileAppData": {
  "details": {
    "transactions": [
      {
        "upiTransactionId": "ICIE92b4a01d4618a0eca5fdecc37ff2001",
        "payerVpa": "payer@okicici",
        "payeeVpa": "payee@okicici",
        "upirefId": "100416612001",
        "merchantReferenceId": "EZY00001",
        "amount": "10.00",
        "payeeName": "Merchant Name",
        "payeeRemarks": "bill Pay",-- Note
"transactionTimestamp": "1609754504"
"transactionResponseCode": "00",
        "transactionStatusDescription": "Successful"
      },
      {
        "upiTransactionId": "ICIE92b4a01d4618a0eca5fdecc37ff2002",
        "payerVpa": "payer1@okicici",
        "payeeVpa": "payee1@okicici",
        "upirefId": "100416612002",
        "merchantReferenceId": "EZY00002",
        "amount": "20.00",
        "payeeName": "Merchant Name",
        "payeeRemarks": "bill Pay",-- Note
"transactionTimestamp": "1609754505"
"transactionResponseCode": "00",
        "transactionStatusDescription": "Successful"
      },
      {
        "upiTransactionId": "ICIE92b4a01d4618a0eca5fdecc37ff2003",
        "payerVpa": "payer2@okicici",
        "payeeVpa": "payee2@okicici",
        "upirefId": "100416612003",
        "merchantReferenceId": "EZY00003",
        "amount": "30.00",
        "payeeName": "Merchant Name",
        "payeeRemarks": "bill Pay",
"transactionTimestamp": "1609754505",
"transactionResponseCode": "00",
        "transactionStatusDescription": "Successful"
      }
    ]
  }
}

```

Merchant Transaction API

Merchant Transaction API are targeted to use by Merchant Application/Merchant SDK.

Merchant Store Account Details

Merchant SDK must invoke this API, to map merchant VPA with respective account in UPI switch. This API will also create a merchant user profile against the mobile number entered. This profile will be used by UPI switch for internal use. The profile id will be returned in response which is expected as input.

Merchant MCC, populate respective Merchant MCC

Merchant Type, always send "Entity". Current Merchant Transactions flow only work when type is "Entity"

****Note** – post successful execution of merchant store account details API, manage verified address API has to be called to add this merchant in the trusted list of NPCI along with his certificate in case of signed intent/QR

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/MerchantStoreAccountDetails>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/MerchantStoreAccountDetails>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed / Variable Length	Data Type	Description
1	Service-provider	M	255	V	AN	Name of the SMS service provider
2	mobile	M	10	F	N	Mobile number of the user
3	Seq-no	M	36	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	message-test	M	255	V	AN	Message text Eg: TRL WHA ICIWCB70CEF50FB3367BFC39F8F71D79666

6	Timestam p	M	20	V	AN	Format : YYYY-MM-DDTHH:MM:SS Eg: 2018-04-18T17:49:33
7	account- number	M	20	V	AN	Account Number selected by the user. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
8	Mmid	O	7	F	N	MMID of the account to which the virtual address will be mapped.
9	virtual- address	M	255	V	AN	Alias name with which the user can be identified by his registered entity. E.g. <va:name>@<yourpsp:name>
10	account- type	M	20	V	A	Account type of the mapped account
11	profile-id	O	10	V	N	For first account registration this parameter will be blank/will not be present. This parameter needs to be populated when the user is already registered and is adding another account.
12	Name	M	100	V	A	Name of the user
13	default- debit	M	1	F	A	Flag 'D' to denote to set this account as the default debit account. Value other than 'D' will not set the default debit account.
14	default- credit	M	1	F	A	Flag 'D' to denote to set this account as the default credit account. Value other than 'D' will not set the default credit account.
15	Mcc	M	4	F	N	Merchant Category Code
16	merchant -type	M	50	V	A	For Merchant Transactions merchant type should be ENTITY.
17	Mid	M	20	V	A	Merchant Identifier
18	Msid	M	15	V	A	Store Id of the merchant

19	Mtid	M	20	V	A	Merchant Terminal ID
20	Brand	O	20	V	A	Merchant brand name
21	Legal	O	20	V	A	Merchant legal details
22	franchise	O	20	V	A	Merchant franchise name
23	ownership-type	M	50	V	A	Type of Ownership: PROPRIETARY/PARTNERSHIP/PRIVATE/PUBLIC/OTHERS
24	merchant-class	M	10	V	A	Merchant class can be SMALL/LARGE
25	hashed-virtual-address	M	255	V	AN	In case of RESTRICTED channels, it contains Hashed value for the value passed in virtual-address parameter. For other channels this parameter is not required.
26	institution-type	C	100	V	AN	Institution type from institution block. This is a conditional parameter. It is mandatory for FIR transactions , but optional for other transactions
27	route	O	100	V	AN	Defines the route of the fir transaction
28	name-value	O	100	V	AN	Name of the bank/MTO
29	purpose-code	O	100	V	AN	Purpose Code
30	originator-name	O	100	V	AN	Name of the payer
31	originator-type	O	100	V	AN	Individual/Bank
32	ref-no	O	100	V	AN	Reference number of the transaction

33	address-location	O	100	V	AN	Address location
34	country	O	100	V	AN	Originating country
35	City	O	100	V	AN	City
36	merchant-category-identifier	O	100	V	AN	It is a flag/value which denotes what type of merchant is initiating the transaction. This flag is configurable For FIR transactions the value will be FIR.
37	skip-ref-id-validation	O	1	F	A	This parameter will accept 'Y' / 'N'. Y=Skip validation N=Don't skip the validation (Default value will be N if not provided)
38	allow-payment-from-od	O	1	F	A	Y=Allow payment from OD account N=Don't allow payment from OD account (Default value will be N if not provided)
39	payee-consent-name	O	100	V	A	Merchant should have GSTIN to get the benefit. This will have static value 'GST'. 'NOT GST' not in scope for now.
40	payee-consent-type	O	100	V	A	This will have static value 'GSTIN'.
41	payee-consent-value	O	100	V	AN	This will have GSTIN number in this attribute. If above 'payee-consent-type' is blank then this value is optional.

*NOTE: The flags for default account are optional. The first account added for the VA will be set as default debit and default credit.

Sample Request with dummy Values

```
Request {
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"Imobile",
  "mobile":"9028909024",
  "account-provider":"5",
  "account-number":"87542154623",
  "ifsc":"ICIC5421544",
  "mmid":"9229001",
  "virtual-address":"xyz@psp",
  "account-type":"Saving",
```

```

"name":"abc",
"default-debit":"D",
"default-credit":"D",
"mcc":"4814",
"merchant-type":"ENTITY",
"mid":"MER000122",
"msid":"MUM1223",
"mtid":"T0001",
"brand":"xyz",
"legal":"dummyvalue",
"franchise":"f1",
"allow-payment-from-od":"Y",
"ownership-type":" PROPRIETARY",
"institutionType":"MTO",
"route":"MTSS",
"nameValue":"UAE Exchange Centre",
"purposeCode":"S1301",
"originatorName":"SarthakChoudhary",
"originatorType":"INDIVIDUAL",
"refNo":"A23674",
"addressLocation":"Queensland",
"city":"Goldcoast",
"merchantCategoryIdentifier":"FIR",
"country":"Australia",
"channelCode":"imobile",
"geocode":"19.01.72, 84.032",
"payee-consent-name":"GST",
"payee-consent-type":"GSTIN",
"payee-consent-value":"22AAAAA0000A1Z5"
}

```

Response

Scenario 1: Account is mapped successfully.

```

{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "604916025241",
  "UpiTranlogId": "1006",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": ""
}

```

Scenario 2: account already exists for the same VA.

```

{
  "success": false,
  "response": 30,
  "message": "Account already mapped to same VA",
}

```

```

"BankRRN": "604916025241",
"UpiTranlogId": "1006",
"UserProfile": "10",
"SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"MobileAppData": ""
}

```

Response Code

Merchant Store Account Details	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

Merchant Collect Request

Merchant Application can initiate Collect request from Customer VPA (Payer VPA).

****NOTE:** If the initiation-mode = 12 then the institution tag is mandatory, details of the same are available in the common request parameters section.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/MerchantCollectRequest>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/MerchantCollectRequest>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	account-provider	M	20	V	N	This will be the ID associated with the account provider selected by the user from the List account provider API.
6	ifsc	C	11	F	AN	IFSC code of the account. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
7	account-number	M	20	V	AN	Account Number of the payee. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.

8	payee-va	M	255	V	N	Alias name with which the payee can be identified by his registered entity.
9	payer-va	M	255	V	N	Alias name with which the payer can be identified by his registered entity.
10	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
11	amount	M	14	V	N	Amount to be collected. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12
12	account-type	O	20	V	A	Account type of the mapped account
13	note	M	50	V	AN	Remarks entered by the payer for his reference.
14	expire-after	M	10	V	N	Minutes after which the transaction will expire.
15	mcc	M	4	F	N	Merchant Category Code
16	merchant-type	M	50	V	A	For Merchant Transactions merchant type should be ENTITY.
17	ref-id	M	35	V	AN	Reference Id of the transaction.
18	payer-name	O	100	V	A	Name of the Payer
19	validate-payer-account	O	1	F	A	This is a flag. If Y the "payer-account" and "payer-ifsc" will be considered as Mandatory fields. Sample Values : Y/N
20	payer-account	C	512	V	N	Payer Account Number. Either single A/c No or pipe separated in case of multiple account numbers. Mandatory if validate-payer-account is 'Y'.
21	payer-ifsc	C	512	F	AN	Payer IFSC. Either IFSC code or pipe separated in case of multiple IFSC code. Mandatory if validate-payer-account is 'Y'.

22	mid	C	100	V	AN	Merchant ID
23	sub-mid	C	100	V	AN	Sub Merchant ID
24	m-txnid	C	100	V	AN	Merchant Transaction ID
25	sub-mername	C	100	V	AN	Sub Merchant Name
26	min-amount	C	14	V	N	Minimum Amount to be collected. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12
29	currency	O	3	F	AN	Currency to be used, if black 356/INR would be used by default
30	ref-url	O	255	V	AN	This should be a URL when clicked provides customer with further transaction details like complete bill details, bill copy, order copy, ticket details, etc. This can also be used to deliver digital goods such as mp3 files etc. after payment. This URL, when used, MUST BE related to the particular transaction and MUST NOT be used to send unsolicited information that are not relevant to the transaction. url should initiate with http or https.

31	initiation-mode	C	2	F	N	00=Default 01=QR Code 02=Secure QR Code 03=Bharat QR Code 04=Intent 05=Secure Intent 06=NFC(Near Field Communication) 07=BLE (Bluetooth) 08=UHF(Ultra High Frequency) 09=Aadhaar 10=SDK (Software Development Kit) 11=UPI-Mandate 12= FIR (Foreign Inward Remittance) 13= QR Mandate 14= BBPS. If the initiation mode is 12 then institution details mentioned in the common parameter list is mandatory
32	org-id	O	6	F	N	If the transaction is initiated by any PSP app then the respective orgID needs to be passed. For merchant initiated/created intent/QR '000000' will be used
33	msid	O	15	V	A	Store Id of the merchant
34	mtid	O	20	V	A	Merchant Terminal ID
35	purpose	M	02	F	AN	The purpose field is specially used for SEBI txn 00-DEFAULT, 01-SEBI, 02- AMC 03- Travel, 04- Hospitality, 05- Hospital, 06- Telecom, 07- Insurance, 08- Education, 09- Gifting, 10- Others
36	payee-consent-name	M	100	V	A	Merchant should have GSTIN to get the benefit. This will have static value 'GST'. 'NOT GST' not in scope for now.

37	payee-consent-type	O	100	V	A	This will have static value 'GSTIN'.
38	payee-consent-value	O	100	V	AN	This will have GSTIN number in this attribute. If above 'payee-consent-type' is blank then this value is optional.
39	pin-code	O	6	F	N	Pin or Postal code of the merchant
40	reg-id-no	O	255	V	AN	Registration id / Establishment No that needs to be passed for the merchant. eg. Gumasta number
41	tier	O	255	V	AN	TIER1 TIER2 TIER3 TIER4 TIER5 TIER6 Denotes the tier of the city on basis of population
42	gst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
43	cgst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
44	Sgst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
45	cess	O	14	V	N	It should be in INR. Integer with 2 decimal value.
46	lgst	O	14	V	N	It should be in INR. Integer with 2 decimal value.
47	gst-incentive	O	14	V	N	It should be in INR. Integer with 2 decimal value.
48	gst-pct	O	14	V	N	It should be in INR. Integer with 2 decimal value.
49	gstn	O	100	V	AN	This will have GSTIN number
50	invoice-name	O	100	V	AN	This will have Invoice Name (merchant name)
51	invoice-no	O	100	V	AN	This will have Invoice number
52	invoice-date	O	8	F	N	This will have Invoice date ddmmYYYY
53	ptc-mobile	O	10	F	N	Pay To Contact Mobile No. Optional: when Channel-code belongs to Internal Channel Mandatory: when Channel-code belongs to External Channel ptc-mobile parameter does have value, then the value received in payer VPA will be treated as HASHED for pay to contact transaction

Sample Request with dummy Values

```
Request {
  "account-provider":"5",
  "mobile":"9028909024",
  "payer-va":"abc@xyz",
  "payee-va":"flipkart@xyz",
  "amount":"100.00",
  "note":"taxi-bill",
  "expire-after":"10",
  "device-id":"84521654864135",
  "seq-no":" ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile",
  "profile-id":"10",
  "account- type":"Saving",
  "ifsc":"ICIC5421544",
  "account-number":"8976376573767",
  "mcc":"4814",
  "merchant-type":"ENTITY",
  " ref-id":"ghyf452178542536514kljiuhngty12345",
  "payer-name":"ABC",
  "validate- payer-account":"Y",
  "payer-account":"123478541258",
  "payer-ifsc":"ABCD1245874",
  "min-amount":"1.00",
  "payee-consent-name":"GST",
  "payee-consent-type":"GSTIN",
  "payee-consent- value":"22AAAAA0000A1Z5",
  "pin-code":"111111",
  "reg-id-no":"123456789",
  "Tier":"TIER1",
  "Gst":"5.00",
  "Cgst":"2.50",
  "Sgst":"2.50",
  "Cess":"1.00",
  "Gst":"1.00",
  "st- incentive":"1.00",
  "gst-pct":"1.00",
  "Gstin":"22AAAAA0000A1Z5",
  "invoice-name":"ABC",
  "invoice-no":"12244566",
  "invoice-date":"09032016",
  "ptc-mobile":"9898989898"
}
```

Response

```
{
  "success": true,
  "response": 91,
  "message": "Transaction Initiated",
}
```

```
"BankRRN": "605417966281",  
"UpiTranlogId": "1273",  
"UserProfile": "10",  
"SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",  
"MobileAppData": ""
```

Merchant Refund Request

Refund API works depending on the Channel of the Original Transaction. UPI will only initiate Credit for specific Channels. Otherwise it will act like "Get Payer Details" for other channel.

API works based on the "seq-no" of the original transaction.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/MerchantRefundRequest>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/MerchantRefundRequest>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	ori-seq-no	M	255	V	AN	Seq No of the original transaction for which we are checking the status

6	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
7	payer-va	M	255	V	N	Alias name with which the payer can be identified by his registered entity.

Sample Request with dummy Values

```
Request {
  "mobile":"9028909024",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code":"lmobile",
  "profile-id":"10",
  "ori-seq-no":"ef1e92b4annnb618a0eca5fdecc37ff23f3",
  "payer-va":"payer@icici"
}
```

Response

Scenario: Transaction Refund to be done OR Channel expecting Payer Details

Payer details will be always returned.

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "10",
  "MobileAppData": {
    "details": "{payerIfsc=ICIC0000004, payerAccountNo=999999999999, payerName=xyz}"
  },
  "SeqNo": "hks99700p10rerwo0004kjdnsakjndekftw"
}
```

Response for Failure Transaction:

```
{
  "success": true,
  "response": 11,
  "message": "Transaction Successful",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "10",
  "MobileAppData": "",
  "SeqNo": "hks99700p10rerwo0004kjdnsakjndekftw"
}
```

}

Response Code

Merchant Refund Request	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

API

Manage Verified Addresses

This API will add/update/remove the verified virtual addresses as per the operation in the input.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ManageVerifiedAddresses>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ManageVerifiedAddresses>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
6	virtual-address	M	255	V	AN	Virtual address which needs to be managed.

7	operation	M	10	V	A	Operation which needs to be carried out on the entered virtual-address E.g. : add/update/remove
8	merchant-name	M	100	V	A	Name of the merchant to whom the virtual address belongs

9	url	M	255	V	AN	URL of the merchant
10	logo	O	255	V	AN	Logo URL of the merchant
11	merchant-certificate	O	1024	V	AN	base64 encoded certificate <code,ki,ver base64 encoded encrypted data> Please check NPCI guidelines.

Example Request with Sample Values

DATA

```
{
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
  "profile-id": "10",
  "virtual-address": "xyz@icici",
  "Operation": "add",
  "merchant-name": "lic",
  "url": "www.lic.co.in"
}
```

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "604916025241",
  "UpiTranlogId": "1006",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": ""
}
```

Response Code

Manage Verified Addresses	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present

0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0071	signingKey cannot be null
0072	NPCI UPI Not available
0073	NPCI UPI Not available
0074	NPCI UPI Not available
0U01	The request is duplicate
0U05	Formation is not proper
0U07	Validation error
0U08	System exception
0U10	Illegal operation
0U13	External error
0U48	Transaction is id not present
0U49	Request message id is not present
0U51	PSP orgId not found
0G11	VaeList.Vae.op/name must be present/valid
0G12	VaeList.Vae.name must be present, maxlength 99
0G13	VaeList.Vae.addr must be valid VPA, maxlength 255
0G14	VaeList.Vae.logo must be valid, maxlength 255
0G15	VaeList.Vae.url must be valid url, maxlength 255

Get Auto created VPA

This API will return auto generated VPA for the user.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetAutoCreatedVPA>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetAutoCreatedVPA>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
---	-----------	---	-----	---	----	---

2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

Example Request with Sample Values

```
DATA {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "Imobile",
}
```

Response for Successful Transaction

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "604916025241",
  "UpiTranlogId": "1006",
  "UserProfile": "10",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "MobileAppData": {
    "details": "{defaultVpa=abc10@imobile}"
  },
}
```

Response for Failure Transaction

```
{
  "success": true,
  "response": 44,
  "message": "Default VPA not found",
  "BankRRN": "604916025241",
  "UpiTranlogId": "788",
}
```

```

"UserProfile": "10",
"SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"MobileAppData": {
  "details": "{defaultVpa=abc10@imobile}"
},
}

```

Response Code

Get Auto created VPA	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

Device Binding

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/DeviceBinding>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/DeviceBinding>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	channel-customer-id	M	100	V	AN	Channel Profile ID.
6	verification-data	M	200	V	AN	Verification Data received from SMS Service

Example Request with Sample Values

```
Request {
  "mobile":"9028909024",
  "device-id":"84521654864135",
  "seq-no":"ef1e92b4a01d4618a0eca5fdecc37ff23f3",
```

```

"channel-code":"channel",
"channel-customer-id":"abc@gmail.com"
}

```

Response

```

{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "",
  "SeqNo": "hks99700p10rerwo0004kjdnsakjndekftw",
  "MobileAppData": ""
}

```

Response Code

Device Binding	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present
0091	Transaction Initiated
9999	UPI Technical Error
1001	Mobile No mismatched
1002	SMS Verification data mismatched
1003	Channel mismatched
1004	No record found for device binding
1005	Device binding already done
1006	Active device binding record not found
1008	Invalid device Id
1009	VAE Data not found

Reclaim VPA

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/ReclaimVPA>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ReclaimVPA>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	100	V	AN	UPI Profile ID.
6	vpa-list	M	200	V	AN	Vpa list

Example Request with Sample Values

```
Request {
  "device-id": "16de70f3de64c9c9",
```

```

"mobile": "9326410342",
"channel-code": "GOOGLE",
"profile-id": "3239960",
"seq-no": "IC16a7611c126bb4475b6c533ce15bd52e3",
"vpa-list": [
  {
    "virtualAddress": "9326410342-4@tapicici",
    "accountNo": "AX2c52e67d1ae4135ff4e53378281f1632",
    "ifsc": "ICIC0000040"
  },
  {
    "virtualAddress": "9326410342-4@tapicici",
    "accountNo": "AX2c52e67d1ae4135ff4e53378281f1632",
    "ifsc": "ICIC0000040"
  },
  {
    "virtualAddress": "9326410342-4@tapicici",
    "accountNo": "AX2c52e67d1ae4135ff4e53378281f1632",
    "ifsc": "ICIC0000040"
  }
]
}

```

Response

```

{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "",
  "SeqNo": "hks99700p10rerwo0004kjdnsakjndekftw",
  "MobileAppData": ""
}

```

Response Code

Reclaim VPA	
0000	Success
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0005	UPI Server Internal Error
0031	mobile no not present

0091	Transaction Initiated
9999	UPI Technical Error
0038	Mobile number and profile Id doesn't belong to same User

Block Unblock Customer

This API will be used to block or unblock a specific UPI customer

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/BlockUnblockCustomer>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/BlockUnblockCustomer>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	Reason	M	255	V	AN	Reason for blocking or unblocking a particular UPI customer
2	block-type	M	20	V	AN	Block type may be ACCOUNT_NUMBER, MOBILE_NUMBER and DEVICE_ID
3	block-value	M	20	V	AN	Block Value is the actual value of the block type
4	employee-id	M	15	V	AN	Employee id of the one blocking the customer
5	Action	M	1	F	A	A= Active B= Block
6	seq-no	M	35	V	AN	35 Digit UUID sequence number for uniquely identifying the transaction
7	channel-code	M	20	V	A	Initiating channel code
8	device-id	M	20	V	AN	Device id of the initiating device
9	Mobile	O	10	F	N	Mobile number of the initiator

Pull SMS Request

Pull SMS request to bypass the SMS gateway

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/PullSMSRequest>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/PullSMSRequest>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	service-provider	O	35	V	AN	Service Provider Name
2	Mobile	M	10	F	N	Mobile number of the user
3	timestamp	O	30	V	AN	Format – YYYY-MM-DDTHH:MM:SS Eg: 2018-04-18T17:49:33
4	verification-data	M	255	V	AN	Verification Data from channel in the below format – <channel-identifier> <REG> <verification-data> Example - FPL REG 12349898595jj595u560590
5	channel-identifier	M	20	V	AN	channel-identifier eg: FPL or TRL

Sample Request with dummy Values

DATA	{
	"mobile": "9028909024",
	"Timestamp": "2018-04-18T17:49:33",
	"channel-identifier": "FPL",
	"message- text": " FPL REG 12349898595jj595u560590"

Successful Response

```
{
  "ActCode": "0",
  "Response": "Transaction Successful",
  "BankRRN": "811018007388",
  "UpiTranlogId": "7388",
  "UserProfile": "",
  "MobileAppData": "",
  "SeqNo": "ICI00501e5415e8f6c234879aee49a6170e"
}
```

Failure Response

```
{
  "ActCode": "13",
  "Response": "channel code not present in request",
  "BankRRN": "811018007385",
}
```

```
"UpiTranlogId": "7385",  
"UserProfile": "",  
"MobileAppData": "",  
"SeqNo": "ICI005010b32c5ede7e34289bf346f7e134"  
}
```

Get VPA Details

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetVPADetails>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetVPADetails>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	The value sent in DeviceID parameter gets validated with value stored against the user in system. Unique device Token. Token should be unique for per channel user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	100	V	AN	UPI Profile ID.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "channel",
  "profile-id": "561"
}
```

Response

```
{
  "success": true,
```

```
"response": 0,  
"message": "Transaction Successful",  
"BankRRN": "605617674574",  
"UpiTranlogId": "1504",  
"UserProfile": "10",  
"SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",  
"MobileAppData": {  
  "details": {  
    "vpalist": [  
      {  
        "vpa": "nikhiladdVA@ICICI",  
        "name": "Rahul Kumar"  
      }  
    ]  
  }  
}
```

Get Transaction Details

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetTransactionDetails>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetTransactionDetails>

Method Name: POST

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	The value sent in DeviceID parameter gets validated with value stored against the user in system.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	100	V	AN	UPI Profile ID.
6	ori-seq-no	M	35	F	AN	This will be an original txn-id of original transaction. Please check NPCI guidelines for reference

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "channel",
  "profile-id": "561"
}
```

Response

```
{
  "success": true,
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "712512014982",
  "UpiTranlogId": "82466",
  "UserProfile": "1204",
  "SeqNo": "ICI8764ab8e31ac4e8892d960dd1c458805",
}
```

```

"MobileAppData": {
  "details": {
    "transaction_list": [
      {
        "status": "PENDING",
        "seqNo": "ICI3eb0042788154bdfa71cf4449dee2521",
        "type": "COLLECT",
        "amount": "2",
        "currency": "INR",
        "note": "Pay to Rahul",
        "payerVa": "pixel@icici",
        "payerName": "Rahul Kumar",
        "payerMaskedAccount": "782267",
        "payerIfsc": "ICIC0000001",
        "payerAccountProvider": "682768",
        "payeeVa": "pixel@icici",
        "payeeName": "Rahul Kumar",
        "payeeMaskedAccount": "782267",
        "payeeIfsc": "ICIC0000001",
        "payeeAccountProvider": "682768",
        "rrn": "84000000184",
        "ref_id": "",
        "ref_url": "",
        "date": "20170505123901"
      }
    ]
  }
}

```

Get Transaction History

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetTransactionHistory>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetTransactionHistory>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	The value sent in DeviceID parameter gets validated with value stored against the user in system. Unique device Token. Token should be unique for per channel user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	100	V	AN	UPI Profile ID Please check NPCI guidelines for reference
6	start-time	M	8	F	N	Format : ddMMyyyy E.g. 09032016
7	end-time	M	8	F	N	Format : ddMMyyyy E.g. 09032016
8	limit	O	2	V		Number of transactions to be returned in response
9	offset	M		V	AN	Starting point of transaction result

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
```

```

"seq-no":" ef1e92b4a01d4618a0eca5fdecc37ff23f3",
"channel-code":"channel",
"profile-id":"561",
"start-time":"01052019",
"end-time":"10052019",
"limit":"10",
"offset":"0"
}

```

Response

```

{
  "success": true,
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "712512014982",
  "UpiTranlogId": "82466",
  "UserProfile": "1204",
  "SeqNo": "ICI8764ab8e31ac4e8892d960dd1c458805",
  "MobileAppData": {
    "details": {
      "transaction_list": [
        {
          "status": "PENDING",
          "seqNo": "ICI3eb0042788154bdfa71cf4449dee2521",
          "type": "COLLECT",
          "amount": "2",
          "currency": "INR",
          "note": "Pay to Rahul",
          "payerVa": "pixel@icici",
          "payerName": "Rahul Kumar",
          "payerMaskedAccount": "782267",
          "payerIfsc": "ICIC0000001",
          "payerAccountProvider": "682768",
          "payeeVa": "pixel@icici",
          "payeeName": "Rahul Kumar",
          "payeeMaskedAccount": "782267",
          "payeeIfsc": "ICIC0000001",
          "payeeAccountProvider": "682768",
          "rrn": "84000000182",
          "ref_id": "",
          "ref_url": "",
          "date": "20170508123901"
        },
        {
          "status": "SUCCESS",
          "seqNo": "ICI3eb0042788154bdfa71cf4449dee2522",
          "type": "PAY",
          "amount": "2",
          "currency": "INR",

```

```

        "note": "Pay to Rahul",
        "payerVa": "pixel@icici",
        "payerName": "Rahul Kumar",
        "payerMaskedAccount": "782267",
        "payerIfsc": "ICIC0000001",
        "payerAccountProvider": "682768",
        "payeeVa": "pixel@icici",
        "payeeName": "Rahul Kumar",
        "payeeMaskedAccount": "782267",
        "payeeIfsc": "ICIC0000001",
        "payeeAccountProvider": "682768",
        "rrn": "84000000181",
        "ref_id": "",
        "ref_url": "",
        "date": "20170507123901"
    },
    {
        "status": "VOID",
        "seqNo": "ICI3eb0042788154bdfa71cf4449dee2523",
        "type": "COLLECT",
        "amount": "2",
        "currency": "INR",
        "note": "Pay to Rahul",
        "payerVa": "pixel@icici",
        "payerName": "Rahul Kumar",
        "payerMaskedAccount": "782267",
        "payerIfsc": "ICIC0000001",
        "payerAccountProvider": "682768",
        "payeeVa": "pixel@icici",
        "payeeName": "Rahul Kumar",
        "payeeMaskedAccount": "782267",
        "payeeIfsc": "ICIC0000001",
        "payeeAccountProvider": "682768",
        "rrn": "84000000180",
        "ref_id": "",
        "ref_url": "",
        "date": "20170506123901"
    }
]
}
}

```

Blocked Unblocked VPA

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/BlockUnblockVPA>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/BlockUnblockVPA>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	The value sent in DeviceID parameter gets validated with value stored against the user in system. Unique device Token. Token should be unique for per channel user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
3	profile-id	M	100	F	AN	UPI Profile ID.
6	Vpa	M	255	V	AN	vpa to block
7	block-vpa	M	255	V	AN	Boolean flag to block / unblock the VPA (value provided in 'vpa' parameter. 1=Block; 0=Unblock
8	block-days	C	4	V	N	This value should present if block-vpa=1. This value represents no of days, vpa need to block. If block-vpa=1 and block-days parameter is blank then vpa will be blocked for infinite time till user unblock it.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "channel",
  "profile-id": "561",
  "vpa": "test@icici",
  "block-vpa": "test1@icici",
  "block-days": "7"
}
```

Response

```
{
  "success": true,
  "response": 0,
  "message": "Transaction Successful",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "10",
  "MobileAppData": "",
  "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
}

5)blocked-vpa-list mobile
profile-id seq-no device-id
channel-code

{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "912019037621",
  "UpiTranlogId": "37621",
  "UserProfile": "1381",
  "MobileAppData": {
    "details": {
      "blocked_vpa_list": [
        {
          "vpa": "nikhil@sbi"
        }
      ]
    }
  },
}
```

Blocked VPA List

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/BlockedVpaList>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/BlockedVpaList>

Method Name: POST

Parameters

#	Parameter Name	Required	Length (max)	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	The value sent in DeviceID parameter gets validated with value stored against the user in system.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	100	V	AN	UPI Profile ID.

Sample Request with dummy Values

```
Request {
  "mobile": "9028909024",
  "device-id": "84521654864135",
  "seq-no": "ef1e92b4a01d4618a0eca5fdecc37ff23f3",
  "channel-code": "channel",
  "profile-id": "561"
}
```

Response

```
{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "912019037621",
  "UpiTranlogId": "37621",
}
```

```
"UserProfile": "1381",
"MobileAppData": {
  "details": {
    "blocked_vpa_list": [
      {
        "vpa": "nikhil@sbi"
      }
    ]
  }
},
"SeqNo": "ICIC6032201605554107122016072011072"
}
```

UDIR API's

Get Complaint Reason Codes

Using this API customer is able to get the list of complaint reason code. To raise transaction complaints, currently transaction-id is the only mandatory field, but in case user want to put details of exact complaint reason then this list will help.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetComplaintReasonCode>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetComplaintReasonCode>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	O	255	V	AN	Unique device Token. Token should be unique for per channel-user.
2	Mobile	O	10	F	N	Mobile Number of the user
3	seq-no	O	35	F	AN	Channel Reference number
4	channel-code	O	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	O	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

Sample request with dummy values

```
Request {
  "device-id":"1234",
  "mobile":"9552548637",
  "seq-no":"ICI5447D86914C14AC1B0A4C4A036B1234",
  "channel-code":"Imobile",
  "profile-id":"1"
}
```

Response

```
{
  "Response": "Transaction Successful",
  "response": "0",
  "MobileAppData": [
    {
```

```

        "reasonCode": "U001",
        "txnType": "PAY-COLLECT",
        "tatDays": 60,
        "flag": "PBRB",
        "description": "Other",
        "id": 15
    },
    {
        "reasonCode": "U005",
        "txnType": "PAY-COLLECT",
        "tatDays": 60,
        "flag": "PBRB",
        "description": "Account has not yet reversed for a declined transaction",
        "id": 1
    },
    {
        "reasonCode": "U008",
        "txnType": "Merchant",
        "tatDays": 60,
        "flag": "PBRB",
        "description": "Goods/services are not provided for approved transaction",
        "id": 2
    },
    {
        "reasonCode": "U009",
        "txnType": "Merchant",
        "tatDays": 60,
        "flag": "PBRB",
        "description": "Account not credited back for declined transaction",
        "id": 3
    },
    {
        "reasonCode": "U010",
        "txnType": "PAY-COLLECT",
        "tatDays": 60,
        "flag": "PBRB",
        "description": "Beneficiary account is not credited for successful pay transaction",
        "id": 4
    }
],
"ActCode": "0",
"message": "Transaction Successful"
}

```

Raise Transaction Complaint

Through this API, customer is able to raise a new complaint against the transaction. It validates the transaction for the transaction status and dispute status and on valid request, complaint will be raised and message would be sent response as “Your complaint has been registered”.

(Customer can raise a complaint in the Payer PSP app with Transaction Id and date, upi application will check transaction and raise complaint with NPCI URCS system)

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/RaiseTransactionComplaint>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/RaiseTransactionComplaint>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	O	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	O	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	O	15	V	A	The code for the source application from which the transaction will be initiated.
5	ori-seq-no	M	255	V	AN	Seq No of the original transaction for which complaint to be raise
6	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

7	Remark	O	100	V	AN	Remarks entered by the payee for his reference.
8	reason-code	M	20	V	AN	If PSP application has know the exact reason of raising complaint or they are get-complaint-reason-codes API to get reason list then they can use parameter otherwise it's not mandatory , system will check status and raise request accordingly.

Sample request with dummy values

```
Request {
  "device-id": "1234",
  "mobile": "9552548637",
  "seq-no": "ICI5447D86914C14AC1B0A4C4A036B32211",
  "channel-code": "Imobile",
  "profile-id": "1",
  "ori-seq-no": "ICI12323465478678768990980BFTy1234MN",
  "remark": "notcredited with bene"
}
```

Response

If transaction exact status available with System like "Success" then below details will get

```
{
  "response": "0",
  "success": true,
  "message": "Transaction Successful",
  "BankRRN": "018817039508",
  "UpiTranlogId": "39508",
  "UserProfile": "1",
  "MobileAppData": {
    "details": {
      "complaint-ref-number": "UPI2102130001231",
      "original-txn-payerva": "google1@okicici",
      "original-txn-npcirc": null,
      "original-txn-rrn": "001714650399",
      "original-txn-payeeva": "payee@imobile",
      "original-txn-response-code": "00",
      "original-txn-message": "SUCCESS",
      "original-txn-tnid": "ICITM202785bAAAAAAAAA1579251429806",
      "original-txn-amount": 2
    }
  },
  "SeqNo": "ICIC2343249089203840923840932"
```

}

If transaction status is like deemed or complaint raised successfully with URCS then response will be as below

```
{
  "response": "0",
  "success": true,
  "message": "Transaction Successful",
  "BankRRN": "018817039509",
  "UpiTranlogId": "39509",
  "UserProfile": "1",
  "MobileAppData": "Your complaint has been registered succesfully,",
  "SeqNo": "ICIC2343249089203840923840932"
}
```

Response Code

Raise Complaint	
0000	Your complaint is raise succesfully and it is under Process
0005	UPI Server Internal Error
0011	invalid data
0015	original record not found
0013	Invalid Channel Code
0001	User profile not found
0115	Complaint cannot initiate now
0252	MANDATE Details not found

Get Complaint List

This API will return list of complaints raised by user.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetComplaintList>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetComplaintList>

Method Name: POST

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	O	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.

2	Mobile	O	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	Channel Ref-number
4	channel-code	O	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

Sample request with dummy Values

```
Request {
  "device-id":"1234",
  "mobile":"9552548637",
  "seq-no":"IC15447D86914C14AC1B0A4C4A036B32211",
  "channel-code":"Imobile",
  "profile-id":"1"
}
```

Response

```
{
  "response": "0",
  "success": true,
  "message": "Transaction Successful",
  "BankRRN": "018819039521",
  "UpiTranlogId": "39521",
  "UserProfile": "1",
  "MobileAppData": {
    "details": {
      "complaintList": [
        {
          "registeredDate": 1594039130000,
          "orgTxnStatus": "C",
          "complaintRefNo": "ICIC2343249089203840923840932",
          "payerva": "google1@okicici",
          "txnType": "PAY",
          "payeeva": "payee@imobile",
          "txnDate": 1579251441000,
          "remarks": null,
          "txnId": "ICITM202785bAAAAAAAAAA1579251429806",
          "status": "N"
        },
        {
          "registeredDate": 1594044659000,
```

```

        "orgTxnStatus": "C",
        "complaintRefNo": "ICIC2343249089203840923840931",
        "payerva": "google1@okicici",
        "txnType": "PAY",
        "payeeva": "payee@imobile",
        "txnDate": 1579251451000,
        "remarks": "complaint raise agains txn not successful",
        "txnId": "ICITM202785bAAAAAAAAAA1579251438285",
        "status": "N"
    }
}
],
},
"SeqNo": "ICIC2343249089203840923840932"
}

```

No Recored Found

```

{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "018819039522",
  "UpiTranlogId": "39522",
  "UserProfile": "1",
  "MobileAppData": "complaint list empty for user",
  "SeqNo": "ICIC2343249089203840923840932"
}

```

Check Transaction / Complaint / Dispute status

This API will used to check status of the transaction/complaint or dispute raised, if any. In response they will get status of transaction with TCC/RET updation, disputes / adjustment etc.

Note: Channel should initiate this API in case there is no response from UPI application for initiated transaction i.e. for timed-out /deemed approve transaction

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/CheckTransactionDisputeStatus>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/CheckTransactionDisputeStatus>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	device-id	O	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	O	15	V	A	The code for the source application from which the transaction will be initiated.
5	ori-seq-no	M	255	V	AN	Seq No of the original transaction for which we are checking the status
6	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
7	category	M	20	V	A	Check status for transaction/mandate Expected Values [TRANSACTIONS/DISPUTE/MANDATE] (Use any One category)

8	Umn	O	70	V	A	In case category is MANDATE and app have UMN value then only u
9	original-txn-type	O	20	V	A	Now this API is available for PSP (app) also, to check the txn-status, complaint, and mandate status, in case no value then default value considered for channel is PAY. Expected Value [PAY, CREDIT, DEBIT, COLLECT]

Sample request with dummy values

```
Request {
  "device-id":"28098409324",
  "mobile":"7798600992",
  "seq-no":"ICIC2343249089203840923840932",
  "channel-code":"google",
  "ori-seq-no":"ICITM202785bAAAAAAAAAA1579251429806",
  "profile-id":"501",
  "category":"TRANSACTIONS",
  "history":"CURRENT"
}
```

Response

1) For Category "TRANSACTIONS"

```
{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "018911039546",
  "UpiTranlogId": "39546",
```

```

"UserProfile": "501",
"MobileAppData": {
  "details": {
    "Transactions": [
      {
        "Txninfo": {
          "TxnID": "HDF0000000000001GRDpegycweFiv88q WI",
          "Custrefno": "324897239",
          "TxnDT": "2019-11-21 13:03:08.0",
          "TxnType": "PAY",
          "TxnSubType": "U3",
          "Initmode": "00",
          "Purpose": "00",
          "FinalRespCode": "00",
          "ErrCode": "XXX",
          "OriginalAmount": "100.00",
          "SettledAmount": "100.00",
          "CycleName": "1C",
          "PayeeInfo": {
            "PayeeVPA": "xyz@sbi",
            "PayeeMCCCode": "1234",
            "BeneOrgID": "159042",
            "BeneAccno": "12903891023123",
            "BeneIFSC": "SBI0000002",
            "BeneAccType": "SAVINGS",
            "PyeRespCode": "00",
            "PyeRevRespCode": "XX",
            "beneOrgID": "159042",
            "payeeVPA": "xyz@sbi",
            "payeeMCCCode": "1234",
            "beneAccno": "12903891023123",
            "beneIFSC": "SBI0000002",
            "beneAccType": "SAVINGS",
            "pyeRespCode": "00",
            "pyeRevRespCode": "XX"
          },
          "PayerInfo": {
            "PayerVPA": "abc@sbi",
            "PayerMCCCode": "0000",
            "RemiOrgID": "159011",
            "RemiAccno": "12938912311231",
            "RemiIFSC": "SBI00000011",
            "RemiAccType": "SAVINGS",
            "PyrRespCode": "00",
            "PyrRevRespCode": "XX",
            "pyrRevRespCode": "XX",
            "payerVPA": "abc@sbi",
            "payerMCCCode": "0000",
            "remiOrgID": "159011",
            "remiAccno": "12938912311231",
            "remiIFSC": "SBI00000011",

```

```

        "remiAccType": "SAVINGS",
        "pyrRespCode": "00"
    }
}
}
}
    ],
    },
    "SeqNo": "ICIC2343249089203840923840932"
}

```

2) For Category "MANDATE"

```

"response": "0",
"ActCode": "0",
"message": "Transaction Successful",
"Response": "Transaction Successful",
"BankRRN": "018912039556",
"UpiTranlogId": "39556",
"UserProfile": "501",
"MobileAppData": {
    "details": {
        "Mandate": [
            {
                "MandateInfo": {
                    "Custrefno": "930523804340",
                    "TxnDT": "2019-11-21 13:03:08.0",
                    "InitMode": "00",
                    "TxnType": "COLLECT",
                    "TxnSubType": "U3",
                    "UMN": "ReqMandate0001GRDpegB9G8wWM3wyNY@andb",
                    "Type": "Loan",
                    "MType": "CREATE",
                    "Initby": "PAYER",
                    "FinalrespCode": "00",
                    "Validfrom": "2019-12-18 00:00:00.0",
                    "ValidTo": "2020-08-18 00:00:00.0",
                    "MAmount": "140.00",
                    "MRule": "MAX",
                    "Occurance": "Once",
                    "Revokable": "Y",
                    "ShareToPayee": "Y",
                    "BlockFund": "Y",
                    "PayerInfo": {
                        "PayerVPA": "abc@sbi",
                        "RemiOrgID": "159011",
                        "RemiAccno": "1293891231",
                        "RemiIFSC": "SBI0000001",
                        "RemiAccType": "SAVINGS"
                    }
                }
            }
        ]
    }
}

```

```

    },
    "TxnID": "UPI345678901234567890123456789012345",
    "PayeeInfo": {
      "PayeeOrgID": "159012",
      "PayeeVPA": "xyz@sbi",
      "BeneAccno": "12903891023123",
      "BeneIFSC": "SBI0000002",
      "BeneAccType": "SAVINGS"
    }
  }
}
]
}
},
"SeqNo": "ICIC2343249089203840923840932"
}

```

3) For Category "DISPUTE"

```

{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "018911039552",
  "UpiTranlogId": "39552",
  "UserProfile": "501",
  "MobileAppData": {
    "details": {
      "Dispute": [
        {
          "DisputeInfo": [
            {
              "TxnID": "HDF0000000000001GRDpegycweFiV88q WI",
              "Custrefno": "324897239",
              "InitOrgId": "159011",
              "AdjDT": "2019-11-21 13:03:08.0",
              "Adjflag": "A",
              "Adjreasoncode": "111",
              "Adjrefno": "1546667",
              "Adjamount": "10.00",
              "IsPartial": "N",
              "IsDeemedAccepted": "N",
              "Crtby": "vaitheemaker",
              "Appby": "vaitheeChecker",
              "AppbyDT": "2019-11-21 13:03:08.0",
              "Remarks": "Okay",
              "initOrgId": "159011",
              "isDeemedAccepted": "N",
              "adjflag": "A",

```

```

        "adjreasoncode": "111",
        "adjrefno": "1546667",
        "txnID": "HDF000000000001GRDpegycweFiv88qWI",
        "adjamount": "10.00",
        "isPartial": "N",
        "crtby": "vaitheemaker",
        "appby": "vaitheeChecker",
        "appbyDT": "2019-11-21 13:03:08.0",
        "adjDT": "2019-11-21 13:03:08.0",
        "remarks": "Okay",
        "custrefno": "324897239"
    },
    {
        "TxnID": "HDF000000000001GRDpegycweFiv88q WI",
        "Custrefno": "324897239",
        "InitOrgId": "159011",
        "AdjDT": "2019-11-21 13:03:08.0",
        "IsPartial": "N",
        "IsDeemedAccepted": "N",
        "Crtby": "vaitheemaker",
        "Appby": "vaitheeChecker",
        "initOrgId": "159011",
        "isDeemedAccepted": "N",
        "txnID": "HDF000000000001GRDpegycweFiv88qWI",
        "isPartial": "N",
        "crtby": "vaitheemaker",
        "appby": "vaitheeChecker",
        "adjDT": "2019-11-21 13:03:08.0",
        "custrefno": "324897239"
    }
]
}
},
"SeqNo": "ICIC2343249089203840923840932"
}

```

Response Code

Chk Txn Status	
0005	UPI Server Internal Error
0011	invalid data
0013	Invalid Channel Code
0001	User profile not found
0252	MANDATE Details not found
C109	adjustment for RC RB transactions
0000	Transaction status is success

C103	Customer account reversed manually post reconciliation
C102	Customer account reversed online
C102	Customer account reversed online
C103	Customer account reversed manually post reconciliation
C105	Goods/services provided
C102	Customer account reversed online
C103	Customer account reversed manually post reconciliation
C107	Customer account credited online
C106	Goods/services not provided
C144	Customer Account is not Debited-General Decline
C104	Account closed
C117	NRI account
C115	Account does not exist
C120	other reason
C119	Invalid beneficiary details
C118	Credit freeze

Request Dispute (for Back-office use only)

With API bank can update the transaction status or raise dispute / adjustment.

Remitter bank can (a) update the transaction status of DRC or (b) raise a Chargeback, along with appropriate chargeback reason code, to URCS through ReqDispute. Beneficiary Banks shall work on the adjustment reports for resolution of disputes as per the existing process and update the status.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/RequestDispute>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/RequestDispute>

Method Name: POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	org-id	M	6	F	N	Bank Org id , bank need to send fix value in this parameter
2	adj-ref-id	M	30	V	AN	Bank Adjustment Ref
3	ori-seq-no	M	255	V	AN	UPI Transaction ID (txnid)
4	adj-flag	M	5	V	AN	Adjustment Flag --Refer Annexure 14.4 (Will update list here)

5	adj-reason-code	M	5	V	AN	UPI Transaction ID (txnid)
6	adj-amount	M	10	V	N	Dispute Amount
7	remarks	O	100	V	AN	Bank remarks

Sample request with dummy values

```
Request {
  "org-id":"159229",
  "adj-ref-id":"228102983029183",
  "ori-seq-no":"ICI5447D86914C14AC1B0A4C4A036B32211",
  "adj-flag":"12334",
  "adj-reason-code":"U1233",
  "adj-amount":"50",
  "remarks":"updated status"
}
```

Response

```
{
  "response": "0",
  "ActCode": "0",
  "message": "Transaction Successful",
  "Response": "Transaction Successful",
  "BankRRN": "018916039560",
  "UpiTranlogId": "39560",
  "UserProfile": "",
  "MobileAppData": {
    "details": {
      "Dispute": [
        {
          "TxnID": "HDF378423412212121212121223431111",
          "Txndate": "20180707",
          "AdjFlag": "B",
          "AdjReasonCode": "1061",
          "AdjAmt": "5.00",
          "AdjrefNo": "32784234",
          "AdjRemarks": "Raise Chargeback",
          "DisputeRaisedStatus": "SUCCESS",
          "RejectReason": "",
          "RejectDesc": ""
        }
      ]
    }
  }
}
```

```
},  
  "SeqNo": ""  
}
```

Mandate API's

Manage Mandate

This API will be used for creating, updating and revoking the mandateUAT:

<https://apibankingonesandbox.icicibank.com/api/v1/upi2/ManageMandate>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/ManageMandate>

Method Name: POST

Parameters–

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.

5	pre-approved	O	1	F	A	A=Pre-approved, M=MPIN required default value would be 'M'. Value of this parameter always should be 'A' for PPI channel.
6	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
7	payer-va	M	255	V	AN	Payer virtual address
8	payee-va	M	255	V	AN	Payee virtual address
9	Action	M	10	V	A	CREATE, UPDATE, REVOKE, SUSPEND, REACTIVATE 1) In UPDATE mandate-shareToPayee, revokeable , payer-va, payee-va and payer A/C can't be allow to modify. 2) Suspend (Pause) mandate can be activated however revoked mandate cannot be undone, pause mandate should not execute/Process. 3) REACTIVATE action available for suspended mandate only
10	Mode	M	10	V	A	PAY (as Payer), Collect (as Payee)
11	Ifsc	C	11	F	AN	IFSC Code. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
12	account-number	M	20	V	AN	Account number. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.

13	account-provider	M	10	V	N	Account Provider
14	amount	M	10	V	N	Amount
15	amount-rule	M	10	V	A	Amount rule can be MAX or EXACT
16	Note	M	255	V	AN	Remarks
17	mandate-name	M	255	V	AN	Mandate name
18	start-date	C	10	F	Date	Format – ddmmyyyy - Only for create mandate start date should be greater than the current date - Only for create mandate Start date cannot be less than end-date value.
19	end-date	M	10	F	Date	Format – ddmmyyyy -end date should be greater than the current date
20	frequency	M	25	V	A	Mandate frequency can be ONETIME DAILY WEEKLY BIMONTHLY MONTHLY QUARTERLY HALFYEARLY YEARLY ASPRESENTED
21	debit-day	C	25	V	AN	depending on the frequency (ONETIME, DAILY, AND ASPRESENTED will not have debit day) if the frequency selected as WEEKLY then the value will be from (1- Monday to 7- Sunday) , FORTNIGHTLY (1-15 days), MONTHLY BIMONTHLY QUARTERLY HALFYEARLY YEARLY (1-30/31 days)-
22	debit-rule	C	25	V	A	BEFORE ON AFTER (ONETIME, DAILY, AND ASPRESENTED will not have debit day rule)

23	Mpin	C	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted mpin> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then
						the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be routed to NPCI for decryption. (To be discussed)</i> If pre-approved flag is M then this MPIN will be mandatory else optional
24	notify-flag	O	5	V	A	true = notify to payee false = don't notify payee default would be false
25	revokeable	M	1	V	A	Default would be "Y" Defines mandate revokeability For current UPI2.0 version (As per NPCI rule against mandate) Revokeable value cannot be 'N'
26	share-to-payee	M	1	V	A	Default value would be Y - For Payee initiated mandate this value should be always N
27	block-fund	O	1	V	A	The field "block-fund" is used for intimating remitter bank to block the necessary fund against customer account.

28	expire-after	O	10	V	N	This value would be considered only for Payee initiated mandate, which contains the minutes after which the mandate request will expire. (default value 30Min for payee initiated transaction)
29	Umn	C	70	V	A	Unique Mandate Number. This filed value would be not applicable for Create mandate (parameter action ="CREATE") , and value would be mandatory for update/revoke/suspend/reactivate mandate.
30	payee-name	C	50	V	A	This field is mandatory if mandate initiated by payer (mode-PAY) and action is for CREATE only, for other case it's optional
31	payer-name	C	50	V	A	This field is mandatory if mandate initiated by payee (mode - Collect) and and action is for CREATE only, for other case it's optional
32	mandate-nick-name	O	50	V	AN	(Payer can set a nickname for the mandates at the time of creation or approval for easy identification, however no transaction can be performed on a nickname
33	purpose	M	02	F	AN	The purpose field is specially used for SEBI txn 00-DEFAULT, 01-SEBI, 02- AMC 03- Travel, 04- Hospitality, 05- Hospital, 06- Telecom, 07- Insurance, 08- Education, ,09- Gifting, 10- Others
34	Mcc	M	4	F	N	Merchant Category Code

35	merchant-type	M	50	V	A	For Merchant Transactions merchant type should be SMALL/LARGE
36	Mid	M	20	V	A	Merchant Identifier
37	Msid	M	15	V	A	Store Id of the merchant
38	Mtid	M	20	V	A	Merchant Terminal ID
39	Brand	O	20	V	A	Merchant brand name
40	Legal	O	20	V	A	Merchant legal details
41	franchise	O	20	V	A	Merchant franchise name
42	ownership-type	O	50	V	A	Type of Ownership: PROPRIETARY/PARTNERSHIP /PRIVATE/PUBLIC/OTHERS
43	customer-type	C	10	V	A	Customer can either be ENTITY or PERSON
44	ref-id	C	35	V	AN	Reference ID

Sample request with dummy values

```
Request {
  "pre-approved":"M",
  "payer-va":"venkat_payerl@icici",
  "payee-va":"xyz_Payee@okicici",
  "action":"CREATE",
  "mode":"PAY",
  "ifsc":"ICIC0000123",
  "account-number":"123456789002",
  "account-provider":"ICIC",
  "amount":"100",
  "amount-rule":"EXACT",
  "note":"Mandate test",
}
```

```

"mandate-name":"Recurring dep -1",
"start-date":"18082017",
"end-date":"18072018",
"frequency":"DAILY",
"debit-rule":"ON",
"mpin":"65444,KeyVVVV,1234",
"revokeable":"Y",
"share-to-payee":"Y",
"block-fund":"Y",
"device-id":"456465465",
"mobile":"9552548637",
"seq-no":"ICI5447D86914C14AC1B0A4C4A036B387B4",
"channel-code":"Imobile",
"profile-id":"1",
"expire-after":"30",
"payee-name":"Venkatesh Yemul",
"payer-name":"Test Payeer"
}

```

Response

```

{
  "SeqNo": "ICI5447D86914C14AC1B0A4C4A036B387B4",
  "BankRRN": "807813003939",
  "UserProfile": "1",
  "response": "92",
  "MobileAppData": {
    "details": {
      "mandate": {
        "debit-day": "null",
        "amount": "100.00",
        "revokeable": "Y",
        "amountRule": "EXACT",
        "validityEnd": "2018-07-16T23:59:59.000Z",
        "mandateName": "Recurring dep -1",
        "blockFund": "Y",
        "payeeIFSC": null,
        "payeeVA": "xyz_Payee@okicici",
        "validityStart": "2017-08-18T00:00:00.000Z",
        "frequency": "DAILY",
        "payerAccount": "123456789002",
        "payeeName": "Venkatesh Yemul",
        "createdDate": "2018-03-19T13:22:54.272Z",
        "payerIFSC": "ICIC0000123",
        "mandateStatus": "Initiated",
        "umr": "70d4daa38a2a4da7a448175c 3432210d@icici",
        "payerVA": "70d4daa38a2a4da7a448175c3432210d@icici",
        "payerName": "TestUser-1",
        "id": "3940",
        "payeeAccount": null,

```

```

        "initiatedBy": "PAYER",
        "txnId": "ICI5447D86914C14AC1B0A4C4A036B387B4",
        "channelCode": "Imobile"
    }
},
"success": true,
"message": "Transaction initiated",
"UpiTranlogId": "3939"
}

```

manage-mandate response for suspend/unsuspend(RESUME)

```

{
  "success": true,
  "response": "00",
  "message": "Transaction Sucessful",
  "BankRRN": "603417064918",
  "UpiTranlogId": "1732222612",
  "UserProfile": "1",
  "SeqNo": "ICI5447D86914C14AC1B0A4C4A036B387B4",
  "MobileAppData": "UMN :2815eada9c1d437ea3febaff74488e88@icici"
}

```

Get Pending Mandates

This API will provide the list of pending mandates to the end user.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetPendingMandates>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/GetPendingMandates>

Method Name: POST

Parameters –

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.

2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	20	V	N	Profile id of the customer
6	payer-va	O	255	V	AN	If present return mandates pending for specific VPA otherwise all pending mandates

Sample request with dummy values

```
Request {
  "payer-va": "venkat_payerl@icici",
  "device-id": "1234",
  "mobile": "9552548637",
  "seq-no": "ICI5447D86914C14AC1B0A4C4A036B387B4",
  "channel-code": "Imobile",
  "profile-id": "1"
}
```

Response

```
{
  "SeqNo": "ICI5447D86914C14AC1B0A4C4A036B387B4",
  "BankRRN": "807818003958",
  "UserProfile": "1",
  "response": "0",
  "MobileAppData": {
    "details": {
      "mandate": {
        "UserAsPayer": [
          {
            "note": "Remarks",

```

```

        "revokeable": "Y",
        "mandateName": "BAJAJFINANCE",
        "blockFund": "N",
        "frequency": "WEEKLY",
        "payeeName": "VAKADA SANTOSH KUMAR",
        "payerIFSC": null,
        "mandateStatus": "Initiated",
        "umrn": "0d52f54d0f984aac94296ba0220f9080@icici",
        "payerVA": "sivawipro@icici",
        "payerName": "Good",
        "id": "45967",
        "refUrl": "https://www.icicibank.com",
        "initiatedBy": "PAYEE",
        "channelCode": "UPI.NPCI",
        "amount": "18.00",
        "debitRule": "ON",
        "amountRule": "EXACT",
        "validityEnd": "2020-11-07",
        "payeeVA": "eazypay.550127900@icici",
        "validityStart": "2020-10-07",
        "payerAccount": null,
        "createdDate": "2020-10-07T13:39:20.000Z",
        "mandateMode": "new",
        "txnId": "ICICI3999u65h011071220160720110712"
    }
}
    ]
}
    }
},
"success": true,
"message": "Transaction Successful",
"UpiTranlogId": "3958"
}

```

Approve/Reject pending mandates

This API will be used for approving or rejecting the mandates

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/Approve/Rejectpendingmandates>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/Approve/Rejectpendingmandates>

Method Name: POST

Parameters–

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
---	----------------	----------	--------	-----------------------	-----------	-------------

1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	pre-approved	M	1	F	A	A=Pre-approved, M=MPIN required Value of this parameter always should be 'A' for PPI channel.
6	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.
7	payer-va	M	255	V	AN	Payer virtual address
8	payee-va	M	255	V	AN	Payee virtual address

9	Ifsc	C	11	F	AN	IFSC Code. In case of RESTRICTED channels it is optional. This parameter is not required for PPI Channel.
10	account-number	M	20	V	AN	Account number. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
11	account-provider	M	10	V	N	Account Provider
12	mpin	C	1024	V	AN	The MPIN would be encrypted by the Mobile APP with the help of the NPCI Common Lib. <code,ki,ver base64 encoded encrypted mpin> These values are the same used at the time of encryption using the NPCI Common lib. Please check NPCI guidelines. If the customer/account is ON US (ICICI Customer), then the OTP should be sent in plain text. <i>If Common Library is used and otp is sent in encrypted format, then the request will have to be routed to NPCI for decryption. (To be discussed)</i> If pre-approved flag is M then this MPIN will be mandatory else optional
13	Umn	M	70	V	AN	Unique mandate number should be a UUID generated number
14	action	M	1	F	A	A- Approve Mandate R- Reject Mandate
15	mandate-nick-name	O	50	V	AN	Payer can use a nickname for the mandates at the time of creation or approval for easy identification, however no transaction can be performed on a nickname

16	upi-txn-id	C	35	F	AN	Mandatory for configured channels. While approving mandate, recent / latest transaction ID to be passed.
----	------------	---	----	---	----	--

Sample request with dummy values

```
Request {
  "pre-approved":"M",
  "payer-va":"Prashant.Takale@Imobile",
  "payee-va":"xyz@paytm",
  "action":"A",
  "mode":"PAY",
  "ifsc":"HDFC0000123",
  "account-number":"151515151516",
  "account-provider":"ICIC",
  "amount":"100",
  "frequency":"DAILY",
  "debit-rule":"ON",
  "mpin":"65444,KeyVVVV,1234",
  "umn":"112defghijklmnopqrstuvwxyz123456",
  "revokeble":"N",
  "share-to-payee":"Y",
  "block-fund":"Y",
  "device-id":"456465465",
  "mobile":"9552548637",
  "seq-no":"ICI5447D86914C14AC1B0A4C4A036B387B4",
  "channel-code":"Imobile",
  "profile-id":"88"
}
```

Response

```
{
  "success": true,
  "response": 92,
  "message": "Transaction Initiated",
  "BankRRN": "603417064918",
  "UpiTranlogId": "1732222604",
  "UserProfile": "88",
  "SeqNo": "ICI5447D86914C14AC1B0A4C4A036B387B4",
  "MobileAppData": "SUCCESS,Action=A "
}
```

Get All Mandates

This API will provide the list of mandates to the end user.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/Approve/GetAllMandates>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/Approve/GetAllMandates>

Method Name: POST

Parameters—

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	20	V	N	Profile id of the customer
6	virtual-address	M	255	V	AN	If present return all active mandates for specific VPA (as payer/payee) otherwise all pending mandates. In case of RESTRICTED channels, it will be hashed value for other channels it will be clear value for VPA

7	mandate-mode	O	1	F	A	A – Active mandate S- Suspend (Pause) Mandate R- Revoke Mandate X- Rejected Mandate If value is null (not available) result display with all mandate list.
8	mandate-ref-no	O	255	V	AN	Transaction ID or UMN to get mandate details, if ref- value available then mandate-mode parameter value ignored

```
Request {
  "virtual-address":"venkatesh.yemul@imobile",
  "device-id":"1234",
  "mobile":"9552548637",
  "seq- no":"ICI5447D86914C14AC1B0A4C4A036B387B4",
  "channel-code":"Imobile",
  "profile-id":"1",
  "mandate-mode":""
}
```

Response

```
{
  "SeqNo": "ICI5447D86914C14AC1B0A4C4A036B387B4",
  "BankRRN": "807818003958",
  "UserProfile": "1",
  "response": "0",
  "MobileAppData": {
    "details": {
      "mandate": {
        "UserAsPayee": [
          {
            "note": "Remarks",
            "revokeable": "Y",
            "mandateName": "BAJAJFINANCE",
            "blockFund": "N",
            "frequency": "WEEKLY",
            "payeeName": "sivaprasad",
            "payerIFSC": "ICIC0000152",
            "mandateStatus": "Active",
            "umn": "e9efcab84d9146e0a9f8b569b465a01d@icici",
            "payerVA": "siva@icici",
            "payerName": "sivaprasad",
            "id": "41755",
            "refUrl": null,
            "initiatedBy": "PAYEE",

```

```

        "channelCode": "IMOBILE",
        "amount": "21200.00",
        "debitRule": "ON",
        "amountRule": "EXACT",
        "validityEnd": "2020-12-25",
        "payeeIFSC": "ICIC0006650",
        "payeeVA": "sivawipro@icici",
        "validityStart": "2020-09-09",
        "payerAccount": "001701008099",
        "createdDate": "2020-09-09T23:31:32.000Z",
        "mandateMode": "Active",
        "payeeAccount": "665001522572",
        "txnId": "ICICI3siv55072011071220160720110712"
    }
],
"UserAsPayer": [
    {
        "note": "Remarks",
        "revokeable": "Y",
        "mandateName": "BAJAJFINANCE",
        "blockFund": "N",
        "frequency": "WEEKLY",
        "payeeName": "VAKADA SANTOSH KUMAR",
        "payerIFSC": "ICIC0006650",
        "mandateStatus": "Active",
        "umn": "0d52f54d0f984aac94296ba0220f9080@ic ici",
        "payerVA": "sivawipro@icici",
        "payerName": "Good",
        "id": "45967",
        "refUrl": "https://www.icicibank.com",
        "initiatedBy": "PAYEE",
        "channelCode": "UPI.NPCI",
        "amount": "18.00",
        "debitRule": "ON",
        "amountRule": "EXACT",
        "validityEnd": "2020-11-07",
        "payeeVA": "eazypay.550127900@icici",
        "validityStart": "2020-10-07",
        "payerAccount": "665001522572",
        "createdDate": "2020-10-07T13:39:20.000Z",
        "mandateMode": "Active",
        "txnId": "ICICI3999u65h011071220160720110712"
    }
]
}
},
"success": true,
"message": "Transaction Successful",
"UpiTranlogId": "3958"
}

```

Mandate History (History of financial mandates only)

This API display the mandate details for payer, which contains the number of instruction (Standing instruction) executed or pending to execute.

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/Approve/MandateHistory>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/Approve/MandateHistory>

Method Name: POST

Parameters—

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	20	V	N	Profile id of the customer

6	virtual-address	M	255	V	AN	If present return all active mandates for specific VPA (as payer/payee) otherwise all pending mandates
7	umn	M	70	V	AN	umn (Unique Mandate Number) , Please send active mandate related umn only

```
Request {
  "virtual-address":"venkatesh.yemul@imobile",
  "device-id":"1234",
  "mobile":"9552548637",
  "seq-no":"ICI5447D86914C14AC1B0A4C4A036B387B4",
  "channel-code":"Imobile",
  "profile-id":"1",
  "umn":"2815eada9c1d437ea3febaff74488e88@icici"
}
```

Response

```
{
  "success": true,
  "response": "00",
  "message": "Success",
  "BankRRN": "605417966281",
  "UpiTranlogId": "11233273",
  "UserProfile": "10",
  "MobileAppData": {
    "details": {
      "mandate": {
        "amount": "100",
        "validityEnd": "2018-07-16",
        "mandateName": "Recurring dep -1",
        "nickName": "MyMandate",
        "blockFund": "Y",
        "payeeIFSC": "ICIC1231232",
        "payeeVA": "venkatesh.yemul@icici",
        "validityStart": "2017-08-18",
        "frequency": "DAILY",
        "payerAccount": "123456789002",
        "payeeName": "Venkatesh Yemul",
        "createdDate": "2018-03-19T13:14:15.000Z",
        "payerIFSC": "ICIC0000123",
        "umn": "2815eada9c1d437ea3febaff74488e88@icici",
        "payerVA": "venkatesh.yemul@icici",
        "payerName": "My payer",
        "executedMandates": {
```

```

        "TotalExecuted": 8,
        "Success": 7,
        "failure": 1
    },
    "TotalScheduledExecution": 30,
    "remainingMandates": 22,
    "transactionDetails": [
        {
            "date": "2018-02-16",
            "type": "PAY",
            "txn-type": "DEBIT",
            "rrn": "625210798414",
            "note": " Restaurant Bill",
            "amount": "100.00",
            "payer": "venkatesh.yemul@icici",
            "payee": "xyz@pockets",
            "status": "SUCCESS"
        },
        {
            "date": "2018-02-17",
            "type": "PAY",
            "txn-type": "DEBIT",
            "rrn": "625210798414",
            "note": " Restaurant Bill",
            "amount": "100.00",
            "payer": "venkatesh.yemul@icici",
            "payee": "xyz@pockets",
            "status": "SUCCESS"
        },
        {
            "date": "2016-02-18",
            "type": "PAY",
            "txn-type": "DEBIT",
            "rrn": "625210798414",
            "note": " Restaurant Bill",
            "amount": "100.00",
            "payer": "venkatesh.yemul@icici",
            "payee": "xyz@pockets",
            "status": "FAILURE"
        }
    ]
},
"SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3"
}

```

Initiate Mandate Collect

This API will provide facility to initiate mandate collect request manually. (Only bank enabled channels can



initiate this request)

UAT: <https://apibankingonesandbox.icicibank.com/api/v1/upi2/Approve/InitiatemandateCollect>

Production: <https://apibankingone.icicibank.com/api/v1/upi2/Approve/InitiatemandateCollect>

Method Name: POST

Parameters –

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user. The channels which are unable to populate the device ID need to send mobile number as the value in this parameter. UPI switch will not be validating the device ID. It will just be forwarded to NPCI as it is a requirement.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in

						the library. This seq-no should be generated using java.util.UUID class. Please check NPCI guidelines for reference
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	profile-id	M	20	V	N	Profile id of the customer
6	account-number	M	20	V	AN	Account Number of the payee. In case of RESTRICTED channels it is hashed value. This parameter is not required for PPI Channel.
7	payee-va	M	255	V	N	Alias name with which the payee can be identified by his registered entity.
8	payer-va	M	255	V	N	Alias name with which the payer can be identified by his registered entity.
9	amount	O	14	V	N	Amount to be collected. (In Rupees , Integer value with 2 decimal) E.g. : 200.00 / 300.12 If amount is null then mandate amount values would send for collect.
10	note	M	50	V	AN	Remarks entered by the payee for his reference.
11	umn	M	70	V	AN	umn (Unique Mandate Number) , list of available umn can get using get-all-mandate (fetch Active only) api.
12	retry-count	C	2	V	N	Its incremental number for financial txn, for original txn its 0,first retry=1,second retry=2...so on... It is mandatory if purpose-code = 14 (Recurring Mandate)
13	mandate-seq-number	C	7	V	N	Mandate sequence number. It is mandatory if purpose-code = 14 (Recurring Mandate)

Sample request with dummy values

```
Request {
  "payer-va": "prashant.takale@lmobile",
  "payee-va": "xyz@paytm",
  "account-number": "151515151516",
  "amount": "100",
  "frequency": "DAILY",
  "debit-rule": "ON",
  "umn": "112defghijklmnopqrstuvwxyz123456",
  "note": "Manual mandate initiate",
  "device-id": "456465465",
  "mobile": "9552548637",
  "seq-no": "ICI5447D86914C14AC1B0A4C4A036B387B4",
  "channel-code": "channel",
  "profile-id": "88"
}
```

Response

```
{
  "success": true,
  "response": 91,
  "message": "Transaction Initiated",
  "BankRRN": "605417966281",
  "UpiTranlogId": "1273",
  "UserProfile": "10",
  "MobileAppData": {
    "details": {
      "mandate": {
        "amount": "100.00",
        "mandateName": "Recurring dep -1",
        "payeeIFSC": "ICIC000123",
        "payeeVA": "xyz_Payee@okicici",
        "validityStart": "2017-08-16T00:00:00.000Z",
        "validityEnd": "2018-07-16T23:59:59.000Z",
        "frequency": "DAILY",
        "payerAccount": "123456789002",
        "payeeName": "Venkatesh Yemul",
        "payerIFSC": "ICIC000123",
        "umn": "112defghijklmnopqrstuvwxyz123456@icici",
        "payerVA": "70d4daa38a2a4da7a448175c3432210d@icici",
        "payerName": "TestUser-1",
        "payeeAccount": "11278979778"
      }
    },
    "SeqNo": "ef1e92b4a01d4618a0eca5fdecc37ff23f3"
  }
}
```

Sample Callback

Payer Callback

```
{
  "MessageType": "1200",
  "ProcCode": "UPI013",
  "NotificationId": "8665073716",
  "TargetMobile": "9951441056",
  "TxnType": "COLLECT",
  "ProfileId": "33327690",
  "UpiTranlogId": "20525923893",
  "ExpireAfter": "10",
  "Payee": {
    "Name": "LendKaro",
    "Mobile": "0000000000",
    "VA": "lendkaro.rzp@axisbank",
    "RespCode": "",
    "MccCode": "",
    "MccType": "",
    "AccountNo": "",
    "Ifsc": "",
    "RevRespCode": ""
  },
  "Payer": {
    "Name": "G JAGADISH",
    "Mobile": "9951441056",
    "VA": "9951441056@icicipay",
    "Ifsc": "",
    "RespCode": "00",
    "RevRespCode": "",
    "AccountNo": ""
  },
  "Amount": "4032.9",
  "ChannelCode": "UPI",
  "TxnStatus": "DEEMED",
  "TxnInitDate": "20201031110839",
  "TxnCompletionDate": "20201031111053",
  "Note": "KreditLoan KreditLoan Repayment",
  "DeviceId": "353108092039084",
  "OriginalTxnId": "AXIf73918a27b79465dbcc7c16a1c15cfab",
  "SeqNo": "",
  "RefId": "Fv0bc2QLSfThRb",
  "RefUrl": "",
  "Rrn": "030511881320",
  "ResponseCode": "",

```

```

"UMN": ""
}

```

Payee Callback

```

{
  "MessageType": "1200",
  "ProcCode": "UPI013",
  "NotificationId": "5675240",
  "TargetMobile": "9326410342",
  "TxnType": "COLLECT",
  "ProfileId": "3239960",
  "UpiTranlogId": "68501294",
  "ExpireAfter": "30",
  "Payee": {
    "Name": "SouravTRB",
    "Mobile": "9326410342",
    "VA": "akshay265@tapicici",
    "RespCode": "BT",
    "MccCode": "0000",
    "MccType": "PERSON",
    "AccountNo": "",
    "Ifsc": "",
    "RevRespCode": "RB"
  },
  "Payer": {
    "Name": "APP2",
    "Mobile": "8287395196",
    "VA": "8287395196@icici",
    "Ifsc": "",
    "RespCode": "00",
    "RevRespCode": "",
    "AccountNo": ""
  },
  "Amount": "93",
  "ChannelCode": "UPI",
  "TxnStatus": "REJECT",
  "TxnInitDate": "20210225182952",
  "TxnCompletionDate": "20210225183233",
  "Note": "UPICollectMoney",
  "DeviceId": "16de70f3de64c9c9",
  "OriginalTxnId": "ICI0b428ea2e47744139d02ca6a02dc226f",
  "SeqNo": "",
  "RefId": "",
  "RefUrl": "https://www.icicibank.com",
  "Rrn": "105618153315",
  "ResponseCode": "BT",
  "UMN": ""
}

```

GetUpiNumberStatus

This new API shall be used for checking the availability of an upi-number before creating a new record as well as for fetching status in case of timeout for CREATE/MODIFY/DELETE record. This API is majorly used to retrieve the VPA linked to the numeric id or mobile number. GetAdd will have 3 types called 'CHECK', 'FETCH' and "PORT".

UAT:

<https://apibankingonesandbox.icicibank.com/api/v1/upi2/GetUpiNumberStatus>

Production:

<https://apibankingone.icicibank.com/api/v1/upi2/Approve/GetUpiNumberStatus>

Method Name : POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be an input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class.
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	virtual-address	M	255	V	AN	VPA of user, if Type =FETCH and upi-number is blank then it will fetch the all upi-number mapped to this VPA
6	Type	O	10	V	AN	Possible value is CHECK, FETCH, PORT in case no value, Default value to be considered is as CHECK

						CHECK = To check availability of UPI number PORT = To check existing VPA before porting UPI number as mobile to different VPA FETCH = This helps in 1) Fetch the list of upi numbers available against VPA 2) Fetch the status upi-number with combination of VPA i.e. VPA + Upi number, useful if upi-number mapping call time-out.
7	upi-number	C	16	V	N	1) currently max length allowed only 10 digits (16 digit is provision for feature use) minimum 8 and max 10 2) if type=FETCH and upi-number value available then it will fetch the status of a given pair of (UPI Number, VPA). 3) If upi-number length is 8 to 9 digits then it will treat as normal numeric id as upi-number. 4) If upi-number length is 10 digits then it will treat as mobile. This should be user's own mobile number.
8	user-consent	O	1	V	A	By default, value is Y i.e. true
9	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc- details' API. This will uniquely identify the user's profile.

Sample Request with dummy Values

```
DATA {
  "device-id": "4556c543d2d1hng",
  "mobile": "8977760872",
  "seq-no": "ICIlad0wa50e7cf0ch879sw472tw3",
  "channel-code": "ASERXYS",
  "virtual-address": "tempvpa1-4@okicici",
  "upi-number": "8977760872",
  "type": "CHECK",
  "user-consent": "Y",
  "profile-id": "3242142"
}
```

Response

```
{
  "Response": "Transaction Successful",
  "SeqNo": "ICIlad0wa50e7cf240ch879s0g73w472tw3",
  "BankRRN": "133409530951",
  "UserProfile": "3242142",
  "response": "0",
  "MobileAppData": {
    "result": "SUCCESS",
    "upiNumberStatus": [
      {
        "upiNumber": "8977760872",
        "vpa": "tempvpa1-4@okicici",
        "upiNumberType": "MOBILE_NUMBER",
        "type": "CHECK",
        "status": "NEW"
      }
    ]
  },
  "success": true,
  "ActCode": "0",
  "message": "Transaction Successful",
  "UpiTranlogId": "309530951"
}
```

1) Response if UPI number is available, user can use this numeric number.

```
{
  "response": "0",
  "message": "Transaction Successful",
}
```

```

"BankRRN": "126600007220",
"UpiTranlogId": "7220",
"UserProfile": "723",
"MobileAppData": {
  "result": "SUCCESS" "upiNumberStatus": [
{
  "status": "NEW",
  "upiNumber": "545681123",
  "type": "CHECK",
  "vpa": "abc124@icici",
  "upiNumberType": "NUMERIC_ID"
}
]
},
"SeqNo": "ICI94010j12k123hiudk654321jMantest"
}

```

02. Response if UPI number is already taken,

```

{
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "126600007221",
  "UpiTranlogId": "7220",
  "UserProfile": "723",
  "MobileAppData": {
    "result": "SUCCESS" "upiNumberStatus": [
{
  "status": "ACTIVE",
  "upiNumber": "545681123",
  "upiNumberStatus": "A",
  "type": "CHECK",
  "vpa": "abc124@icici",
  "upiNumberType": "NUMERIC_ID"
}
]
},
"SeqNo": "ICI94010j12k123hiudk654321jMantest"
}

```

03. PSP level validation error

```

{
  "response": "<<error_code>>",
  "message": "Failure",
  "BankRRN": "<<RRN>>",
  "UpiTranlogId": "<<internalID>>",

```

```

"UserProfile": "<<user>>",
"SeqNo": "<<Seq>>",
"MobileAppData": {
  "result": "FAILURE",
  "pspResponseCode": "<<error_code>>",
  "pspErrorMessage": "<<Error description>>"
}
}

```

sample example.

```

{
  "response": "0012",
  "message": "Failure",
  "BankRRN": "126600007221",
  "UpiTranlogId": "7220",
  "UserProfile": "723",
  "SeqNo": "ICI94010j12k123hiudk654321jMantest",
  "MobileAppData": {
    "result": "FAILURE",
    "pspResponseCode": "0012",
    "pspErrorMessage": "invalid device id"
  }
}

```

04. NPCI level error

```

{
  "response": "<<error_code>>",
  "message": "Failure",
  "BankRRN": "<<RRN>>",
  "UpiTranlogId": "<<internalID>>",
  "UserProfile": "<<user>>",
  "SeqNo": "<<Seq>>",
  "MobileAppData": {
    "result": "FAILURE",
    "npciResponseCode": "<<Error code>>" "npciErrorMessage": "<<Error description>>"
  }
}

```

sample example.

```

{
  "response": "0012",
  "message": "Failure",
  "BankRRN": "126600007221",
  "UpiTranlogId": "7220",
  "UserProfile": "723",

```

```

"SeqNo": "ICI94010j12k123hiudk654321jMantest",
"MobileAppData": {
  "result": "FAILURE",
  "npciResponseCode": "V13" "npciErrorMessage": "NPCI_ERROR"
}
}

```

05.Fetching UPI numbers mapped to a given VPA

```

{
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "126600007221",
  "UpiTranlogId": "7220",
  "UserProfile": "723",
  "MobileAppData": {
    "result": "SUCCESS",
    "upiNumberStatus": [
      {
        "status": "INACTIVE",
        "upiNumber": "545681123",
        "vpa": "abc124@icici",
        "upiNumberType": "NUMERIC_ID"
      },
      {
        "status": "ACTIVE",
        "upiNumber": "9954568123",
        "vpa": "abc124@icici",
        "upiNumberType": "MOBILE"
      },
      {
        "status": "DEREGISTERED",
        "upiNumber": "94568123",
        "vpa": "abc124@icici",
        "upiNumberType": "NUMERIC_ID"
      }
    ]
  },
  "SeqNo": "ICI94010j12k123hiudk654321jMantest"
}

```

06.Response while checking for porting

```

{
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "126600007220",
  "UpiTranlogId": "7220",

```

```

"UserProfile": "723",
"MobileAppData": {
  "result": "SUCCESS",
"upiNumberStatus": [
  {
    "upiNumber": "9512341234",
    "status": "ACTIVE",
    "requestType": "PORT",
    "upiNumberType": "MOBILE_NUMBER",
    "vpa": "test123456@ybl"
  }
]
},
"SeqNo": "ICI94010j12k123hiudk654321jMantest"
}

```

Response Code

UPI Number Availability	
ActCode	Response
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id

ManangeUpiNumber

For following different use cases this API can be use,

1) UPI Number Creation and Update:

- *Registration of mobile-number /numeric-id as UPI number for a new/existing user against VPA (CREATE).*
- *Re-activation of existing UPI number if earlier deactivated by user.*

2) UPI Number Disabling /Delete:

- *Deactivate UPI number (mobile number as well as numeric id of UPI number)*
- *Blocking of UPI number (Temporary state like pause)*

3) UPI Number Portability: *Porting of existing UPI number (mobile) as from one PSP to other(bank's) PSP.*

UAT:

<https://apibankingonesandbox.icicibank.com/api/v1/upi2/ManangeUpiNumber>

Production:

<https://apibankingone.icicibank.com/api/v1/upi2/Approve/ManangeUpiNumber>

Method Name : POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user.
2	mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP. This id will be used in the NPCI Common Library at the time of encrypting the OTP/MPIN. The value should be a input to the 'txn-id' in the library. This seq-no should be generated using java.util.UUID class.
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	Virtual-address	M	255	V	AN	VPA of user.
6	previous-vpa	C	255	V	AN	If action parameter value is PORT , then this field is mandatory (In case of mobile number as upi-number transfer b/w PSPs new PSP shall fire a get-upi-numebr-status first and fetch the old active VPA for validation by the customer followed by getting consent to update the same)

7	upi-number	M	16	V	N	1) currently max length allowed only 10 digits (16 digit is provision for feature use). minimum 8 and max 10 2) If upi-number length is 8 to 9 digits then it will treat as normal numeric id as upi-number. 3) If upi-number length is 10 digits then it will treat as mobile this should be user's own mobile number.
8	operation	M	10	V	A	Possible values are, ADD = to register new upi number (first need to validate whether upi-number available or not). For ADD operation, req-status parameter value should be "ACTIVE" only MODIFY = if existing upi number need to be modified with different action/status then use this value. For MODIFY operation, value of req-status parameter can be any one of the below, ACTIVE INACTIVE DEREGISTER BLOCK UNBLOCK
9	req-status	M		V	A	req-status parameter is required to set the status of upi-number and it's used combined with operation parameter. If operation parameter value is ADD, then req-status should be ACTIVE only. For already registered upi-number, operation parameter value would be MODIFY with any of the below req-status value "ACTIVE" "INACTIVE" "DEREGISTER" "BLOCK" "UNBLOCK"

10	user-consent	O	1	V	A	By default, value is N i.e. false
11	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

Register:

```
DATA {
  "device-id": "4526c9273d2d1eeb",
  "mobile": "8977760872",
  "seq-no": "ICIlad03a7cf2w0chr79s0f77w472tr3",
  "channel-code": "GOOGLECUG",
  "virtual-address": "tempvpa1-4@okicici",
  "previous-vpa": "test1234@ybl",
  "upi-number": "8922747172",
  "operation": "ADD",
  "req-status": "ACTIVE",
  "user-consent": "Y",
  "profile-id": "3242142"
}
```

Response

```
{
  "Response": "Transaction Successful",
  "SeqNo": "ICIlad03a50e7cf2w0chr79s0f77w472tr3",
  "BankRRN": "133409530973",
  "UserProfile": "3242142",
```

```

"response": "0",
"MobileAppData": {
  "result": "SUCCESS",
  "upiNumber": "8977760872",
  "vpa": "tempvpa1-4@okicici",
  "upiNumberType": "MOBILE_NUMBER",
  "action": "ADD|ACTIVE"
},
"success": true,
"ActCode": "0",
"message": "Transaction Successful",
"UpiTranlogId": "309530973"
}

```

Request:

Deregister

```

DATA {
  "device-id": "4526c9273d2d1eeb",
  "mobile": "8977760872",
  "seq-no": "ICIlad03a50e7cf2w0chrw9s0f77w472tr3",
  "channel-code": "abcxyz",
  "virtual-address": "tempvpa1-4@okicici",
  "previous-vpa": "test1234@ybl",
  "upi-number": "9177760872",
  "operation": "MODIFY",
  "req-status": "DEREGISTER",
  "user-consent": "Y",
  "profile-id": "3242142"
}

```

Response:

```

{
  "Response": "Transaction Successful",
  "SeqNo": "ICIlad03a50e7cf2w0chrw9s0f77w472tr3",
  "BankRRN": "133409531033",
  "UserProfile": "3242142",
  "response": "0",
  "MobileAppData": {
    "result": "SUCCESS",
    "upiNumber": "8977760872",
    "vpa": "tempvpa1-4@okicici",
    "upiNumberType": "MOBILE_NUMBER",
    "action": "MODIFY|DEREGISTER"
  },
  "success": true,
  "ActCode": "0",
}

```

```
{
  "message": "Transaction Successful",
  "UpiTranlogId": "309531033"
}
```

Scenario 1: Response if upi number added successfully to central mapper

```
{
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "126600007124",
  "UpiTranlogId": "7220",
  "UserProfile": "723",
  "MobileAppData": {
    "result": "SUCCESS",
    "upiNumber": "34561124",
    "action": "FETCH",
    "vpa": "test1234@icici"
  },
  "upiNumberType": "NUMERIC_ID",
  "SeqNo": "ICI94010j12k123hiudk654321jMantest"
}
```

Scenario 2: If case failure scenario i.e. negative response received from npci then below type of response will get to channel

```
{
  "response": "<<error_code>>",
  "message": "Failure",
  "BankRRN": "126600007210",
  "UpiTranlogId": "7220",
  "UserProfile": "723",
  "SeqNo": "ICI94010j12k123hiudk654321jMantest",
  "MobileAppData": {
    "result": "FAILURE",
    "npciResponseCode": "MM3" "npciErrorMessage": "NPCI_ERROR",
    "upiNumber": "9934561124",
    "action": "FETCH",
    "vpa": "test1234@icici"
  },
  "upiNumberType": "MOBILE"
}
```

Scenario 3: If case failure scenario i.e. negative response with internal validation then below type of response will get to channel

```
{
  "response": "<<error_code>>",
```

```

"message": "Failure",
"BankRRN": "126600007210",
"UpiTranlogId": "7220",
"UserProfile": "723",
"SeqNo": "ICI94010j12k123hiudk654321jMantest",
"MobileAppData": {
  "result": "FAILURE",
  "pspResponseCode": "09",
  "pspErrorMessage": "Could not reach NPCI"
},
"upiNumber": "9934561124",
"action": "FETCH",
"vpa": "test1234@icici"

"upiNumberType": "MOBILE"
},
}

```

Sample Request for port

DATA	<pre> { "action": "PORT", "device-id": "107824107824107824107824", "mobile": "9551234521", "seq-no": "ICI94010j123bk123hiudk6543122Man21", "channel-code": "ICICI", "profile-id": "723", "upi-number": "95511386", "user-consent": "Y", "virtual-address": "testpay@icici", "previous-vpa": "test1234@ybl" } </pre>
------	---

Scenario 4: Response if upi number is ported successfully

```

{
  "response": "0",
  "message": "Transaction Successful",
  "BankRRN": "126600007124",
  "UpiTranlogId": "7220",
  "UserProfile": "723",
  "MobileAppData": {
    "result": "SUCCESS",
  },
  "upiNumber": "9134561124",
  "action": "PORT",
  "status": "SUCESS",
  "vpa": "test1234@icici",
  "previousVpa": "test1234@ybl",
  "upiNumberType": "MOBILE_NUMBER"
},

```

```
"SeqNo": "ICI94010j12k123hiudk654321jMantest"
```

```
}
```

Response Code

UPI Number Availability	
ActCode	Response
0000	Success
0005	UPI Server Internal Error
0011	invalid data
0012	invalid device id
0013	channel code not present in request
0013	invalid channel code
0014	sequence no not present
0031	mobile no not present
0037	Invalid Virtual address
0039	duplicate seq no from channel
0055	virtual address already exist
0091	Transaction Initiated
9999	UPI Technical Error
1037	Invalid request type for UPI number
1038	Invalid UPI number
1039	UPI number value not present in request
1040	previous /old vpa is mandatory for upi number port.
1041	upi number modification against same vpa not allowed
1042	Upi number as mobile value is invalid
1043	Upi number already present to same VPA
1044	Upi number already used by others
1045	Upi number can not be serial number
1046	Upi number can not be same serial value
1047	Upi number create limit exceeded

ListUpiNumber

API will return list of upi-number linked to VPA or profile.

UAT:

<https://apibankingonesandbox.icicibank.com/api/v1/upi2/ListUpiNumber>

Production:

<https://apibankingone.icicibank.com/api/v1/upi2/Approve/ListUpiNumber>

Method Name : POST

Parameters

#	Parameter Name	Required	Length	Fixed/Variable Length	Data type	Description
1	device-id	M	255	V	AN	Unique device Token. Token should be unique for per channel-user.
2	Mobile	M	10	F	N	Mobile Number of the user
3	seq-no	M	35	F	AN	This will be a txn-id generated by the Mobile APP.
4	channel-code	M	15	V	A	The code for the source application from which the transaction will be initiated.
5	virtual-address	O	255	V	AN	If this field is present, it will return the list of upi number linked to this vpa or it will return profile level all vpa
6	Status	O	1	V	AN	This is optional field if empty system will return all upi-number with all possible status value else app can get the specific status related data. A=Active, B= Blocked, D=Deregistered
7	profile-id	M	10	V	N	ID of the profile returned in the response of the 'register mobile/store-acc-details' API. This will uniquely identify the user's profile.

Sample Request with dummy Values

```
DATA {
  "action": "ADD",
  "device-id": "107824107824107824107824",
  "mobile": "9551234567",
  "seqno": "ICI94010j123bk123hiudk6543122Man21",
  "channel-code": "ICICI",
  "profileid": "723",
  "virtual-address": "testpay@icici",
  "status": ""
}
```

Response

```
{
  "response": "0",
  "success": true,
  "message": "Transaction Successful",
  "BankRRN": "126600007219",
  "UpiTranlogId": "7219",
  "UserProfile": "723",
  "MobileAppData": {
    "result": "SUCCESS",
  },
  "upiNumberList": [
    {
      "upiNumber": "9552123456",
      "createdDate": "2021-09-21T16:14:23.000Z",
      "vpa": "loanspay@icici",
      "upiNumberType": "MOBILE_NUMBER",
      "status": "ACTIVE"
    },
    {
      "upiNumber": "95511381",
      "createdDate": "2021-09-21T20:34:58.000Z",
      "vpa": "loanspay1@icici",
      "upiNumberType": "NUMERIC_ID",
      "lastActionDate": "2021-09-21T20:34:58.000Z",
      "lastActionDone": "BLOCK",
      "status": "BLOCKED"
    },
    {
      "upiNumber": "95511382",
      "createdDate": "2021-09-21T20:37:40.000Z",
      "vpa": "loanspay@icici",
      "upiNumberType": "NUMERIC_ID",
      "lastActionDate": "2021-09-21T20:37:40.000Z",
      "lastActionDone": "DEREGISTERED",
      "status": "DELETED"
    }
  ]
}
```

```

    },
    {
      "upiNumber": "955113121",
      "createdDate": "2021-09-21T20:44:32.000Z",
      "vpa": "loanspay123@icici",
      "upiNumberType": "NUMERIC_ID",
      "lastActionDate": "2021-09-21T20:44:32.000Z",
      "lastActionDone": "RECLAIM",
      "status": "ACTIVE"
    }
  ]
},
"SeqNo": "ICI94010j123bk123hiudk654321jvenk12"
}

```

Gateway Error Codes

Error Code	Error Name	Description
8000	Invalid Encrypted Request	Decryption Failure
8001	JSON is EMPTY	JSON Schema request empty
8002	INVALID_JSON	JSON is not valid
8003	INVALID_FIELD FORMAT OR LENGTH	Field is not in the format mentioned
8004	MISSING_REQUIRED_FIELD_DATA	Mandatory field data is missing
8005	MISSING_REQUIRED_FIELD	Mandatory field is missing
8006	INVALID_FIELD_LENGTH	Length of field exceeds defined length
8007	Invalid JSON, OPEN CURLY BRACE MISSING	Length of field exceeds defined length
8008	Invalid JSON, END CURLY BRACE MISSING	Closing Brace missing in JSON
8009	Internal Server Error	Internal Server Error
8012	BACKEND_CONNECTION_TIMEOUT	When connection gets timeout

8013	BACKEND_READ_TIMEOUT	Timed out for reading the response
------	----------------------	------------------------------------