---------- TUTOR UPGRADE OS H3C ----------

1. **Login ke H3C via consol (wajib) karna IP MGT harus di set manual**
2. **Set ip MGT seperti berikut**

   [H3C-S12500R-TEST-M-GigabitEthernet0/0/0]display this
   #
   interface M-GigabitEthernet0/0/0
   ip address 192.168.1.1 255.255.255.252
   #

3. **Setelah itu kita aktifkan beberapa feature untuk proses upgrade**

   [H3C-S12500R-TEST]ftp server enable
   [H3C-S12500R-TEST]sftp server enable

4. **kemudian kita setting user password untuk login ke dalam perangkat**

   H3C-S12500R-TEST]local-user admin class manage
   [H3C-S12500R-TEST-luser-manage-admin]password simple <password_anda>
   [H3C-S12500R-TEST-luser-manage-admin]service-type telnet http https ssh terminal
   [H3C-S12500R-TEST-luser-manage-admin]authorization-attribute user-role level-15
   [H3C-S12500R-TEST-luser-manage-admin]authorization-attribute user-role network-admin

5. **Setelah itu konek dengan menggunakan kabel LAN**

6. **Lalu buka app WinSCP, dari laptop dan login dengan user & password yanga sudah di setting sebelum nya**

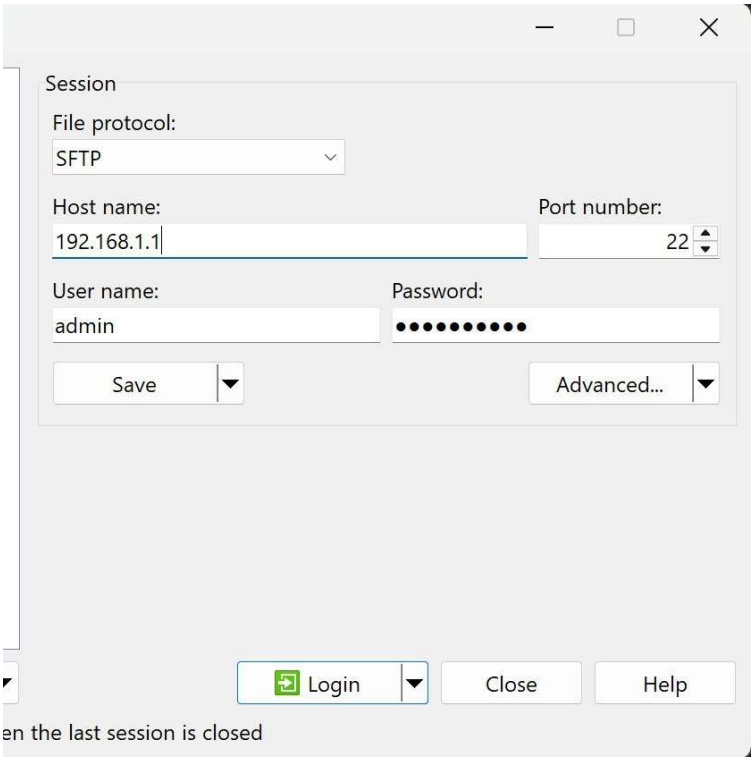

7. **kalo sudah masuk tinggal drag and drop file yang sudah di extract ke dalam switch H3C**

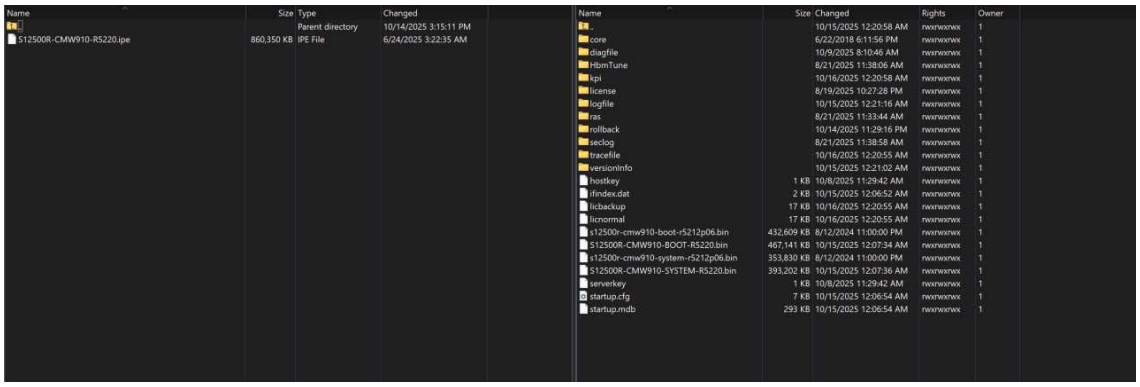

8. **Setelah selesai upload OS, pastikan file OS tidak corupt, pada saat transfer file**

```
<H3C-S12500R-TEST>dir
Directory of flash: (VFAT)
   0 drw-           - Aug 21 2025 04:38:06   HbmTune
   1 -rw-   880998400 Jun 23 2025 20:22:35   S12500R-CMW910-R5220.ipe
   2 drw-           - Jun 22 2018 11:11:56   core
   3 drw-           - Oct 09 2025 01:10:46   diagfile
   4 -rw-         735 Oct 08 2025 04:29:43   hostkey
   5 -rw-        1446 Oct 14 2025 15:46:02   ifindex.dat
   6 -rw-       16928 Oct 14 2025 01:10:46   licbackup
   7 drw-           - Aug 19 2025 15:27:28   license
   8 -rw-       16928 Oct 14 2025 01:10:46   licnormal
   9 drw-           - Oct 08 2025 01:10:56   logfile
  10 drw-           - Aug 21 2025 04:33:44   ras
  11 drw-           - Oct 14 2025 16:29:16   rollback
  12 -rw-   442991616 Aug 12 2024 16:00:00   s12500r-cmw910-boot-r5212p06.bin
  13 -rw-   362321920 Aug 12 2024 16:00:00   s12500r-cmw910-system-r5212p06.bin
  14 drw-           - Aug 21 2025 04:38:58   seclog
  15 -rw-         591 Oct 08 2025 04:29:43   serverkey
  16 -rw-        7056 Oct 14 2025 15:46:02   startup.cfg
  17 -rw-      299843 Oct 14 2025 15:46:02   startup.mdb
  18 drw-           - Aug 21 2025 04:38:58   tracefile
  19 drw-           - Aug 21 2025 04:39:06   versionInfo

3760616 KB total (2111504 KB free)
```

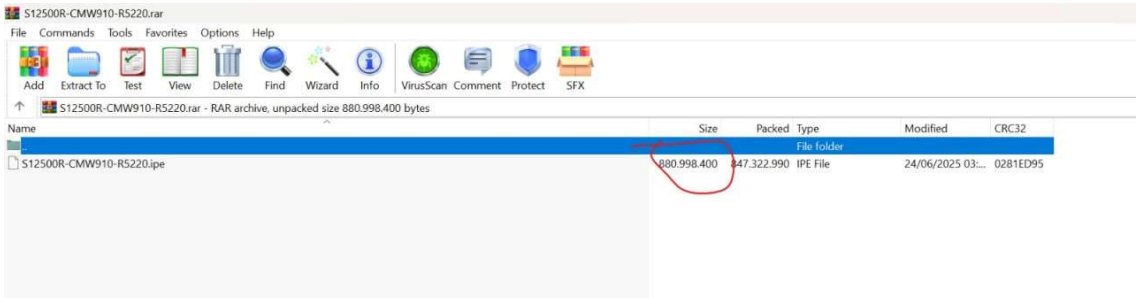

9. **Setelah file nya di pastikan aman masukan command berikut**
   <H3C-S12500R-TEST>save force
10. **Lalu kita boot file OS yang baru dengan command sebagai berikut**
   <H3C-S12500R-TEST>boot-loader file flash:/S12500R-CMW910-R5220.ipe all main

11. **Lalu di restart**

```
The images that have passed all examinations will be used as the main startup software images at the next reboo
Decompression completed.
Do you want to delete flash:/S12500R-CMW910-R5220.ipe now? [Y/N]:y
<H3C-S12500R-TEST>re
<H3C-S12500R-TEST>reboot
Start to check configuration with next startup configuration file, please wait.........DONE!
This command will reboot the device. Continue? [Y/N]:y
Now rebooting, please wait...
```

12. **Setelah switch selesai di restart silahkan di chek dan pastikan bahwa switch sudah terupgrade**

    <H3C-S12500R-TEST>display version
    H3C Comware Software, Version 9.1.058, Release 5220
    Copyright (c) 2004-2025 New H3C Technologies Co., Ltd. All rights reserved.
    H3C S12500R-48C6D uptime is 0 weeks, 0 days, 0 hours, 1 minute
    Last reboot reason : Cold reboot

    Boot image: flash:/S12500R-CMW910-BOOT-R5220.bin
    Boot image version: 9.1.058, Release 5220
    Compiled Mar 07 2025 16:00:00
    System image: flash:/S12500R-CMW910-SYSTEM-R5220.bin
    System image version: 9.1.058, Release 5220
    Compiled Mar 07 2025 16:00:00

13. **Install patch untuk update perbaikan bug terbaru, dan pastikan sudah terinstall**

    <H3C-S12500R-TEST>install activate patch flash:/S12500R-CMW910-SYSTEM-WEAK-R5220HD01.bin all
    <H3C-S12500R-TEST>install commit

    <H3C-S12500R-TEST>display version
    H3C Comware Software, Version 9.1.058, Release 5220
    Copyright (c) 2004-2025 New H3C Technologies Co., Ltd. All rights reserved.
    H3C S12500R-48C6D uptime is 8 weeks, 6 days, 16 hours, 41 minutes
    Last reboot reason : Cold reboot

    Boot image: flash:/S12500R-CMW910-BOOT-R5220.bin
    Boot image version: 9.1.058, Release 5220
    Compiled Mar 07 2025 16:00:00
    System image: flash:/S12500R-CMW910-SYSTEM-R5220.bin
    System image version: 9.1.058, Release 5220
    Compiled Mar 07 2025 16:00:00
    Patch image(s) list:
    flash:/S12500R-CMW910-SYSTEM-WEAK-R5220HD01.bin, version: R5220HD01
    Compiled Mar 07 2025 16:00:00

    Note : *setelah patch sudah terinstall tidak perlu reboot switch*