



owaspbw

Report generated by Nessus™


Thu, 14 Jul 2022 00:29:36 CST

TABLE OF CONTENTS

Vulnerabilities by Host

- 192.168.2.101.....4

Vulnerabilities by Host

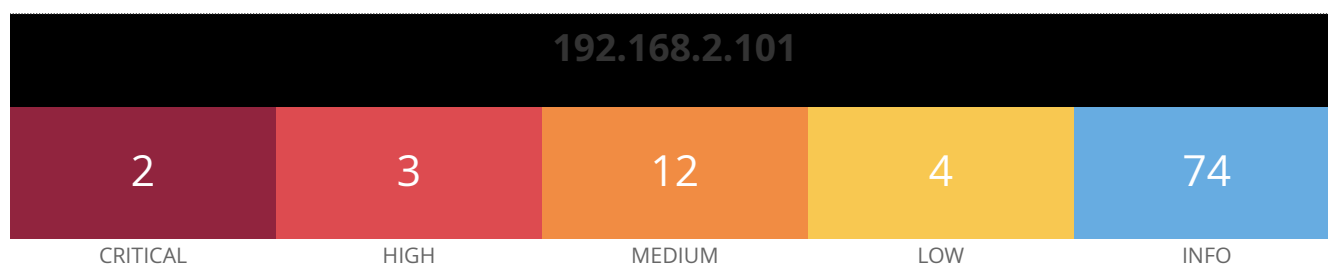

Scan Information

Start time: Thu Jul 14 00:11:29 2022
End time: Thu Jul 14 00:29:36 2022

Host Information

Netbios Name: OWASPBWA
IP: 192.168.2.101
MAC Address: 5C:61:99:30:30:BF
OS: Linux Kernel 2.6 on Ubuntu 10.04 (lucid)

Vulnerabilities

20007 - SSL Version 2 and 3 Protocol Detection

Synopsis

The remote service encrypts traffic using a protocol with known weaknesses.

Description

The remote service accepts connections encrypted using SSL 2.0 and/or SSL 3.0. These versions of SSL are affected by several cryptographic flaws, including:

- An insecure padding scheme with CBC ciphers.
- Insecure session renegotiation and resumption schemes.

An attacker can exploit these flaws to conduct man-in-the-middle attacks or to decrypt communications between the affected service and clients.

Although SSL/TLS has a secure means for choosing the highest supported version of the protocol (so that these versions will be used only if the client or server support nothing better), many web browsers implement this in an unsafe way that allows an attacker to downgrade a connection (such as in POODLE). Therefore, it is recommended that these protocols be disabled entirely.

NIST has determined that SSL 3.0 is no longer acceptable for secure communications. As of the date of enforcement found in PCI DSS v3.1, any version of SSL will not meet the PCI SSC's definition of 'strong cryptography'.

See Also

<https://www.schneier.com/academic/paperfiles/paper-ssl.pdf>

<http://www.nessus.org/u?b06c7e95>

<http://www.nessus.org/u?247c4540>

<https://www.openssl.org/~bodo/ssl-poodle.pdf>

<http://www.nessus.org/u?5d15ba70>

<https://www.imperialviolet.org/2014/10/14/poodle.html>

<https://tools.ietf.org/html/rfc7507>

<https://tools.ietf.org/html/rfc7568>

Solution

Consult the application's documentation to disable SSL 2.0 and 3.0.

Use TLS 1.2 (with approved cipher suites) or higher instead.

Risk Factor

Critical

CVSS v3.0 Base Score

9.8 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:H/I:H/A:H)

CVSS v2.0 Base Score

10.0 (CVSS2#AV:N/AC:L/Au:N/C:C/I:C/A:C)

Plugin Information

Published: 2005/10/12, Modified: 2022/04/04

Plugin Output

tcp/443

```
- SSLv3 is enabled and the server supports at least one cipher.  
Explanation: TLS 1.0 and SSL 3.0 cipher suites may be used with SSLv3
```

Medium Strength Ciphers (> 64-bit and < 112-bit key, or 3DES)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	---	-----	---
EDH-RSA-DES-CBC3-SHA		DH	RSA	3DES-CBC(168)	
SHA1					
DES-CBC3-SHA		RSA	RSA	3DES-CBC(168)	
SHA1					

High Strength Ciphers (>= 112-bit key)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
DHE-RSA-AES128-SHA		DH	RSA	AES-CBC(128)	
SHA1					
DHE-RSA-AES256-SHA		DH	RSA	AES-CBC(256)	
SHA1					
AES128-SHA		RSA	RSA	AES-CBC(128)	
SHA1					
AES256-SHA		RSA	RSA	AES-CBC(256)	
SHA1					
RC4-MD5		RSA	RSA	RC4(128)	MD5
RC4-SHA		RSA	RSA	RC4(128)	
SHA1					

The fields above are :

```
{Tenable ciphername}
{Cipher ID code}
Kex={key exchange}
Auth={authentication}
Encrypt={symmetric encryption method}
MAC={message authentication code}
{export flag}
```

33850 - Unix Operating System Unsupported Version Detection

Synopsis

The operating system running on the remote host is no longer supported.

Description

According to its self-reported version number, the Unix operating system running on the remote host is no longer supported.

Lack of support implies that no new security patches for the product will be released by the vendor. As a result, it is likely to contain security vulnerabilities.

Solution

Upgrade to a version of the Unix operating system that is currently supported.

Risk Factor

Critical

CVSS v3.0 Base Score

10.0 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:C/C:H/I:H/A:H)

CVSS v2.0 Base Score

10.0 (CVSS2#AV:N/AC:L/Au:N/C/I:C/A:C)

References

XREF	IAVA:0001-A-0502
XREF	IAVA:0001-A-0648

Plugin Information

Published: 2008/08/08, Modified: 2022/05/18

Plugin Output

tcp/0

```
Ubuntu 10.04 support ended on 2013-05-09 (Desktop) / 2015-04-30 (Server).  
Upgrade to Ubuntu 21.04 / LTS 20.04 / LTS 18.04.
```

```
For more information, see : https://wiki.ubuntu.com/Releases
```

35291 - SSL Certificate Signed Using Weak Hashing Algorithm

Synopsis

An SSL certificate in the certificate chain has been signed using a weak hash algorithm.

Description

The remote service uses an SSL certificate chain that has been signed using a cryptographically weak hashing algorithm (e.g. MD2, MD4, MD5, or SHA1). These signature algorithms are known to be vulnerable to collision attacks. An attacker can exploit this to generate another certificate with the same digital signature, allowing an attacker to masquerade as the affected service.

Note that this plugin reports all SSL certificate chains signed with SHA-1 that expire after January 1, 2017 as vulnerable. This is in accordance with Google's gradual sunsetting of the SHA-1 cryptographic hash algorithm.

Note that certificates in the chain that are contained in the Nessus CA database (known_CA.inc) have been ignored.

See Also

<https://tools.ietf.org/html/rfc3279>

<http://www.nessus.org/u?9bb87bf2>

<http://www.nessus.org/u?e120eea1>

<http://www.nessus.org/u?5d894816>

<http://www.nessus.org/u?51db68aa>

<http://www.nessus.org/u?9dc7bfba>

Solution

Contact the Certificate Authority to have the SSL certificate reissued.

Risk Factor

Medium

CVSS v3.0 Base Score

7.5 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:N/I:H/A:N)

CVSS v3.0 Temporal Score

6.7 (CVSS:3.0/E:P/RL:O/RC:C)

CVSS v2.0 Base Score

5.0 (CVSS2#AV:N/AC:L/Au:N/C:N/I:P/A:N)

CVSS v2.0 Temporal Score

3.9 (CVSS2#E:POC/RL:OF/RC:C)

References

BID	11849
BID	33065
CVE	CVE-2004-2761
XREF	CERT:836068
XREF	CWE:310

Plugin Information

Published: 2009/01/05, Modified: 2022/01/14

Plugin Output

tcp/443

The following certificates were part of the certificate chain sent by the remote host, but contain hashes that are considered to be weak.

```
Subject           : CN=owaspbwa
Signature Algorithm : SHA-1 With RSA Encryption
Valid From        : Jan 02 21:12:38 2013 GMT
Valid To          : Dec 31 21:12:38 2022 GMT
Raw PEM certificate :
```

-----BEGIN CERTIFICATE-----

[illegible]

42873 - SSL Medium Strength Cipher Suites Supported (SWEET32)

Synopsis

The remote service supports the use of medium strength SSL ciphers.

Description

The remote host supports the use of SSL ciphers that offer medium strength encryption. Nessus regards medium strength as any encryption that uses key lengths at least 64 bits and less than 112 bits, or else that uses the 3DES encryption suite.

Note that it is considerably easier to circumvent medium strength encryption if the attacker is on the same physical network.

See Also

<https://www.openssl.org/blog/blog/2016/08/24/sweet32/>

<https://sweet32.info>

Solution

Reconfigure the affected application if possible to avoid use of medium strength ciphers.

Risk Factor

Medium

CVSS v3.0 Base Score

7.5 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:H/I:N/A:N)

CVSS v2.0 Base Score

5.0 (CVSS2#AV:N/AC:L/Au:N/C:P/I:N/A:N)

References

CVE CVE-2016-2183

Plugin Information

Published: 2009/11/23, Modified: 2021/02/03

Plugin Output

tcp/443

Medium Strength Ciphers (> 64-bit and < 112-bit key, or 3DES)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
EDH-RSA-DES-CBC3-SHA	0x00, 0x16	DH	RSA	3DES-CBC(168)	
SHA1					
DES-CBC3-SHA	0x00, 0x0A	RSA	RSA	3DES-CBC(168)	
SHA1					

The fields above are :

{Tenable ciphername}
{Cipher ID code}
Kex={key exchange}
Auth={authentication}
Encrypt={symmetric encryption method}
MAC={message authentication code}
{export flag}

90509 - Samba Badlock Vulnerability

Synopsis

An SMB server running on the remote host is affected by the Badlock vulnerability.

Description

The version of Samba, a CIFS/SMB server for Linux and Unix, running on the remote host is affected by a flaw, known as Badlock, that exists in the Security Account Manager (SAM) and Local Security Authority (Domain Policy) (LSAD) protocols due to improper authentication level negotiation over Remote Procedure Call (RPC) channels. A man-in-the-middle attacker who is able to intercept the traffic between a client and a server hosting a SAM database can exploit this flaw to force a downgrade of the authentication level, which allows the execution of arbitrary Samba network calls in the context of the intercepted user, such as viewing or modifying sensitive security data in the Active Directory (AD) database or disabling critical services.

See Also

<http://badlock.org>

<https://www.samba.org/samba/security/CVE-2016-2118.html>

Solution

Upgrade to Samba version 4.2.11 / 4.3.8 / 4.4.2 or later.

Risk Factor

Medium

CVSS v3.0 Base Score

7.5 (CVSS:3.0/AV:N/AC:H/PR:N/UI:R/S:U/C:H/I:H/A:H)

CVSS v3.0 Temporal Score

6.5 (CVSS:3.0/E:U/RL:O/RC:C)

CVSS v2.0 Base Score

6.8 (CVSS2#AV:N/AC:M/Au:N/C:P/I:P/A:P)

CVSS v2.0 Temporal Score

5.0 (CVSS2#E:U/RL:OF/RC:C)

References

BID 86002

CVE	CVE-2016-2118
XREF	CERT:813296

Plugin Information

Published: 2016/04/13, Modified: 2019/11/20

Plugin Output

tcp/445/cifs

```
Nessus detected that the Samba Badlock patch has not been applied.
```

88098 - Apache Server ETag Header Information Disclosure

Synopsis

The remote web server is affected by an information disclosure vulnerability.

Description

The remote web server is affected by an information disclosure vulnerability due to the ETag header providing sensitive information that could aid an attacker, such as the inode number of requested files.

See Also

<http://httpd.apache.org/docs/2.2/mod/core.html#FileETag>

Solution

Modify the HTTP ETag header of the web server to not include file inodes in the ETag header calculation. Refer to the linked Apache documentation for more information.

Risk Factor

Medium

CVSS v3.0 Base Score

5.3 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:L/I:N/A:N)

CVSS v3.0 Temporal Score

4.6 (CVSS:3.0/E:U/RL:O/RC:C)

CVSS v2.0 Base Score

4.3 (CVSS2#AV:N/AC:M/Au:N/C:P/I:N/A:N)

CVSS v2.0 Temporal Score

3.2 (CVSS2#E:U/RL:OF/RC:C)

References

BID	6939
CVE	CVE-2003-1418
XREF	CWE:200

Plugin Information

Plugin Output

tcp/80/www

```
Nessus was able to determine that the Apache Server listening on  
port 80 leaks the servers inode numbers in the ETag HTTP  
Header field :
```

```
Source           : ETag: "45f13-6da3-51c22f5365e00"  
Inode number     : 286483  
File size        : 28067 bytes  
File modification time : Jul. 31, 2015 at 02:55:52 GMT
```

12085 - Apache Tomcat Default Files

Synopsis

The remote web server contains default files.

Description

The default error page, default index page, example JSPs and/or example servlets are installed on the remote Apache Tomcat server. These files should be removed as they may help an attacker uncover information about the remote Tomcat install or host itself.

See Also

<http://www.nessus.org/u?4cb3b4dd>

https://www.owasp.org/index.php/Securing_tomcat

Solution

Delete the default index page and remove the example JSP and servlets. Follow the Tomcat or OWASP instructions to replace or modify the default error page.

Risk Factor

Medium

CVSS v3.0 Base Score

5.3 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:L/I:N/A:N)

CVSS v2.0 Base Score

5.0 (CVSS2#AV:N/AC:L/Au:N/C:P/I:N/A:N)

Plugin Information

Published: 2004/03/02, Modified: 2019/08/12

Plugin Output

tcp/8080/www

The following default files were found :

```
http://192.168.2.101:8080/docs/  
http://192.168.2.101:8080/examples/servlets/index.html  
http://192.168.2.101:8080/examples/jsp/index.html
```


11213 - HTTP TRACE / TRACK Methods Allowed

Synopsis

Debugging functions are enabled on the remote web server.

Description

The remote web server supports the TRACE and/or TRACK methods. TRACE and TRACK are HTTP methods that are used to debug web server connections.

See Also

https://www.cgisecurity.com/whitehat-mirror/WH-WhitePaper_XST_ebook.pdf

<http://www.apacheweek.com/issues/03-01-24>

<https://download.oracle.com/sunalerts/1000718.1.html>

Solution

Disable these HTTP methods. Refer to the plugin output for more information.

Risk Factor

Medium

CVSS v3.0 Base Score

5.3 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:L/I:N/A:N)

CVSS v3.0 Temporal Score

4.6 (CVSS:3.0/E:U/RL:O/RC:C)

CVSS v2.0 Base Score

5.0 (CVSS2#AV:N/AC:L/Au:N/C:P/I:N/A:N)

CVSS v2.0 Temporal Score

3.7 (CVSS2#E:U/RL:OF/RC:C)

References

BID	9506
BID	9561
BID	11604
BID	33374

BID	37995
CVE	CVE-2003-1567
CVE	CVE-2004-2320
CVE	CVE-2010-0386
XREF	CERT:288308
XREF	CERT:867593
XREF	CWE:16
XREF	CWE:200

Plugin Information

Published: 2003/01/23, Modified: 2020/06/12

Plugin Output

tcp/80/www

To disable these methods, add the following lines for each virtual host in your configuration file :

```
RewriteEngine on
RewriteCond %{REQUEST_METHOD} ^(TRACE|TRACK)
RewriteRule .* - [F]
```

Alternatively, note that Apache versions 1.3.34, 2.0.55, and 2.2 support disabling the TRACE method natively via the 'TraceEnable' directive.

Nessus sent the following TRACE request :

```
----- snip -----
TRACE /Nessus1725075667.html HTTP/1.1
Connection: Close
Host: 192.168.2.101
Pragma: no-cache
User-Agent: Mozilla/4.0 (compatible; MSIE 8.0; Windows NT 5.1; Trident/4.0)
Accept: image/gif, image/x-xbitmap, image/jpeg, image/pjpeg, image/png, */*
Accept-Language: en
Accept-Charset: iso-8859-1,*,utf-8
```

```
----- snip -----
```

and received the following response from the remote server :

```
----- snip -----
HTTP/1.1 200 OK
Date: Thu, 14 Jul 2022 06:16:23 GMT
Server: Apache/2.2.14 (Ubuntu) mod_mono/2.4.3 PHP/5.3.2-lubuntu4.30 with Suhosin-Patch proxy_html/3.0.1 mod_python/3.3.1 Python/2.6.5 mod_ssl/2.2.14 OpenSSL/0.9.8k Phusion_Passenger/4.0.38 mod_perl/2.0.4 Perl/v5.10.1
Keep-Alive: timeout=15, max=100
Connection: Keep-Alive
Transfer-Encoding: chunked
Content-Type: message/http
```

```
TRACE /Nessus1725075667.html HTTP/1.1
Connection: Keep-Alive
Host: 192.168.2.101
Pragma: no-cache
```

```
User-Agent: Mozilla/4.0 (compatible; MSIE 8.0; Windows NT 5.1; Trident/4.0)
Accept: image/gif, image/x-xbitmap, image/jpeg, image/pjpeg, image/png, */*
Accept-Language: en
Accept-Charset: iso-8859-1,*,utf-8
```

```
----- snip -----
```

50686 - IP Forwarding Enabled

Synopsis

The remote host has IP forwarding enabled.

Description

The remote host has IP forwarding enabled. An attacker can exploit this to route packets through the host and potentially bypass some firewalls / routers / NAC filtering.

Unless the remote host is a router, it is recommended that you disable IP forwarding.

Solution

On Linux, you can disable IP forwarding by doing :

```
echo 0 > /proc/sys/net/ipv4/ip_forward
```

On Windows, set the key 'IPEnableRouter' to 0 under

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Services\Tcpip\Parameters

On Mac OS X, you can disable IP forwarding by executing the command :

```
sysctl -w net.inet.ip.forwarding=0
```

For other systems, check with your vendor.

Risk Factor

Medium

CVSS v3.0 Base Score

6.5 (CVSS:3.0/AV:A/AC:L/PR:L/UI:N/S:C/C:L/I:L/A:L)

CVSS v2.0 Base Score

5.8 (CVSS2#AV:A/AC:L/Au:N/C:P/I:P/A:P)

References

CVE CVE-1999-0511

Plugin Information

Published: 2010/11/23, Modified: 2021/12/29

Plugin Output

tcp/0

IP forwarding appears to be enabled on the remote host.

Detected local MAC Address : 642737d8dd03
Response from local MAC Address : 642737d8dd03

Detected Gateway MAC Address : 5c61993030bf
Response from Gateway MAC Address : 5c61993030bf

136929 - JQuery 1.2 < 3.5.0 Multiple XSS

Synopsis

The remote web server is affected by multiple cross site scripting vulnerability.

Description

According to the self-reported version in the script, the version of JQuery hosted on the remote web server is greater than or equal to 1.2 and prior to 3.5.0. It is, therefore, affected by multiple cross site scripting vulnerabilities.

Note, the vulnerabilities referenced in this plugin have no security impact on PAN-OS, and/or the scenarios required for successful exploitation do not exist on devices running a PAN-OS release.

See Also

<https://blog.jquery.com/2020/04/10/jquery-3-5-0-released/>

<https://security.paloaltonetworks.com/PAN-SA-2020-0007>

Solution

Upgrade to JQuery version 3.5.0 or later.

Risk Factor

Medium

CVSS v3.0 Base Score

6.1 (CVSS:3.0/AV:N/AC:L/PR:N/UI:R/S:C/C:L/I:L/A:N)

CVSS v3.0 Temporal Score

5.5 (CVSS:3.0/E:P/RL:O/RC:C)

CVSS v2.0 Base Score

4.3 (CVSS2#AV:N/AC:M/Au:N/C:N/I:P/A:N)

CVSS v2.0 Temporal Score

3.4 (CVSS2#E:POC/RL:OF/RC:C)

STIG Severity

II

References

CVE	CVE-2020-11022
CVE	CVE-2020-11023
XREF	IAVB:2020-B-0030

Plugin Information

Published: 2020/05/28, Modified: 2021/09/09

Plugin Output

tcp/80/www

```
URL           : http://192.168.2.101/jquery.min.js
Installed version : 1.3.2
Fixed version   : 3.5.0
```

57608 - SMB Signing not required

Synopsis

Signing is not required on the remote SMB server.

Description

Signing is not required on the remote SMB server. An unauthenticated, remote attacker can exploit this to conduct man-in-the-middle attacks against the SMB server.

See Also

<http://www.nessus.org/u?df39b8b3>

<http://technet.microsoft.com/en-us/library/cc731957.aspx>

<http://www.nessus.org/u?74b80723>

<https://www.samba.org/samba/docs/current/man-html/smb.conf.5.html>

<http://www.nessus.org/u?a3cac4ea>

Solution

Enforce message signing in the host's configuration. On Windows, this is found in the policy setting 'Microsoft network server: Digitally sign communications (always)'. On Samba, the setting is called 'server signing'. See the 'see also' links for further details.

Risk Factor

Medium

CVSS v3.0 Base Score

5.3 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:N/I:L/A:N)

CVSS v3.0 Temporal Score

4.6 (CVSS:3.0/E:U/RL:O/RC:C)

CVSS v2.0 Base Score

5.0 (CVSS2#AV:N/AC:L/Au:N/C:N/I:P/A:N)

CVSS v2.0 Temporal Score

3.7 (CVSS2#E:U/RL:OF/RC:C)

Plugin Information

Published: 2012/01/19, Modified: 2021/03/15

Plugin Output

tcp/445/cifs

90317 - SSH Weak Algorithms Supported

Synopsis

The remote SSH server is configured to allow weak encryption algorithms or no algorithm at all.

Description

Nessus has detected that the remote SSH server is configured to use the Arcfour stream cipher or no cipher at all. RFC 4253 advises against using Arcfour due to an issue with weak keys.

See Also

<https://tools.ietf.org/html/rfc4253#section-6.3>

Solution

Contact the vendor or consult product documentation to remove the weak ciphers.

Risk Factor

Medium

CVSS v2.0 Base Score

4.3 (CVSS2#AV:N/AC:M/Au:N/C:P/I:N/A:N)

Plugin Information

Published: 2016/04/04, Modified: 2016/12/14

Plugin Output

tcp/22/ssh

```
The following weak server-to-client encryption algorithms are supported :
```

```
arcfour
arcfour128
arcfour256
```

```
The following weak client-to-server encryption algorithms are supported :
```

```
arcfour
arcfour128
arcfour256
```

51192 - SSL Certificate Cannot Be Trusted

Synopsis

The SSL certificate for this service cannot be trusted.

Description

The server's X.509 certificate cannot be trusted. This situation can occur in three different ways, in which the chain of trust can be broken, as stated below :

- First, the top of the certificate chain sent by the server might not be descended from a known public certificate authority. This can occur either when the top of the chain is an unrecognized, self-signed certificate, or when intermediate certificates are missing that would connect the top of the certificate chain to a known public certificate authority.
- Second, the certificate chain may contain a certificate that is not valid at the time of the scan. This can occur either when the scan occurs before one of the certificate's 'notBefore' dates, or after one of the certificate's 'notAfter' dates.
- Third, the certificate chain may contain a signature that either didn't match the certificate's information or could not be verified. Bad signatures can be fixed by getting the certificate with the bad signature to be re-signed by its issuer. Signatures that could not be verified are the result of the certificate's issuer using a signing algorithm that Nessus either does not support or does not recognize.

If the remote host is a public host in production, any break in the chain makes it more difficult for users to verify the authenticity and identity of the web server. This could make it easier to carry out man-in-the-middle attacks against the remote host.

See Also

<https://www.itu.int/rec/T-REC-X.509/en>

<https://en.wikipedia.org/wiki/X.509>

Solution

Purchase or generate a proper SSL certificate for this service.

Risk Factor

Medium

CVSS v3.0 Base Score

6.5 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:L/I:L/A:N)

CVSS v2.0 Base Score

6.4 (CVSS2#AV:N/AC:L/Au:N/C:P/I:P/A:N)

Plugin Information

Published: 2010/12/15, Modified: 2020/04/27

Plugin Output

tcp/443

```
The following certificate was at the top of the certificate
chain sent by the remote host, but it is signed by an unknown
certificate authority :
```

```
| -Subject : CN=owaspbwa
| -Issuer  : CN=owaspbwa
```

Synopsis

The remote service supports the use of the RC4 cipher.

Description

The remote host supports the use of RC4 in one or more cipher suites.

The RC4 cipher is flawed in its generation of a pseudo-random stream of bytes so that a wide variety of small biases are introduced into the stream, decreasing its randomness.

If plaintext is repeatedly encrypted (e.g., HTTP cookies), and an attacker is able to obtain many (i.e., tens of millions) ciphertexts, the attacker may be able to derive the plaintext.

See Also

<https://www.rc4nomore.com/>

<http://www.nessus.org/u?ac7327a0>

<http://cr.yp.to/talks/2013.03.12/slides.pdf>

<http://www.isg.rhul.ac.uk/tls/>

https://www.imperva.com/docs/HII_Attacking_SSL_when_using_RC4.pdf

Solution

Reconfigure the affected application, if possible, to avoid use of RC4 ciphers. Consider using TLS 1.2 with AES-GCM suites subject to browser and web server support.

Risk Factor

Medium

CVSS v3.0 Base Score

5.9 (CVSS:3.0/AV:N/AC:H/PR:N/UI:N/S:U/C:H/I:N/A:N)

CVSS v3.0 Temporal Score

5.4 (CVSS:3.0/E:U/RL:X/RC:C)

CVSS v2.0 Base Score

4.3 (CVSS2#AV:N/AC:M/Au:N/C:P/I:N/A:N)

CVSS v2.0 Temporal Score

3.7 (CVSS2#E:U/RL:ND/RC:C)

References

BID 58796
BID 73684
CVE CVE-2013-2566
CVE CVE-2015-2808

Plugin Information

Published: 2013/04/05, Modified: 2021/02/03

Plugin Output

tcp/443

List of RC4 cipher suites supported by the remote server :

High Strength Ciphers (>= 112-bit key)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
RC4-MD5	0x00, 0x04	RSA	RSA	RC4(128)	MD5
RC4-SHA	0x00, 0x05	RSA	RSA	RC4(128)	
SHA1					

The fields above are :

{Tenable ciphername}
{Cipher ID code}
Kex={key exchange}
Auth={authentication}
Encrypt={symmetric encryption method}
MAC={message authentication code}
{export flag}

57582 - SSL Self-Signed Certificate

Synopsis

The SSL certificate chain for this service ends in an unrecognized self-signed certificate.

Description

The X.509 certificate chain for this service is not signed by a recognized certificate authority. If the remote host is a public host in production, this nullifies the use of SSL as anyone could establish a man-in-the-middle attack against the remote host.

Note that this plugin does not check for certificate chains that end in a certificate that is not self-signed, but is signed by an unrecognized certificate authority.

Solution

Purchase or generate a proper SSL certificate for this service.

Risk Factor

Medium

CVSS v3.0 Base Score

6.5 (CVSS:3.0/AV:N/AC:L/PR:N/UI:N/S:U/C:L/I:L/A:N)

CVSS v2.0 Base Score

6.4 (CVSS2#AV:N/AC:L/Au:N/C:P/I:P/A:N)

Plugin Information

Published: 2012/01/17, Modified: 2022/06/14

Plugin Output

tcp/443

```
The following certificate was found at the top of the certificate
chain sent by the remote host, but is self-signed and was not
found in the list of known certificate authorities :
```

```
| -Subject : CN=owaspbwa
```

78479 - SSLv3 Padding Oracle On Downgraded Legacy Encryption Vulnerability (POODLE)

Synopsis

It is possible to obtain sensitive information from the remote host with SSL/TLS-enabled services.

Description

The remote host is affected by a man-in-the-middle (MitM) information disclosure vulnerability known as POODLE. The vulnerability is due to the way SSL 3.0 handles padding bytes when decrypting messages encrypted using block ciphers in cipher block chaining (CBC) mode.

MitM attackers can decrypt a selected byte of a cipher text in as few as 256 tries if they are able to force a victim application to repeatedly send the same data over newly created SSL 3.0 connections.

As long as a client and service both support SSLv3, a connection can be 'rolled back' to SSLv3, even if TLSv1 or newer is supported by the client and service.

The TLS Fallback SCSV mechanism prevents 'version rollback' attacks without impacting legacy clients; however, it can only protect connections when the client and service support the mechanism. Sites that cannot disable SSLv3 immediately should enable this mechanism.

This is a vulnerability in the SSLv3 specification, not in any particular SSL implementation. Disabling SSLv3 is the only way to completely mitigate the vulnerability.

See Also

<https://www.imperialviolet.org/2014/10/14/poodle.html>

<https://www.openssl.org/~bodo/ssl-poodle.pdf>

<https://tools.ietf.org/html/draft-ietf-tls-downgrade-scsv-00>

Solution

Disable SSLv3.

Services that must support SSLv3 should enable the TLS Fallback SCSV mechanism until SSLv3 can be disabled.

Risk Factor

Medium

CVSS v3.0 Base Score

6.8 (CVSS:3.0/AV:N/AC:H/PR:N/UI:N/S:C/C:H/I:N/A:N)

CVSS v3.0 Temporal Score

5.9 (CVSS:3.0/E:U/RL:O/RC:C)

CVSS v2.0 Base Score

4.3 (CVSS2#AV:N/AC:M/Au:N/C:P/I:N/A:N)

CVSS v2.0 Temporal Score

3.2 (CVSS2#E:U/RL:OF/RC:C)

References

BID	70574
CVE	CVE-2014-3566
XREF	CERT:577193

Plugin Information

Published: 2014/10/15, Modified: 2020/06/12

Plugin Output

tcp/443

Nessus determined that the remote server supports SSLv3 with at least one CBC cipher suite, indicating that this server is vulnerable.

It appears that TLSv1 or newer is supported on the server. However, the Fallback SCSV mechanism is not supported, allowing connections to be "rolled back" to SSLv3.

104743 - TLS Version 1.0 Protocol Detection

Synopsis

The remote service encrypts traffic using an older version of TLS.

Description

The remote service accepts connections encrypted using TLS 1.0. TLS 1.0 has a number of cryptographic design flaws. Modern implementations of TLS 1.0 mitigate these problems, but newer versions of TLS like 1.2 and 1.3 are designed against these flaws and should be used whenever possible.

As of March 31, 2020, Endpoints that aren't enabled for TLS 1.2 and higher will no longer function properly with major web browsers and major vendors.

PCI DSS v3.2 requires that TLS 1.0 be disabled entirely by June 30, 2018, except for POS POI terminals (and the SSL/TLS termination points to which they connect) that can be verified as not being susceptible to any known exploits.

See Also

<https://tools.ietf.org/html/draft-ietf-tls-oldversions-deprecate-00>

Solution

Enable support for TLS 1.2 and 1.3, and disable support for TLS 1.0.

Risk Factor

Medium

CVSS v3.0 Base Score

6.5 (CVSS:3.0/AV:N/AC:H/PR:N/UI:N/S:U/C:H/I:L/A:N)

CVSS v2.0 Base Score

6.1 (CVSS2#AV:N/AC:H/Au:N/C:C/I:P/A:N)

Plugin Information

Published: 2017/11/22, Modified: 2020/03/31

Plugin Output

tcp/443

```
TLsv1 is enabled and the server supports at least one cipher.
```

70658 - SSH Server CBC Mode Ciphers Enabled

Synopsis

The SSH server is configured to use Cipher Block Chaining.

Description

The SSH server is configured to support Cipher Block Chaining (CBC) encryption. This may allow an attacker to recover the plaintext message from the ciphertext.

Note that this plugin only checks for the options of the SSH server and does not check for vulnerable software versions.

Solution

Contact the vendor or consult product documentation to disable CBC mode cipher encryption, and enable CTR or GCM cipher mode encryption.

Risk Factor

Low

CVSS v2.0 Base Score

2.6 (CVSS2#AV:N/AC:H/Au:N/C:P/I:N/A:N)

CVSS v2.0 Temporal Score

1.9 (CVSS2#E:U/RL:OF/RC:C)

References

BID	32319
CVE	CVE-2008-5161
XREF	CERT:958563
XREF	CWE:200

Plugin Information

Published: 2013/10/28, Modified: 2018/07/30

Plugin Output

tcp/22/ssh

```
The following client-to-server Cipher Block Chaining (CBC) algorithms
are supported :
```

```
3des-cbc  
aes128-cbc  
aes192-cbc  
aes256-cbc  
blowfish-cbc  
cast128-cbc  
rijndael-cbc@lysator.liu.se
```

The following server-to-client Cipher Block Chaining (CBC) algorithms are supported :

```
3des-cbc  
aes128-cbc  
aes192-cbc  
aes256-cbc  
blowfish-cbc  
cast128-cbc  
rijndael-cbc@lysator.liu.se
```

153953 - SSH Weak Key Exchange Algorithms Enabled

Synopsis

The remote SSH server is configured to allow weak key exchange algorithms.

Description

The remote SSH server is configured to allow key exchange algorithms which are considered weak.

This is based on the IETF draft document Key Exchange (KEX) Method Updates and Recommendations for Secure Shell (SSH) draft-ietf-curdle-ssh-kex-sha2-20. Section 4 lists guidance on key exchange algorithms that SHOULD NOT and MUST NOT be enabled. This includes:

diffie-hellman-group-exchange-sha1

diffie-hellman-group1-sha1

gss-gex-sha1-*

gss-group1-sha1-*

gss-group14-sha1-*

rsa1024-sha1

Note that this plugin only checks for the options of the SSH server, and it does not check for vulnerable software versions.

See Also

<http://www.nessus.org/u?b02d91cd>

<https://datatracker.ietf.org/doc/html/rfc8732>

Solution

Contact the vendor or consult product documentation to disable the weak algorithms.

Risk Factor

Low

CVSS v3.0 Base Score

3.7 (CVSS:3.0/AV:N/AC:H/PR:N/UI:N/S:U/C:L/I:N/A:N)

CVSS v2.0 Base Score

2.6 (CVSS2#AV:N/AC:H/Au:N/C:P/I:N/A:N)

Plugin Information

192.168.2.101

Plugin Output

tcp/22/ssh

The following weak key exchange algorithms are enabled :

```
diffie-hellman-group-exchange-sha1
diffie-hellman-group1-sha1
```

71049 - SSH Weak MAC Algorithms Enabled

Synopsis

The remote SSH server is configured to allow MD5 and 96-bit MAC algorithms.

Description

The remote SSH server is configured to allow either MD5 or 96-bit MAC algorithms, both of which are considered weak.

Note that this plugin only checks for the options of the SSH server, and it does not check for vulnerable software versions.

Solution

Contact the vendor or consult product documentation to disable MD5 and 96-bit MAC algorithms.

Risk Factor

Low

CVSS v2.0 Base Score

2.6 (CVSS2#AV:N/AC:H/Au:N/C:P/I:N/A:N)

Plugin Information

Published: 2013/11/22, Modified: 2016/12/14

Plugin Output

tcp/22/ssh

```
The following client-to-server Message Authentication Code (MAC) algorithms
are supported :
```

```
  hmac-md5
  hmac-md5-96
  hmac-sha1-96
```

```
The following server-to-client Message Authentication Code (MAC) algorithms
are supported :
```

```
  hmac-md5
  hmac-md5-96
  hmac-sha1-96
```

69551 - SSL Certificate Chain Contains RSA Keys Less Than 2048 bits

Synopsis

The X.509 certificate chain used by this service contains certificates with RSA keys shorter than 2048 bits.

Description

At least one of the X.509 certificates sent by the remote host has a key that is shorter than 2048 bits. According to industry standards set by the Certification Authority/Browser (CA/B) Forum, certificates issued after January 1, 2014 must be at least 2048 bits.

Some browser SSL implementations may reject keys less than 2048 bits after January 1, 2014. Additionally, some SSL certificate vendors may revoke certificates less than 2048 bits before January 1, 2014.

Note that Nessus will not flag root certificates with RSA keys less than 2048 bits if they were issued prior to December 31, 2010, as the standard considers them exempt.

See Also

https://www.cabforum.org/wp-content/uploads/Baseline_Requirements_V1.pdf

Solution

Replace the certificate in the chain with the RSA key less than 2048 bits in length with a longer key, and reissue any certificates signed by the old certificate.

Risk Factor

Low

Plugin Information

Published: 2013/09/03, Modified: 2018/11/15

Plugin Output

tcp/443

The following certificates were part of the certificate chain sent by the remote host, but contain RSA keys that are considered to be weak :

```
| -Subject      : CN=owaspbwa  
| -RSA Key Length : 1024 bits
```


18261 - Apache Banner Linux Distribution Disclosure

Synopsis

The name of the Linux distribution running on the remote host was found in the banner of the web server.

Description

Nessus was able to extract the banner of the Apache web server and determine which Linux distribution the remote host is running.

Solution

If you do not wish to display this information, edit 'httpd.conf' and set the directive 'ServerTokens Prod' and restart Apache.

Risk Factor

None

Plugin Information

Published: 2005/05/15, Modified: 2022/03/21

Plugin Output

tcp/0

```
The Linux distribution detected was :  
- Ubuntu 10.04 (lucid)
```

48204 - Apache HTTP Server Version

Synopsis

It is possible to obtain the version number of the remote Apache HTTP server.

Description

The remote host is running the Apache HTTP Server, an open source web server. It was possible to read the version number from the banner.

See Also

<https://httpd.apache.org/>

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0530

Plugin Information

Published: 2010/07/30, Modified: 2020/09/22

Plugin Output

tcp/80/www

```
URL      : http://192.168.2.101/
Version  : 2.2.99
backported : 1
modules   : mod_mono/2.4.3 PHP/5.3.2-lubuntu4.30 with Suhosin-Patch proxy_html/3.0.1
mod_python/3.3.1 Python/2.6.5 mod_ssl/2.2.14 OpenSSL/0.9.8k Phusion_Passenger/4.0.38 mod_perl/2.0.4
Perl/v5.10.1
os        : ConvertedUbuntu
```

39446 - Apache Tomcat Detection

Synopsis

The remote web server is an Apache Tomcat server.

Description

Nessus was able to detect a remote Apache Tomcat web server.

See Also

<https://tomcat.apache.org/>

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0535

Plugin Information

Published: 2009/06/18, Modified: 2020/09/22

Plugin Output

tcp/8080/www

```
URL      : http://192.168.2.101:8080/  
Version  : unknown
```

84574 - Backported Security Patch Detection (PHP)

Synopsis

Security patches have been backported.

Description

Security patches may have been 'backported' to the remote PHP install without changing its version number.

Banner-based checks have been disabled to avoid false positives.

Note that this test is informational only and does not denote any security problem.

See Also

https://access.redhat.com/security/updates/backporting/?sc_cid=3093

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2015/07/07, Modified: 2022/04/11

Plugin Output

tcp/80/www

```
Give Nessus credentials to perform local checks.
```

39520 - Backported Security Patch Detection (SSH)

Synopsis

Security patches are backported.

Description

Security patches may have been 'backported' to the remote SSH server without changing its version number.

Banner-based checks have been disabled to avoid false positives.

Note that this test is informational only and does not denote any security problem.

See Also

https://access.redhat.com/security/updates/backporting/?sc_cid=3093

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/06/25, Modified: 2015/07/07

Plugin Output

tcp/22/ssh

```
Give Nessus credentials to perform local checks.
```

39521 - Backported Security Patch Detection (WWW)

Synopsis

Security patches are backported.

Description

Security patches may have been 'backported' to the remote HTTP server without changing its version number.

Banner-based checks have been disabled to avoid false positives.

Note that this test is informational only and does not denote any security problem.

See Also

https://access.redhat.com/security/updates/backporting/?sc_cid=3093

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/06/25, Modified: 2015/07/07

Plugin Output

tcp/80/www

```
Give Nessus credentials to perform local checks.
```

45590 - Common Platform Enumeration (CPE)

Synopsis

It was possible to enumerate CPE names that matched on the remote system.

Description

By using information obtained from a Nessus scan, this plugin reports CPE (Common Platform Enumeration) matches for various hardware and software products found on a host.

Note that if an official CPE is not available for the product, this plugin computes the best possible CPE based on the information available from the scan.

See Also

<http://cpe.mitre.org/>

<https://nvd.nist.gov/products/cpe>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2010/04/21, Modified: 2022/05/24

Plugin Output

tcp/0

The remote operating system matched the following CPE :

cpe:/o:canonical:ubuntu_linux:10.04 -> Canonical Ubuntu Linux

Following application CPE's matched on the remote system :

cpe:/a:apache:http_server:2.2.14 -> Apache Software Foundation Apache HTTP Server
cpe:/a:apache:http_server:2.2.99 -> Apache Software Foundation Apache HTTP Server
cpe:/a:apache:mod_perl:2.0.4 -> Apache Software Foundation mod_perl
cpe:/a:apache:mod_python:3.3.1 -> Apache Software Foundation mod_python
cpe:/a:apache:tomcat -> Apache Software Foundation Tomcat
cpe:/a:jquery:jquery:1.3.2 -> jQuery
cpe:/a:modssl:mod_ssl:2.2.14 -> mod_ssl
cpe:/a:openbsd:openssh:5.3 -> OpenBSD OpenSSH
cpe:/a:openssl:openssl:0.9.8k -> OpenSSL Project OpenSSL
cpe:/a:php:php:5.3.2 -> PHP PHP
cpe:/a:php:php:5.3.2-lubuntu4.30 -> PHP PHP
cpe:/a:python:python:2.6.5 -> Python

```
cpe:/a:samba:samba:3.4.7 -> Samba Samba
```


54615 - Device Type

Synopsis

It is possible to guess the remote device type.

Description

Based on the remote operating system, it is possible to determine what the remote system type is (eg: a printer, router, general-purpose computer, etc).

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2011/05/23, Modified: 2011/05/23

Plugin Output

tcp/0

```
Remote device type : general-purpose  
Confidence level : 95
```

35716 - Ethernet Card Manufacturer Detection

Synopsis

The manufacturer can be identified from the Ethernet OUI.

Description

Each ethernet MAC address starts with a 24-bit Organizationally Unique Identifier (OUI). These OUIs are registered by IEEE.

See Also

<https://standards.ieee.org/faqs/regauth.html>

<http://www.nessus.org/u?794673b4>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/02/19, Modified: 2020/05/13

Plugin Output

tcp/0

The following card manufacturers were identified :

5C:61:99:30:30:BF : CLOUD NETWORK TECHNOLOGY SINGAPORE PTE. LTD.

86420 - Ethernet MAC Addresses

Synopsis

This plugin gathers MAC addresses from various sources and consolidates them into a list.

Description

This plugin gathers MAC addresses discovered from both remote probing of the host (e.g. SNMP and Netbios) and from running local checks (e.g. ifconfig). It then consolidates the MAC addresses into a single, unique, and uniform list.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2015/10/16, Modified: 2020/05/13

Plugin Output

tcp/0

```
The following is a consolidated list of detected MAC addresses:  
- 5C:61:99:30:30:BF
```

43111 - HTTP Methods Allowed (per directory)

Synopsis

This plugin determines which HTTP methods are allowed on various CGI directories.

Description

By calling the OPTIONS method, it is possible to determine which HTTP methods are allowed on each directory.

The following HTTP methods are considered insecure:

PUT, DELETE, CONNECT, TRACE, HEAD

Many frameworks and languages treat 'HEAD' as a 'GET' request, albeit one without any body in the response. If a security constraint was set on 'GET' requests such that only 'authenticatedUsers' could access GET requests for a particular servlet or resource, it would be bypassed for the 'HEAD' version. This allowed unauthorized blind submission of any privileged GET request.

As this list may be incomplete, the plugin also tests - if 'Thorough tests' are enabled or 'Enable web applications tests' is set to 'yes'

in the scan policy - various known HTTP methods on each directory and considers them as unsupported if it receives a response code of 400, 403, 405, or 501.

Note that the plugin output is only informational and does not necessarily indicate the presence of any security vulnerabilities.

See Also

<http://www.nessus.org/u?d9c03a9a>

<http://www.nessus.org/u?b019cbdb>

[https://www.owasp.org/index.php/Test_HTTP_Methods_\(OTG-CONFIG-006\)](https://www.owasp.org/index.php/Test_HTTP_Methods_(OTG-CONFIG-006))

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/12/10, Modified: 2022/04/11

Plugin Output

tcp/80/www

Based on the response to an OPTIONS request :

- HTTP methods GET HEAD OPTIONS POST TRACE are allowed on :

/

43111 - HTTP Methods Allowed (per directory)

Synopsis

This plugin determines which HTTP methods are allowed on various CGI directories.

Description

By calling the OPTIONS method, it is possible to determine which HTTP methods are allowed on each directory.

The following HTTP methods are considered insecure:

PUT, DELETE, CONNECT, TRACE, HEAD

Many frameworks and languages treat 'HEAD' as a 'GET' request, albeit one without any body in the response. If a security constraint was set on 'GET' requests such that only 'authenticatedUsers' could access GET requests for a particular servlet or resource, it would be bypassed for the 'HEAD' version. This allowed unauthorized blind submission of any privileged GET request.

As this list may be incomplete, the plugin also tests - if 'Thorough tests' are enabled or 'Enable web applications tests' is set to 'yes'

in the scan policy - various known HTTP methods on each directory and considers them as unsupported if it receives a response code of 400, 403, 405, or 501.

Note that the plugin output is only informational and does not necessarily indicate the presence of any security vulnerabilities.

See Also

<http://www.nessus.org/u?d9c03a9a>

<http://www.nessus.org/u?b019cbdb>

[https://www.owasp.org/index.php/Test_HTTP_Methods_\(OTG-CONFIG-006\)](https://www.owasp.org/index.php/Test_HTTP_Methods_(OTG-CONFIG-006))

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2009/12/10, Modified: 2022/04/11

Plugin Output

tcp/8081/www

Based on the response to an OPTIONS request :

- HTTP methods HEAD OPTIONS POST TRACE GET are allowed on :

/

10107 - HTTP Server Type and Version

Synopsis

A web server is running on the remote host.

Description

This plugin attempts to determine the type and the version of the remote web server.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0931

Plugin Information

Published: 2000/01/04, Modified: 2020/10/30

Plugin Output

tcp/80/www

The remote web server type is :

```
Apache/2.2.14 (Ubuntu) mod_mono/2.4.3 PHP/5.3.2-lubuntu4.30 with Suhosin-Patch proxy_html/3.0.1
mod_python/3.3.1 Python/2.6.5 mod_ssl/2.2.14 OpenSSL/0.9.8k Phusion_Passenger/4.0.38 mod_perl/2.0.4
Perl/v5.10.1
```


10107 - HTTP Server Type and Version

Synopsis

A web server is running on the remote host.

Description

This plugin attempts to determine the type and the version of the remote web server.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0931

Plugin Information

Published: 2000/01/04, Modified: 2020/10/30

Plugin Output

tcp/8080/www

```
The remote web server type is :  
Apache-Coyote/1.1
```

10107 - HTTP Server Type and Version

Synopsis

A web server is running on the remote host.

Description

This plugin attempts to determine the type and the version of the remote web server.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0931

Plugin Information

Published: 2000/01/04, Modified: 2020/10/30

Plugin Output

tcp/8081/www

```
The remote web server type is :  
Jetty(6.1.25)
```

24260 - HyperText Transfer Protocol (HTTP) Information

Synopsis

Some information about the remote HTTP configuration can be extracted.

Description

This test gives some information about the remote HTTP protocol - the version used, whether HTTP Keep-Alive and HTTP pipelining are enabled, etc...

This test is informational only and does not denote any security problem.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/01/30, Modified: 2019/11/22

Plugin Output

tcp/80/www

```
Response Code : HTTP/1.1 200 OK
```

```
Protocol version : HTTP/1.1
```

```
SSL : no
```

```
Keep-Alive : yes
```

```
Options allowed : (Not implemented)
```

```
Headers :
```

```
    Date: Thu, 14 Jul 2022 06:16:59 GMT
```

```
    Server: Apache/2.2.14 (Ubuntu) mod_mono/2.4.3 PHP/5.3.2-lubuntu4.30 with Suhosin-Patch proxy_html/3.0.1 mod_python/3.3.1 Python/2.6.5 mod_ssl/2.2.14 OpenSSL/0.9.8k Phusion_Passenger/4.0.38 mod_perl/2.0.4 Perl/v5.10.1
```

```
    Last-Modified: Fri, 31 Jul 2015 02:55:52 GMT
```

```
    ETag: "45f13-6da3-51c22f5365e00"
```

```
    Accept-Ranges: bytes
```

```
    Content-Length: 28067
```

```
    Vary: Accept-Encoding
```

```
    Keep-Alive: timeout=15, max=100
```

```
    Connection: Keep-Alive
```

```
    Content-Type: text/html
```

```
Response Body :
```

```
<!DOCTYPE HTML>
```

```
<html>
```

```
<head>
```

```
<title>owaspbwa OWASP Broken Web Applications</title>
```

```

<link rel="stylesheet" href="index.css" type="text/css" media="screen" />
<script type="text/javascript" src="/jquery.min.js"></script> <!--http://ajax.googleapis.com/ajax/
libs/jquery/1.3.2/jquery.min.js pulled april 15 2011-->
<script type="text/javascript" src="animatedcollapse.js">
/*****
* Animated Collapsible DIV v2.4- (c) Dynamic Drive DHTML code library (www.dynamicdrive.com)
* This notice MUST stay intact for legal use
* Visit Dynamic Drive at http://www.dynamicdrive.com/ for this script and 100s more
*****/
</script>
<script type="text/javascript">
animatedcollapse.addDiv('webgoat', 'fade=1')
animatedcollapse.addDiv('webgoat_net', 'fade=1')
animatedcollapse.addDiv('swingset', 'fade=1')
animatedcollapse.addDiv('swingset_interactive', 'fade=1')
animatedcollapse.addDiv('mutillidae', 'fade=1')
animatedcollapse.addDiv('dvwa', 'fade=1')
animatedcollapse.addDiv('ghost', 'fade=1')
animatedcollapse.addDiv('bwapp', 'fade=1')

animatedcollapse.addDiv('OWASPVicnum', 'fade=1')
animatedcollapse.addDiv('jotto', 'fade=1')
animatedcollapse.addDiv('oneliner', 'fade=1')
animatedcollapse.addDiv('peruggia', 'fade=1')
animatedcollapse.addDiv('gruyere', 'fade=1')
animatedcollapse.addDiv('hackxor', 'fade=1')
animatedcollapse [...]

```

24260 - HyperText Transfer Protocol (HTTP) Information

Synopsis

Some information about the remote HTTP configuration can be extracted.

Description

This test gives some information about the remote HTTP protocol - the version used, whether HTTP Keep-Alive and HTTP pipelining are enabled, etc...

This test is informational only and does not denote any security problem.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/01/30, Modified: 2019/11/22

Plugin Output

tcp/8080/www

```
Response Code : HTTP/1.1 400 Bad Request
```

```
Protocol version : HTTP/1.1
```

```
SSL : no
```

```
Keep-Alive : no
```

```
Options allowed : (Not implemented)
```

```
Headers :
```

```
    Server: Apache-Coyote/1.1
```

```
    Date: Thu, 14 Jul 2022 06:16:59 GMT
```

```
    Connection: close
```

```
Response Body :
```

24260 - HyperText Transfer Protocol (HTTP) Information

Synopsis

Some information about the remote HTTP configuration can be extracted.

Description

This test gives some information about the remote HTTP protocol - the version used, whether HTTP Keep-Alive and HTTP pipelining are enabled, etc...

This test is informational only and does not denote any security problem.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/01/30, Modified: 2019/11/22

Plugin Output

tcp/8081/www

Response Code : HTTP/1.1 200 OK

Protocol version : HTTP/1.1

SSL : no

Keep-Alive : no

Options allowed : (Not implemented)

Headers :

Accept-Ranges: bytes

Content-Type: text/html

Content-Length: 1740

Last-Modified: Fri, 01 Feb 2013 21:39:15 GMT

Connection: close

Server: Jetty(6.1.25)

Response Body :

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
  <title>Choose Your Path</title>
```

```
  <style>
```

```
    h3 {
```

```
      font-size: 2em;
```

```
      font-family: Georgia, Helvetica, Arial, sans-serif;
```

```
      color: #444;
```

```
      margin-top: 1.5em;
```

```

    }
    a {
        text-decoration: none;
        text-align: center;
        font-family: Helvetica, Arial, sans-serif;
        font-size: 2em;
        color: #ffffff;
    }
    .button {
        padding: 1em;
        margin: 1em;

        border-radius: 5px;
        border: 5px rgb(136,101,237);

        width: 200px;

        background-image: linear-gradient(bottom, rgb(74,42,164) 10%, rgb(104,72,197) 55%,
rgb(136,101,237) 78%);
        background-image: -o-linear-gradient(bottom, rgb(74,42,164) 10%, rgb(104,72,197) 55%,
rgb(136,101,237) 78%);
        background-image: -moz-linear-gradient(bottom, rgb(74,42,164) 10%, rgb(104,72,197) 55%,
rgb(136,101,237) 78%);
        background-image: -webkit-linear-gradient(bottom, rgb(74,42,164) 10%, rgb(104,72,197)
55%, rgb(136,101,237) 78%);
        background-image: -ms-linear-gradient(bottom, rgb(74,42,164) 10%, rgb(104,72,197) 55%,
rgb(136,101,237) 78%);

        background-image: -webkit-gradient(
            linear,
            left bottom,
            left top,
            color-stop(0.1, rgb(74,42,164)),
            color-stop(0.55, rgb(104,72,197)),
            color-stop(0.78, rgb(136,101,237))
        );
    }
}
</style>
</head>
<body>
<h3>Choose your path</h3>
<a href="./vulnerable"><div class="button">Vulnerable</div></a>
<a href="./securish"><div class="button">Securish</div></a>
</body> [...]

```

10114 - ICMP Timestamp Request Remote Date Disclosure

Synopsis

It is possible to determine the exact time set on the remote host.

Description

The remote host answers to an ICMP timestamp request. This allows an attacker to know the date that is set on the targeted machine, which may assist an unauthenticated, remote attacker in defeating time-based authentication protocols.

Timestamps returned from machines running Windows Vista / 7 / 2008 / 2008 R2 are deliberately incorrect, but usually within 1000 seconds of the actual system time.

Solution

Filter out the ICMP timestamp requests (13), and the outgoing ICMP timestamp replies (14).

Risk Factor

None

CVSS v3.0 Base Score

0.0 (CVSS:3.0/AV:L/AC:L/PR:N/UI:N/S:U/C:N/I:N/A:N)

CVSS v2.0 Base Score

0.0 (CVSS2#AV:L/AC:L/Au:N/C:N/I:N/A:N)

References

CVE CVE-1999-0524

XREF CWE:200

Plugin Information

Published: 1999/08/01, Modified: 2019/10/04

Plugin Output

icmp/0

```
The difference between the local and remote clocks is -136 seconds.
```


11414 - IMAP Service Banner Retrieval

Synopsis

An IMAP server is running on the remote host.

Description

An IMAP (Internet Message Access Protocol) server is installed and running on the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2003/03/18, Modified: 2011/03/16

Plugin Output

tcp/143/imap

The remote imap server banner is :

```
* OK [CAPABILITY IMAP4rev1 UIDPLUS CHILDREN NAMESPACE THREAD=ORDEREDSUBJECT THREAD=REFERENCES SORT
QUOTA IDLE ACL ACL2=UNION] Courier-IMAP ready. Copyright 1998-2008 Double Precision, Inc. See
COPYING for distribution information.
```

106658 - JQuery Detection

Synopsis

The web server on the remote host uses JQuery.

Description

Nessus was able to detect JQuery on the remote host.

See Also

<https://jquery.com/>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2018/02/07, Modified: 2020/01/23

Plugin Output

tcp/80/www

```
URL      : http://192.168.2.101/jquery.min.js
Version  : 1.3.2
```

10397 - Microsoft Windows SMB LanMan Pipe Server Listing Disclosure

Synopsis

It is possible to obtain network information.

Description

It was possible to obtain the browse list of the remote Windows system by sending a request to the LANMAN pipe. The browse list is the list of the nearest Windows systems of the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2000/05/09, Modified: 2022/02/01

Plugin Output

tcp/445/cifs

```
Here is the browse list of the remote host :
```

```
METASPLOITABLE ( os : 0.0 )  
OWASPBWA ( os : 0.0 )
```

Synopsis

It was possible to obtain information about the remote operating system.

Description

Nessus was able to obtain the remote operating system name and version (Windows and/or Samba) by sending an authentication request to port 139 or 445. Note that this plugin requires SMB to be enabled on the host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2001/10/17, Modified: 2021/09/20

Plugin Output

tcp/445/cifs

```
The remote Operating System is : Unix
The remote native LAN manager is : Samba 3.4.7
The remote SMB Domain Name is : OWASPBWA
```

11011 - Microsoft Windows SMB Service Detection

Synopsis

A file / print sharing service is listening on the remote host.

Description

The remote service understands the CIFS (Common Internet File System) or Server Message Block (SMB) protocol, used to provide shared access to files, printers, etc between nodes on a network.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2002/06/05, Modified: 2021/02/11

Plugin Output

tcp/139/smb

```
An SMB server is running on this port.
```

11011 - Microsoft Windows SMB Service Detection

Synopsis

A file / print sharing service is listening on the remote host.

Description

The remote service understands the CIFS (Common Internet File System) or Server Message Block (SMB) protocol, used to provide shared access to files, printers, etc between nodes on a network.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2002/06/05, Modified: 2021/02/11

Plugin Output

tcp/445/cifs

```
A CIFS server is running on this port.
```

100871 - Microsoft Windows SMB Versions Supported (remote check)

Synopsis

It was possible to obtain information about the version of SMB running on the remote host.

Description

Nessus was able to obtain the version of SMB running on the remote host by sending an authentication request to port 139 or 445.

Note that this plugin is a remote check and does not work on agents.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2017/06/19, Modified: 2019/11/22

Plugin Output

tcp/445/cifs

```
The remote host supports the following versions of SMB :  
SMBv1
```

106716 - Microsoft Windows SMB2 and SMB3 Dialects Supported (remote check)

Synopsis

It was possible to obtain information about the dialects of SMB2 and SMB3 available on the remote host.

Description

Nessus was able to obtain the set of SMB2 and SMB3 dialects running on the remote host by sending an authentication request to port 139 or 445.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2018/02/09, Modified: 2020/03/11

Plugin Output

tcp/445/cifs

```
The remote host does NOT support the following SMB dialects :
_version_  _introduced in windows version_
2.0.2      Windows 2008
2.1        Windows 7
2.2.2      Windows 8 Beta
2.2.4      Windows 8 Beta
3.0         Windows 8
3.0.2       Windows 8.1
3.1         Windows 10
3.1.1       Windows 10
```


Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/22/ssh

```
Port 22/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/80/www

```
Port 80/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/139/smb

```
Port 139/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/143/imap

```
Port 143/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/443

```
Port 443/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/445/cifs

```
Port 445/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/5001/java-listener

```
Port 5001/tcp was found to be open
```

Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/8080/www

```
Port 8080/tcp was found to be open
```


Synopsis

It is possible to determine which TCP ports are open.

Description

This plugin is a SYN 'half-open' port scanner. It shall be reasonably quick even against a firewalled target.

Note that SYN scans are less intrusive than TCP (full connect) scans against broken services, but they might cause problems for less robust firewalls and also leave unclosed connections on the remote target, if the network is loaded.

Solution

Protect your target with an IP filter.

Risk Factor

None

Plugin Information

Published: 2009/02/04, Modified: 2022/02/14

Plugin Output

tcp/8081/www

```
Port 8081/tcp was found to be open
```

19506 - Nessus Scan Information

Synopsis

This plugin displays information about the Nessus scan.

Description

This plugin displays, for each tested host, information about the scan itself :

- The version of the plugin set.
- The type of scanner (Nessus or Nessus Home).
- The version of the Nessus Engine.
- The port scanner(s) used.
- The port range scanned.
- The ping round trip time
- Whether credentialed or third-party patch management checks are possible.
- Whether the display of superseded patches is enabled
- The date of the scan.
- The duration of the scan.
- The number of hosts scanned in parallel.
- The number of checks done in parallel.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2005/08/26, Modified: 2022/06/09

Plugin Output

tcp/0

Information about this scan :

```
Nessus version : 10.2.0
Nessus build : 20075
Plugin feed version : 202206161148
Scanner edition used : Nessus Home
Scanner OS : LINUX
Scanner distribution : debian9-x86-64
Scan type : Normal
Scan name : owaspbw
```

```
Scan policy used : Basic Network Scan
Scanner IP : 192.168.2.103
Port scanner(s) : nessus_syn_scanner
Port range : default
Ping RTT : 198.448 ms
Thorough tests : no
Experimental tests : no
Plugin debugging enabled : no
Paranoia level : 1
Report verbosity : 1
Safe checks : yes
Optimize the test : yes
Credentialed checks : no
Patch management checks : None
Display superseded patches : yes (supersedence plugin launched)
CGI scanning : disabled
Web application tests : disabled
Max hosts : 30
Max checks : 4
Recv timeout : 5
Backports : Detected
Allow post-scan editing : Yes
Scan Start Date : 2022/7/14 0:11 CST
Scan duration : 1081 sec
```

11936 - OS Identification

Synopsis

It is possible to guess the remote operating system.

Description

Using a combination of remote probes (e.g., TCP/IP, SMB, HTTP, NTP, SNMP, etc.), it is possible to guess the name of the remote operating system in use. It is also possible sometimes to guess the version of the operating system.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2003/12/09, Modified: 2022/03/09

Plugin Output

tcp/0

```
Remote operating system : Linux Kernel 2.6 on Ubuntu 10.04 (lucid)
Confidence level : 95
Method : HTTP
```

```
The remote host is running Linux Kernel 2.6 on Ubuntu 10.04 (lucid)
```

117886 - OS Security Patch Assessment Not Available

Synopsis

OS Security Patch Assessment is not available.

Description

OS Security Patch Assessment is not available on the remote host.

This does not necessarily indicate a problem with the scan.

Credentials may not have been provided, OS security patch assessment may not be supported for the target, the target may not have been identified, or another issue may have occurred that prevented OS security patch assessment from being available. See plugin output for details.

This plugin reports non-failure information impacting the availability of OS Security Patch Assessment. Failure information is reported by plugin 21745 : 'OS Security Patch Assessment failed'. If a target host is not supported for OS Security Patch Assessment, plugin 110695 : 'OS Security Patch Assessment Checks Not Supported' will report concurrently with this plugin.

Solution

n/a

Risk Factor

None

References

XREF IAVB:0001-B-0515

Plugin Information

Published: 2018/10/02, Modified: 2021/07/12

Plugin Output

tcp/0

The following issues were reported :

```
- Plugin      : no_local_checks_credentials.nasl
  Plugin ID   : 110723
  Plugin Name : Target Credential Status by Authentication Protocol - No Credentials Provided
  Message     :
  Credentials were not provided for detected SSH service.
```

50845 - OpenSSL Detection

Synopsis

The remote service appears to use OpenSSL to encrypt traffic.

Description

Based on its response to a TLS request with a specially crafted server name extension, it seems that the remote service is using the OpenSSL library to encrypt traffic.

Note that this plugin can only detect OpenSSL implementations that have enabled support for TLS extensions (RFC 4366).

See Also

<https://www.openssl.org/>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2010/11/30, Modified: 2020/06/12

Plugin Output

tcp/443

57323 - OpenSSL Version Detection

Synopsis

Nessus was able to detect the OpenSSL version.

Description

Nessus was able to extract the OpenSSL version from the web server's banner. Note that security patches in many cases are backported and the displayed version number does not show the patch level. Using it to identify vulnerable software is likely to lead to false detections.

See Also

<https://www.openssl.org/>

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0682

Plugin Information

Published: 2011/12/16, Modified: 2020/09/22

Plugin Output

tcp/80/www

```
Source          : Apache/2.2.14 (Ubuntu) mod_mono/2.4.3 PHP/5.3.2-1ubuntu4.30 with
Suhosin-Patch proxy_html/3.0.1 mod_python/3.3.1 Python/2.6.5 mod_ssl/2.2.14 OpenSSL/0.9.8k
Phusion_Passenger/4.0.38 mod_perl/2.0.4 Perl/v5.10.1
Reported version : 0.9.8k
Backported version : 0.9.8k
```

48243 - PHP Version Detection

Synopsis

It was possible to obtain the version number of the remote PHP installation.

Description

Nessus was able to determine the version of PHP available on the remote web server.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0936

Plugin Information

Published: 2010/08/04, Modified: 2022/04/15

Plugin Output

tcp/80/www

Nessus was able to identify the following PHP version information :

```
Version : 5.3.2-lubuntu4.30
Source  : Server: Apache/2.2.14 (Ubuntu) mod_mono/2.4.3 PHP/5.3.2-lubuntu4.30 with
Suhosin-Patch proxy_html/3.0.1 mod_python/3.3.1 Python/2.6.5 mod_ssl/2.2.14 OpenSSL/0.9.8k
Phusion_Passenger/4.0.38 mod_perl/2.0.4 Perl/v5.10.1
```


Synopsis

The remote host is missing several patches.

Description

The remote host is missing one or more security patches. This plugin lists the newest version of each patch to install to make sure the remote host is up-to-date.

Note: Because the 'Show missing patches that have been superseded' setting in your scan policy depends on this plugin, it will always run and cannot be disabled.

Solution

Install the patches listed below.

Risk Factor

None

Plugin Information

Published: 2013/07/08, Modified: 2022/06/14

Plugin Output

tcp/0

```
. You need to take the following action :  
[ Samba Badlock Vulnerability (90509) ]  
+ Action to take : Upgrade to Samba version 4.2.11 / 4.3.8 / 4.4.2 or later.
```

122364 - Python Remote HTTP Detection

Synopsis

Python is running on the remote host.

Description

A web server is running Python on the remote host.

Note that the web server may be running on top of Python, or just running an embedded version.

See Also

<https://www.python.org/>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2019/02/21, Modified: 2022/04/25

Plugin Output

tcp/80/www

```
Path      : /  
Version   : 2.6.5  
Backported : 1  
Product   : Python
```

70657 - SSH Algorithms and Languages Supported

Synopsis

An SSH server is listening on this port.

Description

This script detects which algorithms and languages are supported by the remote service for encrypting communications.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2013/10/28, Modified: 2017/08/28

Plugin Output

tcp/22/ssh

```
Nessus negotiated the following encryption algorithm with the server :
```

```
The server supports the following options for kex_algorithms :
```

```
diffie-hellman-group-exchange-sha1
diffie-hellman-group-exchange-sha256
diffie-hellman-group1-sha1
diffie-hellman-group14-sha1
```

```
The server supports the following options for server_host_key_algorithms :
```

```
ssh-dss
ssh-rsa
```

```
The server supports the following options for encryption_algorithms_client_to_server :
```

```
3des-cbc
aes128-cbc
aes128-ctr
aes192-cbc
aes192-ctr
aes256-cbc
aes256-ctr
arcfour
arcfour128
arcfour256
blowfish-cbc
cast128-cbc
rijndael-cbc@lysator.liu.se
```

The server supports the following options for `encryption_algorithms_server_to_client` :

```
3des-cbc
aes128-cbc
aes128-ctr
aes192-cbc
aes192-ctr
aes256-cbc
aes256-ctr
arcfour
arcfour128
arcfour256
blowfish-cbc
cast128-cbc
rijndael-cbc@lysator.liu.se
```

The server supports the following options for `mac_algorithms_client_to_server` :

```
hmac-md5
hmac-md5-96
hmac-ripemd160
hmac-ripemd160@openssh.com
hmac-sha1
hmac-sha1-96
umac-64@openssh.com
```

The server supports the following options for `mac_algorithms_server_to_client` :

```
hmac-md5
hmac-md5-96
hmac-ripemd160
hmac-ripemd160@openssh.com
hmac-sha1
hmac-sha1-96
umac-64@openssh.com
```

The server supports the following options for `compression_algorithms_client_to_server` :

```
none
zlib@openssh.com
```

The server supports the following options for `compression_algorithms_server_to_client` :

```
none
zlib@openssh.com
```

149334 - SSH Password Authentication Accepted

Synopsis

The SSH server on the remote host accepts password authentication.

Description

The SSH server on the remote host accepts password authentication.

See Also

<https://tools.ietf.org/html/rfc4252#section-8>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2021/05/07, Modified: 2021/05/07

Plugin Output

tcp/22/ssh

10881 - SSH Protocol Versions Supported

Synopsis

A SSH server is running on the remote host.

Description

This plugin determines the versions of the SSH protocol supported by the remote SSH daemon.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2002/03/06, Modified: 2021/01/19

Plugin Output

tcp/22/ssh

```
The remote SSH daemon supports the following versions of the  
SSH protocol :
```

- 1.99
- 2.0

153588 - SSH SHA-1 HMAC Algorithms Enabled

Synopsis

The remote SSH server is configured to enable SHA-1 HMAC algorithms.

Description

The remote SSH server is configured to enable SHA-1 HMAC algorithms.

Although NIST has formally deprecated use of SHA-1 for digital signatures, SHA-1 is still considered secure for HMAC as the security of HMAC does not rely on the underlying hash function being resistant to collisions.

Note that this plugin only checks for the options of the remote SSH server.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2021/09/23, Modified: 2022/04/05

Plugin Output

tcp/22/ssh

```
The following client-to-server SHA-1 Hash-based Message Authentication Code (HMAC) algorithms are supported :
```

```
  hmac-sha1
  hmac-sha1-96
```

```
The following server-to-client SHA-1 Hash-based Message Authentication Code (HMAC) algorithms are supported :
```

```
  hmac-sha1
  hmac-sha1-96
```

10267 - SSH Server Type and Version Information

Synopsis

An SSH server is listening on this port.

Description

It is possible to obtain information about the remote SSH server by sending an empty authentication request.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0933

Plugin Information

Published: 1999/10/12, Modified: 2020/09/22

Plugin Output

tcp/22/ssh

```
SSH version : SSH-2.0-OpenSSH_5.3p1 Debian-3ubuntu4  
SSH supported authentication : publickey,password
```


56984 - SSL / TLS Versions Supported

Synopsis

The remote service encrypts communications.

Description

This plugin detects which SSL and TLS versions are supported by the remote service for encrypting communications.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2011/12/01, Modified: 2021/02/03

Plugin Output

tcp/443

```
This port supports SSLv3/TLSv1.0.
```

10863 - SSL Certificate Information

Synopsis

This plugin displays the SSL certificate.

Description

This plugin connects to every SSL-related port and attempts to extract and dump the X.509 certificate.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2008/05/19, Modified: 2021/02/03

Plugin Output

tcp/443

```
Subject Name:

Common Name: owaspbwa

Issuer Name:

Common Name: owaspbwa

Serial Number: 00 E6 87 0D DD 72 C2 B9 E7

Version: 1

Signature Algorithm: SHA-1 With RSA Encryption

Not Valid Before: Jan 02 21:12:38 2013 GMT
Not Valid After: Dec 31 21:12:38 2022 GMT

Public Key Info:

Algorithm: RSA Encryption
Key Length: 1024 bits
Public Key: 00 C8 C5 7B 5F 3A 1E 93 71 E4 4B 01 DE 4B 01 F0 39 BC 52 FF
            B9 A7 D1 D7 92 8A FA 4D 18 AF 5C 4D 8E 3B 8F 77 B8 97 FC 02
            9D 52 1E 70 03 33 34 32 AA 19 78 42 A2 EF 61 F0 89 37 B3 60
            52 45 2E FA 4C 43 FE 8F 07 E0 0B B7 16 27 01 FE EF 42 44 B1
            99 02 EC A1 E2 91 A3 02 99 39 5E 27 22 3B 84 14 A0 A9 DC 44
            64 EF 10 DB 3A 7B 39 6E DE B6 20 6F 47 C6 38 B9 71 B2 4C 6A
            AE 02 20 CB 10 73 53 47 B5
Exponent: 01 00 01

Signature Length: 128 bytes / 1024 bits
Signature: 00 88 05 00 97 4D 29 28 80 A4 E9 B0 32 A0 6A E2 82 0E AC 23
```

Fingerprints :

PEM certificate :

MIIBnTCCAqYCCQDmhw3dcscK55zANBgqhkiG9w0BAQUFADATMREwDwYDVQQDEwhvd2ZzcGJ3YTAEfw0xMzAxMDIyMTEyMzhaFw0yMjEyafr15KK+k0Yr1xnJjuPd7ix/AKDuh5wAzM0MgoZeEKI72HwiTezyYFJFLvpMQ/6PB+ALtxYnAf7vQkSxmQLsoeKRowKZOV4niJuEFKCp3ERk7xDboNs5bt62IG9Hxji5cbJMaq4CIMSqc1N [...]

70544 - SSL Cipher Block Chaining Cipher Suites Supported

Synopsis

The remote service supports the use of SSL Cipher Block Chaining ciphers, which combine previous blocks with subsequent ones.

Description

The remote host supports the use of SSL ciphers that operate in Cipher Block Chaining (CBC) mode. These cipher suites offer additional security over Electronic Codebook (ECB) mode, but have the potential to leak information if used improperly.

See Also

<https://www.openssl.org/docs/manmaster/man1/ciphers.html>

<http://www.nessus.org/u?cc4a822a>

<https://www.openssl.org/~bodo/tls-cbc.txt>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2013/10/22, Modified: 2021/02/03

Plugin Output

tcp/443

Here is the list of SSL CBC ciphers supported by the remote server :

Medium Strength Ciphers (> 64-bit and < 112-bit key, or 3DES)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
EDH-RSA-DES-CBC3-SHA	0x00, 0x16	DH	RSA	3DES-CBC(168)	
SHA1					
DES-CBC3-SHA	0x00, 0x0A	RSA	RSA	3DES-CBC(168)	
SHA1					

High Strength Ciphers (>= 112-bit key)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
DHE-RSA-AES128-SHA	0x00, 0x33	DH	RSA	AES-CBC(128)	
SHA1					

DHE-RSA-AES256-SHA	0x00, 0x39	DH	RSA	AES-CBC(256)
SHA1				
AES128-SHA	0x00, 0x2F	RSA	RSA	AES-CBC(128)
SHA1				
AES256-SHA	0x00, 0x35	RSA	RSA	AES-CBC(256)
SHA1				

The fields above are :

```
{Tenable ciphername}
{Cipher ID code}
Kex={key exchange}
Auth={authentication}
Encrypt={symmetric encryption method}
MAC={message authentication code}
{export flag}
```

21643 - SSL Cipher Suites Supported

Synopsis

The remote service encrypts communications using SSL.

Description

This plugin detects which SSL ciphers are supported by the remote service for encrypting communications.

See Also

<https://www.openssl.org/docs/man1.1.0/apps/ciphers.html>

<http://www.nessus.org/u?3a040ada>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2006/06/05, Modified: 2021/03/09

Plugin Output

tcp/443

```
Here is the list of SSL ciphers supported by the remote server :  
Each group is reported per SSL Version.
```

```
SSL Version : TLSv1
```

```
Medium Strength Ciphers (> 64-bit and < 112-bit key, or 3DES)
```

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
EDH-RSA-DES-CBC3-SHA	0x00, 0x16	DH	RSA	3DES-CBC(168)	
SHA1					
DES-CBC3-SHA	0x00, 0x0A	RSA	RSA	3DES-CBC(168)	
SHA1					

```
High Strength Ciphers (>= 112-bit key)
```

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
DHE-RSA-AES128-SHA	0x00, 0x33	DH	RSA	AES-CBC(128)	
SHA1					
DHE-RSA-AES256-SHA	0x00, 0x39	DH	RSA	AES-CBC(256)	
SHA1					
AES128-SHA	0x00, 0x2F	RSA	RSA	AES-CBC(128)	
SHA1					

AES256-SHA	0x00, 0x35	RSA	RSA	AES-CBC(256)	
SHA1					
RC4-MD5	0x00, 0x04	RSA	RSA	RC4(128)	MD5
RC4-SHA	0x00, 0x05	RSA	RSA	RC4(128)	
SHA1					

SSL Version : SSLv3

Medium Strength Ciphers (> 64-bit and < 112-bit key, or 3DES)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
EDH-RSA-DES-CBC3-SHA	0x00, 0x16	DH	RSA	3DES-CBC(168)	
SHA1					
DES-CBC3-SHA	0x00, 0x0A	RSA	RSA	3DES-CBC(168)	
SHA1					

High Strength Ciphers (>= 112-bit key)

Name	Code	KEX	[...]
------	------	-----	-------

62563 - SSL Compression Methods Supported

Synopsis

The remote service supports one or more compression methods for SSL connections.

Description

This script detects which compression methods are supported by the remote service for SSL connections.

See Also

<http://www.iana.org/assignments/comp-meth-ids/comp-meth-ids.xml>

<https://tools.ietf.org/html/rfc3749>

<https://tools.ietf.org/html/rfc3943>

<https://tools.ietf.org/html/rfc5246>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2012/10/16, Modified: 2022/04/11

Plugin Output

tcp/443

```
Nessus was able to confirm that the following compression method is
supported by the target :
```

```
  DEFLATE (0x01)
```


57041 - SSL Perfect Forward Secrecy Cipher Suites Supported

Synopsis

The remote service supports the use of SSL Perfect Forward Secrecy ciphers, which maintain confidentiality even if the key is stolen.

Description

The remote host supports the use of SSL ciphers that offer Perfect Forward Secrecy (PFS) encryption. These cipher suites ensure that recorded SSL traffic cannot be broken at a future date if the server's private key is compromised.

See Also

<https://www.openssl.org/docs/manmaster/man1/ciphers.html>

https://en.wikipedia.org/wiki/Diffie-Hellman_key_exchange

https://en.wikipedia.org/wiki/Perfect_forward_secrecy

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2011/12/07, Modified: 2021/03/09

Plugin Output

tcp/443

Here is the list of SSL PFS ciphers supported by the remote server :

Medium Strength Ciphers (> 64-bit and < 112-bit key, or 3DES)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
EDH-RSA-DES-CBC3-SHA SHA1	0x00, 0x16	DH	RSA	3DES-CBC(168)	

High Strength Ciphers (>= 112-bit key)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
DHE-RSA-AES128-SHA SHA1	0x00, 0x33	DH	RSA	AES-CBC(128)	
DHE-RSA-AES256-SHA SHA1	0x00, 0x39	DH	RSA	AES-CBC(256)	

The fields above are :

```
{Tenable ciphername}  
{Cipher ID code}  
Kex={key exchange}  
Auth={authentication}  
Encrypt={symmetric encryption method}  
MAC={message authentication code}  
{export flag}
```

51891 - SSL Session Resume Supported

Synopsis

The remote host allows resuming SSL sessions.

Description

This script detects whether a host allows resuming SSL sessions by performing a full SSL handshake to receive a session ID, and then reconnecting with the previously used session ID. If the server accepts the session ID in the second connection, the server maintains a cache of sessions that can be resumed.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2011/02/07, Modified: 2021/09/13

Plugin Output

tcp/443

```
This port supports resuming SSLv3 sessions.
```

156899 - SSL/TLS Recommended Cipher Suites

Synopsis

The remote host advertises discouraged SSL/TLS ciphers.

Description

The remote host has open SSL/TLS ports which advertise discouraged cipher suites. It is recommended to only enable support for the following cipher suites:

TLSv1.3:

- 0x13,0x01 TLS_AES_128_GCM_SHA256
- 0x13,0x02 TLS_AES_256_GCM_SHA384
- 0x13,0x03 TLS_CHACHA20_POLY1305_SHA256

TLSv1.2:

- 0xC0,0x2B ECDHE-ECDSA-AES128-GCM-SHA256
- 0xC0,0x2F ECDHE-RSA-AES128-GCM-SHA256
- 0xC0,0x2C ECDHE-ECDSA-AES256-GCM-SHA384
- 0xC0,0x30 ECDHE-RSA-AES256-GCM-SHA384
- 0xCC,0xA9 ECDHE-ECDSA-CHACHA20-POLY1305
- 0xCC,0xA8 ECDHE-RSA-CHACHA20-POLY1305
- 0x00,0x9E DHE-RSA-AES128-GCM-SHA256
- 0x00,0x9F DHE-RSA-AES256-GCM-SHA384

This is the recommended configuration for the vast majority of services, as it is highly secure and compatible with nearly every client released in the last five (or more) years.

See Also

https://wiki.mozilla.org/Security/Server_Side_TLS

<https://ssl-config.mozilla.org/>

Solution

Only enable support for recommended cipher suites.

Risk Factor

None

Plugin Information

Published: 2022/01/20, Modified: 2022/04/06

Plugin Output

tcp/443

The remote host has listening SSL/TLS ports which advertise the discouraged cipher suites outlined below:

Medium Strength Ciphers (> 64-bit and < 112-bit key, or 3DES)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
EDH-RSA-DES-CBC3-SHA	0x00, 0x16	DH	RSA	3DES-CBC(168)	
SHA1					
DES-CBC3-SHA	0x00, 0x0A	RSA	RSA	3DES-CBC(168)	
SHA1					

High Strength Ciphers (>= 112-bit key)

Name	Code	KEX	Auth	Encryption	MAC
-----	-----	---	----	-----	---
DHE-RSA-AES128-SHA	0x00, 0x33	DH	RSA	AES-CBC(128)	
SHA1					
DHE-RSA-AES256-SHA	0x00, 0x39	DH	RSA	AES-CBC(256)	
SHA1					
AES128-SHA	0x00, 0x2F	RSA	RSA	AES-CBC(128)	
SHA1					
AES256-SHA	0x00, 0x35	RSA	RSA	AES-CBC(256)	
SHA1					
RC4-MD5	0x00, 0x04	RSA	RSA	RC4(128)	MD5
RC4-SHA	0x00, 0x05	RSA	RSA	RC4(128)	
SHA1					

The fields above are :

```
{Tenable ciphername}
{Cipher ID code}
Kex={key exchange}
Auth={authentication}
Encrypt={symmetric encryption method}
MAC={message authentication code}
{export flag}
```

25240 - Samba Server Detection

Synopsis

An SMB server is running on the remote host.

Description

The remote host is running Samba, a CIFS/SMB server for Linux and Unix.

See Also

<https://www.samba.org/>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/05/16, Modified: 2019/11/22

Plugin Output

tcp/445/cifs

104887 - Samba Version

Synopsis

It was possible to obtain the samba version from the remote operating system.

Description

Nessus was able to obtain the samba version from the remote operating by sending an authentication request to port 139 or 445. Note that this plugin requires SMB1 to be enabled on the host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2017/11/30, Modified: 2019/11/22

Plugin Output

tcp/445/cifs

```
The remote Samba Version is : Samba 3.4.7
```

96982 - Server Message Block (SMB) Protocol Version 1 Enabled (uncredentialed check)

Synopsis

The remote Windows host supports the SMBv1 protocol.

Description

The remote Windows host supports Server Message Block Protocol version 1 (SMBv1). Microsoft recommends that users discontinue the use of SMBv1 due to the lack of security features that were included in later SMB versions. Additionally, the Shadow Brokers group reportedly has an exploit that affects SMB; however, it is unknown if the exploit affects SMBv1 or another version. In response to this, US-CERT recommends that users disable SMBv1 per SMB best practices to mitigate these potential issues.

See Also

<https://blogs.technet.microsoft.com/filecab/2016/09/16/stop-using-smb1/>

<https://support.microsoft.com/en-us/help/2696547/how-to-detect-enable-and-disable-smbv1-smbv2-and-smbv3-in-windows-and>

<http://www.nessus.org/u?8dcab5e4>

<http://www.nessus.org/u?234f8ef8>

<http://www.nessus.org/u?4c7e0cf3>

Solution

Disable SMBv1 according to the vendor instructions in Microsoft KB2696547. Additionally, block SMB directly by blocking TCP port 445 on all network boundary devices. For SMB over the NetBIOS API, block TCP ports 137 / 139 and UDP ports 137 / 138 on all network boundary devices.

Risk Factor

None

References

XREF IAVT:0001-T-0710

Plugin Information

Published: 2017/02/03, Modified: 2020/09/22

Plugin Output

tcp/445/cifs

```
The remote host supports SMBv1.
```


22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2021/04/14

Plugin Output

tcp/22/ssh

```
An SSH server is running on this port.
```

22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2021/04/14

Plugin Output

tcp/80/www

```
A web server is running on this port.
```

22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2021/04/14

Plugin Output

tcp/143/imap

```
An IMAP server is running on this port.
```

22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2021/04/14

Plugin Output

tcp/443

```
A TLSv1 server answered on this port.
```

tcp/443

```
The service closed the connection without sending any data.  
It might be protected by some sort of TCP wrapper.
```

22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2021/04/14

Plugin Output

tcp/8080/www

```
A web server is running on this port.
```

22964 - Service Detection

Synopsis

The remote service could be identified.

Description

Nessus was able to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/08/19, Modified: 2021/04/14

Plugin Output

tcp/8081/www

```
A web server is running on this port.
```

17975 - Service Detection (GET request)

Synopsis

The remote service could be identified.

Description

It was possible to identify the remote service by its banner or by looking at the error message it sends when it receives an HTTP request.

Solution

n/a

Risk Factor

None

References

XREF IAVT:0001-T-0935

Plugin Information

Published: 2005/04/06, Modified: 2021/10/27

Plugin Output

tcp/5001/java-listener

```
A JAVA-LISTENER server is running on this port
```


25220 - TCP/IP Timestamps Supported

Synopsis

The remote service implements TCP timestamps.

Description

The remote host implements TCP timestamps, as defined by RFC1323. A side effect of this feature is that the uptime of the remote host can sometimes be computed.

See Also

<http://www.ietf.org/rfc/rfc1323.txt>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2007/05/16, Modified: 2019/03/06

Plugin Output

tcp/0

110723 - Target Credential Status by Authentication Protocol - No Credentials Provided

Synopsis

Nessus was able to find common ports used for local checks, however, no credentials were provided in the scan policy.

Description

Nessus was not able to successfully authenticate directly to the remote target on an available authentication protocol. Nessus was able to connect to the remote port and identify that the service running on the port supports an authentication protocol, but Nessus failed to authenticate to the remote service using the provided credentials. There may have been a protocol failure that prevented authentication from being attempted or all of the provided credentials for the authentication protocol may be invalid. See plugin output for error details.

Please note the following :

- This plugin reports per protocol, so it is possible for valid credentials to be provided for one protocol and not another. For example, authentication may succeed via SSH but fail via SMB, while no credentials were provided for an available SNMP service.
- Providing valid credentials for all available authentication protocols may improve scan coverage, but the value of successful authentication for a given protocol may vary from target to target depending upon what data (if any) is gathered from the target via that protocol. For example, successful authentication via SSH is more valuable for Linux targets than for Windows targets, and likewise successful authentication via SMB is more valuable for Windows targets than for Linux targets.

Solution

n/a

Risk Factor

None

References

XREF IAVB:0001-B-0504

Plugin Information

Published: 2018/06/27, Modified: 2021/11/19

Plugin Output

tcp/0

```
SSH was detected on port 22 but no credentials were provided.  
SSH local checks were not enabled.
```


10287 - Traceroute Information

Synopsis

It was possible to obtain traceroute information.

Description

Makes a traceroute to the remote host.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 1999/11/27, Modified: 2020/08/20

Plugin Output

udp/0

```
For your information, here is the traceroute from 192.168.2.103 to 192.168.2.101 :
192.168.2.103
192.168.2.101

Hop Count: 1
```

135860 - WMI Not Available

Synopsis

WMI queries could not be made against the remote host.

Description

WMI (Windows Management Instrumentation) is not available on the remote host over DCOM. WMI queries are used to gather information about the remote host, such as its current state, network interface configuration, etc.

Without this information Nessus may not be able to identify installed software or security vulnerabilities that exist on the remote host.

See Also

<https://docs.microsoft.com/en-us/windows/win32/wmisdk/wmi-start-page>

Solution

n/a

Risk Factor

None

Plugin Information

Published: 2020/04/21, Modified: 2022/06/07

Plugin Output

tcp/445/cifs

```
Can't connect to the 'root\CIMV2' WMI namespace.
```

32318 - Web Site Cross-Domain Policy File Detection

Synopsis

The remote web server contains a 'crossdomain.xml' file.

Description

The remote web server contains a cross-domain policy file. This is a simple XML file used by Adobe's Flash Player to allow access to data that resides outside the exact web domain from which a Flash movie file originated.

See Also

<http://www.nessus.org/u?8a58aa76>

http://kb2.adobe.com/cps/142/tn_14213.html

<http://www.nessus.org/u?74a6a9a5>

<http://www.nessus.org/u?acb70df2>

Solution

Review the contents of the policy file carefully. Improper policies, especially an unrestricted one with just '*', could allow for cross- site request forgery and cross-site scripting attacks against the web server.

Risk Factor

None

Plugin Information

Published: 2008/05/15, Modified: 2022/04/11

Plugin Output

tcp/80/www

```
Nessus was able to obtain a cross-domain policy file from the remote
host using the following URL :
```

```
http://192.168.2.101/crossdomain.xml
```

Synopsis

It was possible to obtain the network name of the remote host.

Description

The remote host is listening on UDP port 137 or TCP port 445, and replies to NetBIOS nbtscan or SMB requests.

Note that this plugin gathers information to be used in other plugins, but does not itself generate a report.

Solution

n/a

Risk Factor

None

Plugin Information

Published: 1999/10/12, Modified: 2021/02/10

Plugin Output

udp/137/netbios-ns

```
The following 7 NetBIOS names have been gathered :
```

```
OWASPBWA      = Computer name
OWASPBWA      = Messenger Service
OWASPBWA      = File Server Service
__MSBROWSE__  = Master Browser
WORKGROUP     = Master Browser
WORKGROUP     = Browser Service Elections
WORKGROUP     = Workgroup / Domain name
```

```
This SMB server seems to be a Samba server - its MAC address is NULL.
```