




NAME: Angelica R. Lacaba	Subject: System INTEG
PROGRAM/SECTION: BSIT 3-2	Date: 9/23/2025

1. Monolithic Architecture

Example: Early WhatsApp

In the early version of WhatsApp, the system worked as a single application. The user interface, message handling, media sharing, and database access were all inside one large codebase.

When a user sent a message, the request started at the UI, then passed through the business logic (handling chats), and finally stored/retrieved from the database — all within the same program. Every feature such as sending texts, checking status, or viewing contacts was tightly integrated, so updating one part required updating the entire application.

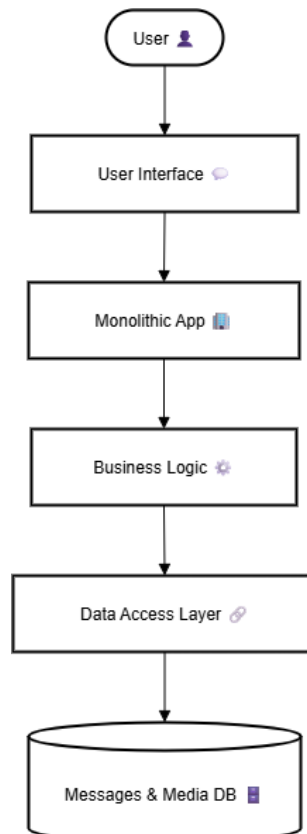




2. Client-Server Architecture

Example: Facebook

In Facebook, the client is a web browser or mobile app where the user logs in and interacts with the platform. The client sends requests (viewing posts, sending messages, liking content) to the Facebook server, which processes the data, retrieves information from the database, and sends results back to the client.

This back-and-forth communication allows users to browse feeds, chat with friends, and see notifications in real time.

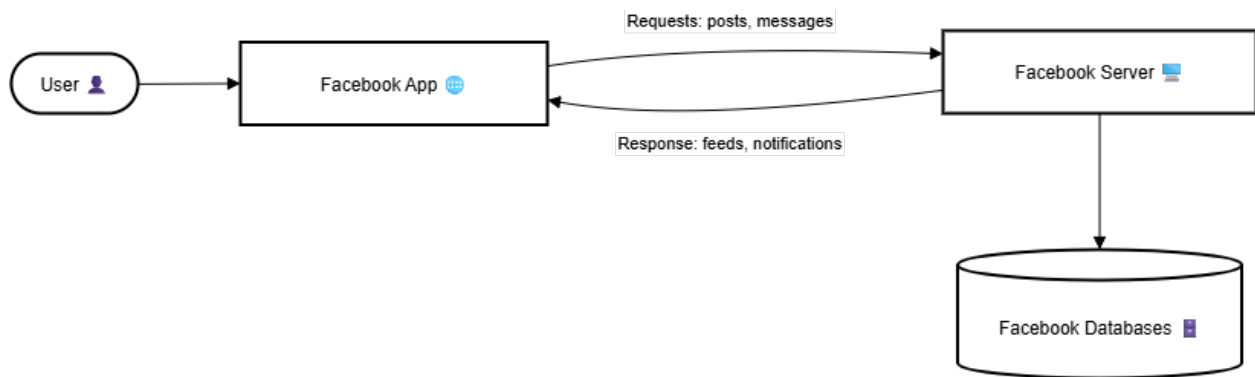



3. Microservices Architecture

Example: Netflix

Netflix uses microservices, meaning its system is divided into many small, independent services. For example, one service handles user authentication, another manages the movie catalog, another delivers video streaming, and another provides recommendations.

These services communicate via APIs. Each can be updated or scaled without affecting the others, allowing Netflix to handle millions of users worldwide efficiently.

