



Republic of the Philippines

POLYTECHNIC UNIVERSITY OF THE PHILIPPINES

OFFICE OF THE VICE PRESIDENT FOR CAMPUSES

STO. TOMAS CAMPUS

Name: Lamano, Leanne A.

Score: _____

Year & Section: BSIT 3-2


Date: November 8, 2025

HANDS-ON ACTIVITY: SQL DATA DEFINITION


=====

Procedure:

1. Click **New Query** and type an SQL statement to create a database named **myDB**.



2. Click the **Execute** button or press **F5** to see the new database in the *Object Explorer*.
3. Create queries to perform the next steps. Before writing the queries, type **USE myDB**; in the first line to use the database you have created in Step 1.
4. Create the tables named **Customers** and **Product**. Set the appropriate data types and determines which ones are supposed to be NOT NULL.
Customers: CustomerID (Primary key), FirstName, LastName, Email, Gender, Birthdate
Products: ProductID (Primary key), Description, Quantity, Price, VendorID
5. Create another table named **Vendors** with columns: **VendorID** (Primary key), **Name**, **ContactNum**, **CityAddress**.
6. Set **VendorID** from the **Vendor** table as a foreign key in the **Products** table.
7. Save to submit queries of each table created. Ensure to capture queries, successful execution and database in each of your screenshot.

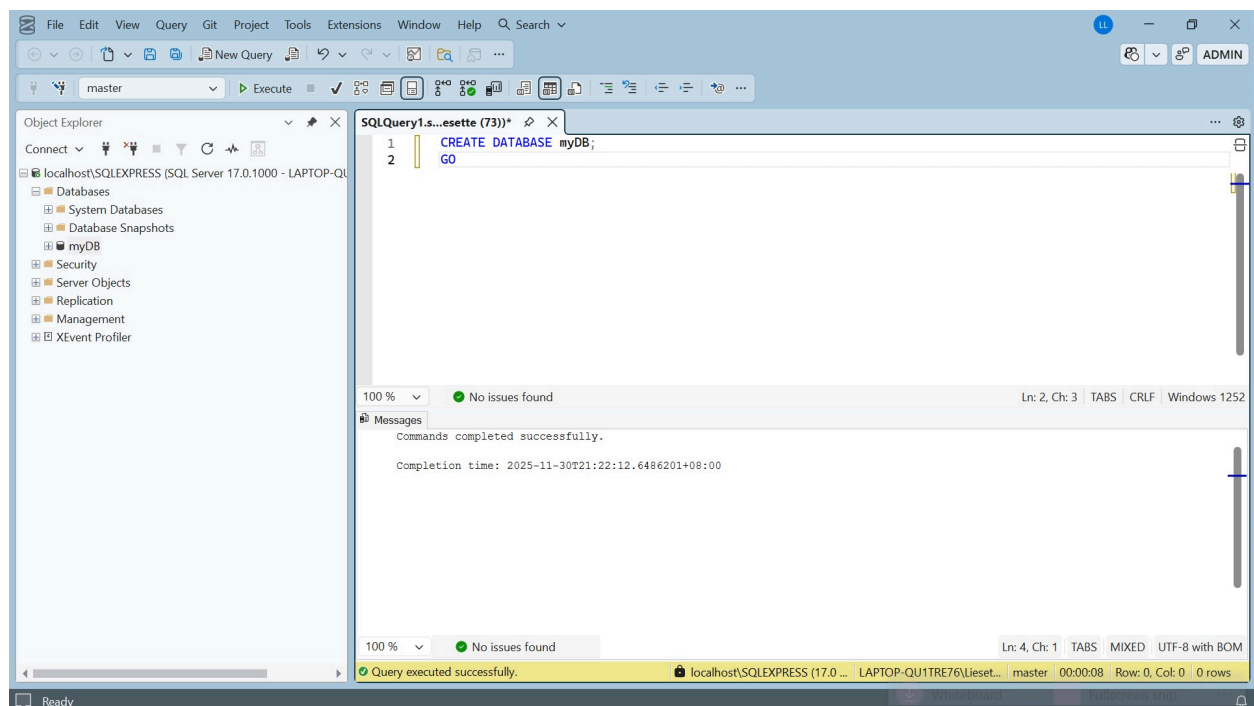



Republic of the Philippines

POLYTECHNIC UNIVERSITY OF THE PHILIPPINES

OFFICE OF THE VICE PRESIDENT FOR CAMPUSES

STO. TOMAS CAMPUS

SQLQuery2.s...esette (72))*

```
1 USE myDB;
2 GO
```

100 % No issues found Ln: 2, Ch: 3 TABS LF Windows 1252

Messages

Commands completed successfully.

Completion time: 2025-11-30T21:25:14.5822974+08:00

100 % No issues found Ln: 4, Ch: 1 TABS MIXED UTF-8 with BOM

Query executed successfully. localhost\SQLEXPRESS (17.0 ... LAPTOP-QU1TRE76)Lieset... myDB 00:00:00 Row: 0, Col: 0 0 rows

SQLQuery3.s...esette (80))* SQLQuery2.sq...iesette (72))* SQLQuery1.sq...iesette (73))*

```
1 CREATE TABLE Customers (
2     CustomerID INT PRIMARY KEY NOT NULL,
3     FirstName VARCHAR(50) NOT NULL,
4     LastName VARCHAR(50) NOT NULL,
5     Email VARCHAR(100),
6     Gender VARCHAR(10),
7     Birthdate DATE,
8 );
9
10 CREATE TABLE Products (
11     ProductID INT PRIMARY KEY NOT NULL,
12     Description VARCHAR(100) NOT NULL,
13     Quantity INT NOT NULL,
14     Price DECIMAL(10, 2) NOT NULL,
15     VendorID INT
16 );
```

100 % 1 0 0 Ln: 17, Ch: 1 SPC CRLF Windows 1252

Messages

Commands completed successfully.

Completion time: 2025-11-30T21:35:14.8013020+08:00

100 % No issues found Ln: 4, Ch: 1 TABS MIXED UTF-8 with BOM

Query executed successfully. localhost\SQLEXPRESS (17.0 ... LAPTOP-QU1TRE76)Lieset... myDB 00:00:02 Row: 0, Col: 0 0 rows



Republic of the Philippines
POLYTECHNIC UNIVERSITY OF THE PHILIPPINES
OFFICE OF THE VICE PRESIDENT FOR CAMPUSES
STO. TOMAS CAMPUS

The screenshot shows the SQL Server Enterprise Manager interface. The query editor displays the following SQL command:

```
1 CREATE TABLE Vendors (  
2     VendorID INT PRIMARY KEY NOT NULL,  
3     Name VARCHAR(100) NOT NULL,  
4     ContactNum VARCHAR(20),  
5     CityAddress VARCHAR(100)  
6 );  
7
```

The Messages pane at the bottom indicates that the command completed successfully. The completion time is 2025-11-30T21:40:21.8684417+08:00. The status bar at the bottom shows "Query executed successfully." and "localhost\SQLEXPRESS (17.0 ... LAPTOP-QU1TRE76)Lieset... myDB 00:00:00 Row: 0, Col: 0 0 rows".

The screenshot shows the SQL Server Enterprise Manager interface. The query editor displays the following SQL command:

```
1 ALTER TABLE Products  
2 ADD CONSTRAINT FK_Products_Vendors  
3 FOREIGN KEY (VendorID) REFERENCES Vendors(VendorID);  
4
```

The Messages pane at the bottom indicates that the command completed successfully. The completion time is 2025-11-30T21:42:47.7401472+08:00. The status bar at the bottom shows "Query executed successfully." and "localhost\SQLEXPRESS (17.0 ... LAPTOP-QU1TRE76)Lieset... myDB 00:00:00 Row: 0, Col: 0 0 rows".

The Object Explorer on the left shows the database structure for myDB, including tables, views, and security objects.



Republic of the Philippines
POLYTECHNIC UNIVERSITY OF THE PHILIPPINES
OFFICE OF THE VICE PRESIDENT FOR CAMPUSES
STO. TOMAS CAMPUS

The screenshot shows the SQL Server Enterprise Designer interface. The Object Explorer on the left displays the database structure for 'localhost\SQLEXPRESS (SQL Server 17.0.1000 - LAPTOP-QU1...)'. The main pane shows the table design for 'LAPTOP-QU1...Customers'. The table has the following columns:

Column Name	Data Type	Allow Nulls
CustomerID	int	☐
FirstName	varchar(50)	☐
LastName	varchar(50)	☐
Email	varchar(100)	☒
Gender	varchar(10)	☒
Birthdate	date	☒

The Column Properties pane on the right shows the properties for the 'CustomerID' column:

- (General)
 - (Name) CustomerID
 - Allow Nulls No
 - Data Type int
 - Default Value or Binding
- Table Designer
 - Collation <database.default>
- (General)

The screenshot shows the SQL Server Enterprise Designer interface. The Object Explorer on the left displays the database structure for 'localhost\SQLEXPRESS (SQL Server 17.0.1000 - LAPTOP-QU1...)'. The main pane shows the table design for 'LAPTOP-QU1...bo.Products'. The table has the following columns:

Column Name	Data Type	Allow Nulls
ProductID	int	☐
Description	varchar(100)	☐
Quantity	int	☐
Price	decimal(10, 2)	☐
VendorID	int	☒

The Column Properties pane on the right shows the properties for the 'ProductID' column:


- (General)
 - (Name) ProductID
 - Allow Nulls No
 - Data Type int
 - Default Value or Binding
- Table Designer
 - Collation <database.default>
- (General)



Republic of the Philippines
POLYTECHNIC UNIVERSITY OF THE PHILIPPINES
OFFICE OF THE VICE PRESIDENT FOR CAMPUSES
STO. TOMAS CAMPUS

The screenshot shows the SQL Server Enterprise Designer interface. The Object Explorer on the left displays the database structure for 'myDB', including tables like 'dbo.Vendors'. The main pane shows the 'Table Designer' for 'Vendors'. The table has four columns: 'VendorID' (int, primary key), 'Name' (varchar(100)), 'ContactNum' (varchar(20)), and 'CityAddress' (varchar(100)). The 'Allow Nulls' column shows that 'VendorID' is not nullable, while the others are. The 'Column Properties' pane on the right shows the 'General' tab for the 'VendorID' column, with properties like 'Name', 'Allow Nulls', 'Data Type', and 'Default Value or Binding'.

Column Name	Data Type	Allow Nulls
VendorID	int	☐
Name	varchar(100)	☐
ContactNum	varchar(20)	☒
CityAddress	varchar(100)	☒

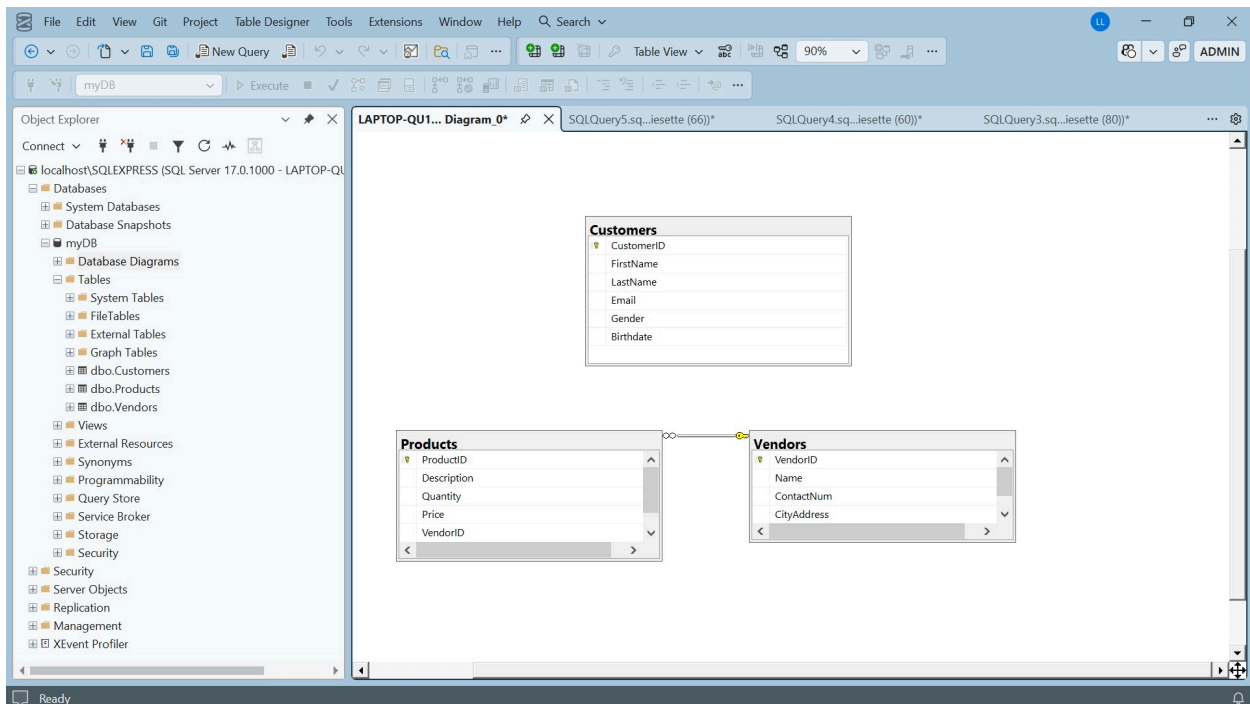



Republic of the Philippines

POLYTECHNIC UNIVERSITY OF THE PHILIPPINES

OFFICE OF THE VICE PRESIDENT FOR CAMPUSES

STO. TOMAS CAMPUS
