
## 1. Bitcoin and Cryptocurrencies: Full dataset, filtering, and reproducibility

Since the <u>launch of Bitcoin in 2008 (https://newfronttest.bitcoin.com/bitcoin.pdf)</u>, hundreds of similar projects based on the blockchain technology have emerged. We call these cryptocurrencies (also coins or cryptos in the Internet slang). Some are extremely valuable nowadays, and others may have the potential to become extremely valuable in the future<sup>1</sup>. In fact, on the 6th of December of 2017, Bitcoin has a <u>market capitalization</u> (<a href="https://en.wikipedia.org/wiki/Market capitalization">https://en.wikipedia.org/wiki/Market capitalization</a>) above \$200 billion.

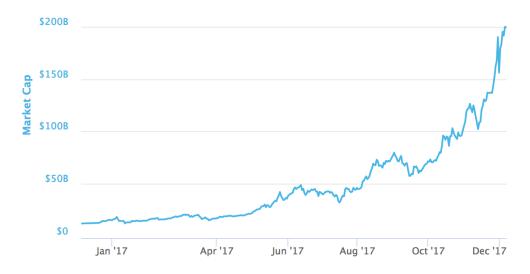

The astonishing increase of Bitcoin market capitalization in 2017.

That said, let's get to business. We will start with a CSV we conveniently downloaded on the 6th of December of 2017 using the coinmarketcap API (NOTE: The public API went private in 2020 and is no longer available) named datasets/coinmarketcap\_06122017.csv.

<sup>\*1</sup> **WARNING**: The cryptocurrency market is exceptionally volatile<sup>2</sup> and any money you put in might disappear into thin air. Cryptocurrencies mentioned here **might be scams** similar to <u>Ponzi Schemes</u> (<a href="https://en.wikipedia.org/wiki/Ponzi scheme">https://en.wikipedia.org/wiki/Ponzi scheme</a>) or have many other issues (overvaluation, technical, etc.). **Please do not mistake this for investment advice**. \*

<sup>&</sup>lt;sup>2</sup> Update on March 2020: Well, it turned out to be volatile indeed :D

```
In [78]: # Importing pandas
         import pandas as pd
         # Importing matplotlib and setting aesthetics for plotting later.
         import matplotlib.pyplot as plt
         %matplotlib inline
         %config InlineBackend.figure format = 'svg'
         plt.style.use('fivethirtyeight')
         # Reading datasets/coinmarketcap 06122017.csv into pandas
         dec6 = pd.read csv('datasets/coinmarketcap 06122017.csv')
         # Selecting the 'id' and the 'market cap usd' columns
         market_cap_raw = dec6[["id", "market_cap_usd"]]
         # Counting the number of values
         market cap raw.count()
Out[78]: id
                            1326
                            1031
         market cap usd
         dtype: int64
In [79]:
         %%nose
         import inspect
         def test dec6 is dataframe():
             assert type(dec6) == pd.core.frame.DataFrame, \
              'The variable dec6 should contain the DataFrame produced by read csv
         ()'
         def test market cap raw():
             assert list(market cap raw.columns) == ['id', 'market cap usd'], \
              'The variable market cap raw should contain the "id" and "market cap
         _usd" columns exclusively'
         def test pandas imported():
             assert inspect.ismodule(pd), 'Do not delete the "from pandas import
          pd" import'
         def test plt imported():
             assert inspect.ismodule(plt), 'Do not delete the "import matplotlib.
         pyplot as plt "import'
```

### Out[79]: 4/4 tests passed

# 2. Discard the cryptocurrencies without a market capitalization

Why do the <code>count()</code> for <code>id</code> and <code>market\_cap\_usd</code> differ above? It is because some cryptocurrencies listed in coinmarketcap.com have no known market capitalization, this is represented by <code>NaN</code> in the data, and <code>NaN</code> s are not counted by <code>count()</code>. These cryptocurrencies are of little interest to us in this analysis, so they are safe to remove.

```
In [80]: # Filtering out rows without a market capitalization
         cap = market_cap_raw.query("market_cap_usd > 0")
         # Counting the number of values again
         cap.count()
Out[80]: id
                            1031
         market cap usd
                            1031
         dtype: int64
In [81]: %%nose
         def test_cap_filtered():
             assert cap.id.count() == cap.market_cap_usd.count(), 'id and market_
         cap usd should have the same count'
         def test cap small():
             assert cap.id.count() == 1031, 'The resulting amount of cryptos shou
         ld be 1031'
Out[81]: 2/2 tests passed
```

## 3. How big is Bitcoin compared with the rest of the cryptocurrencies?

At the time of writing, Bitcoin is under serious competition from other projects, but it is still dominant in market capitalization. Let's plot the market capitalization for the top 10 coins as a barplot to better visualize this.


```
In [82]: #Declaring these now for later use in the plots
   TOP_CAP_TITLE = 'Top 10 market capitalization'
   TOP_CAP_YLABEL = '% of total cap'

# Selecting the first 10 rows and setting the index
   cap10 = cap[:10].set_index('id')

# Calculating market_cap_perc
   cap10 = cap10.assign(market_cap_perc = lambda x: (x.market_cap_usd / cap
   .market_cap_usd.sum())*100)

# Plotting the barplot with the title defined above
   ax = cap10.market_cap_perc.plot.bar(title=TOP_CAP_TITLE)

# Annotating the y axis with the label defined above
   ax.set_ylabel(TOP_CAP_YLABEL);
```

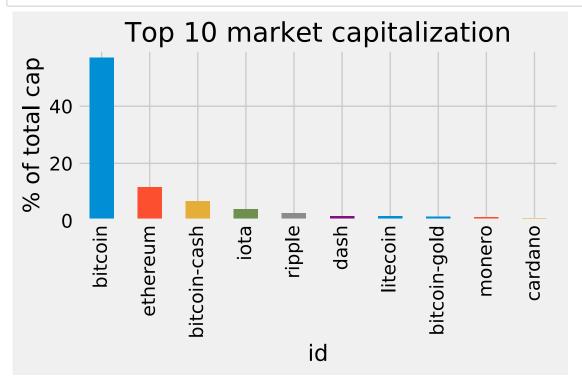

```
In [83]:
         %%nose
         def test len cap10():
             assert len(cap10) == 10, 'cap10 needs to contain 10 rows'
         def test index():
             assert cap10.index.name == 'id', 'The index should be the "id" colum
         n'
         def test_perc_correct():
             assert round(cap10.market cap perc.iloc[0], 2) == 56.92, 'the "marke
         t_cap_perc" formula is incorrect'
         def test title():
             assert ax.get title() == TOP CAP TITLE, 'The title of the plot shoul
         d be {}'.format(TOP_CAP_TITLE)
         def test ylabel():
             assert ax.get_ylabel() == TOP_CAP_YLABEL, 'The y-axis should be name
         d {}'.format(TOP CAP YLABEL)
```

Out[83]: 5/5 tests passed

### 4. Making the plot easier to read and more informative

While the plot above is informative enough, it can be improved. Bitcoin is too big, and the other coins are hard to distinguish because of this. Instead of the percentage, let's use a log<sup>10</sup> scale of the "raw" capitalization. Plus, let's use color to group similar coins and make the plot more informative<sup>1</sup>.

For the colors rationale: bitcoin-cash and bitcoin-gold are forks of the bitcoin blockchain (<a href="https://en.wikipedia.org/wiki/Blockchain">https://en.wikipedia.org/wiki/Blockchain</a>. Ethereum and Cardano both offer Turing Complete <a href="maintenant-contracts">smart contracts</a> (<a href="https://en.wikipedia.org/wiki/Smart\_contracts">https://en.wikipedia.org/wiki/Smart\_contracts</a>). Iota and Ripple are not minable. Dash, Litecoin, and Monero get their own color.

<sup>&</sup>lt;sup>1</sup> This coloring is a simplification. There are more differences and similarities that are not being represented here.


<sup>&</sup>lt;sup>2</sup> The bitcoin forks are actually **very** different, but it is out of scope to talk about them here. Please see the warning above and do your own research.

```
In [84]: # Colors for the bar plot
    COLORS = ['orange', 'green', 'orange', 'cyan', 'cyan', 'blue', 'silver',
    'orange', 'red', 'green']

# Plotting market_cap_usd as before but adding the colors and scaling th
    e y-axis
    ax = cap10.market_cap_perc.plot.bar(title=TOP_CAP_TITLE, logy=True, colo
    r=COLORS)

# Annotating the y axis with 'USD'
    ax.set_ylabel("USD")

# Final touch! Removing the xlabel as it is not very informative
    ax.set_xlabel('');
```

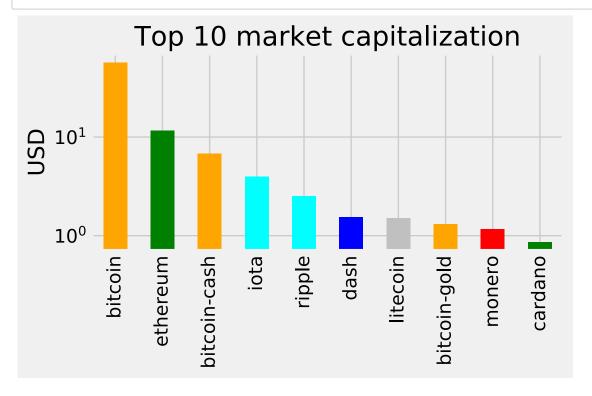

```
In [85]:
         %%nose
         def test_title():
             assert ax.get_title() == TOP_CAP_TITLE, 'The title of the plot shoul
         d be {}'.format(TOP_CAP_TITLE)
         def test_ylabel():
             assert ax.get ylabel() == 'USD', 'The y-axis should be named {}'.for
         mat(TOP_CAP_YLABEL)
         def test xlabel():
             assert not ax.get_xlabel(), 'The X label should contain an empty str
         ing, currently it contains "{}"'.format(ax.get_xlabel())
         def test log scale():
             assert ax.get_yaxis().get_scale() == 'log', \
              'The y-axis is not on a log10 scale. Do not transform the data yours
         elf, use the pandas/matplotlib interface'
         #def test colors():
              assert round(ax.patches[1].get facecolor()[1], 3) == 0.502, 'The co
         lors of the bars are not correct'
```

Out[85]: 4/4 tests passed

## 5. What is going on?! Volatility in cryptocurrencies

The cryptocurrencies market has been spectacularly volatile since the first exchange opened. This notebook didn't start with a big, bold warning for nothing. Let's explore this volatility a bit more! We will begin by selecting and plotting the 24 hours and 7 days percentage change, which we already have available.

```
In [86]: # Selecting the id, percent_change_24h and percent_change_7d columns
    volatility = dec6[["id", "percent_change_24h", "percent_change_7d"]]

# Setting the index to 'id' and dropping all NaN rows
    volatility = volatility.set_index("id").dropna()

# Sorting the DataFrame by percent_change_24h in ascending order
    volatility = volatility.sort_values("percent_change_24h")

# Checking the first few rows
    volatility.head()
```

#### Out[86]:

id		
flappycoin	-95.85	-96.61
credence-coin	-94.22	-95.31
coupecoin	-93.93	-61.24
tyrocoin	-79.02	-87.43
petrodollar	-76.55	542.96

```
In [87]: %%nose

def test_vol():
    assert list(volatility.columns) == ['percent_change_24h', 'percent_change_7d'], '"volatility" not loaded correctly'


def test_vol_index():
    assert list(volatility.index[:3]) == ['flappycoin', 'credence-coin', 'coupecoin'], \
    '"volatility" index is not set to "id", or data sorted incorrectly'
```

Out[87]: 2/2 tests passed

### 6. Well, we can already see that things are a bit crazy

It seems you can lose a lot of money quickly on cryptocurrencies. Let's plot the top 10 biggest gainers and top 10 losers in market capitalization.

```
In [88]: #Defining a function with 2 parameters, the series to plot and the title
         def top10 subplot(volatility series, title):
             # Making the subplot and the figure for two side by side plots
             fig, axes = plt.subplots(nrows=1, ncols=2, figsize=(10, 6))
             # Plotting with pandas the barchart for the top 10 losers
             ax = volatility_series[:10].plot.bar(color="darkred", ax=axes[0])
             # Setting the figure's main title to the text passed as parameter
             fig.suptitle(title)
             # Setting the ylabel to '% change'
             ax.set ylabel("% change")
             # Same as above, but for the top 10 winners
             ax = volatility_series[-10:].plot.bar(color="darkblue", ax=axes[1])
             # Returning this for good practice, might use later
             return fig, ax
         DTITLE = "24 hours top losers and winners"
         # Calling the function above with the 24 hours period series and title D
         TITLE
         fig, ax = top10_subplot(volatility.percent_change_24h, DTITLE)
```

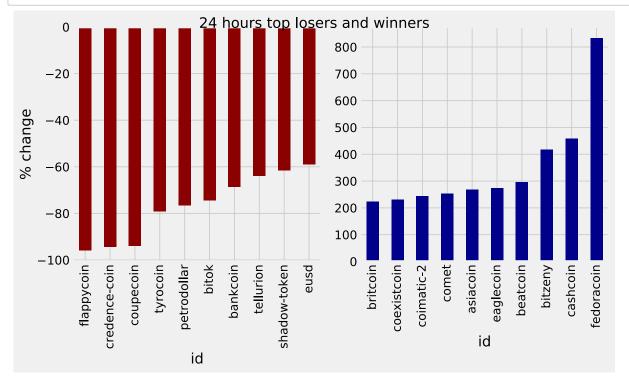

```
In [89]: %%nose
         DTITLE = "24 hours top losers and winners"
         def test_title():
             assert fig.get_children()[-1].get_text() == DTITLE, 'The title of th
         e plot should be {}'.format(DTITLE)
         def test subplots():
             assert len(fig.get_axes()) == 2, 'The plot should have 2 subplots'
         def test ylabel():
             fig.get_axes()[0].get_ylabel() == '% change', 'y axis label should b
         e set to % change'
         def test_comet_coin():
             assert round(fig.get children()[2].get children()[3].get height(),
          0) == 252.0, \
             'The data on the winners plot is incorrect'
         def test_tyrocoin():
             assert abs(round(fig.get_children()[1].get_children()[4].get_height
         (), 0)) == 77.0, \setminus
              'The data on the losers plot is incorrect'
         #def test_colors():
              r, g, b, a = fig.get axes()[0].patches[1].get facecolor()
              assert round(r, 1) and not round(g, 1) and not round(b, 1), 'The ba
         rs on the left plot are not red'
         #def test colors2():
              r, g, b, a = fig.get axes()[1].patches[1].get facecolor()
              assert not round(r, 1) and not round(g, 1) and round(b, 1), 'The ba
         rs on the left plot are not blue'
```

Out[89]: 5/5 tests passed

## 7. Ok, those are... interesting. Let's check the weekly Series too.

800% daily increase?! Why are we doing this tutorial and not buying random coins?<sup>1</sup>


After calming down, let's reuse the function defined above to see what is going weekly instead of daily.

<sup>&</sup>lt;sup>1</sup> Please take a moment to understand the implications of the red plots on how much value some cryptocurrencies lose in such short periods of time

```
In [90]: # Sorting in ascending order
volatility7d = volatility.sort_values("percent_change_7d")

WTITLE = "Weekly top losers and winners"

# Calling the top10_subplot function
fig, ax = top10_subplot(volatility7d.percent_change_7d, WTITLE);
```

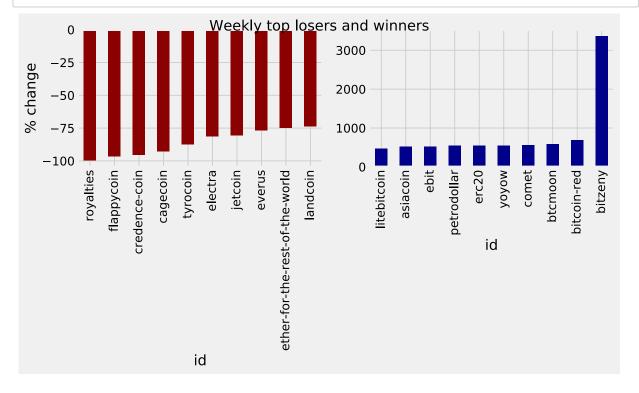

```
In [91]:
        %%nose
         WTITLE = "Weekly top losers and winners"
         def test_title():
             assert fig.get_children()[-1].get_text() == WTITLE, 'The title of th
         e plot should be {}'.format(WTITLE)
         def test subplots():
             assert len(fig.get_axes()) == 2, 'The plot should have 2 subplots'
         def test ylabel():
             fig.get_axes()[0].get_ylabel() == '% change', "y axis label should b
         e set to '% change'"
         #def test_colors():
              r, g, b, a = fig.get_axes()[0].patches[1].get_facecolor()
              assert round(r, 1) and not round(g, 1) and not round(b, 1), 'The ba
         rs on the left plot are not red'
         #def test colors2():
              r, g, b, a = fig.get_axes()[1].patches[1].get_facecolor()
              assert not round(r, 1) and not round(g, 1) and round(b, 1), 'The ba
         rs on the left plot are not blue'
         def test_comet_coin():
             assert abs(round(fig.get children()[2].get children()[3].get height
         (), 0)) == 543.0, \setminus
              'The data on the gainers plot is incorrect'
         def test tyrocoin():
             assert abs(round(fig.get children()[1].get children()[4].get height
         (), 0)) == 87.0, \setminus
              'The data on the losers plot is incorrect'
```

Out[91]: 5/5 tests passed

### 8. How small is small?

The names of the cryptocurrencies above are quite unknown, and there is a considerable fluctuation between the 1 and 7 days percentage changes. As with stocks, and many other financial products, the smaller the capitalization, the bigger the risk and reward. Smaller cryptocurrencies are less stable projects in general, and therefore even riskier investments than the bigger ones<sup>1</sup>. Let's classify our dataset based on Investopedia's capitalization <u>definitions (https://www.investopedia.com/video/play/large-cap/)</u> for company stocks.

<sup>&</sup>lt;sup>1</sup> Cryptocurrencies are a new asset class, so they are not directly comparable to stocks. Furthermore, there are no limits set in stone for what a "small" or "large" stock is. Finally, some investors argue that bitcoin is similar to gold, this would make them more comparable to a <u>commodity</u> (https://www.investopedia.com/terms/c/commodity.asp) instead.

```
In [92]: # Selecting everything bigger than 10 billion
largecaps = cap.query("market_cap_usd > 1E+10")

# Printing out largecaps
largecaps
```

#### Out[92]:

	id	market_cap_usd
0	bitcoin	2.130493e+11
1	ethereum	4.352945e+10
2	bitcoin-cash	2.529585e+10
3	iota	1.475225e+10

```
In [93]: %%nose

def test_large():
    assert not largecaps.market_cap_usd.count() < 4, 'You filtered too m
    uch'

def test_small():
    assert not largecaps.market_cap_usd.count() > 4, "You didn't filter
    enough"

def test_order():
    assert largecaps.iloc[1].id == "ethereum", "The dataset is not in th
    e right order, no need to manipulate it here"
```


Out[93]: 3/3 tests passed

## 9. Most coins are tiny

Note that many coins are not comparable to large companies in market cap, so let's divert from the original Investopedia definition by merging categories.

This is all for now. Thanks for completing this project!

```
In [94]: # Making a nice function for counting different marketcaps from the
         # "cap" DataFrame. Returns an int.
         # INSTRUCTORS NOTE: Since you made it to the end, consider it a gift :D
         def capcount(query_string):
             return cap.query(query_string).count().id
         # Labels for the plot
         LABELS = ["biggish", "micro", "nano"]
         # Using capcount count the biggish cryptos
         biggish = capcount("market cap usd > 3E+8")
         # Same as above for micro ...
         micro = capcount("market cap usd >= 5E+7 & market cap usd < 3E+8")</pre>
         # ... and for nano
         nano = capcount("market cap usd < 5E+7")</pre>
         # Making a list with the 3 counts
         values = [biggish, micro, nano]
         # Plotting them with matplotlib
         plt.bar(range(len(values)), values, tick_label=LABELS);
```

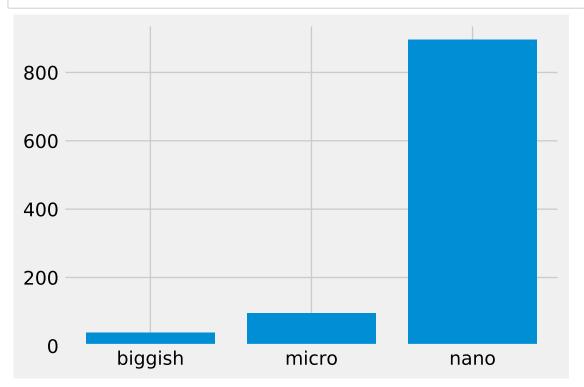

```
In [95]: %%nose

def test_biggish():
    assert biggish == 39, 'biggish is not correct'

def test_micro():
    assert micro == 96, 'micro is not correct'

def test_nano():
    assert nano == 896, 'nano is not correct'

def test_lenvalues():
    assert len(values) == 3, "values list is not correct"
```

Out[95]: 4/4 tests passed