



Evidences


Creation of the GE data and index tablespaces:

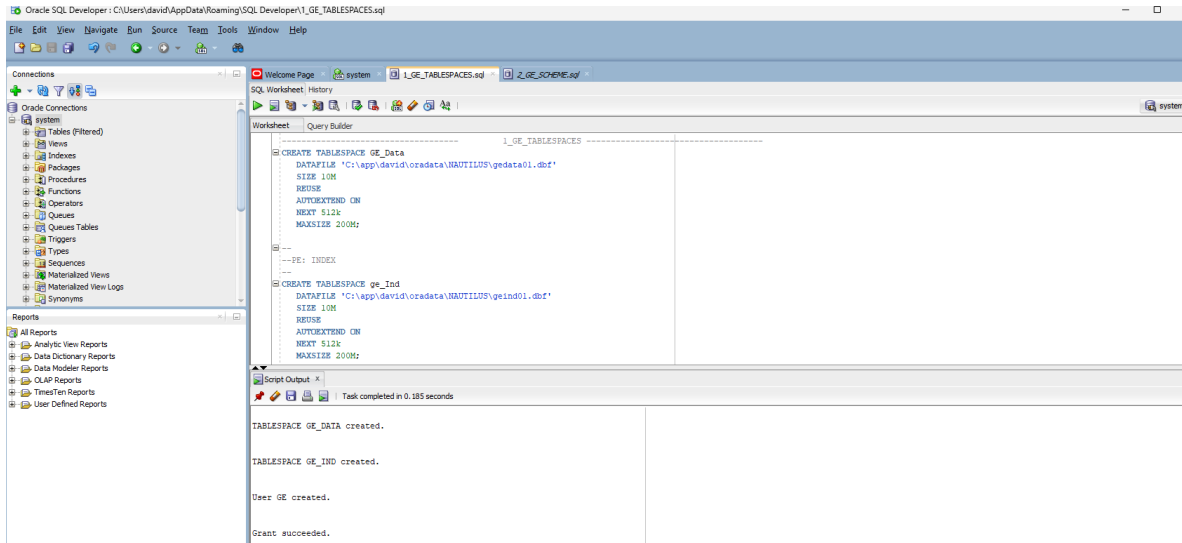

Tables people and phone:

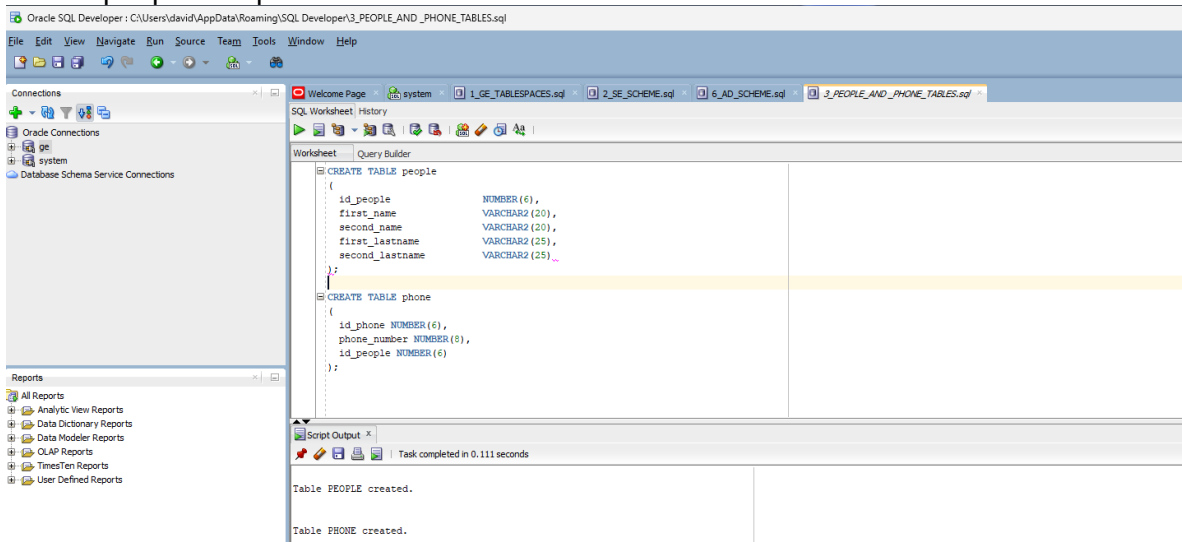

Primary keys of people and phone table:

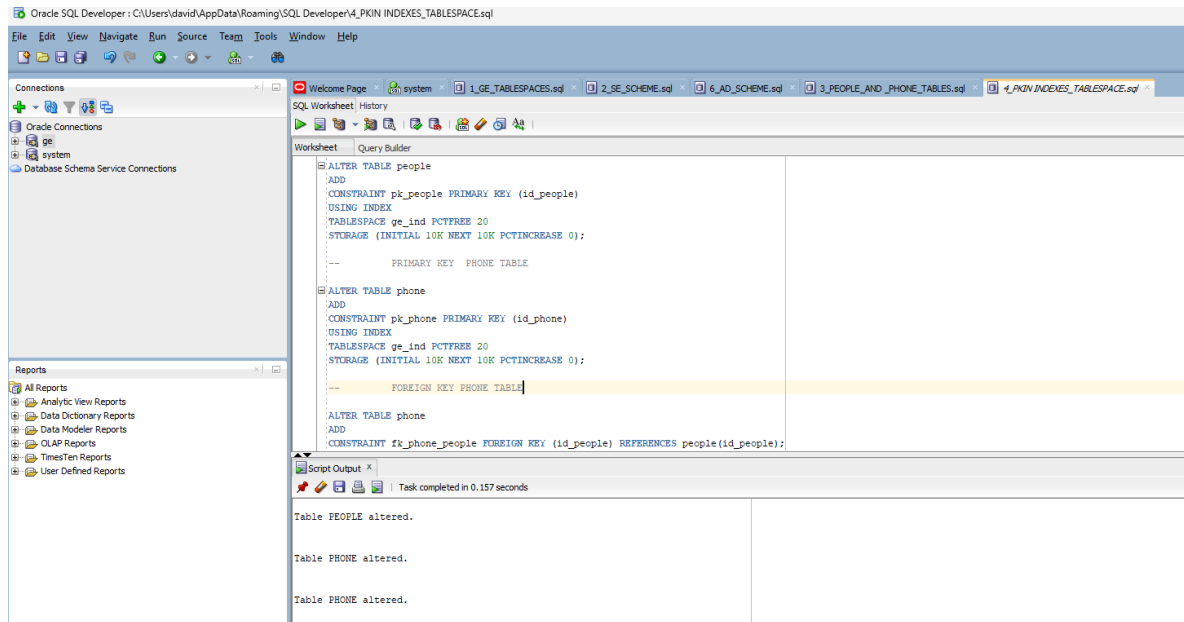

Constraints of people and phone tables:

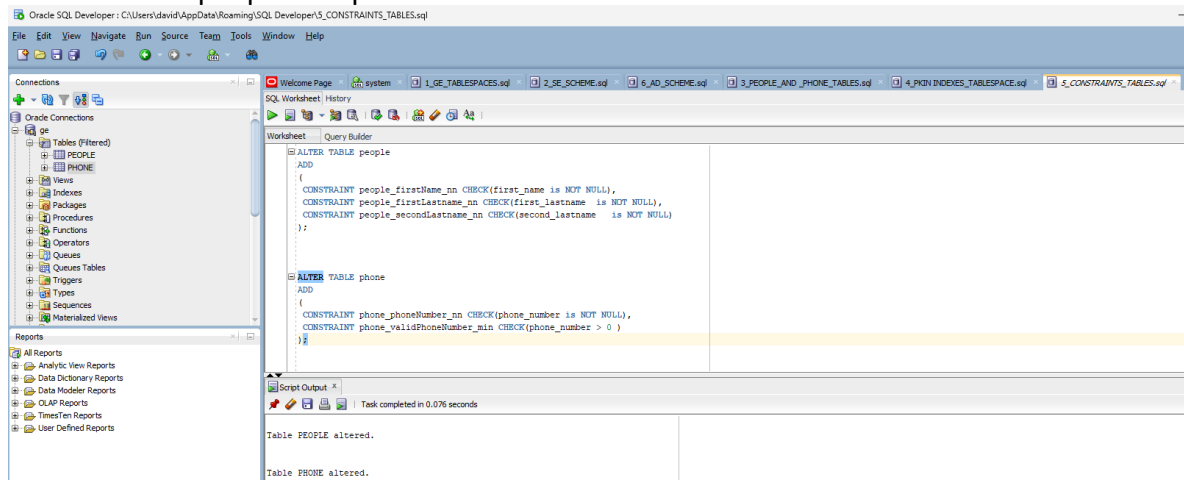


Table people before modifications


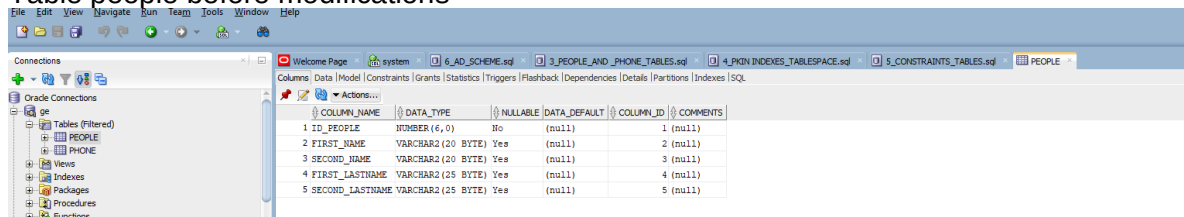


Table phone before modifications:

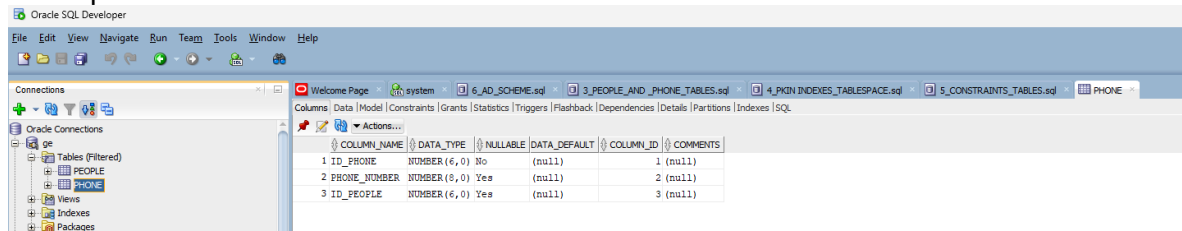


Oracle SQL Developer

Columns: Data | Model | Constraints | Grants | Statistics | Triggers | Flashback | Dependencies | Details | Partitions | Indexes | SQL

	COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
1	ID_PHONE	NUMBER (6, 0)	No	(null)	1	(null)
2	PHONE_NUMBER	NUMBER (8, 0)	Yes	(null)	2	(null)
3	ID_PEOPLE	NUMBER (6, 0)	Yes	(null)	3	(null)

Primary key people before modifications:

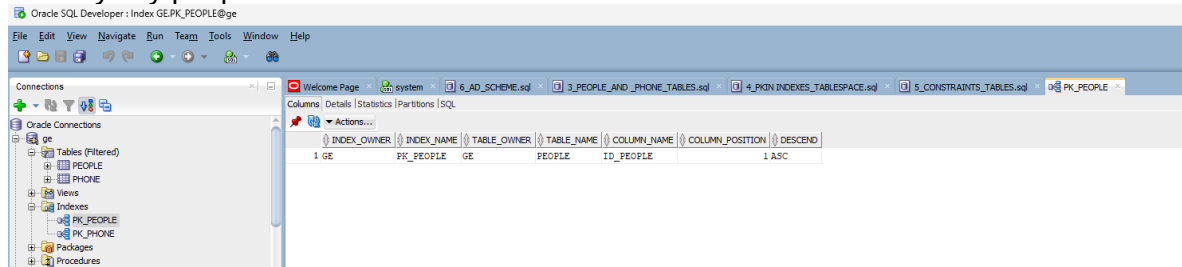


Oracle SQL Developer: Index: GE.PK_PEOPLE@ge

Columns: Details | Statistics | Partitions | SQL

	INDEX_OWNER	INDEX_NAME	TABLE_OWNER	TABLE_NAME	COLUMN_NAME	COLUMN_POSITION	DESCEND
1	GE	PK_PEOPLE	GE	PEOPLE	ID_PEOPLE	1	ASC

Primary key phone before modifications:

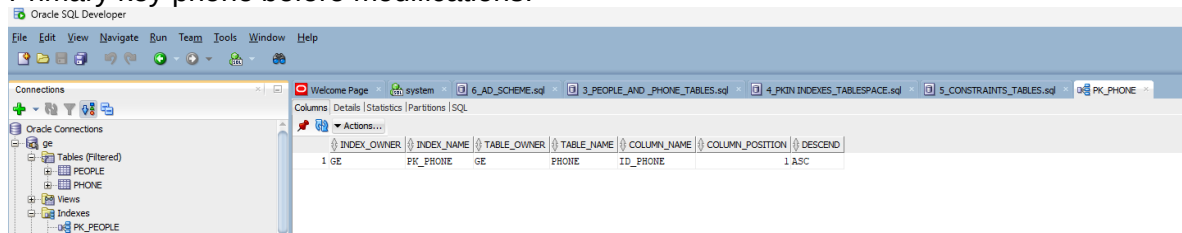


Oracle SQL Developer

Columns: Details | Statistics | Partitions | SQL

	INDEX_OWNER	INDEX_NAME	TABLE_OWNER	TABLE_NAME	COLUMN_NAME	COLUMN_POSITION	DESCEND
1	GE	PK_PHONE	GE	PHONE	ID_PHONE	1	ASC

People table after renaming it to employee:

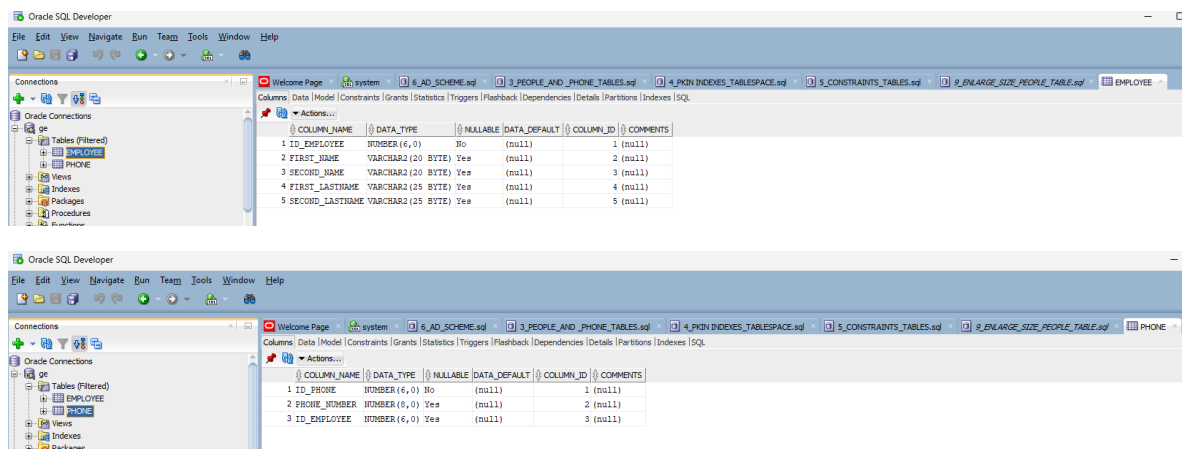

Oracle SQL Developer

Columns: Data | Model | Constraints | Grants | Statistics | Triggers | Flashback | Dependencies | Details | Partitions | Indexes | SQL


	COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
1	ID_EMPLOYEE	NUMBER (6, 0)	No	(null)	1	(null)
2	FIRST_NAME	VARCHAR2 (20 BYTE)	Yes	(null)	2	(null)
3	SECOND_NAME	VARCHAR2 (20 BYTE)	Yes	(null)	3	(null)
4	FIRST_LASTNAME	VARCHAR2 (25 BYTE)	Yes	(null)	4	(null)
5	SECOND_LASTNAME	VARCHAR2 (25 BYTE)	Yes	(null)	5	(null)

Oracle SQL Developer

Columns: Data | Model | Constraints | Grants | Statistics | Triggers | Flashback | Dependencies | Details | Partitions | Indexes | SQL

	COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
1	ID_PHONE	NUMBER (6, 0)	No	(null)	1	(null)
2	PHONE_NUMBER	NUMBER (8, 0)	Yes	(null)	2	(null)
3	ID_EMPLOYEE	NUMBER (6, 0)	Yes	(null)	3	(null)

Creating customer, food, foodType, foodxorder and web_order tables in the AD schema:

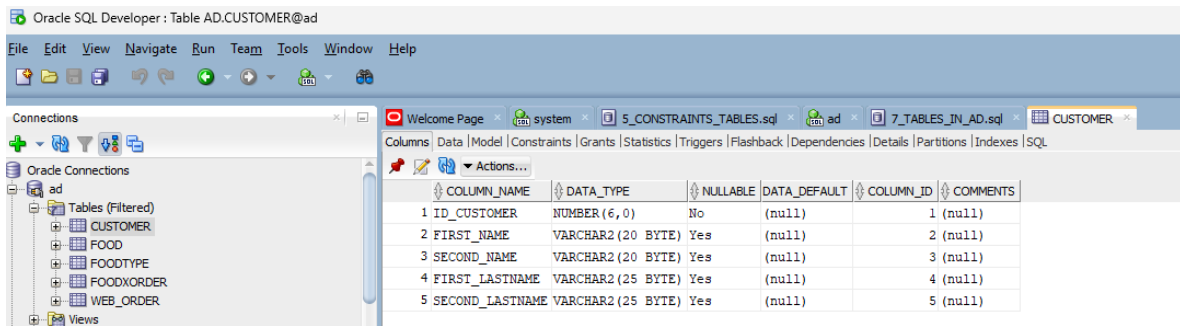


Oracle SQL Developer: Table AD.CUSTOMER@ad

Columns | Data | Model | Constraints | Grants | Statistics | Triggers | Flashback | Dependencies | Details | Partitions | Indexes | SQL

COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
1 ID_CUSTOMER	NUMBER (6,0)	No	(null)	1 (null)	
2 FIRST_NAME	VARCHAR2 (20 BYTE)	Yes	(null)	2 (null)	
3 SECOND_NAME	VARCHAR2 (20 BYTE)	Yes	(null)	3 (null)	
4 FIRST_LASTNAME	VARCHAR2 (25 BYTE)	Yes	(null)	4 (null)	
5 SECOND_LASTNAME	VARCHAR2 (25 BYTE)	Yes	(null)	5 (null)	


Food table before column changes.

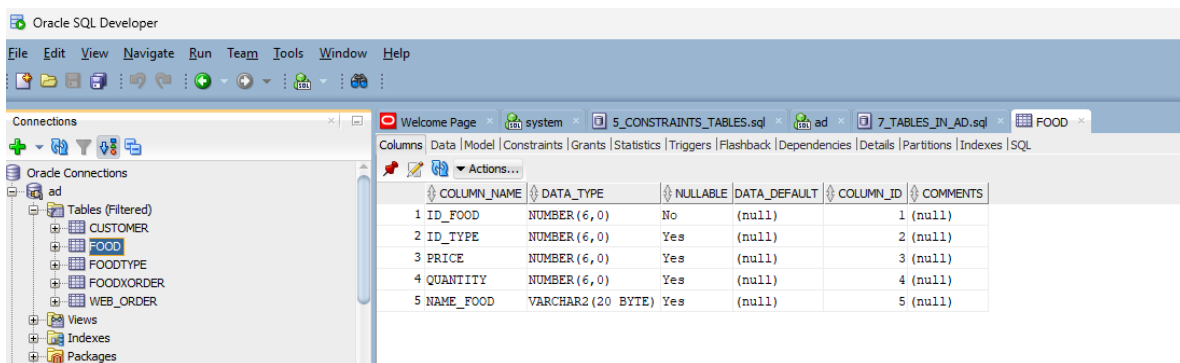

Oracle SQL Developer

Columns | Data | Model | Constraints | Grants | Statistics | Triggers | Flashback | Dependencies | Details | Partitions | Indexes | SQL

COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
1 ID_FOOD	NUMBER (6,0)	No	(null)	1 (null)	
2 ID_TYPE	NUMBER (6,0)	Yes	(null)	2 (null)	
3 PRICE	NUMBER (6,0)	Yes	(null)	3 (null)	
4 QUANTITY	NUMBER (6,0)	Yes	(null)	4 (null)	
5 NAME_FOOD	VARCHAR2 (20 BYTE)	Yes	(null)	5 (null)	

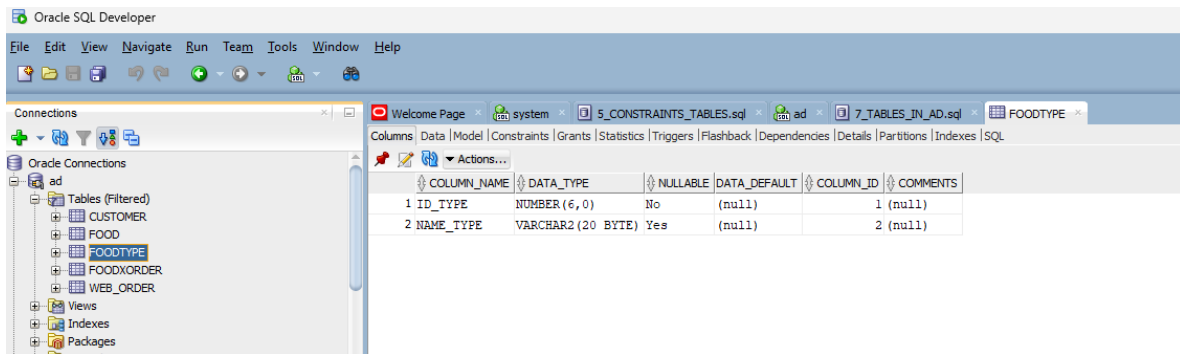

Oracle SQL Developer

Columns | Data | Model | Constraints | Grants | Statistics | Triggers | Flashback | Dependencies | Details | Partitions | Indexes | SQL

COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
1 ID_TYPE	NUMBER (6,0)	No	(null)	1 (null)	
2 NAME_TYPE	VARCHAR2 (20 BYTE)	Yes	(null)	2 (null)	

Oracle SQL Developer: Table AD.FOODXORDER@ad

File Edit View Navigate Run Team Tools Window Help

Connections

Oracle Connections

- ad
 - Tables (Filtered)
 - CUSTOMER
 - FOOD
 - FOODTYPE
 - FOODXORDER
 - WEB_ORDER
 - Views
 - Indexes

Columns | Data | Model | Constraints | Grants | Statistics | Triggers | Flashback | Dependencies | Details | Partitions | Indexes | SQL

Actions...

	COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
1	ID_FOOD_XORDER	NUMBER (6, 0)	No	(null)	1	(null)
2	ID_FOOD	NUMBER (6, 0)	Yes	(null)	2	(null)
3	ID_ORDER	NUMBER (6, 0)	Yes	(null)	3	(null)

Oracle SQL Developer

File Edit View Navigate Run Team Tools Window Help

Connections

Oracle Connections

- ad
 - Tables (Filtered)
 - CUSTOMER
 - FOOD
 - FOODTYPE
 - FOODXORDER
 - WEB_ORDER
 - Views
 - Indexes
 - Packages
 - Procedures

Columns | Data | Model | Constraints | Grants | Statistics | Triggers | Flashback | Dependencies | Details | Partitions | Indexes | SQL

Actions...

	COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
1	ID_ORDER	NUMBER (6, 0)	No	(null)	1	(null)
2	ID_CUSTOMER	NUMBER (6, 0)	Yes	(null)	2	(null)

Oracle SQL Developer

File Edit View Navigate Run Team Tools Window Help

Connections

Oracle Connections

- ad
 - Tables (Filtered)
 - CUSTOMER
 - FOOD
 - FOODTYPE
 - FOODXORDER
 - WEB_ORDER
 - Views
 - Indexes
 - PK_CUSTOMER
 - PK_FOOD
 - PK_FOODTYPE
 - PK_FOODXORDER
 - PK_ORDER
 - Packages
 - Procedures

Columns | Details | Statistics | Partitions | SQL

Actions...

	INDEX_OWNER	INDEX_NAME	TABLE_OWNER	TABLE_NAME	COLUMN_NAME	COLUMN_POSITION	DESCEND
1	AD	PK_CUSTOMER	AD	CUSTOMER	ID_CUSTOMER		1 ASC


Reports

- All Reports
- Analytic View Reports

Food table after column changes in point 8, columns were renamed:

-price TO cost


-name_food TO name

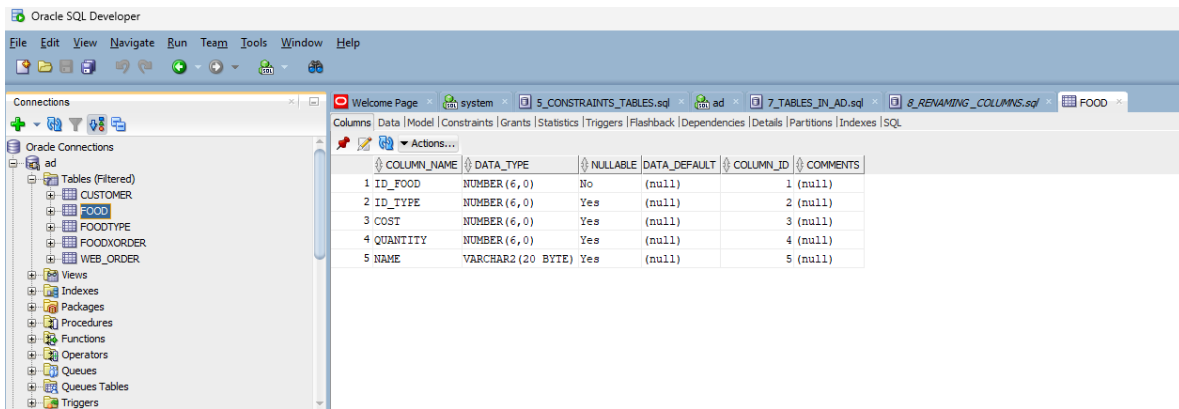

The screenshot shows the Oracle SQL Developer interface. On the left, the 'Connections' pane shows a tree view with 'ad' selected, containing 'Tables (Filtered)' with 'FOOD' highlighted. The main pane displays the 'Columns' tab for the 'FOOD' table. The table structure is as follows:

COLUMN_NAME	DATA_TYPE	NULLABLE	DATA_DEFAULT	COLUMN_ID	COMMENTS
ID_FOOD	NUMBER(6,0)	No	(null)	1	(null)
ID_TYPE	NUMBER(6,0)	Yes	(null)	2	(null)
COST	NUMBER(6,0)	Yes	(null)	3	(null)
QUANTITY	NUMBER(6,0)	Yes	(null)	4	(null)
NAME	VARCHAR2(20 BYTE)	Yes	(null)	5	(null)

Scripts

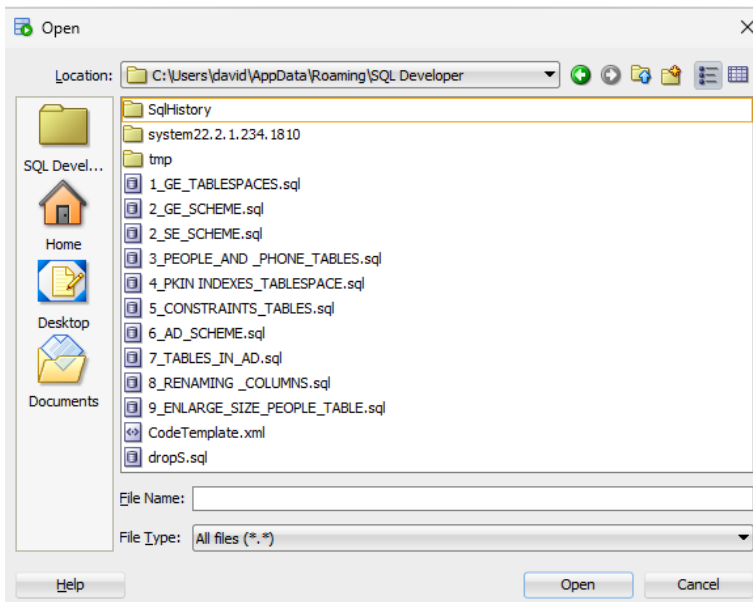

Evidence that the data and index tablespaces for both GE and AD are created

