

Diffuse to Compress: Leveraging Diffusion LMs for Lossless Compression

Angelo Nardone^{1*}, Paolo Ferragina^{1,2}

¹ University of Pisa, Department of Computer Science, Pisa, Italy

² Scuola Superiore Sant’Anna, Pisa, Italy
angelo.nardone@phd.unipi.it, paolo.ferragina@santannapisa.it

Abstract

We study the problem of lossless text compression, motivated by the rapid growth in the collection and storage of digital textual data — including plain text, source code, and structured formats such as XML — and by recent advances in neural language model-based compression. In particular, recent LLM-based approaches, whether built on symbol-ranking pipelines or paired with a statistical compressor, have demonstrated compression ratios significantly superior to general-purpose compressors such as `zstd`, `gzip`, or `bzip` on text and code. However, these neural approaches suffer from severe throughput limitations, making them not yet practically usable.

For the first time in the context of lossless neural text compression, we introduce Diffusion Language Models (DLMs) as an alternative inference paradigm to autoregressive LLM-based approaches. We argue that replacing autoregressive LLMs with DLMs within the same compression framework could overcome the throughput bottleneck caused by their one-symbol-per-step limitation. However, achieving these improvements requires addressing algorithmic challenges introduced by applying DLMs to lossless compression, where the architecture allows the number and positions of symbols encoded at each forward pass to be decided independently. We design efficient and effective strategies to solve these challenges and evaluate them experimentally against LLM-based and general-purpose compressors on `enwik8`, a well-established textual benchmark.

Our results show that the newly proposed DLM-based framework advances the state of the art in lossless text compression. Moreover, as DLMs are still a relatively young paradigm, recent advances toward increasingly capable and efficient models suggest substantial room for further improvements.

Introduction

Data compression is one of the most fundamental problems in Computer Science, with direct implications for storage costs, data transfer speed, energy consumption, and scalability of HPC systems. The rapid growth of digital data — fueled in large part by the demand for large-scale datasets to train and deploy AI models — has made these concerns increasingly pressing. Among the data types that have seen the sharpest growth is textual data: plain text, source code, and structured formats such as XML and JSON now populate vast digital archives worldwide. Prominent examples

include *Common Crawl* (Common Crawl Foundation 2007), one of the largest open repositories of plain text web data, and *Software Heritage* (Software Heritage 2025), the largest archive of public source code.

A significant share of such archives falls into the category of *cold storage*: systems optimized for long-term preservation of massive datasets at very low cost, where data is written once and retrieved rarely. In this setting, compression ratio is the dominant concern — even at the cost of slower compression speed. General-purpose compressors, such as `zstd` or `lzma`, offer a good speed-ratio trade-off but fail to capture the grammatical and lexical regularities inherent in natural language, leaving substantial compression gains on the table.

This limitation, combined with the well-known connection between accurate language prediction and compression efficiency, dating back to (Shannon 1951), has motivated a growing body of work on lossless text compression based on Large Language Models (LLMs), such as (Mittu et al. 2024; Valmeekam et al. 2023; Narashiman and Chandrachoodan 2024; Delétang et al. 2024). These approaches have proven remarkably effective, achieving compression ratios well beyond those of general-purpose tools — making them particularly promising for cold storage archives. However, even in this setting, where speed requirements are relaxed, their throughput remains impractically low, as inference dominates the computational cost because autoregressive LLMs are constrained to sequential symbol generation. Consequently, new neural-based architectures are needed to preserve the compression quality achieved by LLMs while providing better speed performance.

In this work, we introduce, for the first time in the context of neural lossless text compression, *Diffusion Language Models* (DLMs) as an alternative inference paradigm to autoregressive LLM-based approaches. Unlike autoregressive LLMs, DLMs make the selection of symbols to be encoded at each inference step a design choice rather than a model constraint, allowing the number and positions of encoded symbols to be controlled independently. We therefore argue that the ability of DLMs to predict multiple symbols per forward pass may be leveraged to mitigate the architectural bottleneck imposed by one-symbol-per-step inference. However, this requires solving two main algorithmic challenges that are raised by the DLM architecture. The first one concerns the symbol commitment schedule employed by DLMs during the

*Corresponding author.

compression process; the second one relates to identifying effective initial contexts that may allow DLMs to avoid inefficient first-step predictions and consequently improve compression quality. We design strategies for solving both these challenges and evaluate them experimentally against LLM-based and general-purpose compressors on `enwik8`, a well-established benchmark in this setting (Mittu et al. 2024). Our DLM-based compressors improve compression–throughput trade-offs over prior neural approaches and open promising directions for future research.

State of the Art

The idea of leveraging neural networks for lossless data compression is not new (Mahoney 2000; Schmidhuber and Heil 1996). However, the recent progress of neural language models has reignited interest, leading to two main pipelines: (i) using the neural model as a probability estimator paired with a statistical coder, typically arithmetic coding (Witten, Neal, and Cleary 1987); or (ii) using the neural model as a predictor within the Symbol Ranking pipeline (Shannon 1951), paired with a general-purpose compressor.

In the former class belong approaches such as *DeepZip* (Goyal et al. 2018) and *NNCP* (Bellard 2021), which combine RNN/LSTM-based predictors with Arithmetic Coding, thus achieving promising compression ratios at substantial computational cost. The introduction of the Transformer architecture (Vaswani et al. 2017) marked a turning point, positioning LLM-based methods as the strongest candidates for designing probability estimators. *LLMZip* (Valmeekam et al. 2023) was among the first to combine LLMs with both Symbol Ranking and Arithmetic Coding. *FineZip* (Mittu et al. 2024) then extended *LLMZip* with parameter-efficient fine-tuning via LoRA, while *AlphaZip* (Narashiman and Chandrhoodan 2024) focused on smaller models paired with `gzip` or Brotli (Alakuijala et al. 2018). More recently, Delétang et al. (2024) studied the use of arithmetic coding with three foundation models of varying scale, showing that pretrained models can act as compressors across text, video, and images. Heurtel-Depeiges et al. (2024) extended this analysis to byte-level multimodal compression, showing that small pretrained models can outperform standard compressors, even accounting for model size, although they struggle with unseen modalities. Finally, (Nardone and Ferragina 2026) studied 30 pretrained LLMs for source code compression, showing that the compression ratio–throughput trade-off depends strongly on model size and quantization, that small models enable high throughput, and that source code is even more compressible than standard text.

Despite their differences, all these approaches share a common limitation. While outperforming general-purpose compressors in compression ratio, they suffer from severely limited throughput. Since Transformers scale quadratically with context length, recent works (Mittu et al. 2024; Delétang et al. 2024) tried to address this limitation by partitioning the input into independently compressed chunks, enabling parallel processing across multiple GPUs. This strategy slightly degrades compression quality, but does not achieve a significant improvement in throughput, which remains in the order of kilobits per second (Mittu et al. 2024), thus making these

methods impractical even with multi-GPU parallelization.

Crucially, throughput is rarely treated as a primary metric in this setting: in fact, Delétang et al. (2024) reports no explicit timing data, and decompression time is never reported in any of these works. More recently, (Nardone and Ferragina 2026) provided the first systematic study of the compression–throughput trade-off, showing that both metrics can be improved through proper algorithmic choices, but all of them remain constrained by the autoregressive paradigm adopted by LLMs. Closing the gap between neural and general-purpose compressors in throughput — while preserving a compression ratio advantage — is therefore a key challenge. We argue that achieving this goal requires an change in the compression paradigm: the throughput bottleneck is architectural, rooted in the fact that LLMs are designed to generate one symbol per forward pass — a consequence of the autoregressive next-symbol prediction paradigm that cannot be overcome by optimizing existing pipelines.

Our Contribution

Motivated by these limitations, we advance neural lossless compression with the following contributions.

1. We introduce, for the first time in the literature, the use of Diffusion Language Models (DLMs) for lossless text compression, establishing a new *non*-autoregressive compression paradigm. Unlike autoregressive LLMs, DLMs make the selection of symbols to be encoded at each inference step a design choice rather than a model constraint, allowing the number and positions of encoded symbols to be controlled independently. We instantiate this framework using *LLaDA* (Nie et al. 2025), one of the first masked DLMs released on Hugging Face, which is competitive with autoregressive LLMs such as *LLaMA 3 8B* (Grattafiori et al. 2024) in language modeling.
2. Our paradigm change needs to solve two novel algorithmic challenges raised by the DLM architecture. The first concerns the symbol commitment schedule employed during the compression process; the second hinges on the ability to provide arbitrary initial contexts to avoid inefficient first-step predictions, reduce the number of symbol-generation stages, and thus improve compression performance. We design and evaluate various strategies for solving both challenges efficiently (cfr. throughput) and efficaciously (cfr. compression ratio), thus improving prediction quality while avoiding wasteful inference time.
3. We experimentally evaluate our DLM-based compression framework against prior LLM-based approaches and general-purpose compressors on `enwik8`, a standard benchmark shared with prior work (Mittu et al. 2024). Our results corroborate the theoretical analysis and confirm that our DLM-based compressors advance the state of the art in neural lossless compression, coming closer to usable end-to-end neural compressors. Moreover, DLMs are still a relatively young paradigm, and recent advances already suggest substantial room for further improvements.

Theoretical Background

General-Purpose Compressors

Modern general-purpose compressors follow three main algorithmic paradigms, differing in how they identify and encode redundancy. Statistical compressors operate through a modeling phase, where symbol probabilities are estimated or fixed in advance, followed by a coding phase using entropy coders such as Huffman coding (Huffman 1952), Arithmetic Coding (Rissanen and Langdon 1979), or Asymmetric Numeral Systems (Duda 2009). We adopt *range Asymmetric Numeral Systems* (rANS), which combines near-optimal entropy coding efficiency with high throughput. Dictionary-based compressors exploit repeated substrings through dictionary references, typically based on LZ77 (Ziv and Lempel 1977). We consider three representative implementations: `gzip` (Deutsch 1996), `lzma` (Pavlov 2024), and `zstd` (Collet and Kucherawy 2018). Finally, block-sorting compressors apply the reversible *Burrows-Wheeler Transform* (BWT) (Burrows and Wheeler 1994), followed by *Move-to-Front* (Bentley et al. 1986), *Run-Length Encoding* (Ferragina 2023), and an entropy coder. We use the representative implementation `bzip2` (Seward 1996).

Neural Language Model-Based Compressors

Neural language model-based compressors specialize on textual data, achieving compression ratios well beyond general-purpose tools. They integrate into two main pipelines: feeding predicted distributions to a statistical coder, or using them within the *symbol ranking* pipeline.

Predictive Approaches. These are statistical approaches mainly solving the *next-symbol prediction* task, which is defined as follows.

Definition 1. Let $S = s_1, \dots, s_n$ be a sequence of symbols over an alphabet Σ , and let $W_{t,k} = s_{t-k}, \dots, s_{t-1}$ denote the window (context) of k symbols preceding position t in S . The *next-symbol prediction* estimates, for each t , a distribution $p(\cdot | W_{t,k})$ over Σ so as to maximize $p(s_t | W_{t,k})$.

The classical instantiation of this approach is *PPM* (Cleary and Witten 1984; Moffat 1990; Cleary and Teahan 1997; Ferragina 2023), which uses explicit variable-length context matching over the prefix $W_{t,t-1}$. Large Language Models (LLMs) represent a far more powerful instantiation: trained to optimize the *language modeling* objective — by assigning a joint probability distribution to sequences of symbols via the chain rule:

$$p_\theta(S) = \prod_{t=1}^n p_\theta(s_t | s_1, \dots, s_{t-1})$$

— they reduce exactly to next-symbol prediction at every position. Unlike PPM, LLMs learn contextual representations and capture long-range statistical dependencies beyond what exact context matching can achieve (Vaswani et al. 2017). This makes them ideal for implementing the modeling phase of a predictive compressor: their predicted distributions over the next symbol are fed directly to a statistical coder such as Arithmetic Coding. This is exactly what a robust line of

research has investigated recently, starting with the papers of (Delétang et al. 2024; Valmeekam et al. 2023; Mittu et al. 2024), and yielding compression ratios well beyond general-purpose compressors. However, this comes at the cost of extremely low throughput.

Symbol Ranking. Rather than feeding distributions to a statistical coder, symbol ranking orders symbols by likelihood, as originally suggested by (Shannon 1951).

Definition 2 (Symbol Ranking). Let $S = s_1, \dots, s_n$ be a sequence of symbols over an alphabet Σ , and let $p(\cdot | W_{t,k})$ be the next-symbol prediction distribution (Definition 1) at position t . This induces an ordered list of symbols $\sigma_0, \dots, \sigma_{|\Sigma|-1}$ such that $p(\sigma_0 | W_{t,k}) \geq \dots \geq p(\sigma_{|\Sigma|-1} | W_{t,k})$. This way, the next symbol s_t is assigned the rank

$$\text{Rank}(s_t | W_{t,k}) = j \iff s_t = \sigma_j.$$

Applying this at every position defines the transformation from the sequence of symbols S to the sequence of ranks (integers) $R = r_1, \dots, r_n$, with $r_t = \text{Rank}(s_t | W_t)$.

Since symbol ranking is a transformation rather than a compressor, the rank sequence R must be compressed by a downstream general-purpose compressor. Fenwick (1997) observed that this approach is related to block-sorting compressors, as both produce skewed output distributions.

Prior LLM-based works (Valmeekam et al. 2023; Mittu et al. 2024; Narashiman and Chandrathoodan 2024) have employed general-purpose compressors such as `gzip` (Deutsch 1996), `zlib` (Deutsch and Gailly 1996), `bzip2` (Seward 1996), and adaptive Huffman coding (Gallager 1978), showing that symbol ranking yields slightly worse compression ratio than Arithmetic Coding, but higher throughput, as compressing integer ranks with general-purpose compressors is considerably faster than the application of Arithmetic Coding over model-predicted distributions.

Diffusion-Based Compression

Rather than further optimizing existing LLM-based pipelines, we address their limitations by introducing Diffusion Language Models (DLMs) as an alternative backbone for neural compression. This substitution preserves the compression pipeline while introducing new algorithmic challenges, whose solution enables a new compression paradigm with state-of-the-art compression-throughput trade-offs.

Diffusion Language Models

Diffusion Language Models (DLMs) are a class of non-autoregressive Transformer-based sequence models that generate text through an iterative denoising process, in contrast to autoregressive generation. Rather than parameterizing $p_\theta(S)$ as an ordered product of conditional probabilities, DLMs model a forward corruption process and learn to invert it. Interest in DLMs is growing rapidly, with recent models such as *DiffusionGemma* (Google DeepMind 2026) demonstrating throughput far exceeding autoregressive alternatives.

Different forward corruption processes give rise to families of DLMs with different inference properties (von Rütte et al. 2025). We focus on *masked diffusion*, in which subsets of

symbols are replaced by [MASK] and the model reconstructs them from the remaining context.

Definition 3 (Masked Diffusion Language Model). A *masked diffusion language model* is a parametric function $p_\theta(\cdot \mid \cdot)$ that, given a partially observed sequence $\tilde{S} = \tilde{s}_1, \dots, \tilde{s}_n$ over $\Sigma \cup \{\text{[MASK]}\}$, estimates in a single forward pass a probability distribution over Σ for each masked position $t \in \mathcal{M} = \{x : \tilde{s}_x = \text{[MASK]}\}$:

$$p_\theta(\cdot \mid \tilde{S}) \in \Delta(\Sigma)^{|\mathcal{M}|},$$

where $\Delta(\Sigma)$ denotes the probability simplex over Σ .

Predictions are *not conditioned on a fixed left-to-right prefix*: each masked position attends to all available unmasked positions, regardless of order. Masked diffusion thus produces, at each inference step, a well-defined probability distribution over all masked positions, enabling masked DLMs to replace LLMs in compression pipelines while avoiding their sequential decoding bottleneck. While other diffusion formulations, such as *uniform diffusion*, exist, they do not naturally provide the conditional token distributions required by entropy coding and therefore require non-trivial adaptations.

Diffusion-Based Compression Pipeline

Given a sequence of symbols $S = s_1, \dots, s_n$ over Σ to be compressed, a diffusion-based pipeline starts from the fully masked state $S^{(0)} = [\text{[MASK]}], \dots, [\text{[MASK]}]$, and iteratively reconstructs the sequence over K inference steps:

$$S^{(k+1)} = f_\theta(S^{(k)}), \quad k = 0, \dots, K-1.$$

At each step, the DLM produces conditional probability distributions over all currently masked positions simultaneously, with no ordering constraint imposed by the model itself. The commitment schedule selects a subset of positions, and the corresponding original symbols are encoded using their predicted distributions. As in LLM-based compression pipelines, these distributions can be directly provided to a statistical coder (e.g., rANS) or converted into symbol rankings. Once encoded, the original symbols are revealed in the sequence state and become additional context for subsequent inference steps, until the full sequence is reconstructed.

The number of inference steps K is freely tunable and depends on the schedule used to select symbols at each step. For small K , many positions are committed per forward pass, reducing inference cost but providing less context for future predictions. Conversely, larger K values reveal symbols gradually, improving prediction accuracy at the cost of additional inference time. Therefore, the commitment schedule, including *which* symbols to commit and *how many* at each step, governs the compression ratio–throughput trade-off.

Prior work on LLM-based compressors has shown that their computational cost is dominated by model inference and can be characterized by the number of sequential forward passes for a fixed context length (Mittu et al. 2024; Valmeekam et al. 2023). While the absolute cost of each pass depends on factors such as model size, quantization, and hardware, when comparing DLMs and LLMs of similar

size, the number of inference passes remains the dominant factor determining throughput.

In the autoregressive setting, the factorization of $p_\theta(S)$ requires computing $p_\theta(\cdot \mid s_1, \dots, s_{t-1})$ for each $t = 1, \dots, n$ sequentially, resulting in n forward passes. Diffusion-based compression instead requires only K evaluations, where K is tunable through the commitment schedule, transforming sequential depth from a model constraint into a design choice that, actually, opens a spectrum of compression ratio–throughput operating points, and consequent trade-offs, unavailable to autoregressive models.

Symbol Commitment Schedules

Unlike LLMs, DLMs decouple inference from symbol encoding order, allowing the commitment schedule to be optimized independently of the model. This introduces a new algorithmic challenge: the choice of which symbols to encode at each inference step and how many to commit. We denote by u_k the number of symbols committed at inference step k , with coverage constraint $\sum_{k=1}^K u_k = n$. The two extreme cases — one-shot ($K = 1$) and autoregressive ($K = n$) — represent undesirable operating points: the former requires predicting the full string S in one-shot from an almost empty context, while the latter recovers the sequential decoding bottleneck. We study and design three commitment strategies of increasing sophistication between these two extremes.

1. Uniform Block Schedule. Given a fixed hyperparameter K , we commit $u = \lfloor n/K \rfloor$ symbols per inference step in contiguous left-to-right blocks. This schedule generalizes the autoregressive setting by committing u consecutive symbols at each step.

2. Progressive Schedule. This schedule is controlled by the initial budget u_1 and growth ratio r . Early inference steps operate with limited revealed context and thus may yield less reliable predictions; later steps have access to additional context and can therefore commit more symbols. We deploy this observation as follows: as in uniform block scheduling, symbols are committed left-to-right, but according to a *geometric schedule*: $u_k = \lfloor u_1 \cdot r^{k-1} \rfloor$. When $r = 1$, this reduces to uniform block scheduling.

3. Entropy-Based Schedule. This schedule is controlled by an entropy threshold τ and the minimum number of committed symbols m . Unlike the two strategies above, it exploits the bidirectional context of DLMs, that is, rather than committing symbols left-to-right, it lets the model decide *which* positions to reveal based on prediction confidence. More precisely, for each currently masked position j , we define $p_j^{(k)}(v) = p_\theta(v \mid S^{(k-1)})$ and compute the entropy

$$H_j^{(k)} = - \sum_{v \in \Sigma} p_j^{(k)}(v) \log p_j^{(k)}(v).$$

At each step, we commit all positions with entropy $H_j^{(k)} \leq \tau$, namely, positions whose predictions are "almost surely" correct according to the parameter τ . If fewer than m positions satisfy this criterion, we then commit the m positions with the lowest entropy, regardless of the threshold.

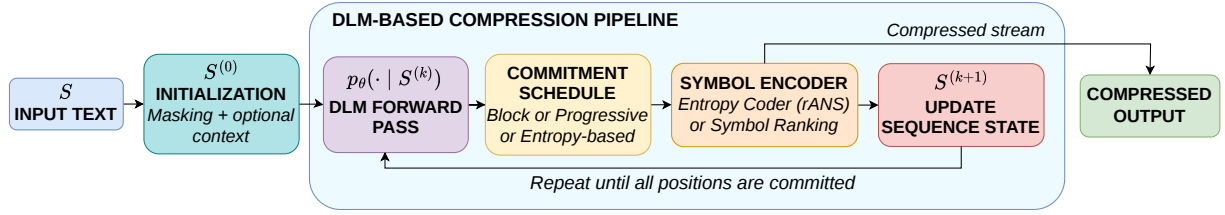


Figure 1: Iterative DLM-based pipeline for lossless text compression.

All strategies are deterministic given their hyperparameters and therefore require no additional side information beyond the compressed file header, allowing the decompressor to reproduce the same commitment decisions.

Initial Context Strategies

Existing LLM-based compression pipelines start encoding text from an empty context (Narashiman and Chandrakhodan 2024; Mittu et al. 2024; Valmeekam et al. 2023; Delétang et al. 2024). However, this leads to poor predictions in the first inference step: without sufficient context, the model produces uncertain distributions that waste computation and hurt compression quality. This limitation is particularly relevant when multiple symbols are committed at the first step. Providing initial context could mitigate this issue, but autoregressive models are restricted to left-to-right prefixes. Conversely, DLMs allow any subset of symbols to be exposed before the first inference step, creating an optimization dimension unavailable to LLM-based compressors.

We study initial context by leaving c symbols unmasked and storing them in the compressed file. While $c = 0$ recovers the fully masked approach and large c approaches direct storage, intermediate values trade conditioning information for storage overhead. Since DLMs attend bidirectionally, any subset of positions can serve as context. We instantiate this optimization problem through four context selection policies, from simple baselines to model-dependent strategies.

1. Contiguous Context. The first c symbols are left visible, and the rest are masked. This is the classical prefix-based initialization, also applicable to LLM-based pipelines.

2. Random Context. c arbitrary positions are selected uniformly at random and left unmasked. This provides a simple non-contiguous baseline that ignores structural information.

3. Frequency-Based Context. Token frequency, derived from the tokenizer vocabulary statistics, reflects how often symbols appear in the training distribution: frequent symbols are less informative, as they are easier to predict. We exploit the frequency statistics of the adopted tokenizer by leaving the c least frequent symbols in S unmasked, as rare tokens provide richer conditioning information.

4. Attention-Based Context. Two complementary forward passes — one with even-indexed positions masked and one with odd-indexed positions masked — estimate the importance of each position through the attention it receives from masked tokens, aggregated via *Attention Rollout* (Abnar and Zuidema 2020). The c highest-scoring positions are

selected as initial context. This strategy requires two additional inferences during compression, increasing encoding time, but the selected context is stored in the file header and reused during decompression without additional cost.

Experimental Methodology

Evaluation Setup. We evaluate our approach on `enwik8`, a standard benchmark for lossless text compression, also adopted by previous LLM-based compression works such as (Mittu et al. 2024). Following prior work, we perform extensive ablation experiments on the first 1 MB of `enwik8` and evaluate final comparisons on its first 10 MB to ensure consistency with previous approaches.

We compare against neural compression methods based on LLMs, including (Valmeekam et al. 2023; Mittu et al. 2024), as well as general-purpose compressors including `gzip` (Deutsch 1996), `lzma` (Pavlov 2024), `zstd` (Collet and Kuchera 2018), and `bzip2` (Seward 1996). For a controlled comparison with autoregressive models, we additionally evaluate *Llama-3.1-8B* (Grattafiori et al. 2024) using our pipeline, without providing any initial context and reconstructing each sequence autoregressively.

We report compression ratio, measured as compressed size over original size, and (de)compression throughput in MB/s. All experiments are conducted on an NVIDIA DGX H100 server equipped with H100 GPUs.

Implementation Details. Our experiments use *LLaDA* (Nie et al. 2025), a masked diffusion language model, as the DLM backbone. The choice of *LLaDA* is not intrinsic to our framework, but is motivated by its being one of the few publicly available masked DLMs on Hugging Face and by its competitive language modeling performance. The model and tokenizer are accessed through Hugging Face Transformers. The input text is tokenized using the *LLaDA* tokenizer and divided into non-overlapping windows of fixed size w . This parameter is configurable and stored in the compressed file header to enable deterministic decoding. Longer windows provide richer context and can improve compression quality, but increase the computational cost due to the quadratic scaling of Transformers with sequence length. Non-overlapping windows also enable parallel processing across multiple GPUs. The resulting windows are processed by our iterative pipeline shown in Figure 1.

The tokens are encoded using either (i) `rANS` (Duda 2009) for the statistical coding approach, or (ii) `Symbol Ranking`, where integer ranks are encoded using byte-aligned variable-length integer (`varint`) encoding and subsequently com-

pressed using the general-purpose compressors described above. A list of hyperparameter configurations explored is provided in the supplementary material (Table 2).

Results

Our experiments show that the proposed approach not only introduces a new compression–throughput trade-off, but also substantially improves throughput over prior neural compressors while preserving competitive compression ratios, making DLM-based compression a promising step toward practical end-to-end usability.

Figure 2 (where y -axis is on a log scale) summarizes the results of our DLM-based compression pipeline (green region), compared with general-purpose compressors (blue region) and an LLM-based implementation of our pipeline (red region). The three approaches occupy clearly distinct regions of the throughput–compression ratio space. General-purpose compressors achieve the lowest compression ratios but provide up to six orders of magnitude higher throughput than the LLM-based pipeline. Conversely, the LLM-based approach achieves the best compression ratios, with the statistical rANS pipeline providing better compression at the cost of lower throughput than Symbol Ranking. This confirms the current performance gap already observed in the literature (Mittu et al. 2024; Delétang et al. 2024; Nardone and Ferragina 2026). So, here comes the novelty and contribution of our DLM-based proposal that enables a substantially broader trade-off depending on the adopted "symbol committed schedule" and "initial context strategy", described in the previous sections. In the autoregressive configuration, which actually mimics LLMs via DLM architectures, our DLM-based pipeline achieves compression and throughput comparable to the LLM-based Symbol Ranking pipeline, showing that *LLaDA-8B* remains competitive with *Llama-3.1-8B* when used autoregressively. However, increasing the number of tokens generated per inference step progressively shifts the operating point of DLMs toward higher throughput, at the cost of a slightly worse compression ratio. In particular, our DLM-based approach achieves up to four orders of magnitude higher throughput than LLM-based approaches while still outperforming general-purpose compressors in compression ratio. Actually, the DLM-based compression pipeline can be broadly configured to favor either compression ratio or throughput depending on the underlying application requirements. These figures become even more interesting in the light of the current developments and potentially appealing progress underlying the design of more and more efficient DLMs, as shown in (Anagnostidis et al. 2025; Kim et al. 2025; Google DeepMind 2026; von Rütte et al. 2025).

Let us now dig more into the technical details of our proposal and compare it with prior work. Table 1 reports the results of LLMZip (Valmeekam et al. 2023) and FineZip (Mittu et al. 2024) on the first 10MB of *enwik8*, as reported by Mittu et al. (2024), for their two final token compression methods: arithmetic coding (AC) and Symbol Ranking (sym). Our approach provides up to four orders of magnitude throughput improvements over prior LLM-based compressors, while maintaining a close compression ratio. An important point to stress is that both LLMZip and FineZip use

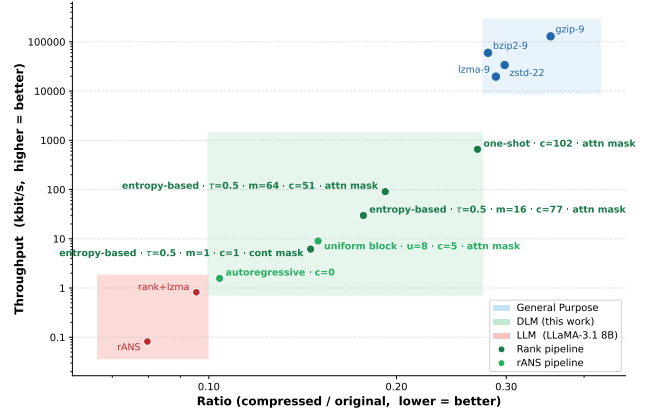


Figure 2: Compression ratio versus compression throughput (log scale) on the first 1 MB of *enwik8*. Blue, red, and green regions denote the operating ranges of general-purpose compressors (blue), LLM-based pipeline (red), and our novel DLM-based approach (green), respectively.

teacher forcing during compression, which allows the entire sequence to be processed in a single inference step. However, teacher forcing is unavailable during decompression, as the original symbols are not known in advance. Consequently, those autoregressive decoders must reconstruct each window sequentially, requiring n inference steps for a window of n tokens. As a result, the throughput advantage obtained from teacher forcing during compression is largely lost during decompression, which is expected to be approximately two orders of magnitude slower. In contrast, our DLM-based approach maintains nearly identical compression and decompression throughput, providing up to six orders of magnitude higher throughput than LLM-based methods during decoding, while preserving a strong compression ratio.

Having established that DLM-based compression provides

Pipeline	CR	C-Thr. (kbit/s)	D-Thr. (kbit/s)
<i>Prior Work (teacher forcing, from (Mittu et al. 2024))</i>			
LLMZip (AC)	0.079	0.09	$\ll$ 0.09
LLMZip (symb)	0.116	0.09	$\ll$ 0.09
FineZip (AC)	0.079	0.10	$\ll$ 0.10
FineZip (symb)	0.128	5.33	$\ll$ 5.33
<i>Our DLM-based Pipeline</i>			
DLM (rANS)	0.127	1.01	1.01
DLM (symb)	0.176	11.23	11.23
DLM (symb)	0.223	44.34	44.35
DLM (symb)	0.246	165.79	166.12

Table 1: Results on the first 10 MB of *enwik8*. CR = compression ratio; C/D-Thr. = compression/decompression throughput (kbit/s). Prior LLM results are copied from Mittu et al. (2024); decompression throughput is not reported in that paper but, as commented in text, it is surely $\ll$ C-Thr.

a new and appealing compression–throughput trade-off, we now analyze the impact of the different configurations. As shown in the supplementary material (Figures 4 and 5), all compressors adopted in the last step of the DLM-based approach achieve comparable throughput — DLM inference remains the main bottleneck — while `lzma-9` provides the best compression ratio, with windows of $w = 256 - 512$ tokens offering the best overall trade-offs.

Let us now concentrate on the two key algorithmic ingredients of DLM-based compressors: commitment schedule and initial context. Regarding the commitment schedule, the results show that the entropy-based schedule achieves the best compression ratio (Figure 3), while uniform-block provides the best trade-off between compression and throughput (Figure 7 of the supplementary material). More precisely, Figure 3 reports the compression ratio of the DLM compressor using the Symbol Ranking pipeline with $c = 2$ tokens left unmasked as initial context. Each curve corresponds to a different commitment schedule, while the points along each curve represent different numbers of tokens encoded per step. Progressive is consistently the worst-performing strategy, while the entropy-based schedule achieves the best compression for every number of encoded tokens per step. Uniform-block schedule performs comparably to the entropy-based one when encoding only one or two tokens per step, but increasingly approaches the progressive schedule as more tokens are encoded per step. Figure 6 in the supplementary material corroborates these results, showing experimentally that the entropy-based schedule provides better compression at a small throughput cost compared to uniform-block, while progressive consistently achieves worse compression ratios.

Overall, these results highlight two important points: (i) relaxing the autoregressive constraint on the number of tokens encoded per step can improve compression quality; and (ii) when increasing the number of tokens encoded per step to overcome the throughput bottleneck, only entropy-

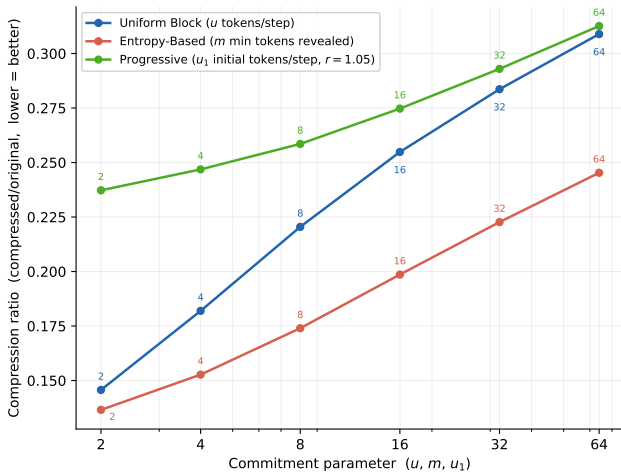


Figure 3: Compression ratio of commitment schedules as the minimum number of tokens encoded per step varies, using Symbol Ranking with $c=2$ initial context tokens.

based scheduling preserves a favorable compression ratio. This flexibility is unique to diffusion-based generation and unavailable to prior autoregressive compression approaches.

Finally, we investigate the effect of providing an initial context of c unmasked tokens to avoid context-free first-step predictions. For space reasons, Figures 8–11 are reported in the supplementary material. Specifically, Figure 8 shows that a proper initial context improves compression across all configurations except the autoregressive one, and that its importance grows with the number of tokens encoded per step. Hence the initial context becomes increasingly important when targeting higher throughput. The choice of which tokens to expose is also crucial. Figures 9–11 report the average results of the adopted initial-context strategies across pipelines, commitment schedules, and numbers of tokens generated per step. The contiguous strategy, which is the only one naturally applicable to LLMs, performs well with the uniform-block schedule at low numbers of tokens generated per step, but degrades substantially at higher token counts and even more under entropy-based scheduling. At higher throughputs, it eventually performs worse than random selection! Conversely, attention-based context consistently provides the best results across all configurations.

Conclusions and Future Works

Our paper introduces the use of Diffusion Language Models (DLMs) for lossless text compression as an alternative inference paradigm to autoregressive LLM-based approaches. We show that replacing autoregressive LLMs with DLMs within the same compression framework can mitigate the throughput bottleneck imposed by their one-symbol-per-step limitation. Doing so, however, introduces novel algorithmic challenges, which we address through the design of novel commitment schedules and initial context strategies suitable for the compression setting at hand. Experiments on `enwik8`, a well-established textual benchmark, demonstrate the effectiveness of our approach against both LLM-based and general-purpose compressors.

The main message of our study is that higher throughput in neural text compression requires encoding multiple tokens per inference step and moving beyond the autoregressive structure of LLMs. In this respect, the architectural advantages of DLMs, identified and studied in this paper for the first time, proved very effective. Our experimental results are particularly promising given that DLMs are still a relatively young paradigm, with recent advances already pointing toward increasingly capable and efficient models (Anagnostidis et al. 2025; Kim et al. 2025; Google DeepMind 2026; von Rütte et al. 2025), thus suggesting substantial room for further improvements in diffusion-based neural compression. This potential is further amplified by the fact that we deployed an 8B-parameter DLM: prior work (Heurtel-Depeiges et al. 2024; Nardone and Ferragina 2026) on LLMs has shown that much smaller distilled models can substantially improve the throughput with limited compression loss: a successful approach that could be investigated on DLMs too.

References

- Abnar, S.; and Zuidema, W. H. 2020. Quantifying Attention Flow in Transformers. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 4190–4197. Online: Association for Computational Linguistics.
- Alakuijala, J.; Farruggia, A.; Ferragina, P.; Kliuchnikov, E.; Obryk, R.; Szabadka, Z.; and Vandevenne, L. 2018. Brotli: A General-Purpose Data Compressor. *ACM Transactions on Information Systems (TOIS)*, 37(1): 1–30.
- Anagnostidis, S.; Bachmann, G.; Kim, Y.; Kohler, J.; Georgopoulos, M.; Sanakoyeu, A.; Du, Y.; Pumarola, A.; Thabet, A.; and Schönfeld, E. 2025. FlexiDiT: Your Diffusion Transformer Can Easily Generate High-Quality Samples with Less Compute. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 28316–28326.
- Bellard, F. 2021. NNCP v2: Lossless Data Compression with Transformer. https://bellard.org/nncp/nncp_v2.pdf. Technical report.
- Bentley, J. L.; Sleator, D. D.; Tarjan, R. E.; and Wei, V. K. 1986. A Locally Adaptive Data Compression Scheme. *Communications of the ACM*, 29(4): 320–330.
- Burrows, M.; and Wheeler, D. J. 1994. A Block-Sorting Lossless Data Compression Algorithm. Technical Report 124, Digital Equipment Corporation, Systems Research Center.
- Cleary, J. G.; and Teahan, W. J. 1997. Unbounded Length Contexts for PPM. *The Computer Journal*, 40(2–3): 67–75.
- Cleary, J. G.; and Witten, I. H. 1984. Data Compression Using Adaptive Coding and Partial String Matching. *IEEE Transactions on Communications*, 32(4): 396–402.
- Collet, Y.; and Kucherawy, M. 2018. Zstandard Compression and the Application/zstd Media Type. Technical Report RFC 8478, RFC Editor.
- Common Crawl Foundation. 2007. Common Crawl — Open Repository of Web Crawl Data. <https://commoncrawl.org>. Accessed: 2026-07-23.
- Delétang, G.; Ruoss, A.; Duquenne, P.-A.; Catt, E.; Genewein, T.; Mattern, C.; Grau-Moya, J.; Wenliang, L. K.; Aitchison, M.; Orseau, L.; Hutter, M.; and Veness, J. 2024. Language Modeling Is Compression. In *International Conference on Learning Representations*.
- Deutsch, L. P. 1996. DEFLATE Compressed Data Format Specification Version 1.3. Technical Report RFC 1951, RFC Editor.
- Deutsch, L. P.; and Gailly, J.-L. 1996. ZLIB Compressed Data Format Specification Version 3.3. Technical Report RFC 1950, RFC Editor.
- Duda, J. 2009. Asymmetric numeral systems. arXiv:0902.0271.
- Fenwick, P. 1997. Symbol Ranking Text Compression with Shannon Recoding. *Journal of Universal Computer Science*, 3(2): 70–85.
- Ferragina, P. 2023. *Pearls of Algorithm Engineering*. Cambridge University Press.
- Gallager, R. G. 1978. Variations on a Theme by Huffman. *IEEE Transactions on Information Theory*, 24(6): 668–674.
- Google DeepMind. 2026. DiffusionGemma: 4x Faster Text Generation. <https://deepmind.google/models/gemma/diffusiongemma/>. Accessed: 2026-06-22.
- Goyal, M.; Tatwawadi, K.; Chandak, S.; and Ochoa, I. 2018. DeepZip: Lossless Data Compression Using Recurrent Neural Networks. arXiv:1811.08162.
- Grattafiori, A.; Dubey, A.; Jauhri, A.; Pandey, A.; Kadian, A.; Al-Dahle, A.; Letman, A.; Mathur, A.; Schelten, A.; and Vaughan, A. 2024. The Llama 3 Herd of Models. arXiv:2407.21783.
- Heurtel-Depeiges, D.; Ruoss, A.; Veness, J.; and Genewein, T. 2024. Compression via Pre-Trained Transformers: A Study on Byte-Level Multimodal Data. arXiv:2410.05078.
- Huffman, D. A. 1952. A Method for the Construction of Minimum-Redundancy Codes. *Proceedings of the IRE*, 40(9): 1098–1101.
- Kim, Y.; Anagnostidis, S.; Du, Y.; Schönfeld, E.; Kohler, J.; Georgopoulos, M.; Pumarola, A.; Thabet, A.; and Sanakoyeu, A. 2025. Autoregressive Distillation of Diffusion Transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 15745–15756.
- Mahoney, M. V. 2000. Fast Text Compression with Neural Networks. In *FLAIRS*, 230–234.
- Mittu, F.; Bu, Y.; Gupta, A.; Devireddy, A.; Ozdarendeli, A. E.; Singh, A.; and Anumanchipalli, G. 2024. FineZip: Pushing the Limits of Large Language Models for Practical Lossless Text Compression. arXiv:2409.17141.
- Moffat, A. 1990. Implementing the PPM Data Compression Scheme. *IEEE Transactions on Communications*, 38(11): 1917–1921.
- Narashiman, S. S.; and Chandrachoodan, N. 2024. AlphaZip: Neural Network-Enhanced Lossless Text Compression. arXiv:2409.15046.
- Nardone, A.; and Ferragina, P. 2026. LLM-based Source Code Compression via Thresholded Symbol Ranking. arXiv:2607.24192.
- Nie, S.; Zhu, F.; You, Z.; Zhang, X.; Ou, J.; Hu, J.; Zhou, J.; Lin, Y.; Wen, J.-R.; and Li, C. 2025. Large Language Diffusion Models. In *Advances in Neural Information Processing Systems*, volume 38, 50608–50646.
- Pavlov, I. 2024. LZMA SDK (Software Development Kit). <https://www.7-zip.org/sdk.html>. Accessed: 2026-06-17.
- Rissanen, J.; and Langdon, G. G. 1979. Arithmetic Coding. *IBM Journal of Research and Development*, 23(2): 149–162.
- Schmidhuber, J.; and Heil, S. 1996. Sequential neural text compression. *IEEE Transactions on Neural Networks*, 7(1): 142–146.
- Seward, J. 1996. bzip2 and libbzip2. <https://sourceware.org/bzip2/>. Accessed: 2026-06-15.
- Shannon, C. E. 1951. Prediction and Entropy of Printed English. *Bell System Technical Journal*, 30(1): 50–64.
- Software Heritage. 2025. Software Heritage Activity Report 2025. <https://www.softwareheritage.org/2026/01/16/software-heritage-activity-report-2025/>. Accessed: 2026-06-11.

Valmeekam, C. S. K.; Narayanan, K.; Kalathil, D.; Chamberland, J.-F.; and Shakkottai, S. 2023. LLMZip: Lossless Text Compression Using Large Language Models. arXiv:2306.04050.

Vaswani, A.; Shazeer, N.; Parmar, N.; Uszkoreit, J.; Jones, L.; Gomez, A. N.; Kaiser, Ł.; and Polosukhin, I. 2017. Attention Is All You Need. In *Advances in Neural Information Processing Systems*, volume 30.

von Rütte, D.; Weiss, M.; Nakhost, H.; et al. 2025. Scaling Behavior of Discrete Diffusion Language Models. arXiv:2512.10858.

Witten, I. H.; Neal, R. M.; and Cleary, J. G. 1987. Arithmetic Coding for Data Compression. *Communications of the ACM*, 30(6): 520–540.

Ziv, J.; and Lempel, A. 1977. A Universal Algorithm for Sequential Data Compression. *IEEE Transactions on Information Theory*, 23(3): 337–343.

Supplementary Material

This supplementary document provides additional figures and tables reporting experimental results that complement the main paper. Due to space constraints, these materials could not be included in the main submission but are provided here to support and enrich the discussion of our findings.

Hyperparameters

The table 2 below summarizes the hyperparameter configurations evaluated in our experiments. All parameters have been introduced in the main submission, and their explored ranges are consistent with the expected operating regimes. We note that the growth ratio r for the progressive schedule is concentrated on small values, as early experiments showed an immediate degradation in compression ratio when using larger values. For the number of context tokens c left unmasked within a window W , some values may appear unusual (e.g., 26, 51, 77, and 102). These correspond to exact percentages of the most extensively explored window size of 512 tokens: 5%, 10%, 15%, and 20%, respectively, rounded to the nearest integer.

Schedule	Hyperparameter	Symbol Ranking		rANS	
		Hyperparameter	Values	Hyperparameter	Values
Uniform Block	u (tokens/step)	{1, 2, 4, 8, 16, 32, 64, n }		{1, 2, 4, 8, 16, 32, 64, n }	
	downstream compressor	lzma, zstd, bzip2, gzip		—	
Progressive	u_1 (initial budget)	{1, 2, 4, 8, 16, 32, 64}		{1, 2, 4, 8, 16, 32, 64}	
	r (growth ratio)	{1.05, 1.1, 1.2, 1.5, 2.0}		{1.05, 1.1, 1.2, 1.5, 2.0}	
	downstream compressor	lzma, zstd, bzip2, gzip		—	
Entropy-Based	τ (entropy threshold)	{0.5, 1.0, 2.0}		{0.5, 1.0, 2.0}	
	m (min reveals)	{1, 2, 4, 8, 16, 32, 64}		{1, 2, 4, 8, 16, 32, 64}	
	downstream compressor	lzma, zstd, bzip2, gzip		—	
All Schedules	w (window size)	{32, 64, 128, 256, 512, 1024}			
	c (context tokens)	{0, 1, 2, 4, 5, 10, 15, 26, 40, 51, 77, 102}			
	masking strategy	Contiguous, Random, Frequency-Based, Attention-Based			

Table 2: Hyperparameter search space for each commitment schedule and compression pipeline. One-Shot ($u = n$) and Autoregressive ($u = 1$) commitment schedules are treated as special cases of the Uniform Block schedule. The downstream compressor applies only to the Symbol Ranking pipeline, because rANS encodes directly from predicted distributions.

External Configuration Analysis

We briefly study two parameters that strongly affect performance while being easily configurable and not directly tied to our contributions, but rather to choices also considered in prior work. These are the window size, i.e., the size of the independent windows processed by our compression pipeline, and the outer compressor used in the Symbol Ranking pipeline.

Figure 4 compares throughput and compression ratio across different window sizes w , and numbers u of tokens encoded per inference step. We report results for the Symbol Ranking pipeline, as its higher throughput with respect to the statistical pipeline makes differences across configurations more clearly visible in the figure. Consistent with other general-purpose compression methods, where larger processing windows typically yield better compression at the cost of slower processing, our results show that increasing the window size leads to an almost linear improvement in compression ratio across all configurations, while throughput degrades accordingly. This trend is consistent across all configurations: the gap in compression ratio between different window sizes increases with the number of tokens encoded per step, whereas the throughput gap remains substantial across all configurations but grows significantly with the increase in the number u of encoded tokens per step (note the logarithmic scale on the y-axis).

Considering the resulting throughput–compression ratio trade-off, we find that intermediate window sizes, particularly $w = 256$ and $w = 512$, provide the best balance. At $w = 1024$, throughput becomes too low, whereas smaller windows, including those evaluated but omitted from the figure, incur an excessive loss in compression ratio. Nevertheless, larger windows may become increasingly attractive as more efficient DLMs become available, potentially shifting the trade-off toward higher compression ratios without incurring the current throughput penalty. Increasing the number u of encoded tokens per step increases the throughput too.

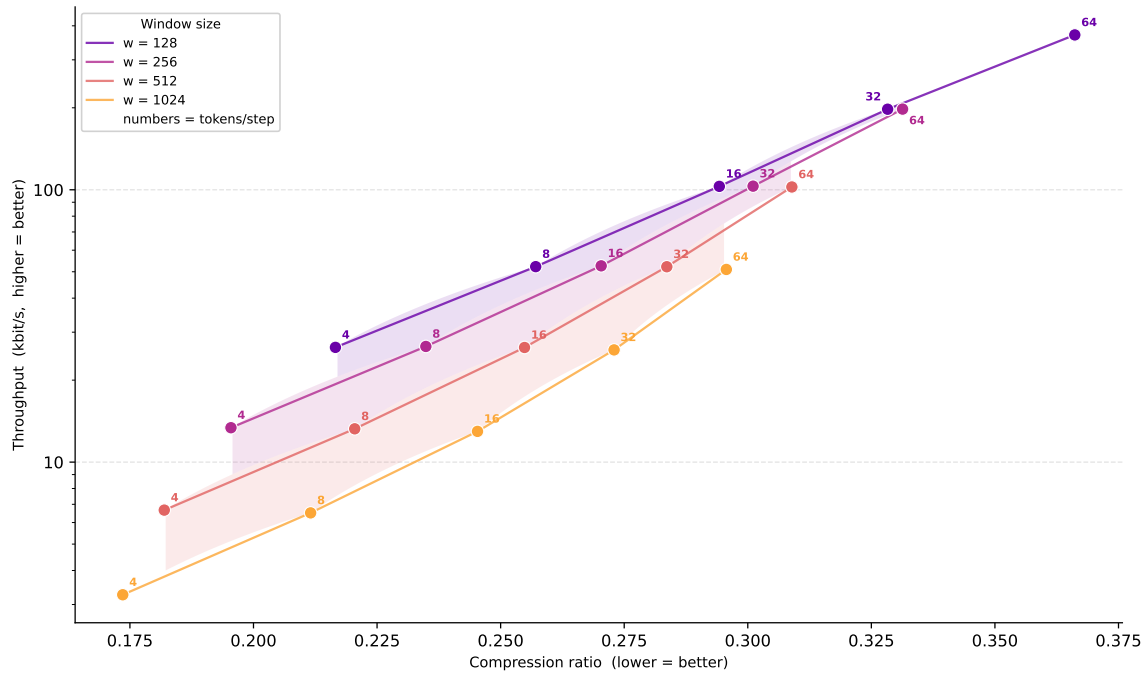


Figure 4: Throughput (kbit/s) versus compression ratio for the Symbol Ranking pipeline using contiguous masking, $c = 2$ context tokens, and lzma-9 as outer compressor, as a function of the window size (w) and the number of unmasked tokens per step (u). Larger windows improve compression by providing the DLM with richer context for probability estimation, while smaller windows increase throughput due to the quadratic complexity of Transformers with respect to sequence length.

For the outer compressor, which follows the Symbol-ranking stage, we study which general-purpose compressor is most promising. Figure 5 reports the average compression ratio (top) and throughput (bottom) for the four compressors considered. For each compressor, we use its highest available compression level: zstd-22 (ultra), lzma-9, gzip-9, and bzip-9. As shown by the throughput results, performance is nearly identical across all configurations, indicating that even for compressors with substantially different processing speeds, such as zstd-22 and gzip-9, their computational differences are negligible compared to the DLM inference bottleneck. In terms of compression ratio, zstd-22 and lzma-9 perform best, with the latter achieving a slightly better ratio. We therefore use lzma-9 as the outer compressor for the Symbol Ranking pipeline in all subsequent experiments.

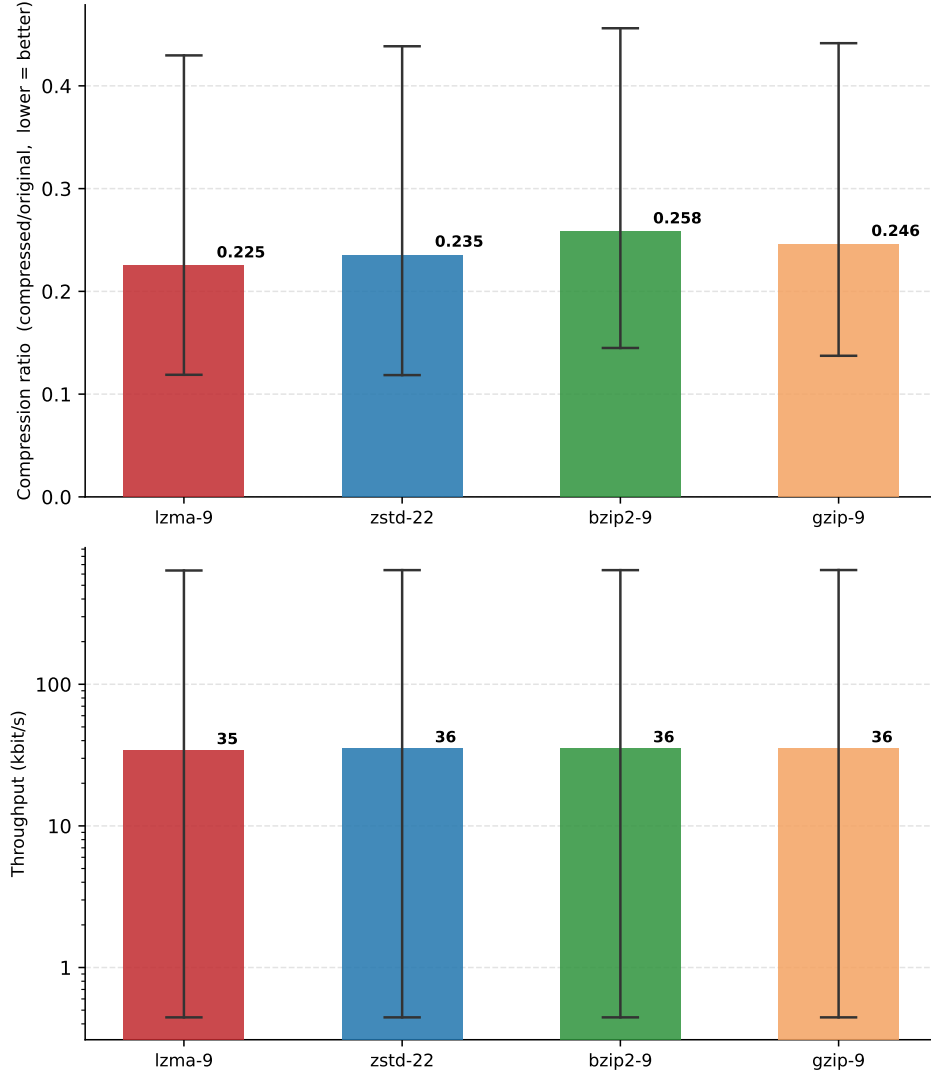


Figure 5: Average compression ratio and throughput obtained with different general-purpose compressors used as the outer compressor in the Symbol Ranking pipeline. Whiskers indicate the range between the worst and best observed results. lzma-9 provides the best compression ratio, whereas throughput is unchanged across compressors, showing that runtime is dominated by DLM inference. Based on these results, lzma-9 is used as the default outer compressor in the following experiments.

Core Configuration Analysis

We study the impact of the two algorithmic strategies introduced in this work — the commitment schedule and the initial context strategy — on the compression performance of our DLM-based approach.

For commitment schedules, Figure 6 reports compression ratio (top) and throughput (bottom) for the three schedules, separately for the Symbol Ranking (left) and the statistical (right) pipelines, across their respective parameters: the number u of tokens encoded per step for uniform-block, the initial number u_1 of tokens and the growth ratio r for the progressive approach, and the minimum number m of tokens encoded per step, and the entropy threshold τ for the entropy-based approach, for which we fix $\tau = 0.5$ as the best-performing configuration. For the same minimum number of tokens encoded per step ($m = u$), entropy-based achieves slightly better compression than uniform-block at a small throughput cost, while progressive consistently provides the worst compression ratio, despite achieving higher average throughput.

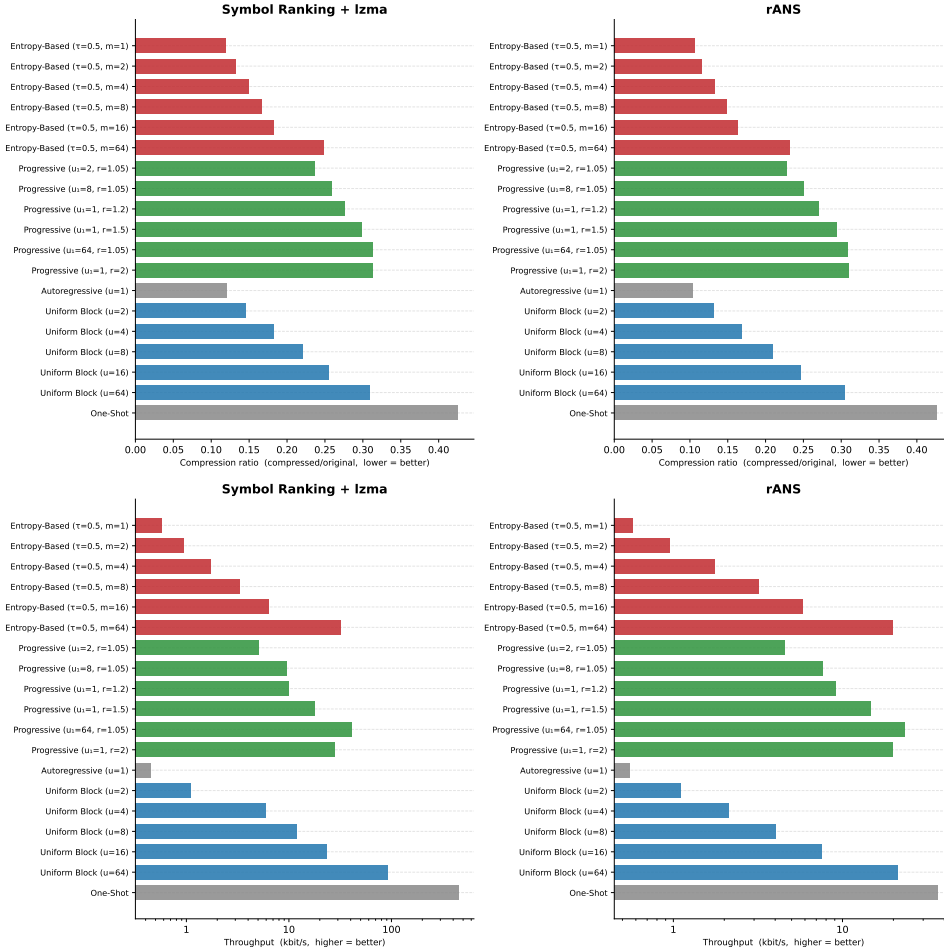


Figure 6: Average throughput (kbit/s) and compression ratio achieved by the three commitment schedules (uniform-block, progressive, and entropy-based), averaged over different values of the number of encoded tokens per step (u , u_1 , and m) and the geometric growth rate r . Results for the Symbol Ranking pipeline with lzma-9 are shown on the left, while those for the statistical pipeline with rANS are shown on the right. The gray bars denote the two limiting cases (autoregressive and one-shot, respectively $u = 1$ and $u = n$). Overall, the Symbol Ranking pipeline consistently achieves higher throughput than the rANS-based pipeline, entropy-based achieves slightly better compression than uniform-block at a small throughput cost, while progressive consistently provides the worst compression ratio, despite achieving higher average throughput.

This trend is further illustrated in Figure 7, which reports compression ratio and throughput for the Symbol Ranking pipeline with $c = 2$ initial context tokens selected via attention-rollout, and varying the minimum number of tokens encoded per step. As the number of tokens encoded per inference step increases, so does the throughput, but worsens the compression ratio. Progressive consistently provides the worst compression ratio but the highest throughput, while entropy-based achieves the best compression at the lowest throughput. Uniform-block performs similarly to entropy-based at low numbers of tokens per step, but increasingly approaches progressive as more tokens are encoded per step, for both compression ratio and throughput.

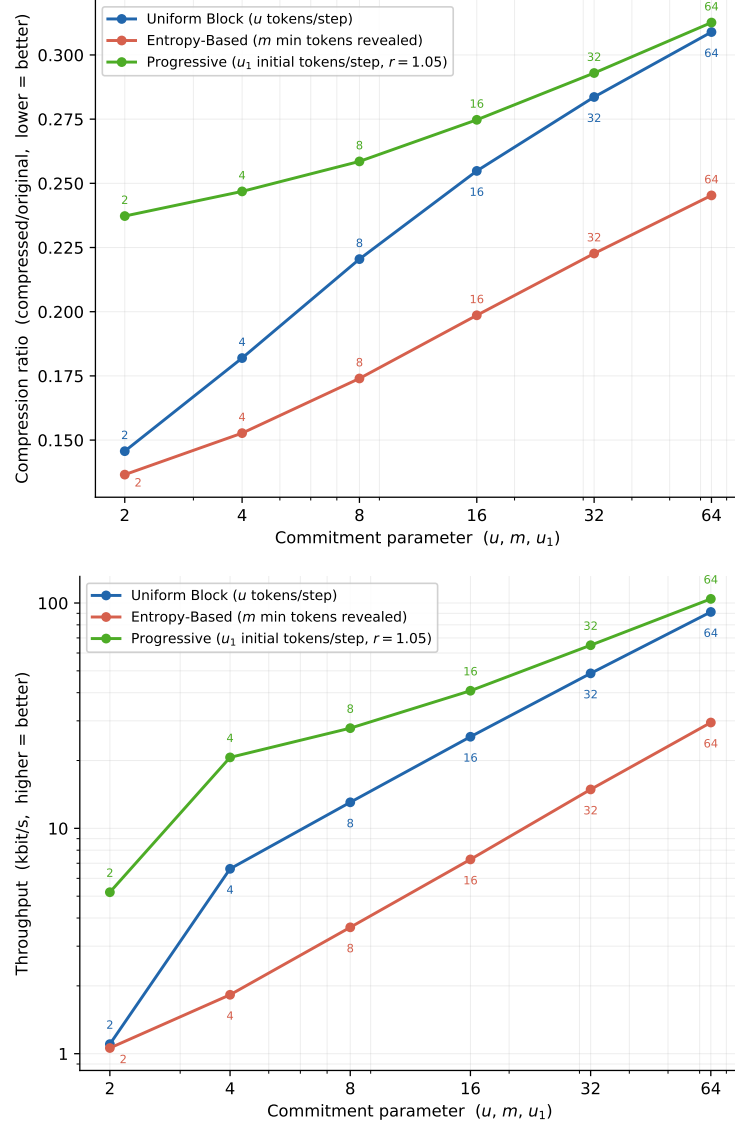


Figure 7: Compression ratio (top) and throughput (bottom) of the three commitment schedules as a function of the minimum number of symbols committed per inference. Results use a fixed configuration: symbol ranking pipeline, lzma-9 as downstream compressor, $c = 2$ unmasked initial context tokens selected via attention rollout and varying the minimum number of tokens encoded per step.

We next investigate the impact of leaving c tokens unmasked to provide the model with an initial context. Figure 8 shows the average compression ratio of the uniform-block and entropy-based schedules as c varies, with one curve for each number of tokens encoded per step — u for uniform-block and m for entropy-based. For each configuration, the optimal value of c is highlighted by the minimum of the corresponding curve. The results show that an empty context ($c = 0$) is optimal only in the autoregressive setting ($u = 1$). As before, with the increase of the number of tokens encoded per inference step, the compression ratio worsens for both approaches, but grows the optimal number of context tokens to be unmasked, making initial context increasingly relevant. In fact, improving throughput by encoding more tokens per step also requires increasing the initial context to achieve the best compression ratio. Conversely, providing too many unmasked tokens when encoding a few symbols per step is counterproductive, as the storage cost of the initial context outweighs the compression gains from DLM distributions.

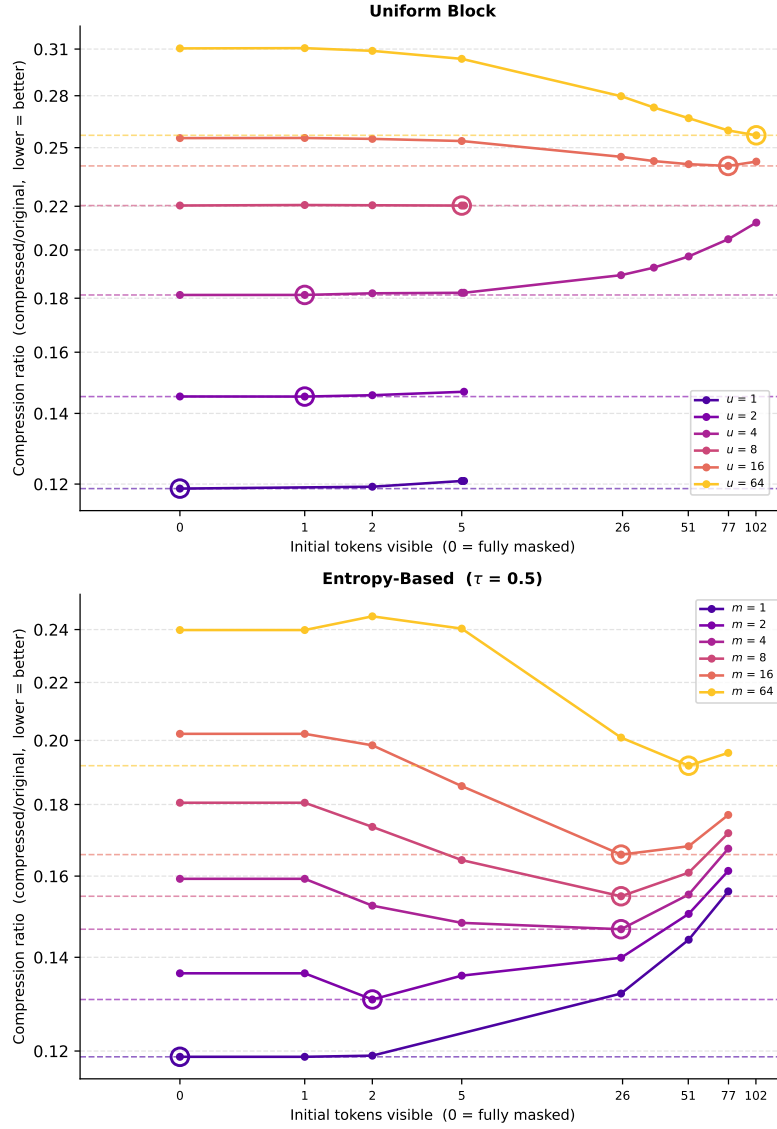


Figure 8: Average compression ratio as the number of unmasked context tokens c varies for uniform-block (top) and entropy-based (bottom) schedules. Each curve corresponds to a different number of tokens encoded per step (u for uniform-block and m for entropy-based).

Once we establish that providing a non-empty initial context $c > 0$ is indeed relevant, it is equally important to identify the most effective strategy for selecting the tokens to leave unmasked. Figures 9, 10 and 11 report the average results of the four proposed initial context strategies across different configurations, including compression pipeline (Symbol Ranking or statistical), commitment schedule, and number of tokens encoded per step. Across all configurations, attention-rollout consistently achieves the best compression ratio while maintaining throughput comparable to the other strategies. In fact, once the remaining parameters are fixed, throughput is largely insensitive to the initial context strategy, as model inference dominates the overall runtime. Consequently, even attention-rollout, which requires two additional inferences per window, incurs only a minor throughput penalty, visible mainly in the fastest Symbol Ranking configurations.

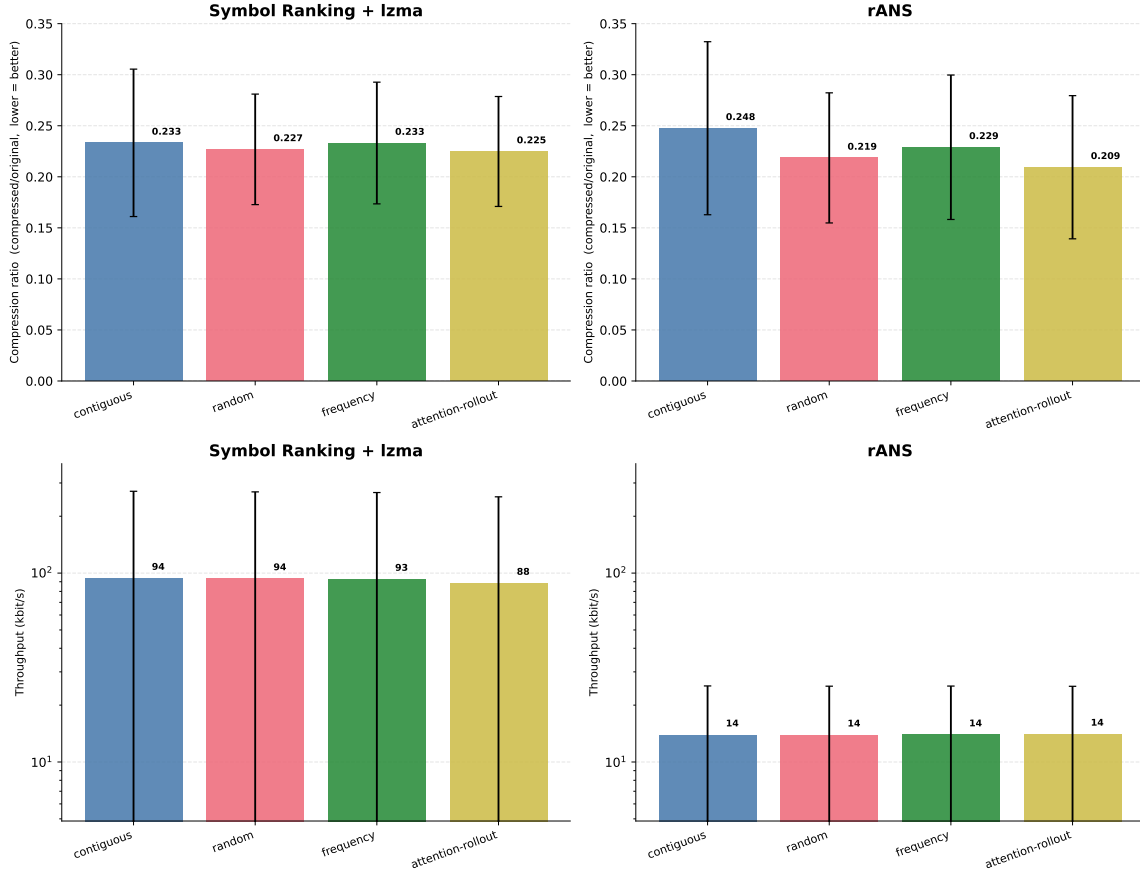


Figure 9: Average compression ratio (top) and throughput (bottom) for the four initial context strategies. Results for the Symbol Ranking pipeline are shown on the left, and for the statistical rANS pipeline on the right.

The results for the other strategies are also revealing. The contiguous strategy, the only one naturally applicable to autoregressive LLM-based approaches (where $u = 1$ and the causal mask restricts attention to left context only), is on average the least effective. While it can outperform attention-rollout in some configurations, such as Symbol Ranking with uniform-block scheduling and a few tokens encoded per step, its performance degrades substantially as more tokens are encoded per step, i.e., in faster configurations, and it is consistently outperformed by the other strategies under entropy-based scheduling, even by random selection.

These results further highlight that achieving faster neural compression while retaining competitive compression ratios requires moving beyond the constraints imposed by autoregressive generation (i.e., $u = 1$ and causal mask), as we do in this paper by investigating diffusion-language-based compression approaches (in which $u > 1$ and attending to any position is possible).

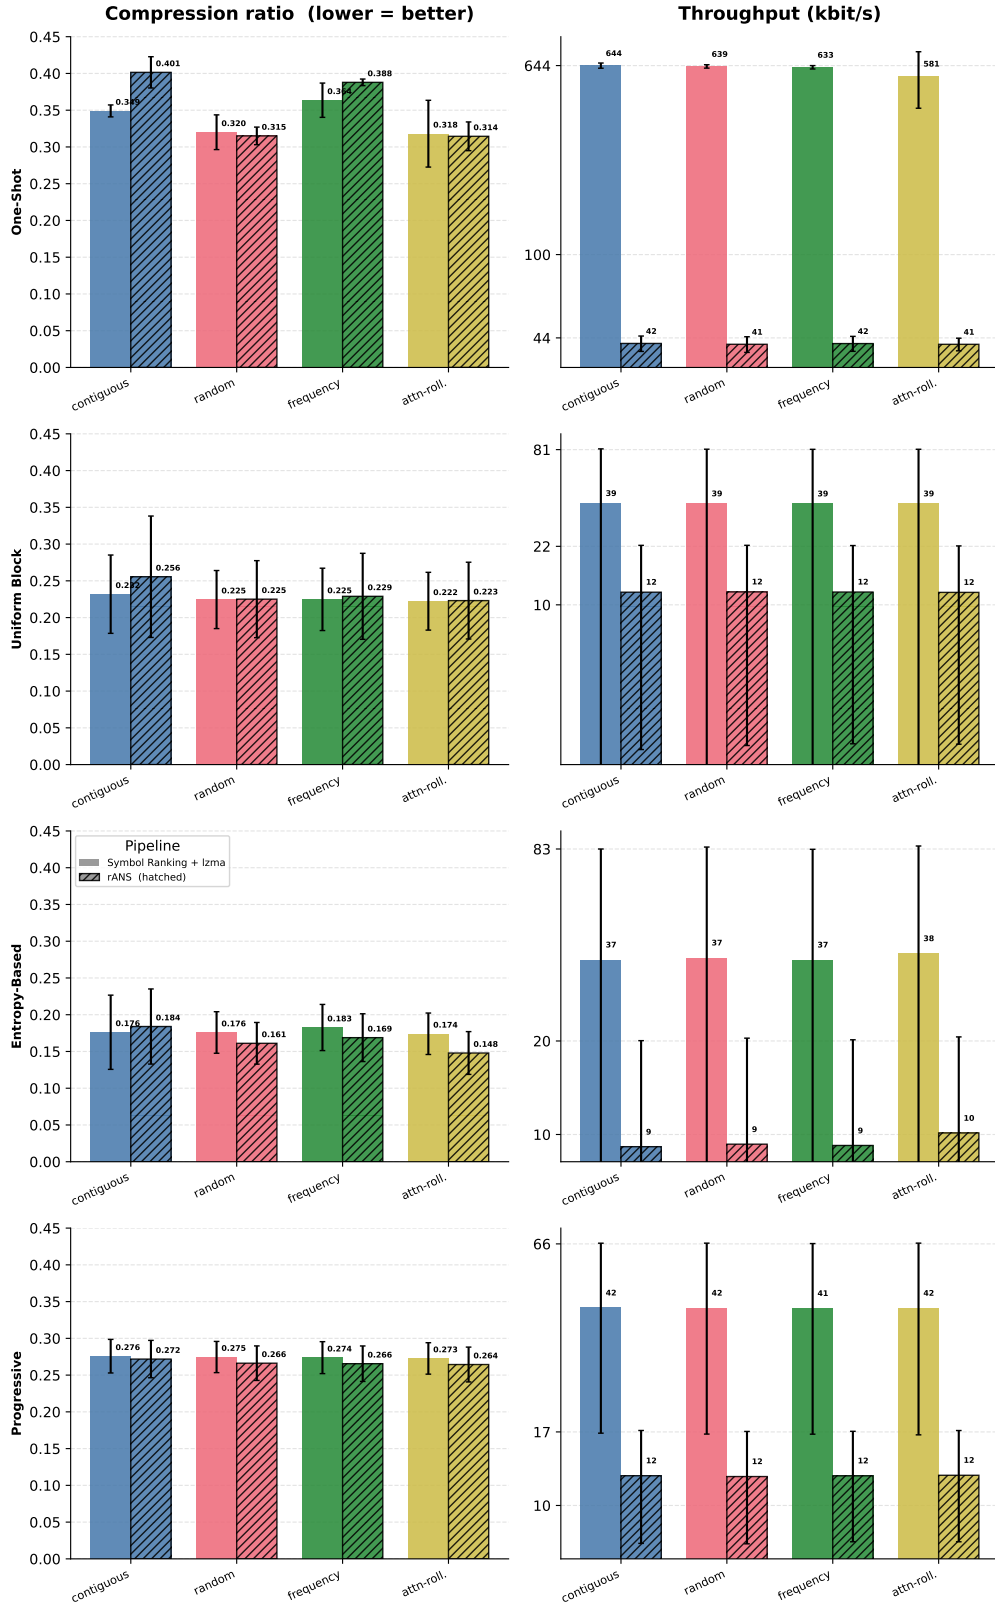


Figure 10: Average compression ratio (left) and throughput (right) for the four initial context strategies, grouped by compression pipeline (Symbol Ranking and statistical rANS) and commitment schedule. One-shot (i.e., $u = n$) is reported separately from uniform-block to highlight its distinct behavior.

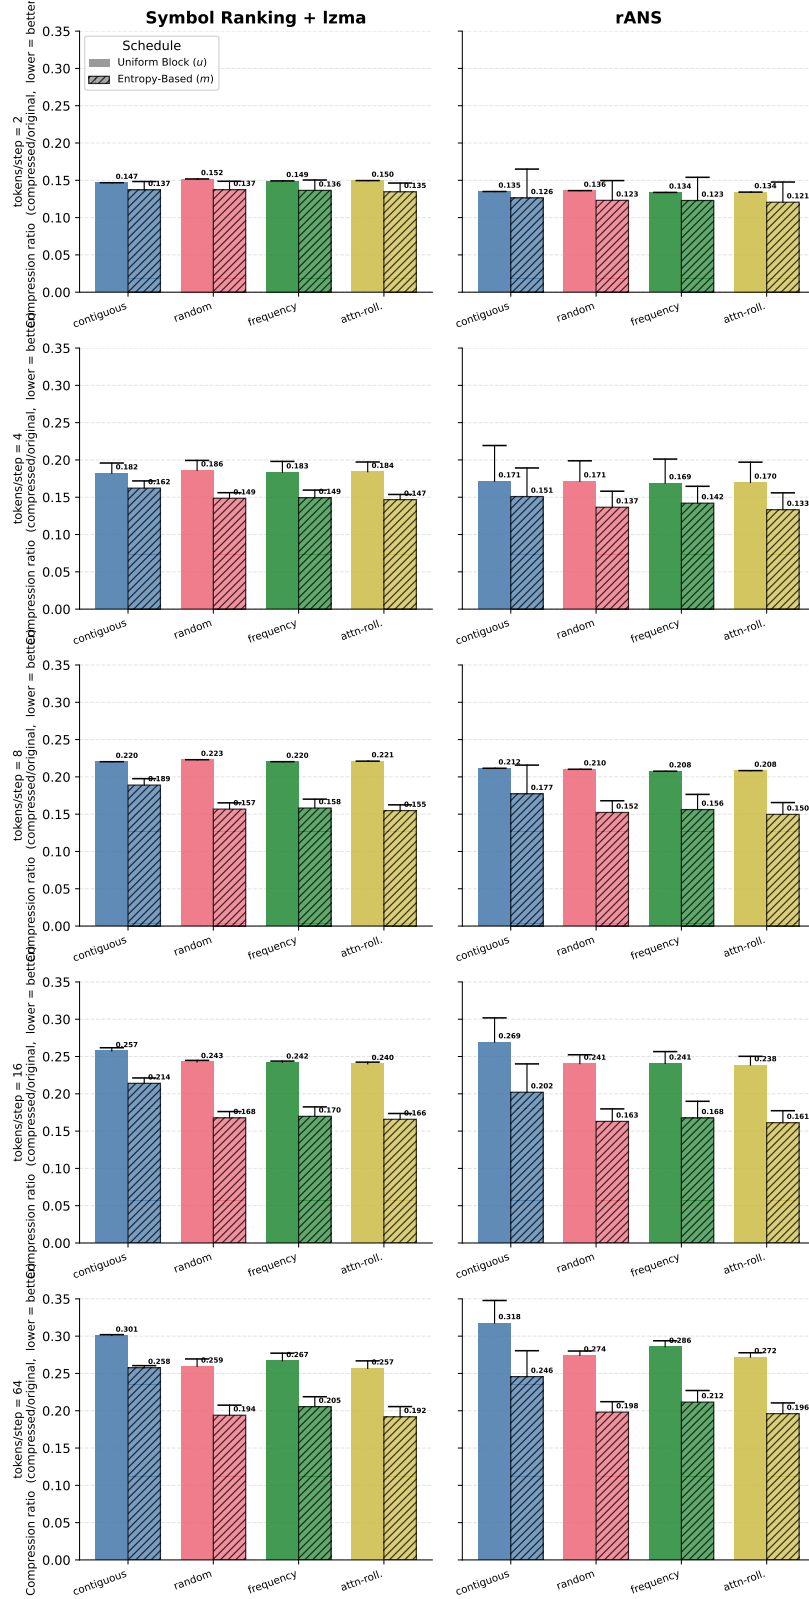


Figure 11: Average compression ratio for the four initial context strategies, grouped by compression pipeline: Symbol Ranking (left) and statistical rANS (right). Results are further divided by commitment schedule (uniform-block and entropy-based) and by the number of tokens encoded per step, given by u for uniform-block and m for entropy-based.