

Warner Electronics (I) Pvt. Ltd.

Trueview



RTMP & FTP User Manual

for T18194-A & T18195-A



Table of Contents

INTRODUCTION OF RTMP	2
RTMP CONFIGURATION STEPS (WEB ACCESS, APPLICATION, SDK).....	3
INTRODUCTION OF FTP	6
FTP CONFIGURATION ON WEB ACCESS	6
FTP CONFIGURATION ON WEB SDK	10
HOW TO CHECK FTP UPLOADS	11
FTP TEST CONDITION WITH CONCLUSION	14

Introduction of RTMP:

RTMP, or **Real-Time Messaging Protocol**, is a technology developed for streaming audio, video, and data over the internet with minimal delay. It allowing live broadcasts and real-time communication between servers and clients. RTMP is widely used in live streaming events and video conferencing due to its ability to maintain a constant connection and adapt to varying network conditions, ensuring smooth and low-latency playback. Despite newer streaming protocols emerging, RTMP remains a common choice for live video delivery.

Our cameras are equipped with RTMP protocol support, enabling direct integration with RTMP servers for seamless live streaming. By entering the RTMP server URL—such as those used for platforms like YouTube, OBS Studio or you can initiate a real-time broadcast without the need for intermediary software or additional hardware configurations. This functionality streamlines the live streaming process, providing a straightforward and efficient solution for delivering high-quality content to your audience across multiple platforms.


RTMP Configuration Steps

- **RTMP Configuration Via Web Browser.**


Before starting the streaming, you need RTMP Server for e.g. YouTube:

1. Goto YouTube Channel
2. Click On GO Live
3. Copy the Streaming URL and Stream Key
4. Connect camera in same network and open on browser via camera IP then goto network settings, then rtmp settings and enable the rtmp switch
5. Paste the streaming URL and before Paste the stream key add Forward slash “/”.
6. Your Complete RTMP link Look like this **rtmp://a.rtmp.youtube.com/live2/ jhru-wc86-tje3-1781-4rwy**
7. Save it

You can refer to the below image for further clarification:

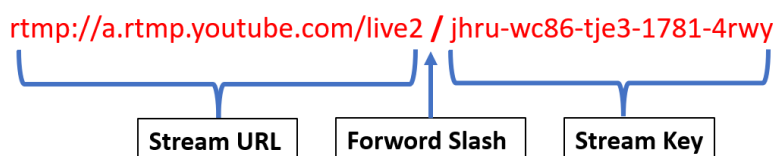

You can refer to the below image for RTMP Configuration through web access:

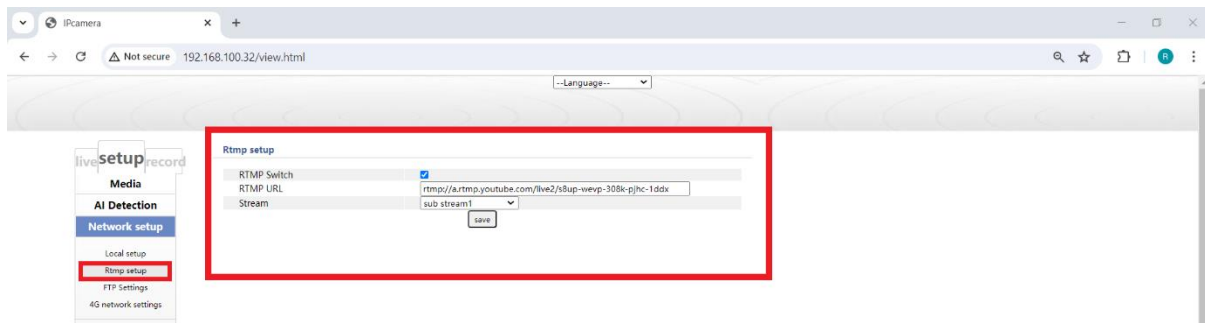


Note: You can do above settings only when your camera RTMP supported and Support Web Access.

- **RTMP Configuration Via Application.**

Before starting the streaming, you need RTMP Server for e.g. YouTube:

1. Goto YouTube Channel
2. Click On GO Live
3. Copy the Streaming URL and Stream Key
4. Configure the camera and goto Advance Settings, then RTMP Status Settings
5. Paste the streaming URL and before Paste the stream key add Forward slash "/"
6. Your Complete RTMP link Look like this **rtmp://a.rtmp.youtube.com/live2/ jhru-wc86-tje3-1781-4rwy**
7. Save it

You can refer to the below image for RTMP Configuration:

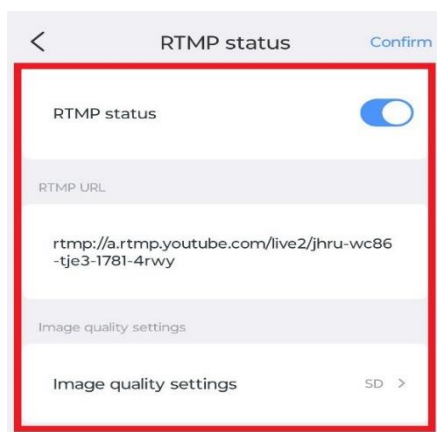

Note: You can do above settings only when your camera RTMP supported.


- **RTMP Configuration Via Web SDK**

Before starting the streaming, you need RTMP Server for e.g. YouTube:

1. Open SDK and Run on Browser using Live HTTP Server

2. Connect Device Via Filling Camera id and password
3. Click on Connect Device
4. Click on get remote settings parameters
5. Goto RTMP Settings and enable it via clicking on rtmp check box.
6. Copy your rtmp link and paste it in web SDK rtmp settings
7. Your Complete RTMP link Look like this **rtmp://a.rtmp.youtube.com/live2/jhru-wc86-tje3-1781-4rwy**
8. Select your stream
9. Click on set to save settings
10. Click on “Get” to view the Connection Status of RTMP

You can refer to the below image for RTMP Configuration:

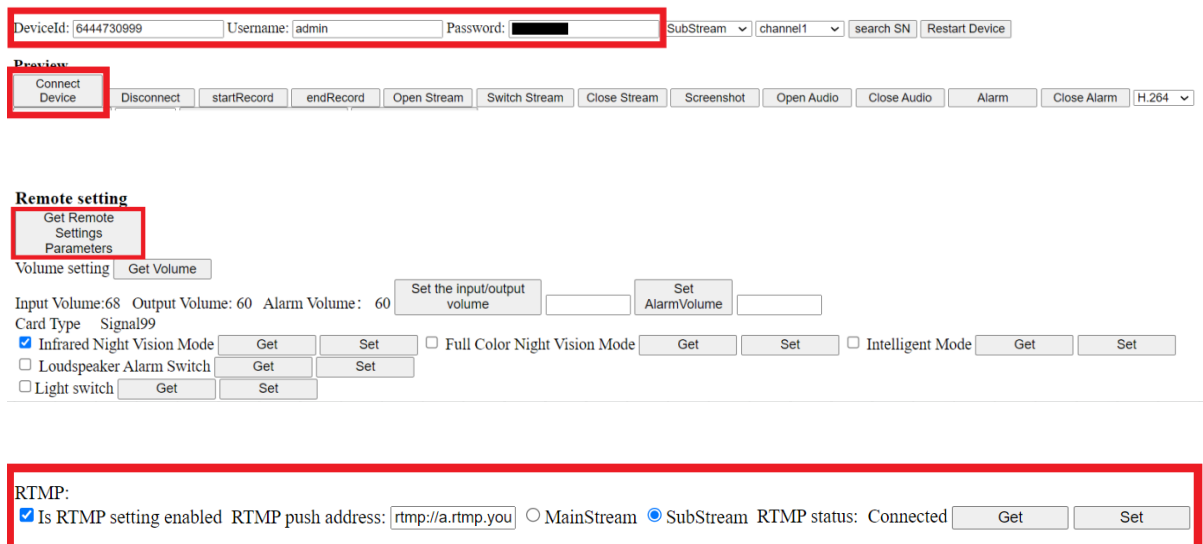

DeviceId: 6444730999 Username: admin Password: [REDACTED] SubStream channel1 search SN Restart Device

Device:
 H.264

Remote setting


Input Volume: 68 Output Volume: 60 Alarm Volume: 60

Card Type Signal99
☒ Infrared Night Vision Mode ☐ Full Color Night Vision Mode ☐ Intelligent Mode
☐ Loudspeaker Alarm Switch
☐ Light switch

RTMP:
☒ Is RTMP setting enabled RTMP push address: rtmp://a.rtmp.you ☐ MainStream ☒ SubStream RTMP status: Connected

Note: You can do above settings only when your camera RTMP supported.

You can refer to the below image for RTMP Streaming:

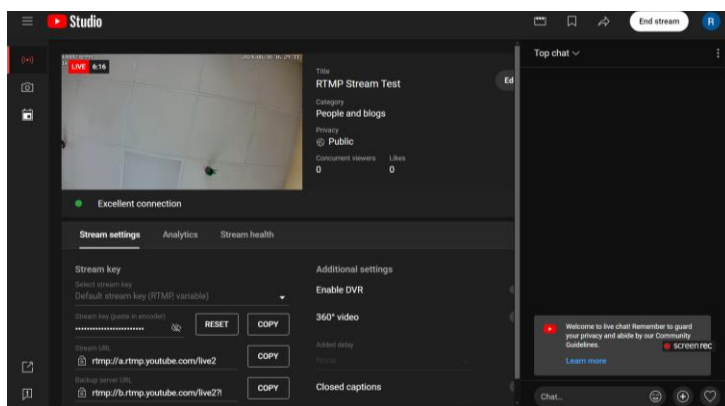

Introduction of FTP:

FTP, or **File Transfer Protocol**, is a standard network protocol used to transfer files between a client and a server over a network. It allows users to upload, download, and manage files on a remote server. FTP is commonly used for tasks like website maintenance, sharing large files, and transferring data between computers.


In our CCTV system, FTP (File Transfer Protocol) is used to upload video files and alert snapshot from the camera to an FTP server. Once configured, the CCTV system transfers recorded footage and alert snapshot to the FTP server based on a set schedule or event triggers, such as motion detection. This setup provides an easy way to back up and access video files remotely.

FTP Configuration on Web Access


- **FTP Configuration Via Web Browser Steps.**

Before starting the uploading, you need FTP Server


1. Connect Camera in same network and open on browser using camera IP, then Goto Network Setup
2. Goto FTP Setting and Enable the FTP Switch
3. Enable the FTP Synchronization Switch

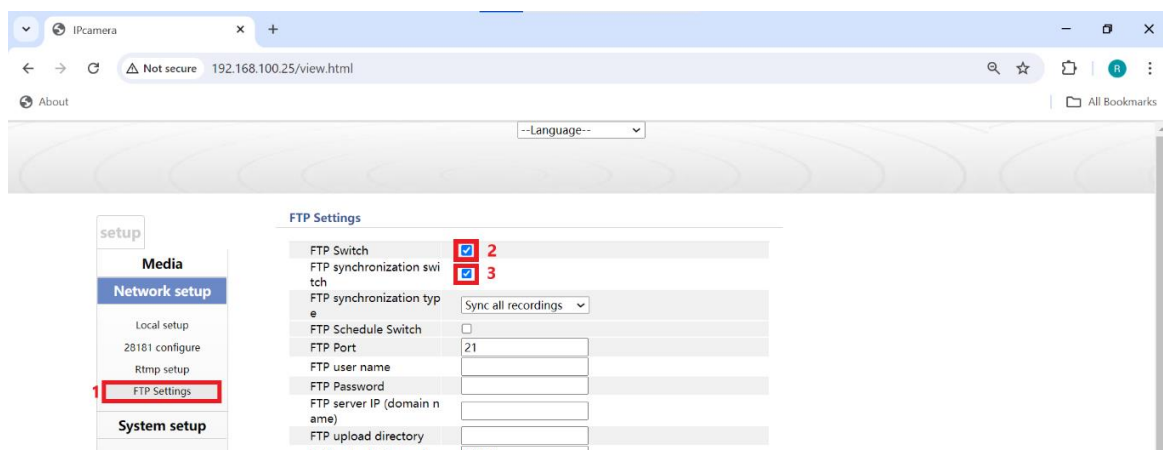

4. Select FTP Synchronization Type



5. Enable the ftp schedule switch and drag the cursor for selecting the time (if you want to upload particular time recording)

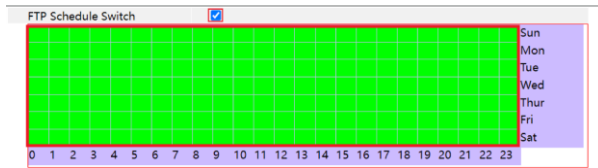

6. Fill Your Own FTP Server Details as given below.

FTP Port	21	Fill Own FTP Server Details
FTP user name	trueview	
FTP Password	*****	
FTP server IP (domain name)	49.248.88.101	

7. Name FTP Upload Directory.

FTP upload directory	/New Folder
FTP upload video path	/video
FTP upload picture path	/picture

8. Select the Upload Way

Alarm: You will get only snapshot No matter which content you are selecting.

FTP Upload Way	Alarm
----------------	-------

Time: You will get 60 second interval snapshot, in which you need to select content.

FTP upload time interval(Seconds)	60
FTP Upload Way	Time

9. Select the Upload Content and Click on Test Button to Check the Status.

FTP upload content	Upload pictures and video
Test	Upload Picture Upload Video Upload pictures and video


10. Click On Save Button

FTP Configuration Save

Note: You can do above settings only when your camera FTP supported and Support Web Access.

- FTP Configuration Setting for Alarm Data Uploads (Only Snapshot for all time)

You can refer to the below image for FTP Configuration

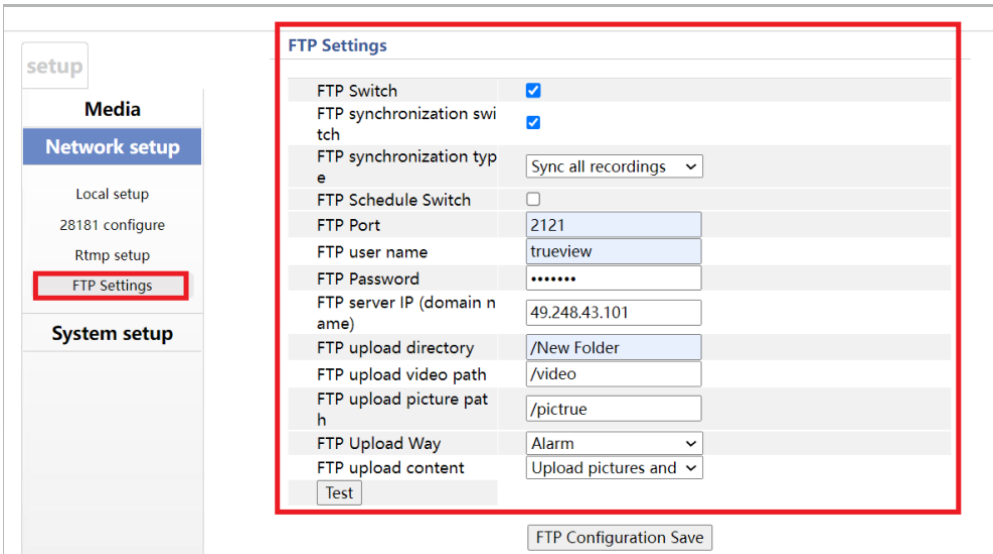


The screenshot shows the 'FTP Settings' configuration page. On the left sidebar, 'FTP Settings' is highlighted under the 'Network setup' section. The main configuration area includes the following fields:

FTP Settings	
FTP Switch	☒
FTP synchronization switch	☒
FTP synchronization type	Sync all recordings
FTP Schedule Switch	☐
FTP Port	2121
FTP user name	trueview
FTP Password	*****
FTP server IP (domain name)	49.248.43.101
FTP upload directory	/New Folder
FTP upload video path	/video
FTP upload picture path	/pictrue
FTP Upload Way	Alarm
FTP upload content	Upload pictures and
Test	

At the bottom right of the configuration area is a button labeled 'FTP Configuration Save'.

- FTP Configuration Setting for Alarm Data Uploads (Only Snapshot for selected time)

You can refer to the below image for FTP Configuration

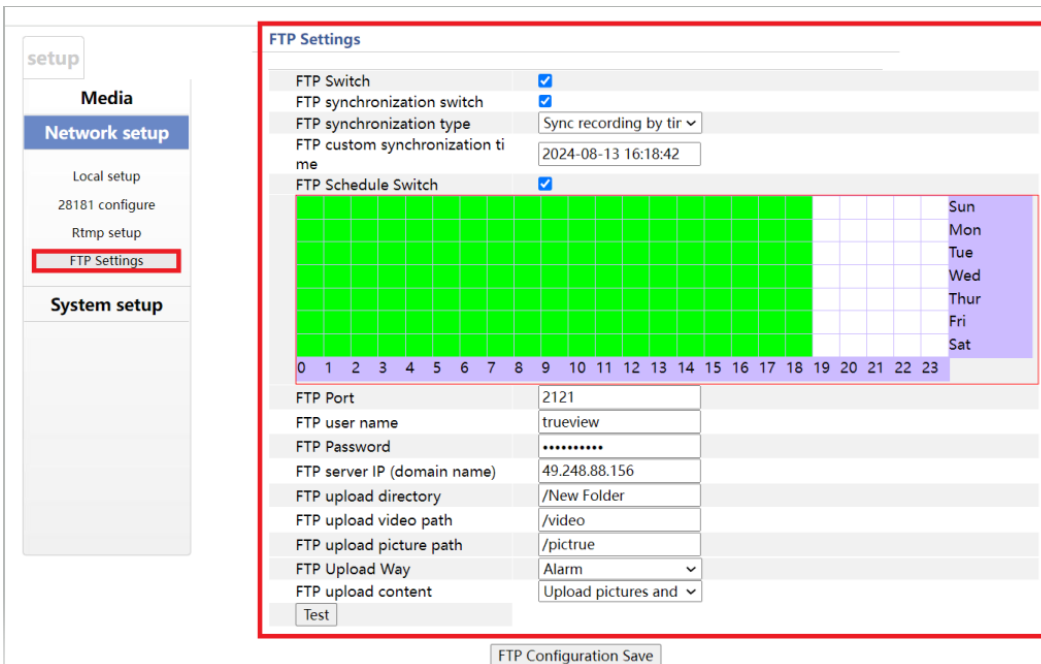

The screenshot shows the 'FTP Settings' configuration page for 'Selected time' uploads. The 'FTP Schedule Switch' is checked, and a calendar grid is displayed. The grid shows days 0 through 23, with days 0-18 highlighted in green and days 19-23 in white. The days of the week are listed on the right: Sun, Mon, Tue, Wed, Thur, Fri, Sat.

FTP Settings	
FTP Switch	☒
FTP synchronization switch	☒
FTP synchronization type	Sync recording by time
FTP custom synchronization time	2024-08-13 16:18:42
FTP Schedule Switch	☒
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 Sun Mon Tue Wed Thur Fri Sat	
FTP Port	2121
FTP user name	trueview
FTP Password	*****
FTP server IP (domain name)	49.248.88.156
FTP upload directory	/New Folder
FTP upload video path	/video
FTP upload picture path	/pictrue
FTP Upload Way	Alarm
FTP upload content	Upload pictures and
Test	

At the bottom right of the configuration area is a button labeled 'FTP Configuration Save'.

- FTP Configuration Setting for Time Data Uploads (Video and Snapshot for all time)

You can refer to the below image for FTP Configuration

setup

Media

Network setup

Local setup

28181 configure

Rtmp setup

FTP Settings

System setup

FTP Settings

FTP Switch

FTP synchronization switch

FTP synchronization type

FTP Schedule Switch

FTP Port

FTP user name

FTP Password

FTP server IP (domain name)

FTP upload directory

FTP upload video path

FTP upload picture path

FTP upload time interval(Seconds)

FTP Upload Way

FTP upload content

Test

FTP Configuration Save

- FTP Configuration Setting for Time Data Uploads (Video and Snapshot for selected time)

setup

Media

Network setup

Local setup

28181 configure

Rtmp setup

FTP Settings

System setup

FTP Settings

FTP Switch

FTP synchronization switch

FTP synchronization type

FTP custom synchronization time

FTP Schedule Switch

FTP Port

FTP user name

FTP Password

FTP server IP (domain name)

FTP upload directory

FTP upload video path

FTP upload picture path

FTP Upload Way

FTP upload content

Test

2024-08-13 15:22:50

0

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

Sun

Mon

Tue

Wed

Thur

Fri

Sat

FTP Configuration Save

FTP Configuration via SDK

- **FTP Configuration Via Web SDK Steps**

Before starting the uploading, you need FTP Server:

1. Open SDK and Run on Browser using Live HTTP Server
2. Connect Device Via Filling Camera id and password
3. Click on Connect Device
4. Click on get remote settings parameters
5. Goto FTP Settings and enable it via clicking on FTP Switch check box.
6. Enable FTP Schedule Switch if you want to upload some period of time data or leave it.
7. Fill the FTP server details like port number, username, password and server IP.
8. Name FTP Upload Directory
9. Enable FTP Synchronization switch
10. Select FTP Upload Way
11. Select FTP synchronization type
12. Select FTP upload content
13. Click on "SET FTP" to save settings
14. Refresh the page and connect device.
15. Click on "Get FTP" to view the Saved FTP Settings

Note: Camera Data will Push on FTP Only when all the information correctly filled.

DeviceId: 6444730999 Username: admin Password: XXXXXXXXXX SubStream ▼ channel1 ▼ search SN Restart Device

Preview

Connect Device

 Disconnect startRecord endRecord Open Stream Switch Stream Close Stream Screenshot Open Audio Close Audio Alarm Close Alarm H.264 ▼

Remote setting

Get Remote Settings Parameters

Volume setting Get Volume

Input Volume: 68 Output Volume: 60 Alarm Volume: 60 Set the input/output volume Set AlarmVolume

Card Type Signal99

☒ Infrared Night Vision Mode Get Set ☐ Full Color Night Vision Mode Get Set ☐ Intelligent Mode Get Set

☐ Loudspeaker Alarm Switch Get Set

☐ Light switch Get Set

FTP: Get FTP Set FTP Test FTP

FTP Switch: ☒
FTP Schedule Switch: ☐ Select Schedule
FTP Synchronization Switch: ☒

FTP Port:
FTP UploadWay: time
FTP synchronization type: Sync all recordings

FTP custom synchronization time:
FTP user name:
FTP Password:

FTP server IP (domain name):
FTP upload directory:
FTP upload picture path:

FTP upload video path:
FTP upload time interval(Seconds):
FTP upload content: Upload pictures and videos

Note: You can do above settings only when your camera FTP supported.

How to Check FTP Upload

1. Go on File Explorer
2. Enable the FTP Synchronization Switch
3. Enter in search bar <ftp://serverip:portnumber/>



4. Enter username and password (after login it will show ftp directory)



5. Open FTP Directory It will show Camera folder for e.g "IPC-S5E16444730999"



6. Open Camera Folder It will show "Picture" and "video" Folder.




Picture: it contains real time snapshot of each 60 second interval time.

Video: it Contains the camera playback video recordings.

Note: camera will push only real time snapshot, if the camera internet gone (offline) for some period of time it will not upload offline time snapshot but it will sync the offline time videos if you enabled the **ftp synchronization** and **ftp upload way time**

7. Open Picture Folder It will show all the snapshot upload by camera.

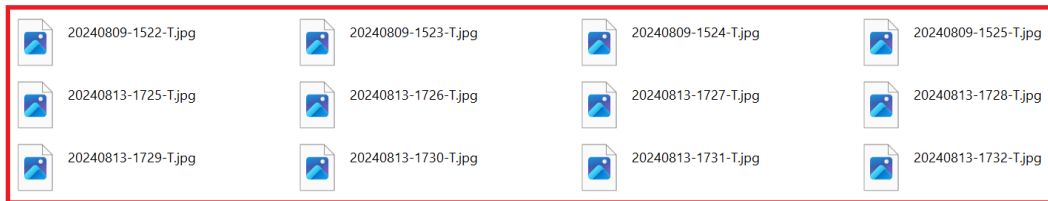

8. Open Video Folder It will show all the day wise video recordings upload by camera.



Remark:

1. FTP Data Upload totally depend upon your **Internet Network Strength and Connectivity.**
2. When Camera is offline then it will **not push any data on FTP server.**
3. When you select the Upload Way in **“Alarm”** then **video recording is not uploading in any condition.**
4. Without SD card data will **not upload on FTP Server in any condition.**
5. Camera will push only **real time snapshot on ftp server.**
6. If the camera internet gone (**offline**) for some period of time it will **not upload offline time snapshot, it will start uploading snapshot form internet connection resume time.**
7. Use **“Alarm”** way content upload **only for Snapshot upload**, if you want to upload Snapshot and Videos **Use “Time” Way Content Upload.**


FTP Test Condition with Conclusion (Alarm and Time)

Connect camera in same network and open on browser via camera IP then Goto FTP Setting and fill your FTP Server Details and only enable the setting those given in test.

- **TEST 1**

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync recording by time(days)”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Alarm”**
5. Select FTP upload content **“upload Picture”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 1.

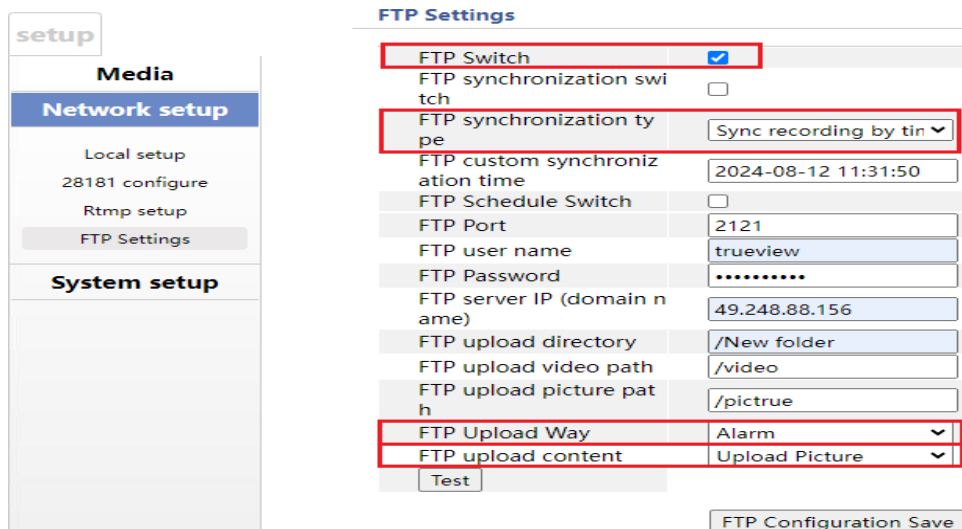


Conclusion :- Pictures upload successfully got each minutes file on ftp server, motion happen or not doesn't matter.

- **TEST 2**

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync all recordings”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Alarm”**
5. Select FTP upload content **“upload Picture”**
6. Click on Test Button to Check the Status.

7. Click On Save Button

You can refer to the below image for Test 2.

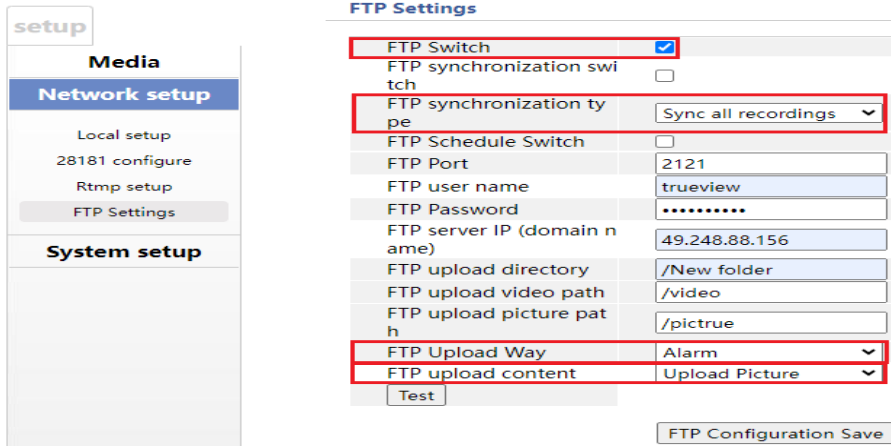


Conclusion :- Pictures upload successfully got each minutes file on ftp server, motion happen or not doesn't matter.

• TEST 3

1. Enable the FTP Switch
2. Select FTP synchronization type "**sync recording by time(days)**"
3. Fill the FTP server credentials.
4. Select FTP Upload Way "**Alarm**"
5. Select FTP upload content "**upload Pictures and videos**"
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 3.

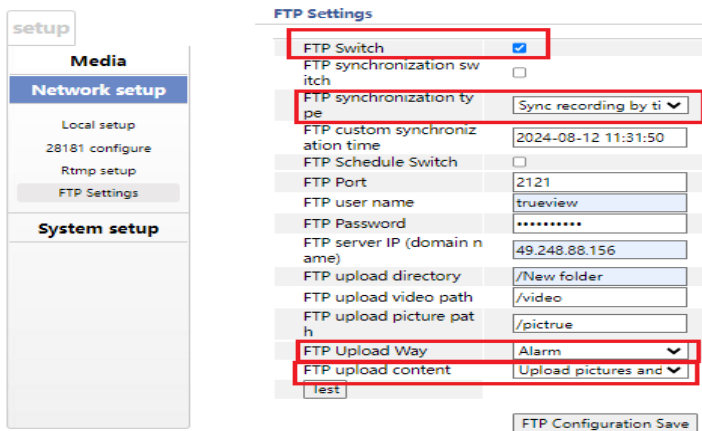


Conclusion :- Pictures upload successfully got each minutes file on ftp server, motion happen or not doesn't matter.

• TEST 4

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync all recordings”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Alarm”**
5. Select FTP upload content **“upload Pictures and videos”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 4.

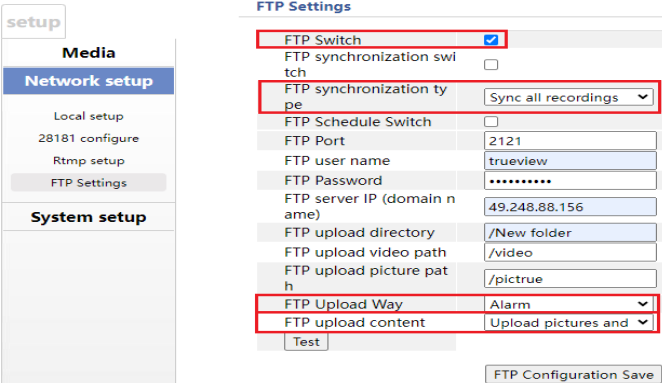

Conclusion :- Pictures upload successfully got each minutes file on ftp server, motion happen or not doesn't matter.

• TEST 5

1. Enable the FTP Switch
2. Enable the FTP **“synchronization switch”**
3. Select FTP synchronization type **“sync recording by time(days)”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Alarm”**
6. Select FTP upload content **“upload Picture”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 5.

setup

Media

Network setup

Local setup

28181 configure

Rtmp setup

FTP Settings

System setup

FTP Settings

FTP Switch	☒
FTP synchronization switch	☒
FTP synchronization type	Sync recording by time
FTP custom synchronization time	2024-08-12 11:31:50
FTP Schedule Switch	☐
FTP Port	2121
FTP user name	trueview
FTP Password	*****
FTP server IP (domain name)	49.248.88.156
FTP upload directory	/New folder
FTP upload video path	/video
FTP upload picture path	/picttrue
FTP Upload Way	Alarm
FTP upload content	Upload Picture
Test	
FTP Configuration Save	

Conclusion :- Pictures upload successfully got each minutes file on ftp server, motion happen or not doesn't matter.

• TEST 6

1. Enable the FTP Switch
2. Enable the FTP **"synchronization switch"**
3. Select FTP synchronization type **"sync all recordings"**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **"Alarm"**
6. Select FTP upload content **"upload Picture"**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 6.

setup

Media

Network setup

Local setup

28181 configure

Rtmp setup

FTP Settings

System setup

FTP Settings


FTP Switch	☒
FTP synchronization switch	☒
FTP synchronization type	Sync all recordings
FTP Schedule Switch	☐
FTP Port	2121
FTP user name	trueview
FTP Password	*****
FTP server IP (domain name)	49.248.88.156
FTP upload directory	/New folder
FTP upload video path	/video
FTP upload picture path	/picttrue
FTP Upload Way	Alarm
FTP upload content	Upload Picture
Test	
FTP Configuration Save	

Conclusion :- Pictures upload successfully got each minutes file on ftp server, motion happen or not doesn't matter.

- **TEST 7**

1. Enable the FTP Switch
2. Enable the FTP **“synchronization switch”**
3. Select FTP synchronization type **“sync recording by time(days)”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Alarm”**
6. Select FTP upload content **“upload Pictures and videos”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 7.

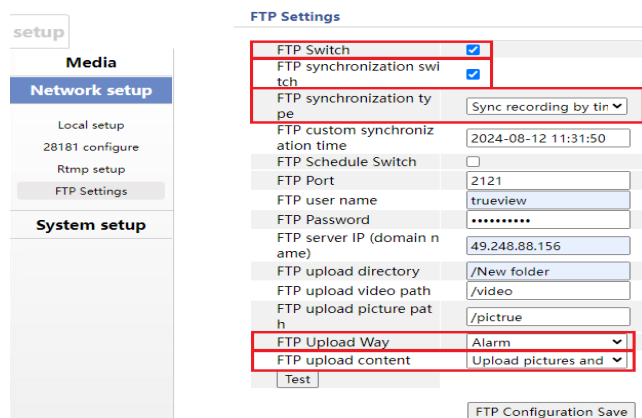


Conclusion :- Pictures upload successfully got each minutes file on ftp server, motion happen or not doesn't matter.

- **TEST 8**

1. Enable the FTP Switch
2. Enable the FTP **“synchronization switch”**
3. Select FTP synchronization type **“sync all recordings”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Alarm”**
6. Select FTP upload content **“upload Pictures and videos”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 8.

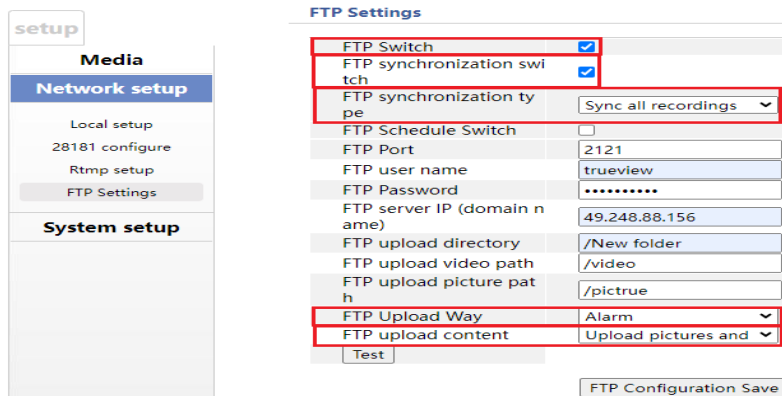


Conclusion :- Pictures upload successfully got each minutes file on ftp server, motion happen or not doesn't matter.

• TEST 9

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync recording by time(days)”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Alarm”**
5. Select FTP upload content **“upload video”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 9.

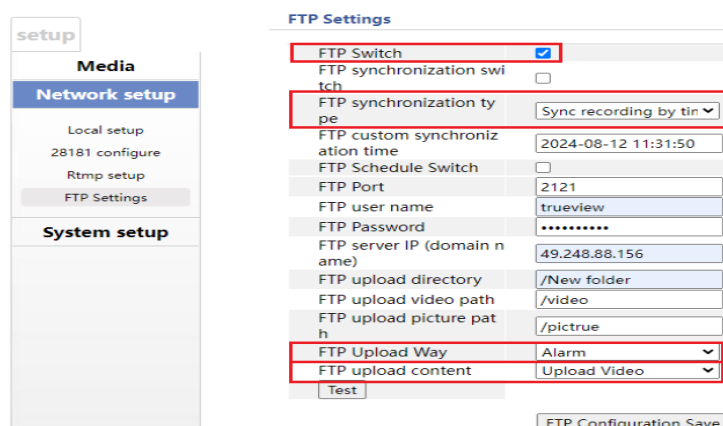


Conclusion :- videos is not uploaded. (Read Remark)

- **TEST 10**

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync all recordings”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Alarm”**
5. Select FTP upload content **“upload video”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 10.

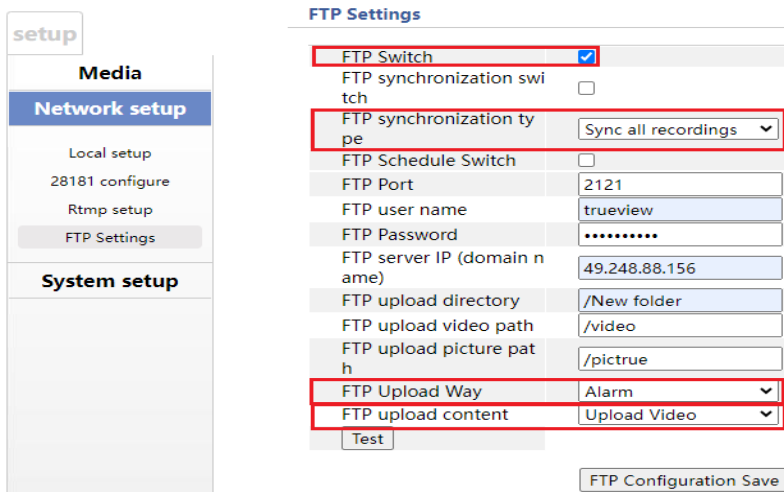


FTP Settings	
FTP Switch	☒
FTP synchronization switch	☐
FTP synchronization type	Sync all recordings
FTP Schedule Switch	☐
FTP Port	2121
FTP user name	trueview
FTP Password	*****
FTP server IP (domain name)	49.248.88.156
FTP upload directory	/New folder
FTP upload video path	/video
FTP upload picture path	/pictrue
FTP Upload Way	Alarm
FTP upload content	Upload Video
Test FTP Configuration Save	

Conclusion :- videos is not uploaded. (Read Remark)

- **TEST 11**

1. Enable the FTP Switch
2. Enable the FTP **“Synchronization Switch”**
3. Select FTP synchronization type **“sync recording by time(days)”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Alarm”**
6. Select FTP upload content **“upload video”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 11.

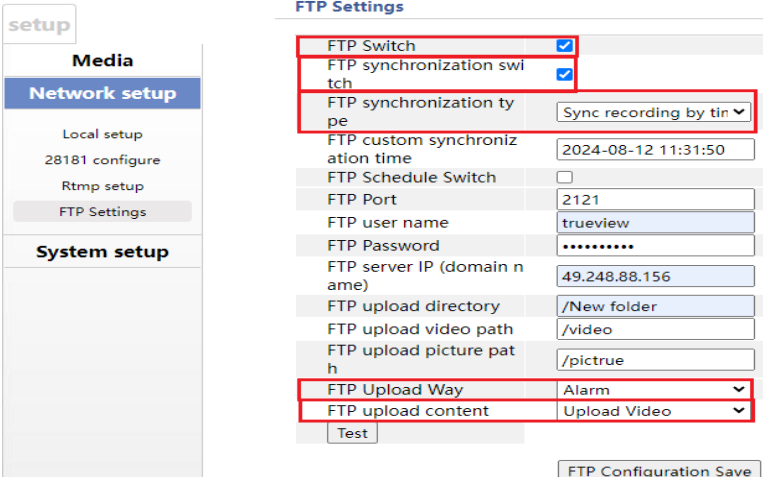


FTP Settings	
FTP Switch	☒
FTP synchronization switch	☒
FTP synchronization type	Sync recording by time
FTP custom synchronization time	2024-08-12 11:31:50
FTP Schedule Switch	☐
FTP Port	2121
FTP user name	trueview
FTP Password	*****
FTP server IP (domain name)	49.248.88.156
FTP upload directory	/New folder
FTP upload video path	/video
FTP upload picture path	/picttrue
FTP Upload Way	Alarm
FTP upload content	Upload Video
Test FTP Configuration Save	

Conclusion :- videos is not uploaded. (Read Remark)

• TEST 12

1. Enable the FTP Switch
2. Enable the FTP “synchronization switch”
3. Select FTP synchronization type “sync all recordings”
4. Fill the FTP server credentials.
5. Select FTP Upload Way “Alarm”
6. Select FTP upload content “upload video”
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 12.

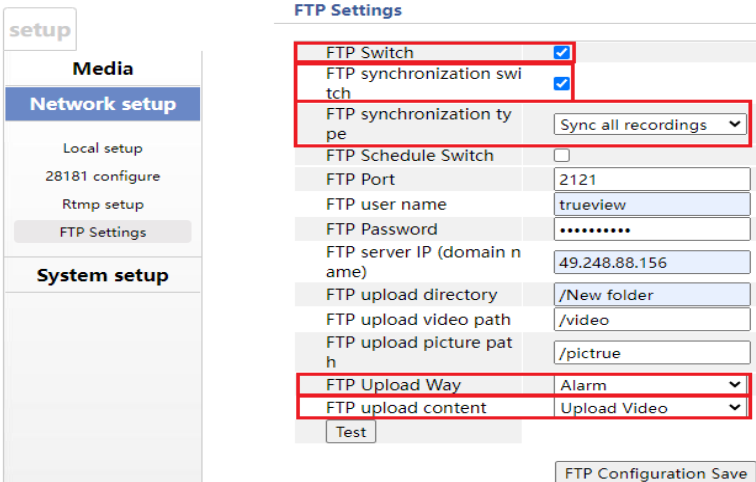


FTP Settings	
FTP Switch	☒
FTP synchronization switch	☒
FTP synchronization type	Sync all recordings
FTP Schedule Switch	☐
FTP Port	2121
FTP user name	trueview
FTP Password	*****
FTP server IP (domain name)	49.248.88.156
FTP upload directory	/New folder
FTP upload video path	/video
FTP upload picture path	/picttrue
FTP Upload Way	Alarm
FTP upload content	Upload Video
Test FTP Configuration Save	

Conclusion :- videos is not uploaded (Read Remark)

- **TEST 13**

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync all recordings”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Time”**
5. Select FTP upload content **“upload picture”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 13.

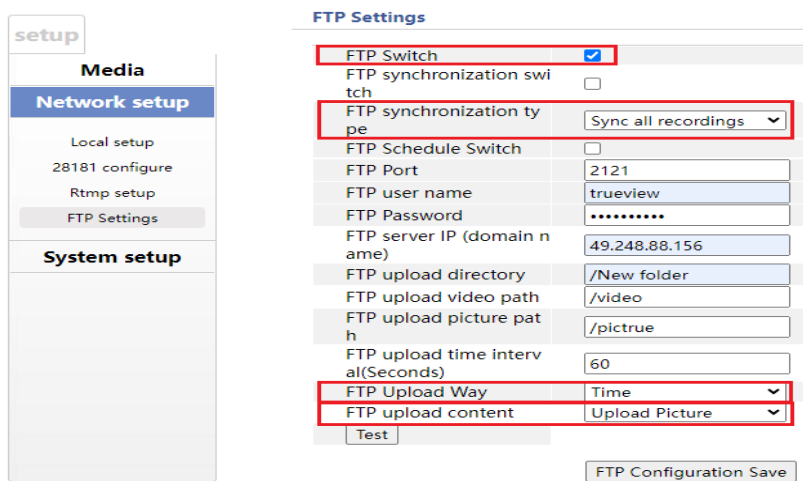


Conclusion :- Pictures upload successfully got each minutes file on ftp server.

- **TEST 14**

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync all recordings”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Time”**
5. Select FTP upload content **“upload video”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 14.

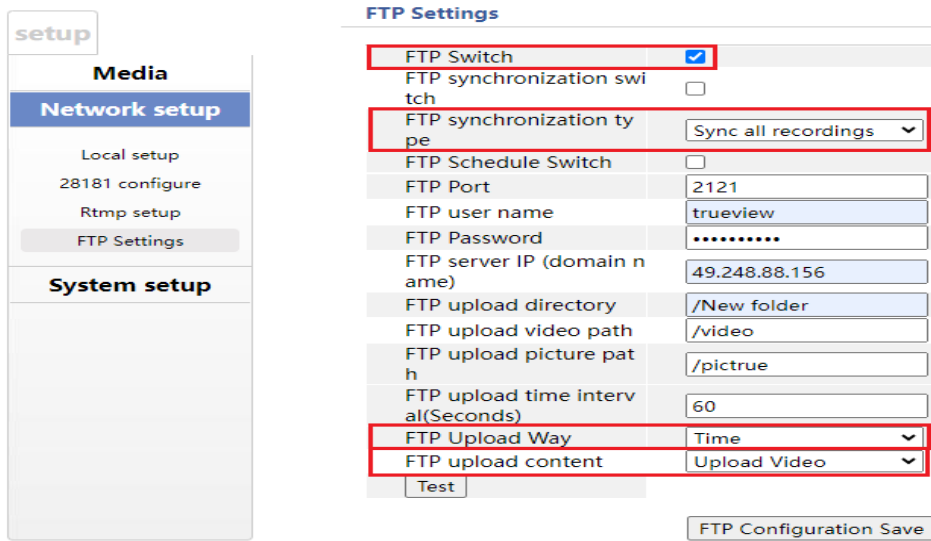


Conclusion :- All video upload successfully, additionally Previously stored video of SD Card Sync Successfully on FTP Server.

• TEST 15

1. Enable the FTP Switch
2. Select FTP synchronization type “**sync all recordings**”
3. Fill the FTP server credentials.
4. Select FTP Upload Way “**Time**”
5. Select FTP upload content “**upload pictures and videos**”
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 15.

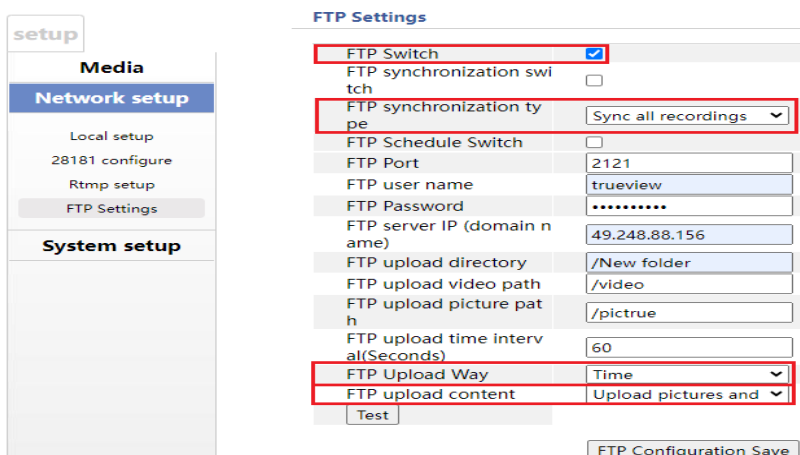


Conclusion :- All video and Real Time Snapshot upload successfully, additionally Previously stored video of SD Card Sync Successfully on FTP Server.

- **TEST 16**

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync recording by time(days)”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Time”**
5. Select FTP upload content **“upload picture”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 16.

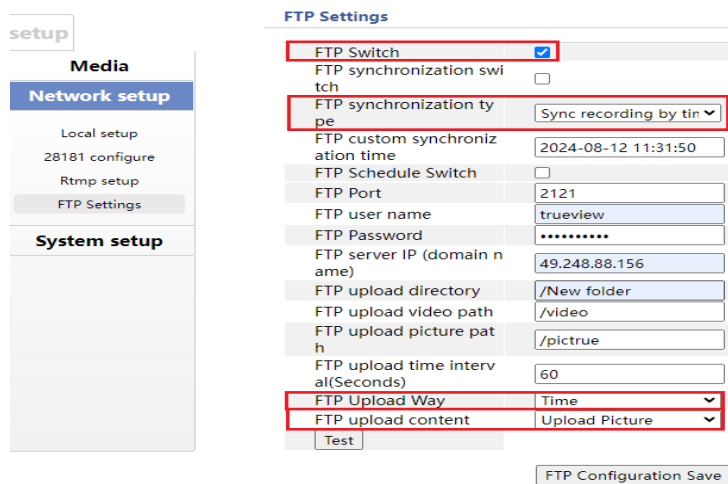

The screenshot displays the 'FTP Settings' configuration page. On the left, a sidebar shows navigation options: 'Media' (with 'Network setup' selected), 'Local setup', '28181 configure', 'Rtmp setup', and 'FTP Settings'. Below this is 'System setup'. The main area contains the following settings:


- FTP Switch:** Checked (indicated by a red box).
- FTP synchronization switch:** Unchecked.
- FTP synchronization type:** Sync recording by time (indicated by a red box).
- FTP custom synchronization time:** 2024-08-12 11:31:50.
- FTP Schedule Switch:** Unchecked.
- FTP Port:** 2121.
- FTP user name:** trueview.
- FTP Password:** (masked with dots).
- FTP server IP (domain name):** 49.248.88.156.
- FTP upload directory:** /New folder.
- FTP upload video path:** /video.
- FTP upload picture path:** /pictrue.
- FTP upload time interval(Seconds):** 60.
- FTP Upload Way:** Time (indicated by a red box).
- FTP upload content:** Upload Picture (indicated by a red box).
- Test:** A button to check the status.
- FTP Configuration Save:** A button to save the settings.

Conclusion :- Pictures upload successfully got each minutes file on ftp server

- **TEST 17**

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync recording by time(days)”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Time”**
5. Select FTP upload content **“upload video”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 17.

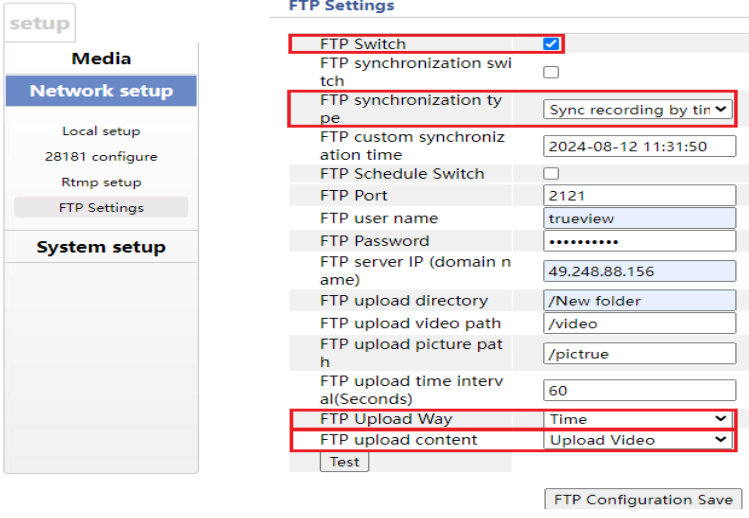


Conclusion :- All video upload successfully, additionally Previously stored video of SD Card Sync Successfully on FTP Server.

• TEST 18

1. Enable the FTP Switch
2. Select FTP synchronization type **“sync recording by time(days)”**
3. Fill the FTP server credentials.
4. Select FTP Upload Way **“Time”**
5. Select FTP upload content **“upload pictures and videos”**
6. Click on Test Button to Check the Status.
7. Click On Save Button

You can refer to the below image for Test 18.

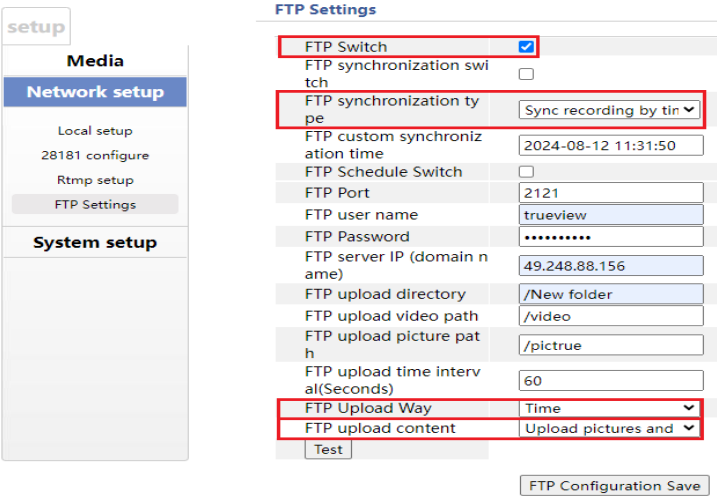


Conclusion :- All video and Real Time Snapshot upload successfully, additionally Previously stored video of SD Card Sync Successfully on FTP Server.

• TEST 19

1. Enable the FTP Switch
2. Enable the FTP **“synchronization switch”**
3. Select FTP synchronization type **“sync all recordings”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Time”**
6. Select FTP upload content **“upload picture”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 19.

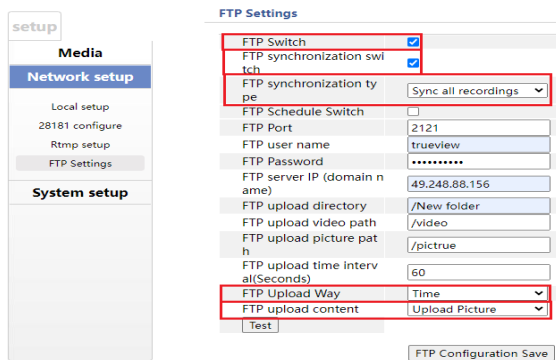

The screenshot shows the 'FTP Settings' configuration page. On the left is a sidebar with 'Media' and 'Network setup' sections. The main area contains the following settings:

- FTP Switch: ☒
- FTP synchronization switch: ☒
- FTP synchronization type: Sync all recordings (dropdown)
- FTP Schedule Switch: ☐
- FTP Port: 2121
- FTP user name: trueview
- FTP Password: *****
- FTP server IP (domain name): 49.248.88.156
- FTP upload directory: /New folder
- FTP upload video path: /video
- FTP upload picture path: /picture
- FTP upload time interval (Seconds): 60
- FTP Upload Way: Time (dropdown)
- FTP upload content: Upload Picture (dropdown)


At the bottom, there is a 'Test' button and an 'FTP Configuration Save' button.

Conclusion :- Pictures upload successfully got each minutes file on ftp server.

• TEST 20

1. Enable the FTP Switch
2. Enable the FTP **“synchronization switch”**
3. Select FTP synchronization type **“sync all recordings”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Time”**
6. Select FTP upload content **“upload video”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 20.

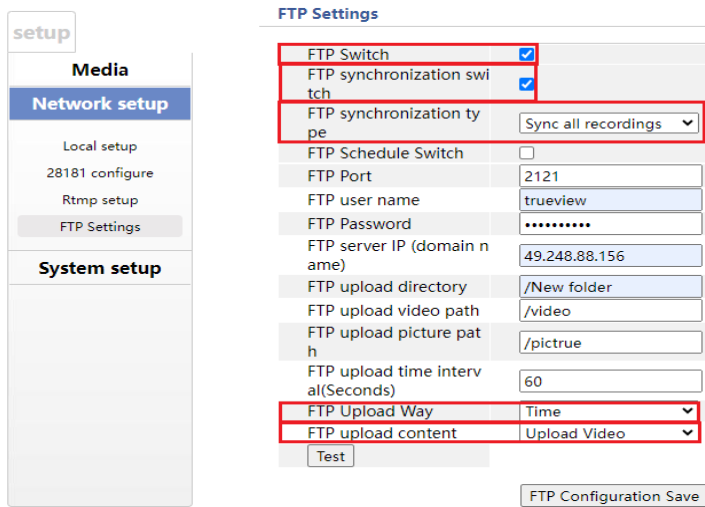


Conclusion :- All video upload successfully before and after FTP Setting.

• TEST 21

1. Enable the FTP Switch
2. Enable the FTP **“synchronization switch”**
3. Select FTP synchronization type **“sync all recordings”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Time”**
6. Select FTP upload content **“upload pictures and videos”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 21.

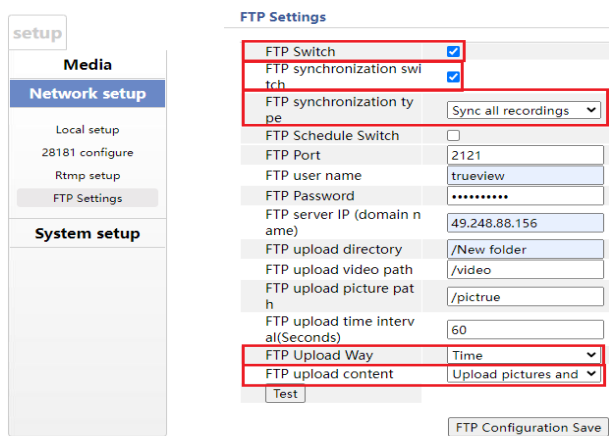


Conclusion :- All video and Real Time Snapshot upload successfully, additionally Previously stored video of SD Card Sync Successfully on FTP Server.

• TEST 22

1. Enable the FTP Switch
2. Enable the FTP **“synchronization switch”**
3. Select FTP synchronization type **“sync recording by time(days)”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Time”**
6. Select FTP upload content **“upload picture”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 22.

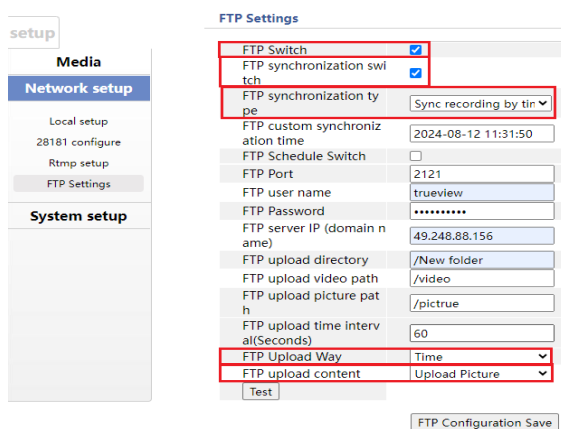


Conclusion :- Pictures upload successfully got each minutes file on ftp server.

• TEST 23

1. Enable the FTP Switch
2. Enable the FTP **“synchronization switch”**
3. Select FTP synchronization type **“sync recording by time(days)”**
4. Fill the FTP server credentials.
5. Select FTP Upload Way **“Time”**
6. Select FTP upload content **“upload video”**
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 23.

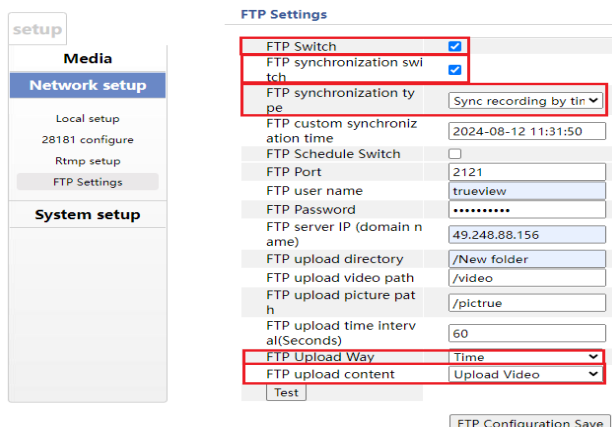


Conclusion :- All video upload successfully, additionally Previously stored video of SD Card Sync Successfully on FTP Server.

• TEST 24

1. Enable the FTP Switch
2. Enable the FTP “**synchronization switch**”
3. Select FTP synchronization type “**sync recording by time(days)**”
4. Fill the FTP server credentials.
5. Select FTP Upload Way “**Time**”
6. Select FTP upload content “**upload pictures and videos**”
7. Click on Test Button to Check the Status.
8. Click On Save Button

You can refer to the below image for Test 24.

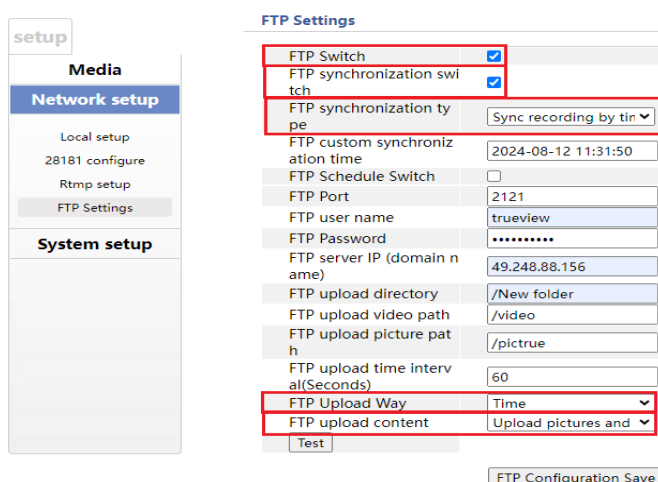

Conclusion :- All video and Real Time Snapshot upload successfully, additionally Previously stored video of SD Card Sync Successfully on FTP Server.