

Notes on LR Parsing

Geoffrey Matthews

Department of Computer Science
Western Washington University

February 24, 2016


Readings

- ▶ http://www.cs.rochester.edu/~nelson/courses/csc_173/grammars/cfg.html
- ▶ http://en.wikipedia.org/wiki/Context-free_grammar
- ▶ http://en.wikipedia.org/wiki/Context-free_language
- ▶ <http://en.wikipedia.org/wiki/Parsing>
- ▶ http://en.wikipedia.org/wiki/Pushdown_automata
- ▶ http://en.wikipedia.org/wiki/LR_parser
- ▶ <https://parasol.tamu.edu/~rwerger/Courses/434/lec12-sum.pdf>

Bottom up parsing of CFGs

- ▶ We start with the input and attempt to build the parse tree.
- ▶ If we begin with the input and attempt to build the tree above it, we are doing **bottom-up** parsing.
- ▶ Equivalently, we try to construct a rightmost derivation from right to left, scanning the input left to right.

$$\begin{aligned} S &\rightarrow SA \mid \epsilon \\ A &\rightarrow AA \mid a \end{aligned}$$



$$S \Rightarrow SA \Rightarrow SAA \Rightarrow SAa \Rightarrow Saa \Rightarrow aa$$

$LR(k)$ grammars


- ▶ $LR(k)$ means we find a rightmost derivation by scanning the input left to right, and have to lookahead at most k symbols.

LR parsing: Shift and Reduce

$S \rightarrow AB$

$A \rightarrow a$

$B \rightarrow b$




Stack	Input	Rule
\$	ab\$	shift
\$a	b\$	$A \rightarrow a$
\$A	b\$	shift
\$Ab	\$	$B \rightarrow b$
\$AB	\$	$S \rightarrow AB$
\$S	\$	accept

$S \Rightarrow AB \Rightarrow Ab \Rightarrow ab$

► Note:

- At all times, stack+input=derivation string
- String changes only on reduce

LR parsing: Shift and Reduce

$$S \rightarrow SA \mid \epsilon$$
$$A \rightarrow AA \mid a$$


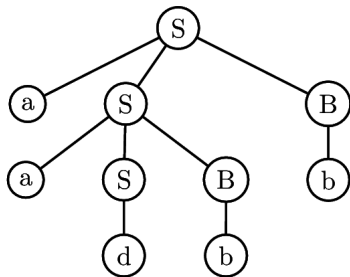
Stack	Input	Rule
\$	aa\$	$S \rightarrow \epsilon$
\$S	aa\$	shift
\$Sa	a\$	$A \rightarrow a$
\$SA	a\$	shift
\$SAa	\$	$A \rightarrow a$
\$SAA	\$	$A \rightarrow AA$
\$SA	\$	$S \rightarrow SA$
\$S	\$	accept

$$S \Rightarrow SA \Rightarrow SAA \Rightarrow SAa \Rightarrow Saa \Rightarrow aa$$

Another LR parse

$$S \rightarrow aSB \mid d$$

$$B \rightarrow b$$




Stack	Input	Rule
\$	aadbb\$	shift
\$a	adbb\$	shift
\$aa	dbb\$	shift
\$aad	bb\$	$S \rightarrow d$
\$aaS	bb\$	shift
\$aaSb	b\$	$B \rightarrow b$
\$aaSB	b\$	$S \rightarrow aSB$
\$aS	b\$	shift
\$aSb	\$	$B \rightarrow b$
\$aSB	\$	$S \rightarrow aSB$
\$S	\$	accept

$$S \Rightarrow aSB \Rightarrow aSb \Rightarrow aaSBb \Rightarrow aaSbb \Rightarrow aadbb$$

LR parsing arithmetic

 $E \rightarrow E + T \mid T$
 $T \rightarrow T * F \mid F$
 $F \rightarrow (E) \mid a$
 $E \Rightarrow E + T$
 $\Rightarrow E + T * F$
 $\Rightarrow E + T * a$
 $\Rightarrow E + F * a$
 $\Rightarrow E + a * a$
 $\Rightarrow T + a * a$
 $\Rightarrow F + a * a$
 $\Rightarrow a + a * a$


Stack	Input	Rule
\$	a+a*a\$	shift
\$a	+a*a\$	$F \rightarrow a$
\$F	+a*a\$	$T \rightarrow F$
\$T	+a*a\$	$E \rightarrow T$
\$E	+a*a\$	shift
\$E+	a*a\$	shift
\$E+a	*a\$	$F \rightarrow a$
\$E+F	*a\$	$T \rightarrow F$
\$E+T	*a\$	shift
\$E+T*	a\$	shift
\$E+T*a	\$	$F \rightarrow a$
\$E+T*F	\$	$T \rightarrow T*F$
\$E+T	\$	$E \rightarrow E+T$
\$E	\$	accept

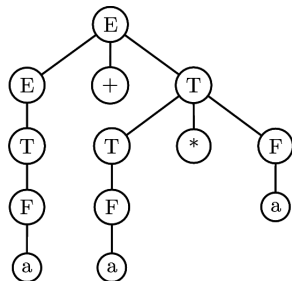


LR(1) parsing

- ▶ The trick is to know when to shift and when to reduce.
- ▶ Hopefully by looking at **only one** symbol of the input.
- ▶ Everything on the stack has already been examined.
- ▶ We can use the entire stack to determine actions.
- ▶ We do this by using an DFA to keep track of stack state.
- ▶ We note each time a RHS appears on top of the stack.
- ▶ If a RHS is on top of the stack, a reduction is *possible*.

LR(1) parsing

$$S \rightarrow AB$$
$$A \rightarrow a$$
$$B \rightarrow b$$

$$S \Rightarrow AB \Rightarrow Ab \Rightarrow ab$$

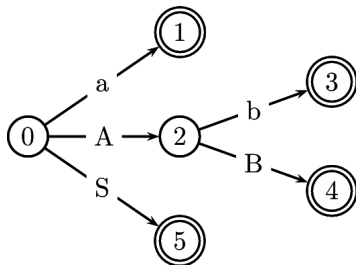
Stack	Input	Rule
\$	ab\$	shift
\$a	b\$	$A \rightarrow a$
\$A	b\$	shift
\$Ab	\$	$B \rightarrow b$
\$AB	\$	$S \rightarrow AB$
\$S	\$	accept



LR(1) parsing

$$S \rightarrow AB$$


$$A \rightarrow a$$

$$B \rightarrow b$$


Stack	Input	Rule
0	ab\$	shift
0 a 1	b\$	$A \rightarrow a$
0 A 2	b\$	shift
0 A 2 b 3	\$	$B \rightarrow b$
0 A 2 B 4	\$	$S \rightarrow AB$
0 S 5	\$	accept

$$S \Rightarrow AB \Rightarrow Ab \Rightarrow ab$$


	a	b	A	B	S	\$
0	1		2		5	
1		$A \rightarrow a$				
2		3		4		
3						$B \rightarrow b$
4						$S \rightarrow AB$
5						accept

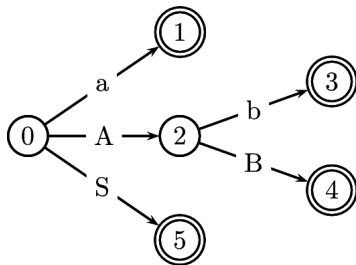

Left recursion: $S \rightarrow Sa \mid a$

Stack	Input
0	a a a a \$
0 a 1	a a a \$
0 S 2	a a a \$
0 S 2 a 3	a a \$
0 S 2	a a \$
0 S 2 a 3	a \$
0 S 2	a \$
0 S 2 a 3	\$
0 S 2	\$

	a	$\$$	S
0	1		2
1	$S \rightarrow a$		
2	3	accept	
3	$S \rightarrow Sa$	$S \rightarrow Sa$	

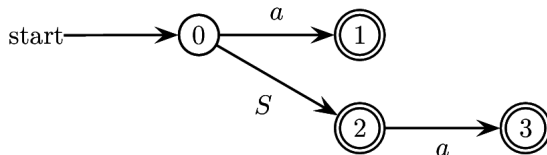

Right recursion: $S \rightarrow aS \mid a$

Stack

0

0 a 1

0 a 1 a 1

0 a 1 a 1 a 1

0 a 1 a 1 a 1 a 1

0 a 1 a 1 a 1 S 2

0 a 1 a 1 S 2

0 a 1 S 2

0 S 3

Input

a a a a \$

a a a \$

a a \$

a \$

\$


\$

\$

\$

\$

	a	$\$$	S
0	1		3
1	1	$S \rightarrow a$	2
2		$S \rightarrow aS$	
3		accept	

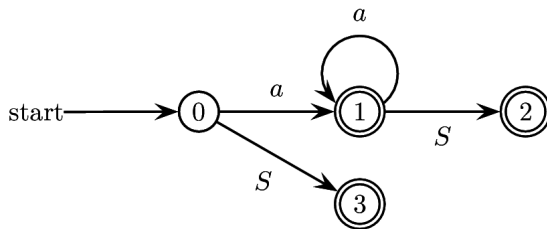

Middle recursion: $S \rightarrow aSa \mid bSb \mid c$


Stack

0
0 a 1
0 a 1 b 2
0 a 1 b 2 c 3
0 a 1 b 2 S 5
0 a 1 b 2 S 5 b 7
0 a 1 S 4
0 a 1 S 4 a 6
0 S 8

Input

a b c b a \$
b c b a \$
c b a \$
b a \$
b a \$
a \$
a \$
\$
\$

	a	b	c	\$	S
0	1	2	9		8
1	1	2	3		4
2	1	2	3		5
3	$S \rightarrow c$	$S \rightarrow c$			
4	6				
5		7			
6	$S \rightarrow aSa$	$S \rightarrow aSa$		$S \rightarrow aSa$	
7	$S \rightarrow bSb$	$S \rightarrow bSb$		$S \rightarrow bSb$	
8				accept	
9				$S \rightarrow c$	

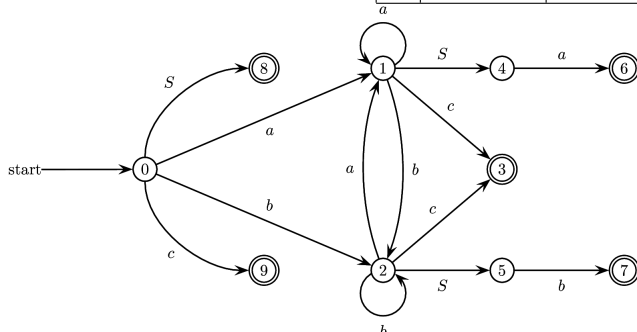


LR(1) parsing, a more complex example

$S \rightarrow aCd \mid bCD$

$C \rightarrow cC \mid c$


$D \rightarrow d$

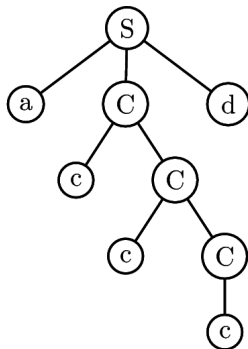

Stack	Input	Rule
\$	acccd\$	shift
\$a	cccd\$	shift
\$ac	ccd\$	shift
\$acc	cd\$	shift
\$accc	d\$	$C \rightarrow c$
\$accC	d\$	$C \rightarrow cC$
\$acC	d\$	$C \rightarrow cC$
\$aC	d\$	shift
\$aCd	\$	$S \rightarrow aCd$
\$S	\$	accept

$S \Rightarrow aCd \Rightarrow acCd \Rightarrow accCd \Rightarrow acccd$

LR(1) parsing
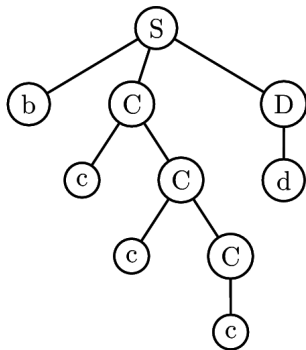
$$S \rightarrow aCd \mid bCD$$
$$C \rightarrow cC \mid c$$
$$D \rightarrow d$$


Stack	Input	Rule
\$	bcccd\$	shift
\$b	cccd\$	shift
\$bc	ccd\$	shift
\$bcc	cd\$	shift
\$bccc	d\$	$C \rightarrow c$
\$bccC	d\$	$C \rightarrow cC$
\$bcC	d\$	$C \rightarrow cC$
\$bC	d\$	shift
\$bCd	\$	$D \rightarrow d$
\$bCD	\$	$S \rightarrow bCD$
\$S	\$	accept

$$S \Rightarrow bCD \Rightarrow bCd \Rightarrow bcCd \Rightarrow bccCd \Rightarrow bcccd$$

LR(1) parsing

$$S \rightarrow aCd \mid bCD$$

$$C \rightarrow cC \mid c$$

$$D \rightarrow d$$

- ▶ $S \Rightarrow aCd \Rightarrow acCd \Rightarrow accCd \Rightarrow acccd$
- ▶ $S \Rightarrow bCD \Rightarrow bCd \Rightarrow bcCd \Rightarrow bccCd \Rightarrow bcccd$
- ▶ At any point, the derivation string must look like one of these:

aCd ac^+Cd ac^+d bCD bCd bc^+Cd bc^+d

- ▶ Whenever we see one of these, we have to know which rule to apply at what point in the shifting of the string.

LR(1) parsing

$$S \rightarrow aCd \mid bCD$$

$$C \rightarrow cC \mid c$$

$$D \rightarrow d$$

Stack	Input	Rule	Peek
\$aCd	\$	$S \rightarrow aCd$	
\$ac ⁺ C	d\$	$C \rightarrow cC$	
\$ac ⁺	d\$	$C \rightarrow c$	d
\$bCD	\$	$S \rightarrow bCD$	
\$bCd	\$	$D \rightarrow d$	
\$bc ⁺ C	d\$	$C \rightarrow cC$	
\$bc ⁺	d\$	$C \rightarrow c$	d

Stack	Input	Rule
\$	bcccd\$	shift
\$b	cccd\$	shift
\$bc	ccd\$	shift
\$bcc	cd\$	shift
\$bccc	d\$	$C \rightarrow c$
\$bccC	d\$	$C \rightarrow cC$
\$bcC	d\$	$C \rightarrow cC$
\$bC	d\$	shift
\$bCd	\$	$D \rightarrow d$
\$bCD	\$	$S \rightarrow bCD$
\$S	\$	accept

Stack	Input	Rule
\$	acccd\$	shift
\$a	cccd\$	shift
\$ac	ccd\$	shift
\$acc	cd\$	shift
\$accc	d\$	$C \rightarrow c$
\$accC	d\$	$C \rightarrow cC$
\$acC	d\$	$C \rightarrow cC$
\$aC	d\$	shift
\$aCd	\$	$S \rightarrow aCd$
\$S	\$	accept


DFA for LR parsing

$$S \rightarrow aCd \mid bCD$$

$$C \rightarrow cC \mid c$$

$$D \rightarrow d$$


Stack	Input	Rule	Peek
\$aCd	\$	$S \rightarrow aCd$	
\$ac^+C	d\$	$C \rightarrow cC$	
\$ac^+	d\$	$C \rightarrow c$	d
\$bCD	\$	$S \rightarrow bCD$	
\$bCd	\$	$D \rightarrow d$	
\$bc^+C	d\$	$C \rightarrow cC$	
\$bc^+	d\$	$C \rightarrow c$	d

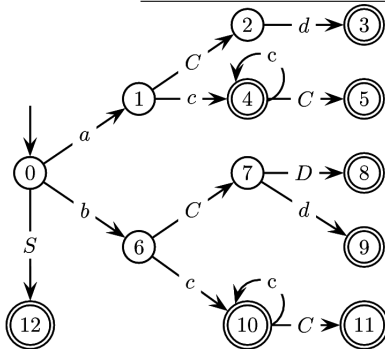

Using the DFA in LR parsing

Stack	Input	Rule	Peek
\$aCd	\$	$S \rightarrow aCd$	
\$ac^+C	d\$	$C \rightarrow cC$	
\$ac^+	d\$	$C \rightarrow c$	d
\$bCD	\$	$S \rightarrow bCD$	
\$bCd	\$	$D \rightarrow d$	
\$bc^+C	d\$	$C \rightarrow cC$	
\$bc^+	d\$	$C \rightarrow c$	d


Stack	Input	Rule
0	acccd\$	shift
0 a 1	cccd\$	shift
0 a 1 c 4	ccd\$	shift
0 a 1 c 4 c 4	cd\$	shift
0 a 1 c 4 c 4 c 4	d\$	$C \rightarrow c$
0 a 1 c 4 c 4 C 5	d\$	$C \rightarrow cC$
0 a 1 c 4 C 5	d\$	$C \rightarrow cC$
0 a 1 C 2	d\$	shift
0 a 1 C 2 d 3	\$	$S \rightarrow aCd$
0 S 12	\$	accept

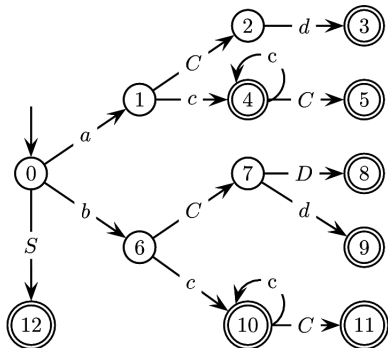

Using the DFA in LR parsing

Stack	Input	Rule	Peek
\$aCd	\$	$S \rightarrow aCd$	
\$ac^+C	d\$	$C \rightarrow cC$	
\$ac^+	d\$	$C \rightarrow c$	d
\$bCD	\$	$S \rightarrow bCD$	
\$bCd	\$	$D \rightarrow d$	
\$bc^+C	d\$	$C \rightarrow cC$	
\$bc^+	d\$	$C \rightarrow c$	d

Stack	Input	Rule
0	bcccd\$	shift
0 b 6	cccd\$	shift
0 b 6 c 10	ccd\$	shift
0 b 6 c 10 c 10	cd\$	shift
0 b 6 c 10 c 10 c 10	d\$	$C \rightarrow c$
0 b 6 c 10 c 10 C 11	d\$	$C \rightarrow cC$
0 b 6 c 10 C 11	d\$	$C \rightarrow cC$
0 b 6 C 7	d\$	shift
0 b 6 C 7 d 9	\$	$D \rightarrow d$
0 b 6 C 7 D 8	\$	$S \rightarrow bCD$
0 S 12	\$	accept

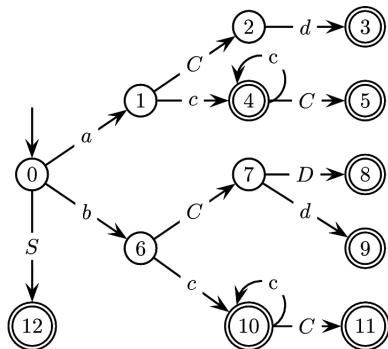

More examples in notes on repo.

LR(k) languages, Knuth's theorem

Theorem

$$\begin{aligned} LR(k) \text{ languages} &= LR(1) \text{ languages} \\ &= \text{deterministic context free languages} \end{aligned}$$

LR parsing exercises

Redo all the solved examples. Also, find DFAs and tables for the following languages, and trace some parses:

► $S \rightarrow a \mid b \mid c$

► $S \rightarrow aSa \mid b$

► $S \rightarrow ABC$

$A \rightarrow a$

$B \rightarrow b$

$C \rightarrow c$