SciLitRAG: A Guarded Hybrid RAG Assistant for Scientific Literature

Angelo Ottendorfer, Benjamin Storck, Kristof Zörenyi, Nuray Visne

1 November 2026

Abstract

SciLitRAG is a retrieval-augmented assistant for scientific literature search and citation analysis over 56,115 LitSearch [1] papers. It combines hybrid retrieval (dense vector search and BM25) and SQL over citation and author tables with a self-hosted language model (`qwen3.8:27b`) and guardrails that check requests and generated sentences before display. Across 597 queries, hybrid retrieval over paper titles and abstracts achieves a mean Recall@20 of 0.709. Four-bit quantization reduces model VRAM by about two-thirds without an observed decrease in NLI-scored citation quality.

1 System Architecture and Component Decoupling

Architecture. SciLitRAG answers three kinds of questions: papers on a topic (S1), papers that cite a given paper, optionally as a baseline (S2), and the authors most cited by papers on a topic (S3). Figure 1 shows the two tiers: UI, FastAPI orchestrator and database run locally in docker compose; the inference engine is a standalone Ollama server with an OpenAI-compatible API, here on a GPU at Modal [6] next to NLI and Prompt Guard for the sources, locally on port 11434 without one. Vector store and relational tables share one PostgreSQL database (ParadeDB with pgvector and pg_search), so filters and citation joins run in the same query as the search.

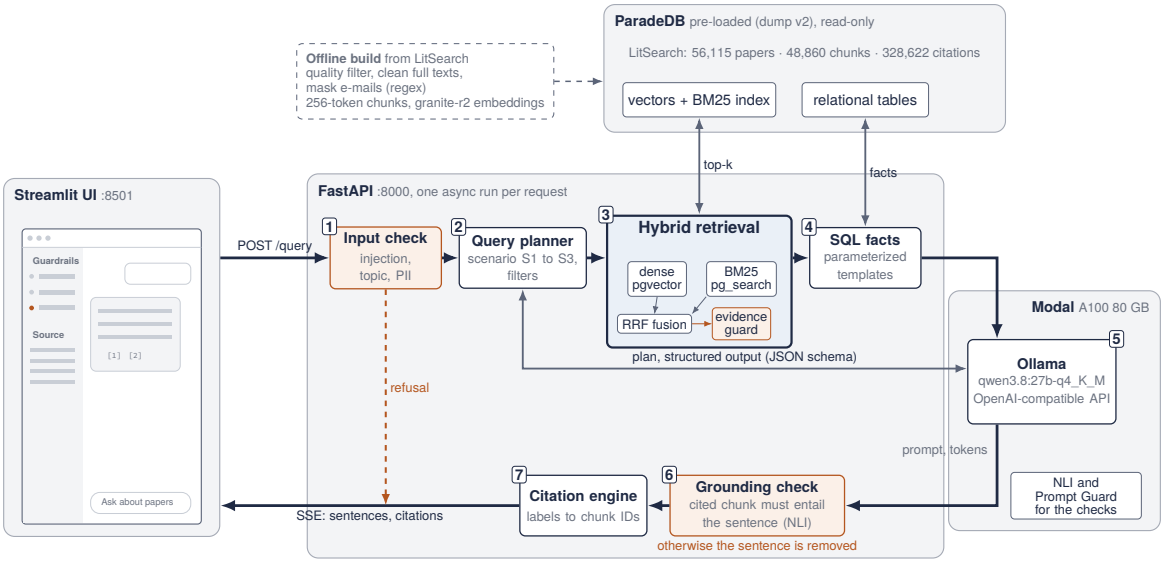


Figure 1: Request loop (steps 1 to 7). The input check can refuse a request before any database or LLM call; the evidence guard drops flagged sources before SQL and generation; the grounding check removes sentences that their cited chunk does not entail.

Execution flow of a multi-hop query. For an S3 question (most cited authors on a topic), FastAPI first runs `check_input`: Prompt Guard, the topic and write-intent gate and PII masking; a refusal ends the request before any database or model call. The planner asks the model for a plan under a strict JSON schema (scenario, topic, filters); explicit years and result limits from the question are reconciled in code. Hybrid retrieval selects topic papers and their passages, and the evidence guard drops flagged sources. SQL then follows the citation edges from the remaining seed papers to the cited papers and their authors; every distinct citing/cited pair gives each author of the cited paper one credit, so the counts cover this subset, not global citation totals. The application emits the ranking table with its parameters and query ID before any generated text; for a plain ranking question the table is the whole answer, otherwise the model summarizes the paper evidence and never computes the ranking.

The model streams text deltas over the OpenAI-compatible API into a bounded server-side sentence buffer; raw tokens never reach the UI. Each complete sentence passes the citation-label check and `check_sentence` (Section 3); accepted sentences are PII-masked, rendered with their citations and sent as a `sentence` SSE event, removed ones only as a status event. A timeout or provider failure ends the stream with an `error` event; a client disconnect cancels generation.

2 Hybrid Indexing and Retrieval Pipeline

Data. We use LitSearch [1]: 597 literature-search queries over 64,183 papers with Semantic Scholar metadata and S2ORC full texts. Quality filters (empty title, no author names, no section heading) leave 56,115 papers and keep all 574 query targets; the database holds 328,622 distinct citation pairs (Table 3 in the appendix).

Chunking. Full texts are chunked for 1,000 papers (all query targets, the demo topics and a random sample); without front matter and bibliography, each section is split into windows of the embedding tokenizer with overlap; no chunk crosses a section boundary. We compared 256, 384 and 512 tokens with 0, 10 and 20 % overlap on two benchmarks over this 1,000-paper pool: the LitSearch queries, and 86 synthetic questions about one- or two-sentence passages, generated by a local LLM and reviewed by hand (Table 4 in the appendix). Quality barely depends on the setting (NDCG@10 0.77 to 0.80 on the pool), cost does: at an equal budget of about 1,024 tokens, 256-token chunks contain the source passage in 84 % of the questions against 62 % for 512 tokens, 10 % of 512-token chunks exceed the per-source prompt limit, and NLI on a full chunk takes about twice as long. We use 256 tokens with 10 % overlap (48,860 chunks; S1 Hit@2 0.76, Hit@5 0.87).

Embedding and index. On paper retrieval over title and abstract of all 56,115 papers (597 queries, exact cosine search), `ibm-granite/granite-embedding-english-r2` reached NDCG@10 0.510 against 0.453 for the planned `BAAI/bge-base-en-v1.5`; the gain is significant on both dev and test halves (paired bootstrap), so granite (768 dimensions) embeds papers, chunks, queries and the topic gate. Vectors are stored in pgvector with an HNSW index (cosine, $m = 16$, $ef_{\text{construction}} = 64$, $ef_{\text{search}} = 100$, iterative scan for filtered searches). BM25 runs in PostgreSQL via ParadeDB pg_search on title and abstract and on chunk text; year, author and paper filters are part of the same SQL query, and both lists are fused with reciprocal rank fusion ($k = 60$). In the production database, LitSearch Recall@20 is 0.690 dense (HNSW), 0.607 BM25 and 0.709 hybrid.

Foundation model. We use the open-weight Qwen 3.8 with 27B parameters (`qwen3.8:27b` [7]); the demo serves its 4-bit variant `qwen3.8:27b-q4_K_M` with Ollama. It was chosen because Ollama offers it in 16-, 8- and 4-bit variants, so the precision comparison of Section 4 runs in one engine, and at 27B the 16-bit variant (56 GB) still fits one A100 80 GB with room for the KV cache. A side run of `gemma4:31b-it-q4_K_M` on 30 of the benchmark queries gave no significant difference in citation quality (recall 0.797, precision 0.836 against 0.802 and 0.801 for qwen in bf16), so we kept qwen.

3 Guardrail Verification and Security Harness

Adversarial input defense. Before any database or model call, `check_input` runs three stages. (1) Prompt Guard 2 (86M, threshold 0.5) scores the query in windows of at most 512 tokens and takes the highest score; it misses requests for the assistant's own instructions ("print your system prompt" scores 0.003), so about eight English and German patterns cover them. (2) The topic gate compares the query embedding with hand-written prototype sentences of three classes (literature question, off-topic, write request) and refuses when a disallowed class is closer. (3) Presidio masks e-mail addresses, phone numbers, card numbers, IBANs and IP addresses; names stay, as authors are search terms. A refusal carries its category (injection, off-topic, write intent), which the UI shows; tests assert that no SQL and no model call ran. The database role can only `SELECT`. Against indirect injection, the evidence guard scores every retrieved chunk and abstract with Prompt Guard 2 and drops it at 0.5 or above; SQL tables are built by our code and not scored.

Output groundedness and citation mapping. The model sees numbered evidence and may only emit labels $[1], \ldots, [n]$; per request the code maps each label to a chunk ID, a paper ID or the query ID of an SQL table. Each streamed sentence is held back until it passes: (i) valid labels at its end; (ii) every number and year in it occurs in a cited source, SQL rows included; (iii) for non-SQL sources, the NLI model ModernCE-large-nli takes each cited source as premise and the sentence without labels as hypothesis; one source with entailment ≥ 0.5 suffices, a contradiction ≥ 0.5 counts as a factual mismatch. Failed sentences are removed and counted; passed ones are rendered by code, which replaces each label by title, year, chunk and paper ID, passage and a SHA-256 fingerprint of the source.

Efficacy. All cases are our own (one author per set), split into tuning and test; Table 1 reports the test split at the thresholds in use. The 23 injection test cases are 10 jailbreaks, 7 direct instruction overrides and 6 system-prompt exfiltrations; the 49 harmless cases are literature questions of all three scenarios, some in German. A rule fixed beforehand (highest DSR with at most 5 % FRR on tuning) did not separate the Prompt Guard thresholds 0.5 and 0.7 on tuning, so the default 0.5 stayed. The query guards refuse 94 % of 50 attacks and 2 % of 49 harmless questions; only 57 % of the injections get the injection category, since the topic gate catches some jailbreaks as off-topic. The evidence guard removes a third of 12 injected passages and none of 3 with the instruction in the middle; 0.01 would catch half but would also remove 7 % of 200 real chunks, so 0.5 stays. The sentence check removes 97 % of 38 manipulated sentences (changed numbers, negations, added claims, wrong source) but also 26 % of 23 faithful ones, among them all 4 that combine facts of two passages, because each source is judged alone.

Table 1: Defense success rate (DSR) on attacks and false rejection rate (FRR) on harmless inputs, test split. Latency in ms (median / p95) over 29 harmless questions run as S1 with an extractive answer (no LLM) from a 12-thread laptop; query guards on the laptop CPU, evidence guard and sentence check on the Modal GPU.

Guard	Group	Cases	Rate (%)	Latency (ms)
Prompt Guard 2	injection, DSR	23	91	152 / 397
Topic gate	write intent, DSR	13	92	108 / 150
	off-topic, DSR	14	100	
All query guards	harmless, FRR	49	2	
Evidence guard	injected, DSR	12	33	253 / 323
	clean, FRR	22	0	
Sentence check, per sentence	manipulated, DSR	38	97	211 / 226
	faithful, FRR	23	26	
All guards, per request				1,532 / 1,816

Overhead. With the evidence guard and NLI on the GPU the guards cost 1.5 s per request (p95 1.8 s). The sentence checks dominate (1.0 of 1.5 s, about 0.21 s per sentence, mostly the round trip to Modal); since a sentence is released only after its check, they delay the first visible sentence by 0.22 s. In live runs, the check removed our own code's notice that only an abstract is available, which no abstract can entail; it now passes by exact template match and is sent once per answer, and on the 12 questions of Section 4 the share of removed sentences fell from 52 % to 24 %.

4 Empirical Results and Performance Benchmarking

Setup. We serve `qwen3.8:27b` in bf16, q8_0 and q4_K_M with Ollama 0.40.5 on one A100 80 GB (Modal); the model has no fp16 tag, so bf16 is the 16-bit variant. Each precision answers all 597 LitSearch queries once with the same S1 prompt built from the app's retrieval (median 3,000 tokens), one request at a time. Citation recall and precision follow ALCE [3], scored with the app's NLI model; answers stating that the evidence holds nothing matching count as "not found".

Table 2: Precision vs. memory, speed and citation quality (597 queries, medians). TTFT engine as reported by Ollama, TTFT client including the network; Total is the full answer. Best value per column in bold; * significantly different from bf16 (paired bootstrap, 95 %), tested for recall and precision only.

Precision	VRAM (GB)	TTFT engine (s)	TTFT client (s)	Tokens/s	Total (s)	Recall	Precision
bf16	52.5	**1.08**	**1.65**	27.6	9.5	0.768	0.749
q8_0	28.5	2.32	2.87	38.7	8.4	0.764	0.741
q4_K_M	**17.1**	2.31	2.84	**43.6**	**7.2**	**0.806***	**0.791***

Results. Quantization cuts memory by a factor of three and speeds up decoding by 58 %, but doubles the engine TTFT, since prompt evaluation is compute-bound and decoding bandwidth-bound. Decoding dominates the answer time, so q4_K_M is faster than bf16 on 522 of 597 queries. Quantization costs no citation quality: q8_0 matches bf16, and q4_K_M scores about 3 points higher; its answers are shorter (median 187 against 213 tokens) with fewer multi-source sentences, which are the hardest to entail, so we do not read this as a quality gain.

End to end. Through the whole app (q4_K_M, 12 LitSearch questions, one at a time, guards as in Section 3), a request takes 14.9 s in the median: the planner's model call 3.3 s, retrieval 0.9 s and generation including the sentence checks 9.5 s. The first sentence appears with the model's first token after 8.3 s, and decoding runs at 42 tokens/s, close to Table 2.

Trade-offs. We serve q4_K_M: a third of the memory of bf16, faster answers and no measurable loss in citation quality. Its 1.2 s higher TTFT is small next to the planner call, and the guards add 1.5 s per request (Table 1). That is the price of answers whose every sentence is backed by a cited source; it also removes faithful sentences that combine two sources (26 % FRR), which we accept, as removing a true sentence is safer than showing an unsupported one.

5 Architectural Trade-offs, Bottlenecks and Post-Mortem

Bottlenecks under load. We sent 12 different LitSearch questions at each of 1, 2, 4 and 8 concurrent requests through the API with all real components (Ollama with 8 slots; Table 5 in the appendix). In the first run, NLI and the evidence guard both ran on the laptop CPU: the sentence check alone took 20 of 38 s at one request, throughput stayed at 1.1 to 1.6 completed requests per minute and 8 of 12 requests timed out at 8, while the app drew only 4 to 6 tokens/s from a GPU

that decodes 43 tokens/s per request and retrieval stayed between 0.8 and 3.5 s. The laptop CPU was the bottleneck, not the GPU or the database. With NLI moved to the GPU, all 48 requests completed at 1, 2, 4 and 8: median latency 30, 34, 38 and 64 s, maximum 57, 58, 48 and 93 s, and 1.9, 3.0, 5.7 and 5.9 requests per minute. Throughput levels off between 4 and 8; the stages that grow most are the evidence guard, then still on the CPU (6.5 to 15.2 s), and the planner's model call (6.2 to 12.6 s), which shares the GPU with eight generations. We then moved the evidence guard to the GPU too and send the abstract-only notice once per answer, without repeating the load test; hence the lower end-to-end time in Section 4.

Discarded approaches.

1. *Guard models on the orchestrator's CPU.* Only the LLM on the GPU looked sufficient, but the CPU-bound checks limited throughput (above). Lesson: measure through the full pipeline, not only the engine.
2. *Evidence-guard threshold 0.01.* Tuned on our own passages it caught 54 % of injected passages and no clean one, but on 200 random real chunks it would remove 7 %, since real text scores higher than our clean examples. Lesson: check thresholds on production data before adopting them.
3. *A small NLI model (EttinX-nli-s).* Chosen first on seven hand-made pairs, it rejected 23 % of sentences copied verbatim from a 200-token premise and 87 % from a 600-token one; ModernCE-large keeps 99 % at six times the cost. Lesson: test with the premise lengths the system actually produces.

Known edge cases. Citation counts and paths only cover the 23.8 % of the 1.44 million bibliography entries that match a corpus paper, and author names that differ by an accent or a middle initial count as different authors. Only 1,000 papers have chunked full texts; for the others the answer rests on the abstract, which the app states. The sentence check removes true sentences that combine two sources. The evidence guard misses instructions in the middle of a passage, and some jailbreaks are refused with the off-topic instead of the injection category. S2 resolves only reviewed short names (DPR, BERT) without the model; for other references the planner can miss the paper, and the question is answered as a topic search.

6 Artifacts and References

Repository. Code, tests and setup instructions are provided in this repository. The README covers setup with `uv`, a mock mode, docker compose (`db`, `api`, `ui`; Dockerfiles in `docker/`) and the inference server on Modal (`deploy/modal/`). The database is pre-seeded from a dump: `scripts/restore_database.py` restores it into a fresh ParadeDB database and creates roles and indexes; since LitSearch's licensing status is unclear, the dump is shared only within the team. Alternatively, `scripts/download_data.py` downloads the pinned LitSearch revision and the README describes the build from scratch.

Provenance. LitSearch is obtained from `https://huggingface.co/datasets/princeton-nlp/LitSearch` and not redistributed. Hugging Face models: `ibm-granite/granite-embedding-english-r2` [4], `dleemiller/ModernCE-large-nli` [2] and `meta-llama/Llama-Prompt-Guard-2-86M` [5]; the LLM is the Ollama tag `qwen3.8:27b-q4_K_M` [7]. Libraries are locked in `uv.lock`; Table 6 lists revisions, versions and the source and hardware of every figure.

References

[1] Anirudh Ajith, Mengzhou Xia, Alexis Chevalier, Tanya Goyal, Danqi Chen, and Tianyu Gao. LitSearch: A retrieval benchmark for scientific literature search. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 2024. arXiv:2407.18940.

[2] dleemiller. Modernce-large-nli. https://huggingface.co/dleemiller/ModernCE-large-nli. Revision 0c0575b.

[3] Tianyu Gao, Howard Yen, Jiatong Yu, and Danqi Chen. Enabling large language models to generate text with citations. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 2023. arXiv:2305.14627.

[4] IBM Granite. granite-embedding-english-r2. https://huggingface.co/ibm-granite/granite-embedding-english-r2. Revision 47ea694.

[5] Meta Llama. Llama-prompt-guard-2-86m. https://huggingface.co/meta-llama/Llama-Prompt-Guard-2-86M. Revision a8ded8e.

[6] Modal Labs. Modal: serverless gpu compute. https://modal.com.

[7] Ollama. qwen3.8 model tags. https://ollama.com/library/qwen3.8. Tags bf16, q8_0 and q4_K_M of the 27B model.

A Additional Material

Table 3: Data after filtering.

Item	Count
Papers (of 64,183 in LitSearch)	56,115
Queries / target papers	597 / 574
Distinct citation pairs	328,622
Papers without any citation link	6,233
Authors / paper-author links	70,171 / 196,079
Author blocks dropped (no name, affiliation, duplicate)	31,449
Papers selected for chunking / chunks	1,000 / 48,860

Table 4: All chunking settings (size in tokens / overlap in %) on the 1,000-paper pool. NDCG@10 on the LitSearch dev split; hit rates on 86 reviewed synthetic questions, a hit being a returned chunk that holds at least half of the source passage; budget: $k = 4, 3, 2$ chunks for 256, 384, 512 tokens; Cut: share of chunks over the 2,400-character limit per source; NLI: ModernCE-large-nli on CPU per full chunk.

Setting	Chunks	NDCG@10	S1 Hit@2	Hit@5	Hit@budget	Cut	NLI (ms)
256/0	45,935	0.775	0.74	0.81	0.79	0.0 %	292
256/10	48,860	0.784	0.76	0.87	0.84	0.0 %	292
256/20	52,701	0.769	0.70	0.85	0.80	0.0 %	292
384/0	33,138	0.785	0.74	0.83	0.78	0.0 %	428
384/10	34,814	0.784	0.76	0.81	0.77	0.0 %	428
384/20	36,978	0.780	0.71	0.83	0.78	0.0 %	428
512/0	26,899	0.799	0.74	0.86	0.67	10.0 %	555
512/10	27,969	0.797	0.70	0.86	0.62	10.2 %	555
512/20	29,353	0.803	0.72	0.85	0.70	10.3 %	555

The NDCG@10 values of Table 4 rank chunks of 1,000 papers that include every query target; the 0.510 of Section 2 ranks title and abstract of all 56,115 papers, a much harder task. The embedding comparison used exact search (granite Recall@20 0.695), the production figures use the HNSW index (dense Recall@20 0.690).

Table 5: Load test through the API, 12 requests per level. Median and maximum latency of completed requests, completed requests per minute and timeouts (120 s).

Parallel requests	1	2	4	8
NLI on CPU: median / max (s)	38 / 73	84 / 109	96 / 113	103 / 108
NLI on CPU: requests/min	1.4	1.2	1.6	1.1
NLI on CPU: timeouts	0	1	3	8
NLI on GPU: median / max (s)	30 / 57	34 / 58	38 / 48	64 / 93
NLI on GPU: requests/min	1.9	3.0	5.7	5.9
NLI on GPU: timeouts	0	0	0	0

Table 6: Models with recorded revisions, and source and hardware of each reported figure. Source files are in `eval/results/` of the repository and contain scores and timings only, no dataset text. Laptop: Intel i7-9750H, 12 threads. Guard scores do not depend on the hardware.

Use	Identifier	Revision
Dataset	`princeton-nlp/LitSearch`	`9573fb2`
Embedding	`ibm-granite/granite-embedding-english-r2`	`47ea694`
NLI	`dleemiller/ModernCE-large-nli`	`0c0575b`*
Injection detection	`meta-llama/Llama-Prompt-Guard-2-86M`	`a8ded8e`*
LLM	Ollama `qwen3.8:27b-{bf16,q8_0,q4_K_M}`	Ollama 0.40.5
Database image	`paradedb/paradedb`	`0.26.2-pg18`

Libraries (`uv.lock`): torch 2.14.1, transformers 5.20.2, sentence-transformers 6.2.0, FastAPI 0.143.3, Streamlit 1.66.0, psycopg 3.3.6, Presidio Analyzer 2.2.364, spaCy 3.8.16.

Figures	Source file	Hardware
Data (Table 3)	`d23_data_statistics.json`	–
Chunking (Table 4)	`d20_chunk_experiment.json`	RTX 4070 Ti SUPER
Embedding comparison	`d22_embedding_comparison.json`	RTX 4070 Ti SUPER
Retrieval recall	`d18_retrieval_comparison.json`	production database
DSR / FRR (Table 1)	`guardrails.json`, `validator.json`, `evidence_real_sample.json`	CPU
Guard latency (Table 1)	`guardrail_latency_replay_gpu_home.json`	laptop + Modal A100
Precision benchmark (Table 2)	`a12_engine.jsonl`, `a12_quality.json`	Modal A100 80 GB
Gemma side run (Section 2)	`a12_engine_30.jsonl`, `a12_quality_30.json`	Modal A100 80 GB
End to end (Section 4)	`a12_end_to_end_{guard_gpu,d082}.jsonl`	laptop + Modal A100
Load test (Table 5)	`a13_load_nli_{cpu,gpu}.jsonl`	laptop + Modal A100

* Snapshot used in the evaluation; the application loads these two models without a pinned revision.