

# Binary Heaps: Homework

- Implement the array-based representation of binary heap together with the functions `HEAP_MIN`, `REMOVE_MIN`, `HEAPIFY`, `BUILD_HEAP`, `DECREASE_KEY`, and `INSERT_VALUE`.

The solution can be found in the file `binheap.c` in the folder [Binary\\_heaps](#), with the corresponding names `min_value`, `extract_min`, `heapify`, `build_heap`, `decrease_key` and `insert_value`. The functions `is_heap_empty`, `swap_keys`, `find_the_max`, `delete_heap`, and `print_heap` are also added.

- Implement an iterative version of `HEAPIFY`.


The solution can be found in the function `heapify`, contained in the file `binheap.c` in the folder [Binary\\_heaps](#).

- Test the implementation on a set of instances of the problem and evaluate the execution time.


After running `test_delet_min` the following output was generated:

```
1 $ ./test_delete_min
2
3 n      On Heaps      On Arrays
4 0      0.000014      0.000005
5 1820   0.039135      0.931853
6 3640   0.070701      3.782944
7 5461   0.098816      8.491803
8 7281   0.105832      15.135461
9 9102   0.124539      23.618608
10 10922  0.139834      34.143487
11 12743  0.193662      46.353465
12 14563  0.239347      60.489976
13 16384  0.219621      76.866161
```

In the following graph we can see the execution time of the program `test_delet_min`:

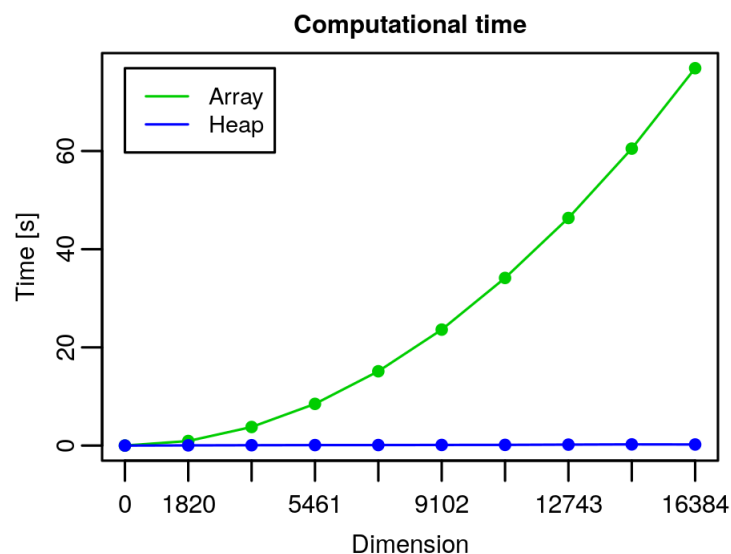

We can see that **????? for the heps the time of extraction is  $O(\log n)$** : replacing the root's key costs  $\Theta(1)$  and the total cost of **HEAPIFY** is the height of the heap:  $O(\log n)$ , so deleting the minimum with the heaps costs  $O(\log n)$ .

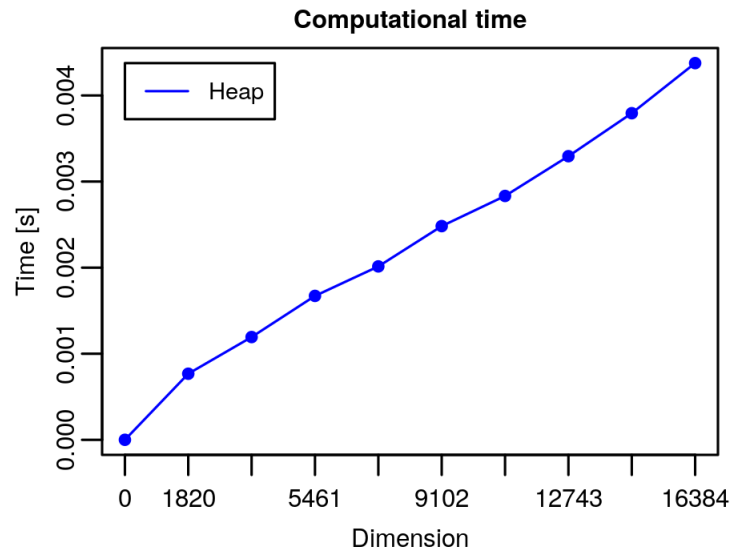

- (Ex. 6.1-7 in [1]) Show that, with the array representation, the leaves of a binary heap containing  $n$  nodes are indexed by  $\lfloor n/2 \rfloor + 1, \lfloor n/2 \rfloor + 2, \dots, n$ .

Let us consider a binary heap containing  $n$  nodes. Since the children of a node  $i$  are the nodes  $2i$  (the left child) and  $2i + 1$  (the right child), we have that the "last" parent, meaning the right-most parent in the second-last level, can at most be the node  $\lfloor n/2 \rfloor$ . That is because if we suppose that  $\lfloor n/2 \rfloor + 1$  is a parent node, then its children are the nodes  $2(\lfloor n/2 \rfloor + 1)$  and  $2(\lfloor n/2 \rfloor + 1) + 1$ , but the left child would be

$$2 \cdot (\lfloor n/2 \rfloor + 1) = 2 \cdot \lfloor n/2 \rfloor + 2 = \begin{cases} 2 \cdot n/2 + 2 & n \text{ even} \\ 2 \cdot (n-1)/2 + 2 & n \text{ odd} \end{cases} = \begin{cases} n + 2 & n \text{ even} \\ n + 1 & n \text{ odd} \end{cases}$$


that is out of the boundary of the array, that is impossible. So all the nodes after the node  $\lfloor n/2 \rfloor$  must be leaves. Then we have the proof that the nodes  $\lfloor n/2 \rfloor + 1, \lfloor n/2 \rfloor + 2, \dots, n$  are leaves.

- (Ex. 6.2-6 in [1]) Show that the worst-case running time of **HEAPIFY** on a binary heap of size  $n$  is  $\Omega(\log n)$ .


(Hint: For a heap with  $n$  nodes, give node values that cause **HEAPIFY** to be called recursively at every node on a simple path from the root down to a leaf.)

Let us consider a binary heap of size  $n$ . Since a simple path from the root down to a leaf is the height of the tree  $h$ , we have to estimate  $h$  in terms of  $n$ . In a binary tree the root has 2 children at depth 1, each of which has 2 children at depth 2, etc. Thus, the number of nodes ( $\equiv$  leaves) at depth  $h$  is  $2^h$ . Consequently, the height of a complete binary tree with  $m$  leaves, which is the length of the simple path from the root to a leaf, is  $\log_2 m$ . Since the number of leaves in a complete binary tree is  $(n+1)/2$  ( $n$  is always odd in a complete binary tree and the number of leaves is  $\lceil n/2 \rceil$ , as seen in the following exercise), we have that the height is  $\log_2 (n+1)/2 = \log_2 (n+1) - \log_2 2 = \log_2 (n+1) - 1$ . So in the worst case, if **HEAPIFY** is called for all the height of the tree, it is called  $\Omega(\log n)$  times.

For example, with the following array in a Min\_heap, when the minimum is deleted **HEAPIFY** is called recursively at every node on a simple path from the root down to a leaf:



that corresponds to the tree

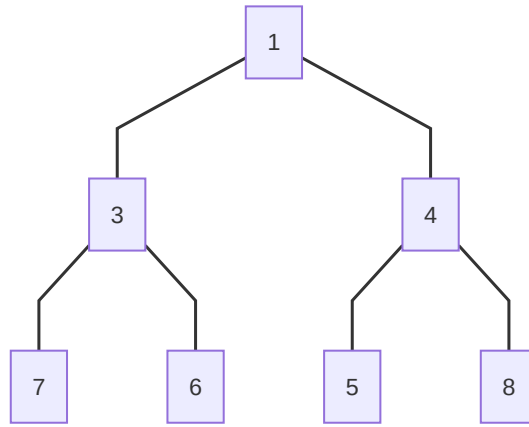

- (Ex. 6.3-3 in [1]) Show that there are at most  $\lceil n/2^{h+1} \rceil$  nodes of height  $h$  in any  $n$ -element binary heap.

The height of a node in a tree is the number of edges on the longest simple downward path from the node to a leaf, and the height of a tree is the height of its root. The height of a tree is also equal to the largest depth of any node in the tree.

Let us consider a  $n$ -element binary heap with height  $h$ . We have that the height of the root is  $h$  and the height of the children of the root is  $h - 1$ , while the height of a leaf is 0 and the height of the parents of the leaves is 1.

Since all the nodes after  $\lfloor n/2 \rfloor$  are leaves, we have  $\lfloor n/2 \rfloor$  leaves, so we have  $\lceil n/2^{0+1} \rceil$  nodes at height 0. We have a binary heap, so we have a binary tree, thus the number of parents of the leaves will be half the number of the leaves, so we will have  $\lceil (n/2)/2 \rceil = \lceil n/4 \rceil = \lceil n/2^{1+1} \rceil$  nodes at height 1. Let's assume that we have  $\lceil n/2^{(i-1)+1} \rceil = \lceil n/2^i \rceil$  nodes at height  $i - 1$ , their parents will be half of them, so they will be  $\lceil (n/2^i)/2 \rceil = \lceil n/2^{i+1} \rceil$ , so we have  $\lceil n/2^{i+1} \rceil$  nodes at height  $i$ . So by induction we have  $\lceil n/2^{h+1} \rceil$  nodes at height  $h$ , and we have proved our thesis. Besides, the root is at height  $h = \log_2 n$ , so we have  $\lceil n/2^{\log_2 n + 1} \rceil = \lceil n/2n \rceil = \lceil 0, \dots \rceil = 1$  node at height  $h$ .

## References

[1] T.H. Cormen, C.E. Leiserson, R.L. Rivest, and C. Stein. *Introduction to Algorithms*. The MIT Press. MIT Press, 2009.