



**Networkforyou**

Subscribe to our  
**You Tube Channel**



**Networkforyou**



**Welcome  
To  
Network for you  
SPAN, RSPAN  
And  
ERSPAN**



**Networkforyou**



Email us:  
**networkforyou4@gmail.com**


1 of 12

**WhatsApp Us : +918143809578**



## SPAN (Switched Port Analyzer):

- SPAN stand for Switched Port Analyzer.
- It is use to analyze the traffic for particular port.
- CISCO Catalyst Switches have this feature called SPAN.
- SPAN copy all traffic from a source port or source VLAN to a destination interface.
- SPAN is very useful for number of reasons like if you want to use Wireshark to capture traffic from an interface that is connected to a workstation, server, phone etc. or Redirect all traffic copy from that that interfaces to IDS/IPS or Redirect all VOIP calls from that interface to any call recorder.
- SPAN is also use for troubleshooting purpose and monitor network traffic etc.
- SPAN is used to monitor traffic for performing a security audit.
- SPAN is able to monitor a single interface or many interfaces.

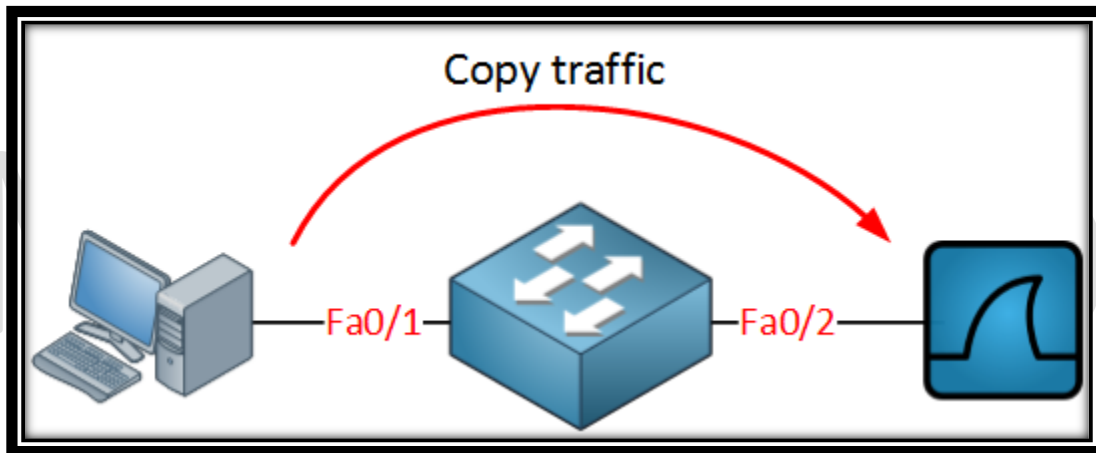



There are 3 main types of SPANs supported on CISCO Switches as given below:

1. Local SPAN (Switched Port Analyzer)
2. RSPAN (Switched Port Analyzer)
3. ERSPAN (Switched Port Analyzer)

## Local SPAN:


- When we use a destination interface on the same switch as your switch we called it is SPAN.
- In Local SPAN all source interface or source VLANs and destination interface are in same switch.
- In Local SPAN copies traffic from source interface to destination interface for analysis.
- When we use destination interface and source interface on same switch then it is called Local SPAN.

**Ps: Link Shadow(<https://www.linkshadow.com/>) application is also we can use to analysis traffic but in lab we will use wireshark.**

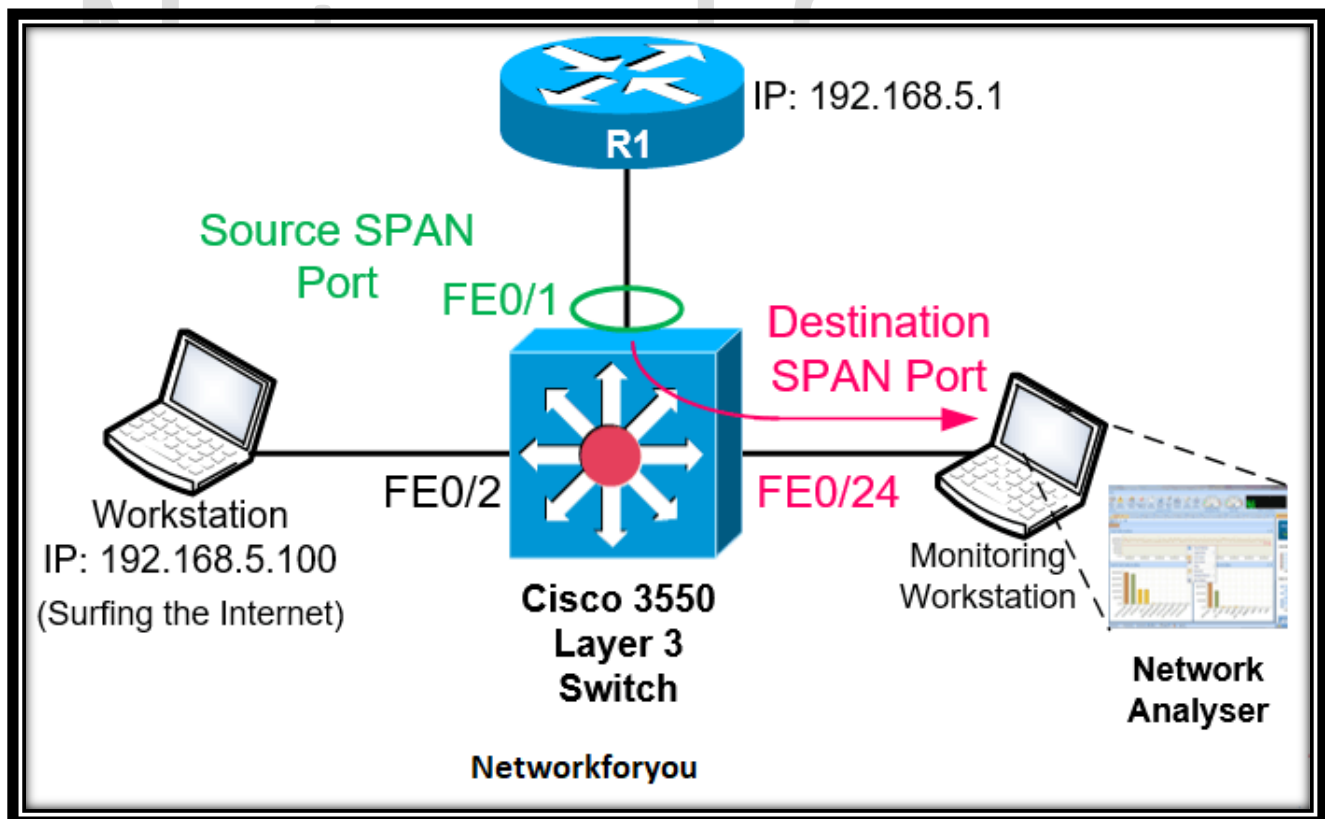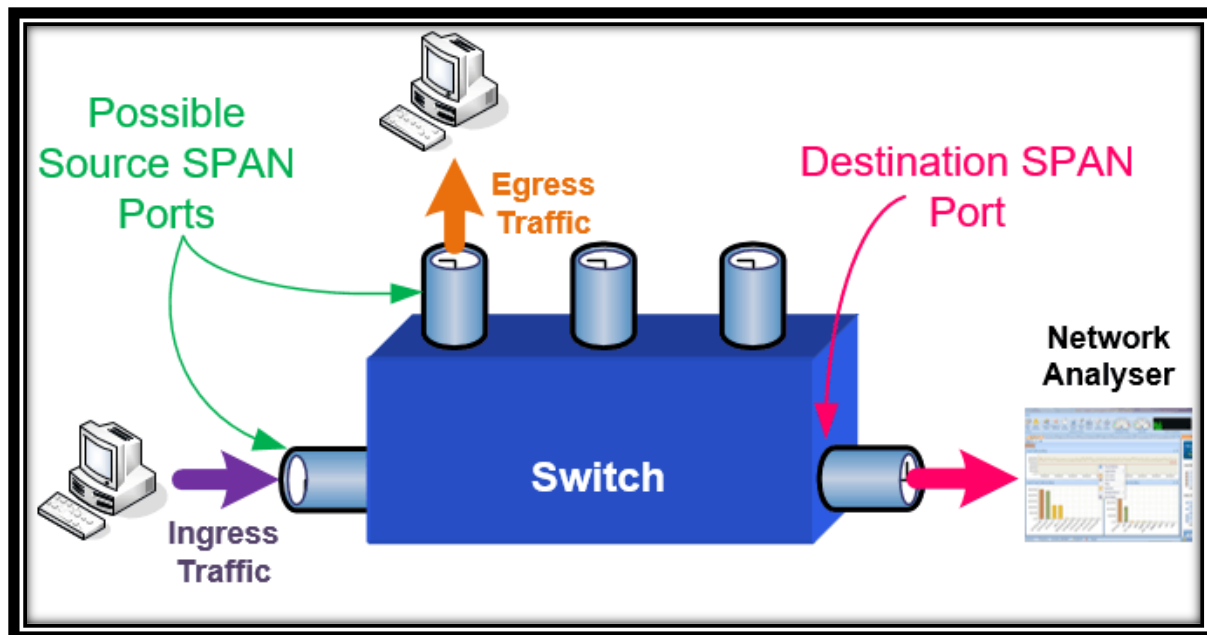



Lab Time:

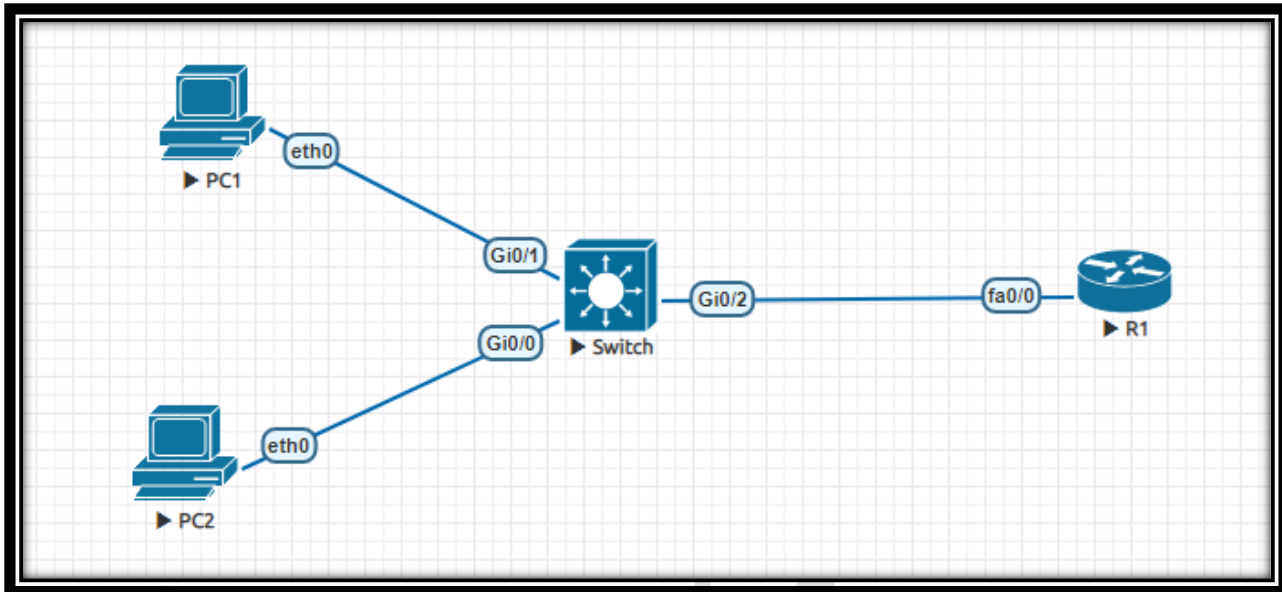

Capturing from Standard input

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter: <Ctrl-F>

| No. | Time      | Source            | Destination            | Protocol | Length | Info                                                          |
|-----|-----------|-------------------|------------------------|----------|--------|---------------------------------------------------------------|
| 1   | 0.000000  | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 2   | 2.040186  | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 3   | 3.425094  | c2:02:1f:79:00:00 | c2:02:1f:79:00:00      | LOOP     | 60     | Reply                                                         |
| 4   | 4.093672  | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 5   | 4.828460  | 50:00:00:01:00:02 | CDP/VTP/DTP/PagP/UD... | DTP      | 60     | Dynamic Trunk Protocol                                        |
| 6   | 4.833618  | 50:00:00:01:00:02 | CDP/VTP/DTP/PagP/UD... | DTP      | 90     | Dynamic Trunk Protocol                                        |
| 7   | 6.170099  | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 8   | 8.250459  | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 9   | 10.306740 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 10  | 12.359646 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 11  | 13.425015 | c2:02:1f:79:00:00 | c2:02:1f:79:00:00      | LOOP     | 60     | Reply                                                         |
| 12  | 14.435802 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 13  | 16.482669 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 14  | 18.505742 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 15  | 20.542366 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 16  | 22.563619 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 17  | 23.416181 | c2:02:1f:79:00:00 | c2:02:1f:79:00:00      | LOOP     | 60     | Reply                                                         |
| 18  | 24.645195 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 19  | 26.732614 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 20  | 28.752339 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 21  | 30.772056 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 22  | 32.805397 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |
| 23  | 33.415120 | c2:02:1f:79:00:00 | c2:02:1f:79:00:00      | LOOP     | 60     | Reply                                                         |
| 24  | 34.845943 | 50:00:00:01:00:02 | Spanning-tree-for-...  | STP      | 60     | Conf. Root = 32768/1/50:00:00:01:00:00 Cost = 0 Port = 0x8003 |

Frame 1: 60 bytes on wire (480 bits), 60 bytes captured (480 bits) on interface 0

- > IEEE 802.3 Ethernet
- > Logical-Link Control
- > Spanning Tree Protocol

Without SPAN Configuration not getting any traffic in Wire sharp.

Email us:  
[networkforyou4@gmail.com](mailto:networkforyou4@gmail.com)

4 of 12

WhatsApp Us : +918143809578



| R1 Configuration                                                               | SW1 Configuration:                                                                                                                                                                      |
|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| en<br>config t<br>hostname R1<br>int f0/0<br>ip add 1.1.1.1 255.0.0.0<br>no sh | en<br>config t<br>hostname SW1<br>monitor session 1 source interface g0/1 both<br>monitor session 1 destination interface g0/2<br><br><b>sh monitor session 1</b><br><b>sh int g0/2</b> |

After SPAN Configuration:

```
SW1#sh int g0/2
GigabitEthernet0/2 is up, line protocol is down (monitoring)
  Hardware is iGbE, address is 5000.0001.0002 (bia 5000.0001.0002)
  MTU 1500 bytes, BW 1000000 Kbit/sec, DLY 10 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Auto Duplex, Auto Speed, link type is auto, media type is unknown media type
  output flow-control is unsupported, input flow-control is unsupported
  Full-duplex, Auto-speed, link type is auto, media type is RJ45
  input flow-control is off, output flow-control is unsupported
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input never, output 00:01:02, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue: 0/0 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
    0 packets input, 0 bytes, 0 no buffer
    Received 0 broadcasts (0 multicasts)
    0 runs, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
    0 watchdog, 0 multicast, 0 pause input
    4 packets output, 330 bytes, 0 underruns
    0 output errors, 0 collisions, 2 interface resets
    0 unknown protocol drops
    0 babbles, 0 late collision, 0 deferred
    0 lost carrier, 0 no carrier, 0 pause output
    0 output buffer failures, 0 output buffers swapped out
```





```
SW1#sh monitor session 1
Session 1
-----
Type                : Local Session
Source Ports        :
  Both              : Gi0/1
Destination Ports   : Gi0/2
Encapsulation       : Native
```

| No. | Time       | Source      | Destination | Protocol | Length | Info                                                                |
|-----|------------|-------------|-------------|----------|--------|---------------------------------------------------------------------|
| 525 | 315.436449 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request id=0x1cfa, seq=408/38913, ttl=64 (reply in 526) |
| 526 | 315.444065 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply id=0x1cfa, seq=408/38913, ttl=64 (request in 525) |
| 527 | 316.447235 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request id=0x1dfa, seq=409/39169, ttl=64 (reply in 528) |
| 528 | 316.449623 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply id=0x1dfa, seq=409/39169, ttl=64 (request in 527) |
| 529 | 317.455668 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request id=0x1efa, seq=410/39425, ttl=64 (reply in 530) |
| 530 | 317.459537 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply id=0x1efa, seq=410/39425, ttl=64 (request in 529) |
| 531 | 318.463788 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request id=0x1ffa, seq=411/39681, ttl=64 (reply in 532) |
| 532 | 318.468861 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply id=0x1ffa, seq=411/39681, ttl=64 (request in 531) |
| 533 | 319.476944 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request id=0x20fa, seq=412/39937, ttl=64 (reply in 534) |
| 534 | 319.479221 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply id=0x20fa, seq=412/39937, ttl=64 (request in 533) |
| 535 | 320.484016 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request id=0x21fa, seq=413/40193, ttl=64 (reply in 536) |
| 536 | 320.490693 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply id=0x21fa, seq=413/40193, ttl=64 (request in 535) |
| 537 | 321.494439 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request id=0x22fa, seq=414/40449, ttl=64 (reply in 538) |
| 538 | 321.499141 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply id=0x22fa, seq=414/40449, ttl=64 (request in 537) |
| 539 | 322.502919 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request id=0x23fa, seq=415/40705, ttl=64 (reply in 540) |
| 540 | 322.505834 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply id=0x23fa, seq=415/40705, ttl=64 (request in 539) |


## RSPAN:

- RSPAN stands for Remote Switched Port Analyzer.
- Source port can be a routed port, switch port, trunk or ether channel.
- When destination Interface that is a remote interface on another switch then it is called RSPAN.
- Supports source ports, source VLANs & destination ports on different switches.
- Each session carries SPAN traffic over user-specified dedicated RSPAN VLAN.
- Remote Switched Port Analyzer need to use VLAN for Remote SPAN traffic.
- When we use RSPAN we need to use a VLAN that carries the traffic that you are copying.
- RSPAN need to use a dedicated VLAN that carries the traffic that are copying.
- RSPAN allows traffic that is sourced from Switch to be mirrored to a remote Switch.

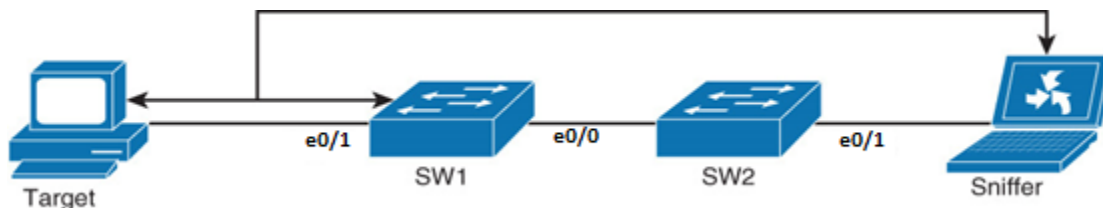

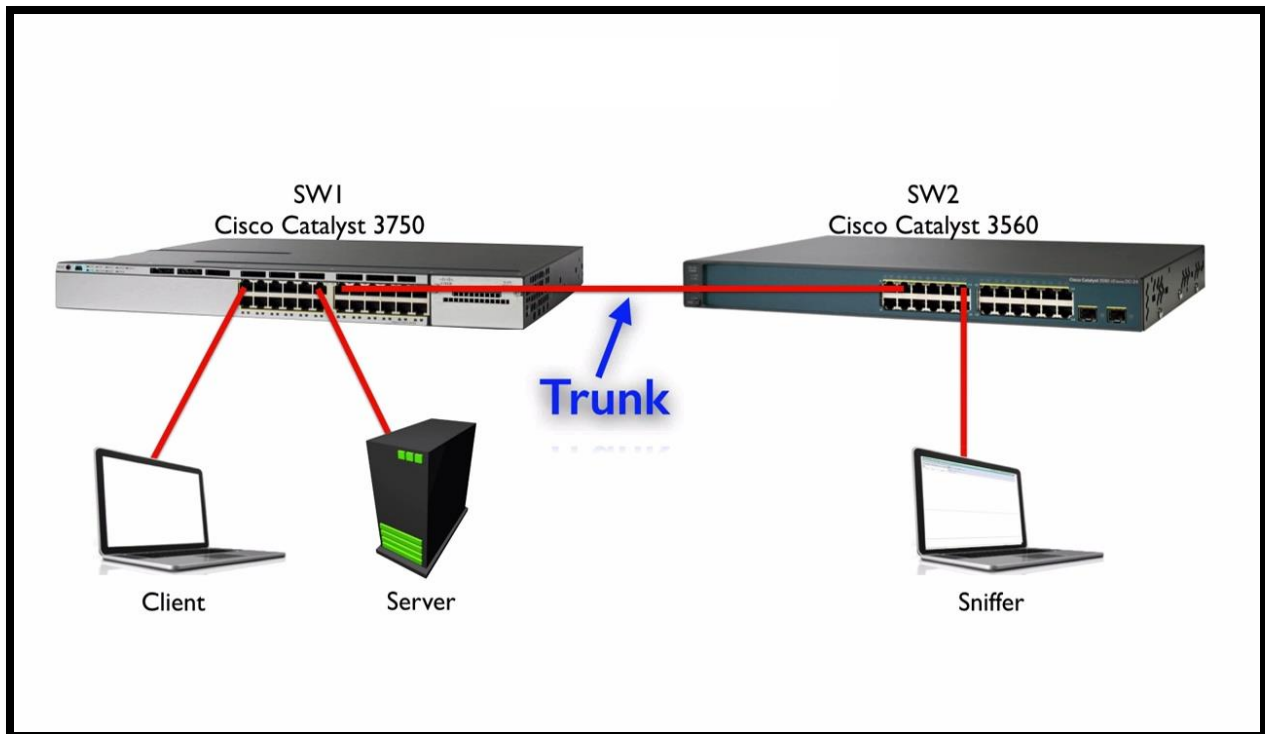

Lab time RSPAN:

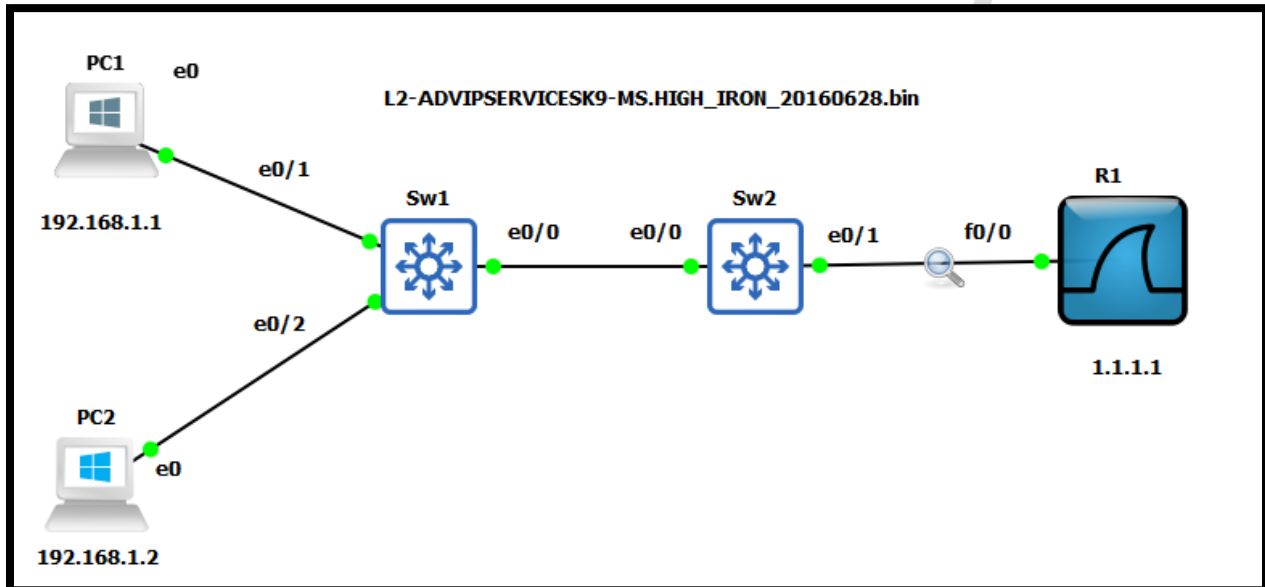



## R1 Configuration

```
En
Config t
Hostname R1
Int f0/0
Ip add 1.1.1.1 255.0.0.0
No sh
```

## SW1 Configuration

```
SW1(Config)#vlan 200
SW1(Config-vlan)#remote-span
SW1(config)#interface Ethernet 0/0
SW1(config-if)#switchport trunk encapsulation dot1q
SW1(config-if)#switchport mode trunk
SW1(config)#monitor session 1 source interface Ethernet 0/1 both
SW1(config)#monitor session 1 destination remote vlan 200
SW1#show monitor session all
```

## SW2 Configuration

```
SW2(config)#vlan 200
SW2(config-vlan)#remote-span
SW2(config)#interface Ethernet 0/0
SW2(config-if)#switchport trunk encapsulation dot1q
SW2(config-if)#switchport mode trunk
SW2(config)#monitor session 1 source remote vlan 200
SW2(config)#monitor session 1 destination interface Ethernet 0/1
SW2#show monitor session all
```

```
S2#sh monitor session all
Session 1
-----
Type                               : Remote Destination Session
Source RSPAN VLAN                  : 200
Destination Ports                   : Et0/1
Encapsulation                       : Native
```



```
S2#sh int e0/1
Ethernet0/1 is up, line protocol is down (monitoring)
  Hardware is Ethernet, address is aabb.cc00.0210 (bia aabb.cc00.0210)
  MTU 1500 bytes, BW 10000 Kbit/sec, DLY 1000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Full-duplex, Auto-speed, media type is RJ45
  input flow-control is off, output flow-control is unsupported
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:08:53, output 00:00:00, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/2000/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue: 0/0 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 1000 bits/sec, 1 packets/sec
    127 packets input, 13457 bytes, 0 no buffer
    Received 25 broadcasts (0 multicasts)
    0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored
    0 input packets with dribble condition detected
  1988 packets output, 174694 bytes, 0 underruns
--More--
```

Wireshark capture of ICMP Echo (ping) traffic between 192.168.1.1 and 192.168.1.2.

| No. | Time      | Source      | Destination | Protocol | Length | Info                  |
|-----|-----------|-------------|-------------|----------|--------|-----------------------|
| 63  | 28.109940 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |
| 64  | 29.109749 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request i |
| 65  | 29.110912 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |
| 66  | 30.110348 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request i |
| 67  | 30.111274 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |
| 69  | 31.110954 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request i |
| 70  | 31.111293 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |
| 71  | 32.111075 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request i |
| 72  | 32.111725 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |
| 74  | 33.112354 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request i |
| 75  | 33.112690 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |
| 76  | 34.112243 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request i |
| 77  | 34.112783 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |
| 78  | 35.112209 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request i |
| 79  | 35.112714 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |
| 80  | 36.113199 | 192.168.1.1 | 192.168.1.2 | ICMP     | 98     | Echo (ping) request i |
| 81  | 36.114346 | 192.168.1.2 | 192.168.1.1 | ICMP     | 98     | Echo (ping) reply i   |

Frame 1: 98 bytes on wire (784 bits), 98 bytes captured (784 bits) on interface -, id 0  
> Ethernet II, Src: Private\_66:68:00 (00:50:79:66:68:00), Dst: Private\_66:68:01 (00:50:79:66:68:01)  
> Internet Protocol Version 4, Src: 192.168.1.1, Dst: 192.168.1.2  
> Internet Control Message Protocol



## ERSPAN:

- ERSPAN is stand for Encapsulated Remote Switched Port Analyzer.
- Feature present on new IOS-XE on ASR1000 also available on Catalyst 6500.
- ERSPAN brings generic routing encapsulation (GRE) for all captured traffic.
- ERSPAN is used to send traffic for sniffing over L3 networks using GRE tunnel.
- ERSPAN on Cisco ASR 1000 Series Routers supports only The Layer 3 interfaces.
- Ethernet interfaces are not supported on ERSPAN configured as Layer 2 interfaces.


## For the Source session, need to Configure:

- To configure ERSPAN it requires Unique session ID, List of source interfaces or VLANs.
- What is the traffic we want to capture tx (Transmit Only ), rx (Receive Only) or both.
- ERSPAN configuration require Destination IP address for the GRE tunnel to connect.
- Origin IP address which is used as source for generic routing encapsulation tunnel.
- Unique Encapsulated Remote Switched Port Analyzer (ERSPAN) flow ID (Identity).

## For the Destination need to Specify:

- For the Destination Unique session ID doesn't have to match with source session.
- ERSPAN require Destination interface(s) where you want to forward the traffic to.
- Source IP address has to match with the origin IP address of the source session.
- ERSPAN require Unique ERSPAN flow ID, has to match with the source session.

## Lab time for ERSPAN:

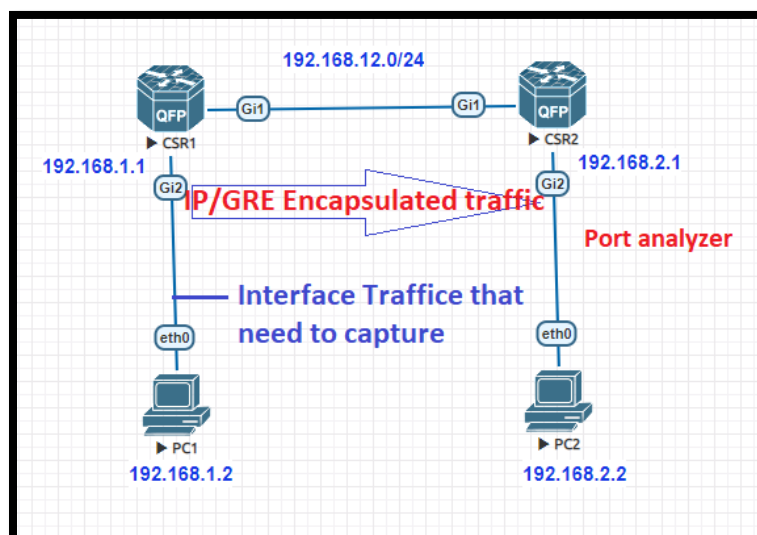



| CSR1 Basic IP Configuration:                                                                                                                                                                      | CSR2 Basic IP Configuration:                                                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| en<br>config t<br>hostname R1<br>int g1<br>ip add 192.168.12.1 255.255.255.0<br>no sh<br>int g2<br>ip add 192.168.1.1 255.255.255.0<br>no sh<br>exit<br><br>ip route 0.0.0.0 0.0.0.0 192.168.12.2 | en<br>config t<br>hostname R2<br>int g1<br>ip add 192.168.12.2 255.255.255.0<br>no sh<br>int g2<br>ip add 192.168.2.1 255.255.255.0<br>no sh<br>exit<br><br>ip route 0.0.0.0 0.0.0.0 192.168.12.1 |

| CSR1 ERSPAN Configuration:                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CSR1(config)#monitor session 1 type erspan-source<br>CSR1(config-mon-erspan-src)#source interface GigabitEthernet 2 both<br>CSR1(config-mon-erspan-src)#no shutdown<br>CSR1(config-mon-erspan-src)#destination<br>CSR1(config-mon-erspan-src-dst)#erspan-id 200<br>CSR1(config-mon-erspan-src-dst)#ip address 192.168.2.2<br>CSR1(config-mon-erspan-src-dst)#origin ip address 192.168.12.1<br>CSR1#show monitor session 1 |

| CSR2 ERSPAN Configuration:                                                                                                                                                                                                                                                                                                                               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CSR2(config)#monitor session 1 type erspan-destination<br>CSR2(config-mon-erspan-dst)#no shutdown<br>CSR2(config-mon-erspan-dst)#destination interface GigabitEthernet 2<br>CSR2(config-mon-erspan-dst)#source<br>CSR2(config-mon-erspan-dst-src)#erspan-id 200<br>CSR2(config-mon-erspan-dst-src)#ip address 192.168.2.2<br>CSR2#show monitor session 1 |



```
R1#sh monitor session all
Session 1
-----
Type                : ERSPAN Source Session
Status              : Admin Enabled
Source Ports        :
Both                : Gi2
Destination IP Address : 192.168.2.2
MTU                 : 1464
Destination ERSPAN ID : 200
Origin IP Address   : 192.168.12.1
```

```
R2#sh monitor session all
Session 1
-----
Type                : ERSPAN Destination Session
Status              : Admin Enabled
Destination Ports    : Gi2
Source IP Address    : 192.168.2.2
Source ERSPAN ID     : 200
```

| No. | Time       | Source      | Destination | Protocol | Length | Info                |
|-----|------------|-------------|-------------|----------|--------|---------------------|
| 660 | 330.541989 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |
| 661 | 331.543690 | 192.168.1.2 | 192.168.1.1 | ICMP     | 148    | Echo (ping) reply   |
| 662 | 331.544128 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |
| 663 | 332.545590 | 192.168.1.2 | 192.168.1.1 | ICMP     | 148    | Echo (ping) reply   |
| 664 | 332.546122 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |
| 665 | 333.547128 | 192.168.1.2 | 192.168.1.1 | ICMP     | 148    | Echo (ping) reply   |
| 666 | 333.547665 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |
| 667 | 334.553581 | 192.168.1.2 | 192.168.1.1 | ICMP     | 148    | Echo (ping) reply   |
| 668 | 334.555070 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |
| 669 | 335.553065 | 192.168.1.2 | 192.168.1.1 | ICMP     | 148    | Echo (ping) reply   |
| 670 | 335.553404 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |
| 671 | 336.554486 | 192.168.1.2 | 192.168.1.1 | ICMP     | 148    | Echo (ping) reply   |
| 672 | 336.555155 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |
| 673 | 337.556106 | 192.168.1.2 | 192.168.1.1 | ICMP     | 148    | Echo (ping) reply   |
| 674 | 337.556581 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |
| 675 | 338.558061 | 192.168.1.2 | 192.168.1.1 | ICMP     | 148    | Echo (ping) reply   |
| 676 | 338.558375 | 192.168.1.1 | 192.168.1.2 | ICMP     | 148    | Echo (ping) request |