

GUIDE & INFO ABOUT IEEE 754 CONVERTER

AUTHORS

This is a project made by three students of University of Vigo in 2025:

- 1. González García, Iván
- 2. Martínez Boullosa, Javier
- 3. Sanjurjo Besada, Marcos

INDEX

INTRODUCTION	2
MAIN INTERFACE	2
BLOCK ONE	3
BLOCK TWO	4
BLOCK THREE	5
APPENDIX	5

INTRODUCTION

In this file is shown the information needed to use the website in the correct way. Currently, this page is in a very recent version, that's why, it may contain errors, we are working to find and solve them and, in addition, we are trying to improve and extend the precision of this site.

If you find an error or you have any questions or suggestions, you can contact us at [this e-mail](#).

Before continuing with this guide, you should know that this website is completely running in the client-side and we do not collect any kind of information.

1. MAIN INTERFACE

The screenshot displays the 'IEEE 754 Converter' website interface, which is organized into three main vertical sections. The leftmost section, titled 'IEEE 754 Converter', contains tabs for 'Decimal', 'Hexadecimal', 'Octal', and 'Binary'. Under the 'Decimal' tab, there are input fields for 'Decimal' (with an example: '13.3' or '1.23e+31'), 'Simple Precision' (with an example: '1234567A' (8 digits needed)), and 'Double Precision' (with an example: '1234567890ABCDEF' (16 digits needed)). Below these are 'Examples' with a dropdown menu, 'Rounding method' with a dropdown menu set to 'roundTiesToEven', and 'Clear' and 'Calculate' buttons. The middle section contains two sub-sections: 'Simple Precision' and 'Double Precision'. Each sub-section has input fields for 'Exact Value', 'Sign Bit', 'Exponent', and 'Significand'. The rightmost section, titled 'Base Converter', has a 'Number' input field, 'From Base' and 'To Base' dropdown menus (both set to 'Decimal'), a 'Result' output field, and 'Clear', 'Calculate', and 'Interchange' buttons. At the bottom of the left section, there are links: 'Download Guide & Info (PDF)', 'Understanding IEEE 754', and 'Contact us'.

This is the main interface of the page, it has three (3) principal sections:

1. At the left, there is the principal section, where you can do the conversions from a number in classic notation to IEEE 754 notation and vice-versa.
2. In the middle, it is the block intended to show the user the extended properties about the IEEE 754 number.
3. At the right, it is an additional block, where you can change a number through different bases.

2. BLOCK ONE (1)

The image shows a web application titled "IEEE 754 Converter". At the top, there are four buttons for selecting the input base: "Decimal", "Hexadecimal", "Octal", and "Binary". Below these, there are three input fields for different IEEE 754 representations: "Decimal" (with an example: '13.3' or '-1.23e+31'), "Simple Precision" (with an example: '1234567A' (8 digits needed)), and "Double Precision" (with an example: '1234567890ABCDEF' (16 digits needed)). Below the input fields, there is a section for "Examples" with a dropdown menu labeled "Select one", a red "Clear" button, and a green "Calculate" button. At the bottom, there is a "Rounding method" dropdown menu currently set to "roundTiesToEven". At the very bottom, there are links for "Download Guide & Info (PDF)", "Understanding IEEE 754", and "Contact us".

We are going to describe the previous menu showed in the image from the top to the bottom:

1. At the top, there is the title of the website.
2. There are four (4) buttons to choose the base number of the first input, the input of the fractional numbers.
3. The first input: fractional numbers are introduced here. You can write here positive, negative and all real numbers in any of the four available bases (decimal, hexadecimal, octal and binary). If you choose decimal base, you can write the number in exponential notation (ex. '23.14e-12').
4. The second input: the simple precision of the IEEE 754 number goes here. You should write an IEEE 754 number in simple precision in this input, eight (8) digits are needed.
5. The third and last input for the double precision. You should write IEEE 754 numbers in this input, with sixteen (16) digits.
6. The select of the examples. In this select you can choose one example of the list and look its representation.
7. The 'Clear' button. This button is to delete all the information in the boxes, included the boxes of the second block (the section of the middle).
8. The 'Calculate' button. This button is for calculate the IEEE 754 number (simple and double) after you introduce the fractional number in the first input.
9. The link to download this file.

Notes:

-The three inputs are for write and read, i.e., when you use the first input to write a fractional number you will see the conversion (simple and double precision) in its respective inputs. And vice-versa, when you write a number in, for example, simple precision input you will see its conversion to real number in the first input and its equivalent in double precision in the third input. The same when the input is in the double precision box.

-To convert a fractional number in its IEEE 754 representation, you should write the number firstly and then, press the 'Calculate' button. But, when the input is one of the two precisions of the IEEE 754, you do not need to press that button, you only must write all the digits for that number (eight (8) for simple and sixteen (16) for double).

-If you introduce a number but it is an incorrect format, the input borders will turn red.

-In the examples select the 'sNaN' and 'qNaN' will not be able to be showed in the inputs of this menu, that's why, they will only be showed in the next section.

-If you use a base other than decimal, the accuracy of the IEEE 754 equivalent may be slightly reduced.

-You can choose three (3) methods to perform rounding: roundTiesToEven, roundTiesToAway or Without Rounding. The first two are explained in [Understanding IEEE 754](#).

3. BLOCK TWO (2)

Simple Precision	Double Precision
Exact Value: Do not write here	Exact Value: Do not write here
Sign Bit: Do not write here	Sign Bit: Do not write here
Exponent: Do not write here	Exponent: Do not write here
Significand: Do not write here	Significand: Do not write here

In this section, you cannot write in any box. You only can see the three (3) areas of the two precisions (sign bit, exponent and significand) bit by bit. The box 'Exact Value' contains the exact real number in decimal base (always in decimal base) that the IEEE 754 number represents.


Important note:

-In this section, "exponent" is used with the meaning of "biased exponent". For more information, check [Understanding IEEE 754](#) out.

Note:

-When in the section one (1) you choose the 'sNaN' or 'qNaN' examples you will see some 'X' in the boxes of this block, the 'X' represents that does not matter if that bit is '1' or '0'.

4. BLOCK THREE (3)

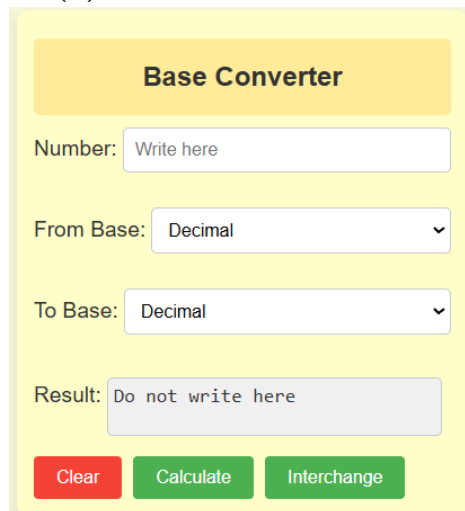

The image shows a web-based 'Base Converter' interface. It has a yellow header with the title 'Base Converter'. Below the header, there are four input fields: 'Number:' with a placeholder 'Write here', 'From Base:' with a dropdown menu showing 'Decimal', 'To Base:' with a dropdown menu showing 'Decimal', and 'Result:' with a placeholder 'Do not write here'. At the bottom, there are three buttons: 'Clear' (red), 'Calculate' (green), and 'Interchange' (green).


This block is additional and works independently of the other two. It can do base conversions in the four (4) bases: decimal, hexadecimal, octal and binary. You should write the original number in the first input, secondly, select the base for that number and then select the base you want, when you press the 'Calculate' button, you will see the conversion in the box 'Result'.

The button 'Clear' is to delete all the information in the boxes and the button 'Interchange' is for change the values between the 'From Base' select and 'To Base'.

Note:

-If you write a number in the incorrect format, you will be advised in the 'Result' box after press the 'Calculate' button.

5. APPENDIX (Understanding IEEE 754)

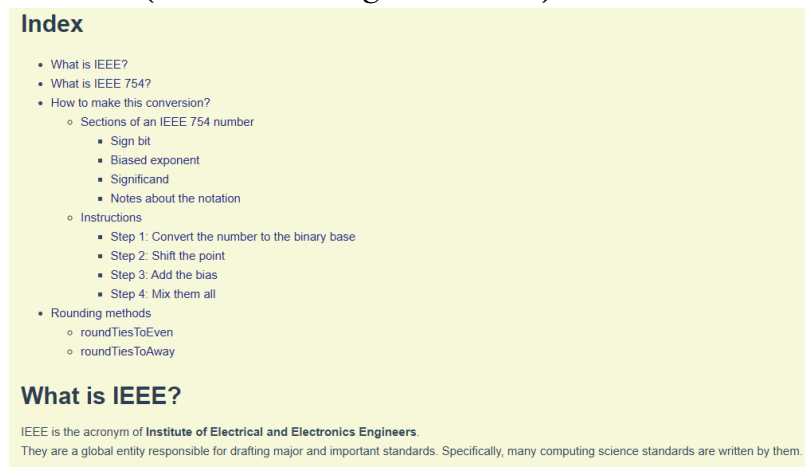

The image shows an 'Index' page for 'Understanding IEEE 754'. It contains a list of topics: 'What is IEEE?', 'What is IEEE 754?', 'How to make this conversion?' (with sub-items: 'Sections of an IEEE 754 number' including 'Sign bit', 'Biased exponent', 'Significand', 'Notes about the notation'; 'Instructions' including 'Step 1: Convert the number to the binary base', 'Step 2: Shift the point', 'Step 3: Add the bias', 'Step 4: Mix them all'); and 'Rounding methods' including 'roundTiesToEven' and 'roundTiesToAway'). Below the index is a section titled 'What is IEEE?' which states: 'IEEE is the acronym of **Institute of Electrical and Electronics Engineers**. They are a global entity responsible for drafting major and important standards. Specifically, many computing science standards are written by them.'

There is a link on the main page that redirects you to another page with a very basic explanation of the conversion.