qNoise: A generator of non-Gaussian colored noise

J. Ignacio Deza[a], Roberto R. Deza[b]

[a]*DONLL, Universitat Politècnica de Catalunya, C/ Jordi Girona 31, 08034, Barcelona, Spain*
[b]*IFIMAR (CONICET-UNMdP), Deán Funes 3350, B7602AYL Mar del Plata, Argentina*

Abstract

We introduce a software generator for a class of *colored* (self-correlated) and *non-Gaussian* noise, whose statistics and spectrum depend upon only two parameters. Inspired by Tsallis' nonextensive formulation of statistical physics, this so-called q-distribution is a handy source of auto-correlated noise for a great variety of applications. This noise has a smooth limit for $q = 1$ to an Ornstein–Uhlenbeck noise of autocorrelation τ. The noise is generated via a stochastic differential equation using a second order Runge-Kutta integration scheme (also known as the Heun method) and it is implemented as a stand alone library in the language c++ available with an open source licence in the repository github[1]. Their statistics can be chosen at will, by varying a single parameter q: it has compact support for $q < 1$, and its variance tends to infinity as q approaches $q = 5/3$. The software here introduced focuses in the regime departures from Gaussianity, namely $0 < q < 5/3$ where the variance is still normalizable. Furthermore. The autocorrelation of the noise can be tuned—by means of parameter τ—independently from the statistics providing a tool to examine the effects of non-Gaussian Colored noise, as a way to model many real-world types of noise. Applications are discussed, illustrating how the noise statistics affects the response of a variety of nonlinear systems. In many of these examples, the system's response turns out to be optimal for some $q \neq 1$. This software is thus suitable for the simulation of a wide range of types of noise, or study the effect of correlation and deviations from Gaussianity in Stochastic ODEs, This is relevant for a wide variety of technological applications, as well as for the understanding of situations of biological interest.

Keywords: non-Gaussian, random process generator, stochastic differential equations

1. Introduction

Most studies on noise-induced phenomena [2, 3] have assumed the noise source to have Gaussian distribution, either "white" (memoryless) or "colored" (red, pink, etc). Although customarily accepted without criticisms on the basis of the central limit theorem, the true rationale behind this assumption lies in the possibility of obtaining some analytical results, and avoiding many difficulties arising in generating and handling non-Gaussian noise. There is however experimental evidence that at least in some cases (particularly in sensory and biological systems) non-Gaussian noise sources may add desirable features to noise-induced phenomena (e.g. robustness, fault tolerance). These findings add practical interest to the task of finding viable ways to deal with non-Gaussian noise.

Here we introduce a light-weighted generator for non-Gaussian, colored stochastic processes. The expected applications of this software range from the simulation of some types of vibrations or fluctuations which are typically non-Gaussian, the generation of noise which is naturally confined to a domain (for a range of applications) and the investigation of the response of many dynamical systems embedded in noise, as the latter departs from being Gaussian.

The main features of noise obeying Tsallis' statistics are summarized in Sec. 2. Section 4 is devoted to the description of the software architecture. Section 3, to a statistical analysis of the generated noise in the qualitatively different cases, ending with a discussion on the q-dependence of the variance and effective self-correlation time. The measured self-correlation times of the obtained series are compared with the given one. In will be made, and in Sec. 5 a very brief review of noise-induced phenomena will be given, citing some publications which have already used a noise scheme similar to the one presented.

2. q-noise with Tsallis' statistics

The exponentially self-correlated Gaussian noise $\eta(t)$ known after Ornstein and Uhlenbeck (OU noise, or "colored" Gaussian noise) can be *dynamically* generated through the differential equation

$$\tau\,\dot{\eta} = -\eta(t) + \xi(t), \tag{1}$$

where $\xi(t)$ is centered Gaussian white noise with variance D, namely

$$\langle \xi(t) \rangle = 0, \quad \langle \xi(t)\,\xi(t') \rangle = 2D\,\delta(t - t').$$

This way, η's self-correlation time turns out to be τ.

A straightforward generalization of Eq. (1) was proposed some time ago [4] as a model for correlated diffusion:

$$\tau\,\dot{\eta} = -\frac{d}{d\eta} V_q(\eta) + \xi(t) \tag{2}$$

Email address: juan.ignacio.deza@upc.edu (J. Ignacio Deza)

where the potential V_q is given by:

$$V_q(\eta) = \frac{D}{\tau\,(q-1)}\,\ln\left[1 + \frac{\tau\,(q-1)}{D}\,\frac{\eta^2}{2}\right], \tag{3}$$

As much as the OU noise provided a device to explore spectral effects of the noise (always within the class of exponentially correlated ones), this generalization provides moreover a device to explore statistics effects by varying just one parameter (namely q, at constant τ and D).

The stationary properties of η, including its time-correlation function, are thoroughly described elsewhere [5, 6, 7, 8, 9] so here we summarize the main results. The stationary probability distribution can be obtained using the Fokker-Plank formalism and it is given by

$$P_q^{\rm st}(\eta) = \frac{1}{Z_q}\left[1 + \frac{\tau\,(q-1)}{D}\,\frac{\eta^2}{2}\right]^{\frac{1}{1-q}}, \tag{4}$$

where Z_q is the normalization factor. This distribution can be normalized only for $q < 3$, afterwards it becomes a non-stationary distribution and most results of this analysis become invalid.

The first moment $\langle\eta\rangle$ always vanishes [5, 6, 7, 8, 9] and the second moment,

$$\langle\eta^2\rangle = \frac{2D}{\tau\,(5-3q)}, \tag{5}$$

is finite only for $q < 5/3$. As Eq. (5) shows, it diverges for $q \to 5/3$.

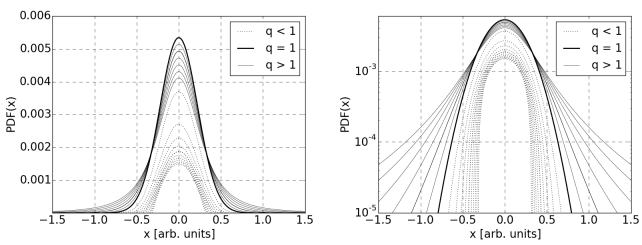

Figure 1: Stationary q-noise pdf for $0 < q < 1$ (dotted line), $q = 1$ (bold line) and $1 < q < 1.6$ (single line). The right panel show the same plot in semilogarithmic scale. Notice the pdf is compact-supported for $q < 1$, Gaussian for $q = 1$ and fat-tailed for $q > 1$.

Some properties of the noise are summarized in Fig. 1. The Gaussian limit is shown as a bold line for $q = 1$. The single lines for $q > 1$ show a second moment larger than the Gaussian limit D/τ. For $q < 1$ (dotted lines) the distribution has a cut-off, and it is only defined for

$$|\eta| < \eta_c \equiv \sqrt{\frac{2D}{\tau\,(1-q)}} \tag{6}$$

the same distributions are shown in both linear (left) and semilogarithmic (right) scale, in order to emphasize different aspects of the distributions.

Finally, the correlation time τ_q of the stationary regime of the process $\eta(t)$ also diverges for $\to 5/3 \approx 1.66$. However, it can be approximated over a range of values of q (not very near to the divergence point) as

$$\tau_q \approx \frac{2\tau}{5-3q} \tag{7}$$

.

Clearly, when $q \to 1$ the limit of η being a Gaussian colored noise is recovered, namely the Ornstein–Uhlenbeck process $\xi_{OU}(t)$, with correlations

$$\langle\xi_{OU}(t)\,\xi_{OU}(t')\rangle = \frac{D}{\tau}\exp\left(-\frac{|t-t'|}{\tau}\right) \tag{8}$$

and probability distribution

$$P^{\rm st}(\xi_{OU}) = Z^{-1}\exp\left(-\frac{\tau}{D}\,\frac{\xi_{OU}^2}{2}\right) \tag{9}$$

2.1. Dependence of τ and $\langle\eta^2\rangle$ with q

As shown in Eqs. (5) and (7), both $\langle\eta^2\rangle$ and τ depend on q. It is however desirable to have a generator able to maintain approximately the characteristics of these properties, in order to study the effects of the statistics due to changes in q for constant τ and variance. This is how the effective τ and $\langle\eta^2\rangle$ can be defined by dividing τ by Eq. (7) before integration and $\langle\eta^2\rangle$ by Eq. (5) after integration. Figure 2 show this dependence for both τ $\langle\eta^2\rangle$ and and how the system becomes independent of q for the range $0 < q < 1.5$ approximately. For $q > 1.5$, the proximity to the divergence point $q = 5/3$ (shown with a dotted line) makes this approximation fail.

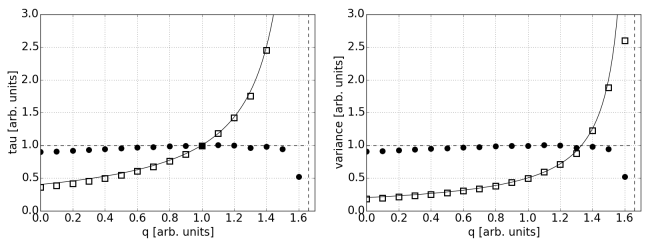

Figure 2: (Left) Dependence of τ on q. The white squares show the measured dependence, fitted by Eq. (7) (full line). The black dots show the behavior of an effective τ in order to make it independent of q. (Right) Equivalently for the variance of the noise, using Eq. (5).

3. Software Description

The noise generator[1] is implemented in c++ as class depending on standard libraries only. It generates random numbers using functions in the built in $<$ *random* $>$ class. It includes Gaussian white noise, Gaussian colored noise (Orstein-Uhlembeck), and two varieties of non-Gaussian non-white noise. One where τ and $\langle\eta^2\rangle$ depend on q—as in the white squares of figure 2—and a normalized version where this effect has been compensated to the first order, sufficiently far away from $q = 5/3$. as shown as black dots in figure 2. The first

type of noise allows to generate noise whose variance tends to infinity, while the normalized version which allows displacements from Gaussianity for independent τ and q. This battery of functions would allow for modeling a wide variety of scenarios and phenomena, some of which are detailed in the last section of this communication. The software uses by default the Mersenne-Twister generator which provides a very long pseudo-random number cycle. So it is advised to seed the generator only once in the program to decrase the probability of spurious correlations .

3.1. Seeding

There are two ways for seeding the random number generator:

```
void seedTimer ()
void seedManual (unsigned UserSeed)
```

the timer seeding is automatic, and for simple applications no seeing is necessary. A manual seeding for each thread is advised when using multi-threading.

3.2. Functions

The class presents four public member functions:

```
1. double gaussWN ()
2. double orsUhl (double x, double tau, double H)
3. double qNoise (double eta, double tau, double q,
double H, double sqrt_H (optional))
4. double qNoiseNorm (double eta, double tau, double q,
double H, double sqrt_H (optional))
```

The first function is an wrapper for the normal distribution implemented in the random standard library. It is presented as a function of this class for convenience.

The second function is an implementation of the Orstein-Uhlembeck noise. It accepts three parameters. One is the previous value of the noise (needed as it is a Markov process), then the autocorrelation time τ of the noise and the integration time H (necessary for setting the adequate timescale of the noise).

The third function implements the qNoise distribution. It accepts the same variables as the orsUhl function plus q (the noise statistics), and sqrt_H as an optional variable. To explicitly input sqrt_H = $\sqrt{H}$ is faster when H is not variable to avoid its calculation every time the function is invoked.

Finally the fourth function is a wrapper for the third function where τ is automatically by equation 7 and the resulting noise is divided using Eq. 5 in order to compensate for the dependence of both τ and the variance of the noise on q. See section 2.1 for an analysis of this effect.

4. Properties of the generated noise

Bounded domain ($q = 0.7$)

Bounded domain noise is widespread in nature and of multiple applications for modeling and control. Even if basically all physical noises are of bounded domain, sometimes it is desirable to explicitly address the effect of a boundary (a physical wall, some kind of potential) in some noisy behavior. For example, in Sec. 5.1 an example of the utility of bounded noises is shown. Numerically it is also desirable to have a distribution which is identically zero outside a boundary.

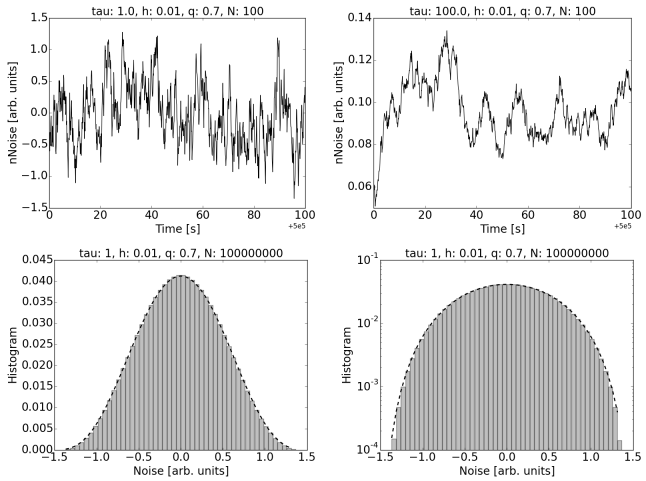

Figure 3: qNoise for $q = 0.7$) (bounded domain), and integration step $h = 0.01$. The top panels show a sample of the noise generated noise, for (left) $\tau = 1s$ and (right) $\tau = 100s$. Notice that in the right figure the noise is not centered around zero as its performing a very long excursion (bigger than the sample) given its very high autocorrelation. Both histograms in the bottom panels show the same data, coinciding with the sample on top-left. ($\tau = 1s$). Although in the linear histogram of the left it cannot be clearly seen, the semilogarithmic plot on the right clearly show the bounded domain. The dotted points show the theoretical distribution as in Fig. 1 for the same parameters agreeing excellently with the histogram of the data.

Gaussian case ($q = 1$)

Supra-Gaussian noise ($q = 1.3$)

5. Applications

Stochastic resonance

This is a phenomenon occurring in some nonlinear systems, whereby enhancing the response to a weak external signal may require *increasing* the noise intensity. An often resorted-to measure is the *signal-to-noise ratio* at the input frequency ω (denoted by R).

The main numerical and theoretical results are [10, 11]: (1) for fixed τ, the maximum R increases with decreasing q; (2) for given q, the optimal noise intensity (the one maximizing R) decreases with q and its value is approximately independent of τ; (3) for fixed noise intensity, the optimal value of q is independent of τ and in general turns out to be $q_{\rm op} \neq 1$. A simple SR experiment with a non-Gaussian *white* noise [12] confirmed most of these predictions.

Brownian motors

A class of nonequilibrium systems with both potential technological applications and biological interest are “ratchets”, in

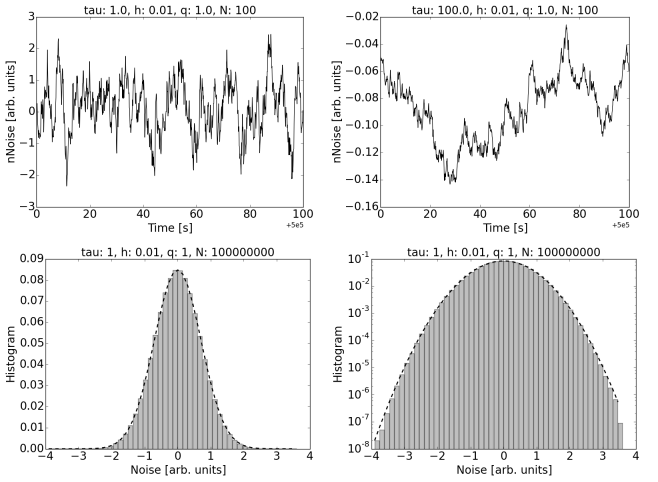

Figure 4: qNoise for $q = 1$) (Gaussian Behavior), and integration step $h = 0.01$. The top panels show a sample of the noise generated noise, for (left) $\tau = 1s$ and (right) $\tau = 100s$. Notice that in the right figure the noise is not centered around zero as its performing a very long excursion (bigger than the sample) given its very high autocorrelation. Both histograms in the bottom panels show the same data, coinciding with the sample on top-left. ($\tau = 1s$). Although in the linear histogram of the left shows a bell-shaped distribution, this is not enough to demonstrate Gaussianity. However the semilogarithmic plot of the right is parabolic demonstrating this fact. The dotted points show the theoretical distribution as in Fig. 1 for the same parameters agreeing excellently with the histogram of the data.

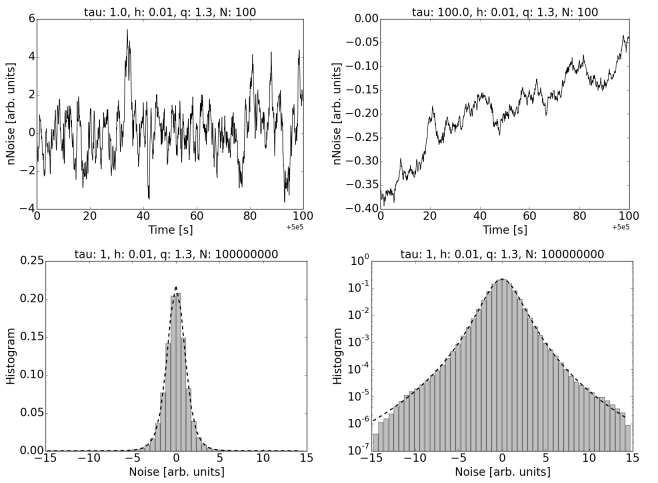

Figure 5: qNoise for $q = 1.3$) (supra-Gaussian Behavior), and integration step $h = 0.01$. The top panels show a sample of the noise generated noise, for (left) $\tau = 1s$ and (right) $\tau = 100s$. Notice that in the right figure the noise is not centered around zero as its performing a very long excursion (bigger than the sample) given its very high autocorrelation. Both histograms in the bottom panels show the same data, coinciding with the sample on top-left. ($\tau = 1s$). Although in the linear histogram of the left shows a bell-shaped distribution, this could make us suspect Gaussianity. The semilogarithmic plot of the right, however, show a supra-Gaussian behavior. The dotted points show the theoretical distribution as in Fig. 1 for the same parameters agreeing excellently with the histogram of the data.

which the breakdown of spatial and/or temporal symmetry induces directional transport. Their transport properties can be studied by means of the Langevin equation

$$m\frac{d^2x}{dt^2} = -\gamma\frac{dx}{dt} - V'(x) - F + \xi(t) + \eta(t), \qquad (10)$$

with m the particle's mass, γ the friction constant, $V(x)$ the (sawtooth-like) ratchet potential, F a constant "load" force, and $\xi(t)$ the thermal noise, satisfying $\langle\xi(t)\xi(t')\rangle = 2\gamma T\delta(t-t')$. The system is kept out of thermal equilibrium by the time-correlated forcing $\eta(t)$ (with zero mean), so allowing to rectify the motion. We have studied the q-dependence of the usual measures of performance: the mean current $J \equiv \langle dx/dt\rangle$ and the efficiency ε (the ratio of the work per unit time done against F, to the mean power injected by η).

In the overdamped regime ($m = 0, \gamma = 1$), J grows monotonically with q whereas ε is maximized for some $1 < q < 5/3$. For $m \neq 0$, ratchets exhibit mass-separation capabilities which are enhanced by non-Gaussian noise [13, 14]. In [15], effects of biological and technological relevance have been found in a model for the transport properties of motor proteins when departing from Gaussian behavior: J is maximized not only by an optimal noise intensity but also by an optimal $q \neq 1$.

5.1. Resonant gated trapping

Stochastic resonance, which is essentially a threshold phenomenon, plays also a relevant role in ionic transport through cell membranes. In [16], a "toy model" considering the simultaneous action of a deterministic and a stochastic external field on the trapping rate of a gated imperfect trap, was studied by assuming Tsallis' noise with $q < 1$: the bounded character of the pdf contributed positively to the rate of overcoming the threshold, and such rate remained at about the same order within a larger range of values than if η had been a white noise.

Noise-induced transition

A genetic model exhibiting a reentrance from a disordered state to an ordered one, and again to a disordered state as τ varies from 0 to ∞ showed moreover a strong shift in the transition line, as q departed from $q = 1$. The transition was anticipated for $q > 1$, while it was retarded for $q < 1$ [17].

Noise-induced phase transition

It results that fat-tail noise distributions ($q > 1$) *counteract* the effect self-correlation (namely, they *advance* the ordering boundary as D is increased at constant coupling), and compact-support ones ($q < 1$) *enhance* it (they *retard* the ordering boundary). Particular interest rises the effect of ($q < 1$) multiplicative noise on the susceptibility: it shifts from being larger on the *ordering* boundary to being larger on the *disordering* boundary [18, 19].

Broad-spectrum energy harvesting

In piezoelectric energy harvesting from noise, a system obeying a square-well potential can strongly profit from the large correlated excursion occurring for $q > 1$ [20].

6. Conclusions

A software to generate a class of non-Gaussian, colored noise is presented. This noise can be easily generated during numerical experiments of fed to experiments via an interface. The software has been uploaded to the online repository github, including tests (which effectively reproduce automatically some of the figures of this paper) and examples, together with an open source licence. As examples and motivation for its use, we have provided instances of noise-induced phenomena arising when the system is submitted to (colored and non-Gaussian) noise sources with Tsallis' q-statistics. The above discussed results show that non-Gaussian noise can significantly change the system's response in many noise-induced phenomena, as compared with the Gaussian case. Moreover, in all the cases presented here, the system's response was either enhanced or altered in a relevant way for values of q departing from Gaussian behavior. In other words, the *optimum response* occurs for $q \neq 1$. Clearly, the study of the change in the response of other related noise-induced phenomena when subject to such a kind of non-Gaussian noise will be of great interest.

Acknowledgments

The authors express their recognition to H.S. Wio and R. Toral, as sources of inspiration and fruitful conversations. This recognition extends to the co-authors in the references: S. Bouzat, F. Castro, M.A. Fuentes, S.E. Mangioni, J.A. Revelli and C.J. Tessone. RD acknowledges support from UNMdP, through grant EXA732/15.

[1] J. I. Deza, qnoise: A generator of non-gaussian colored noise - www.github.com/ignaciodeza/qnoise.

[2] J. García-Ojalvo, J. M. Sancho, *Noise in Spatially Extended Systems*, Springer, New York, 1999.

[3] F. Sagués, J. M. Sancho, J. García-Ojalvo, Spatiotemporal order out of noise, Rev. Mod. Phys. 79 (2007) 829–882.

[4] L. Borland, Ito–Langevin equations within generalized thermostatistics, Phys. Lett. A 245 (1998) 67–72.

[5] M. A. Fuentes, H. S. Wio, R. Toral, Effective Markovian approximation for non-Gaussian noises: a path integral approach, Physica A 303 (2002) 91–104.

[6] H. Wio, Noise induced phenomena and nonextensivity, Europhys. News 36 (2005) 197–201.

[7] H. S. Wio, On the role of non-Gaussian noises on noise-induced phenomena, in: M. Gell-Mann, C. Tsallis (Eds.), *Nonextensive Entropy. Interdisciplinary Applications*, Oxford UP, Oxford, 2004, pp. 177–194.

[8] H. S. Wio, R. R. Deza, J. M. López, *An Introduction to Stochastic Processes and Nonequilibrium Statistical Physics*, revised edition, World Scientific, Singapore, 2012.

[9] H. S. Wio, R. R. Deza, Noise-induced phenomena: Effects of noises based on Tsallis statistics, in: A. D'Onofrio (Ed.), *Bounded noises in Physics, Biology and Engineering*, Birkhäuser, Basel, 2013, pp. 43–58.

[10] M. A. Fuentes, R. Toral, H. S. Wio, Enhancement of stochastic resonance: the role of non Gaussian noises, Physica A 295 (2001) 114–122.

[11] M. A. Fuentes, C. J. Tessone, H. S. Wio, R. Toral, Stochastic resonance in bistable and excitable systems: Effect of non-Gaussian noises, Fluct. Noise Lett. 3 (2003) L365–L371.

[12] F. J. Castro, M. N. Kuperman, M. A. Fuentes, H. S. Wio, Experimental evidence of stochastic resonance without tuning due to non-Gaussian noises, Phys. Rev. E 64 (2001) 051105.

[13] S. Bouzat, H. Wio, Current and efficiency enhancement in Brownian motors driven by non gaussian noises, Eur. Phys. J. B 41 (2004) 97–106.

[14] S. Bouzat, H. S. Wio, New aspects on current enhancement in Brownian motors driven by non-Gaussian noises, Physica A 351 (2005) 69–78.

[15] S. E. Mangioni, H. S. Wio, A random walker on a ratchet potential: effect of a non Gaussian noise, Eur. Phys. J. B 61 (2008) 67–73.

[16] J. A. Revelli, A. D. Sánchez, H. S. Wio, Effect of non-Gaussian noises on the stochastic resonance-like phenomenon in gated traps, Physica D 168-169 (2002) 165–170.

[17] H. S. Wio, R. Toral, Effect of non-Gaussian noise sources in a noise-induced transition, Physica D 193 (2004) 161–168.

[18] R. R. Deza, H. S. Wio, M. A. Fuentes, Noise-induced phase transitions: Effects of the noises' statistics and spectrum, AIP Conf. Proc. 913 (2007) 62–67.

[19] R. R. Deza, M. A. Fuentes, H. S. Wio, Effects of the noises' statistics and spectrum on noise-induced phase transitions, AIP Conf. Proc. 922 (2007) 487–490.

[20] J. I. Deza, R. R. Deza, H. S. Wio, Wide-spectrum energy harvesting out of colored Lévy-like fluctuations, by monostable piezoelectric transducers, Europhys. Lett. 100 (2012) 38001.