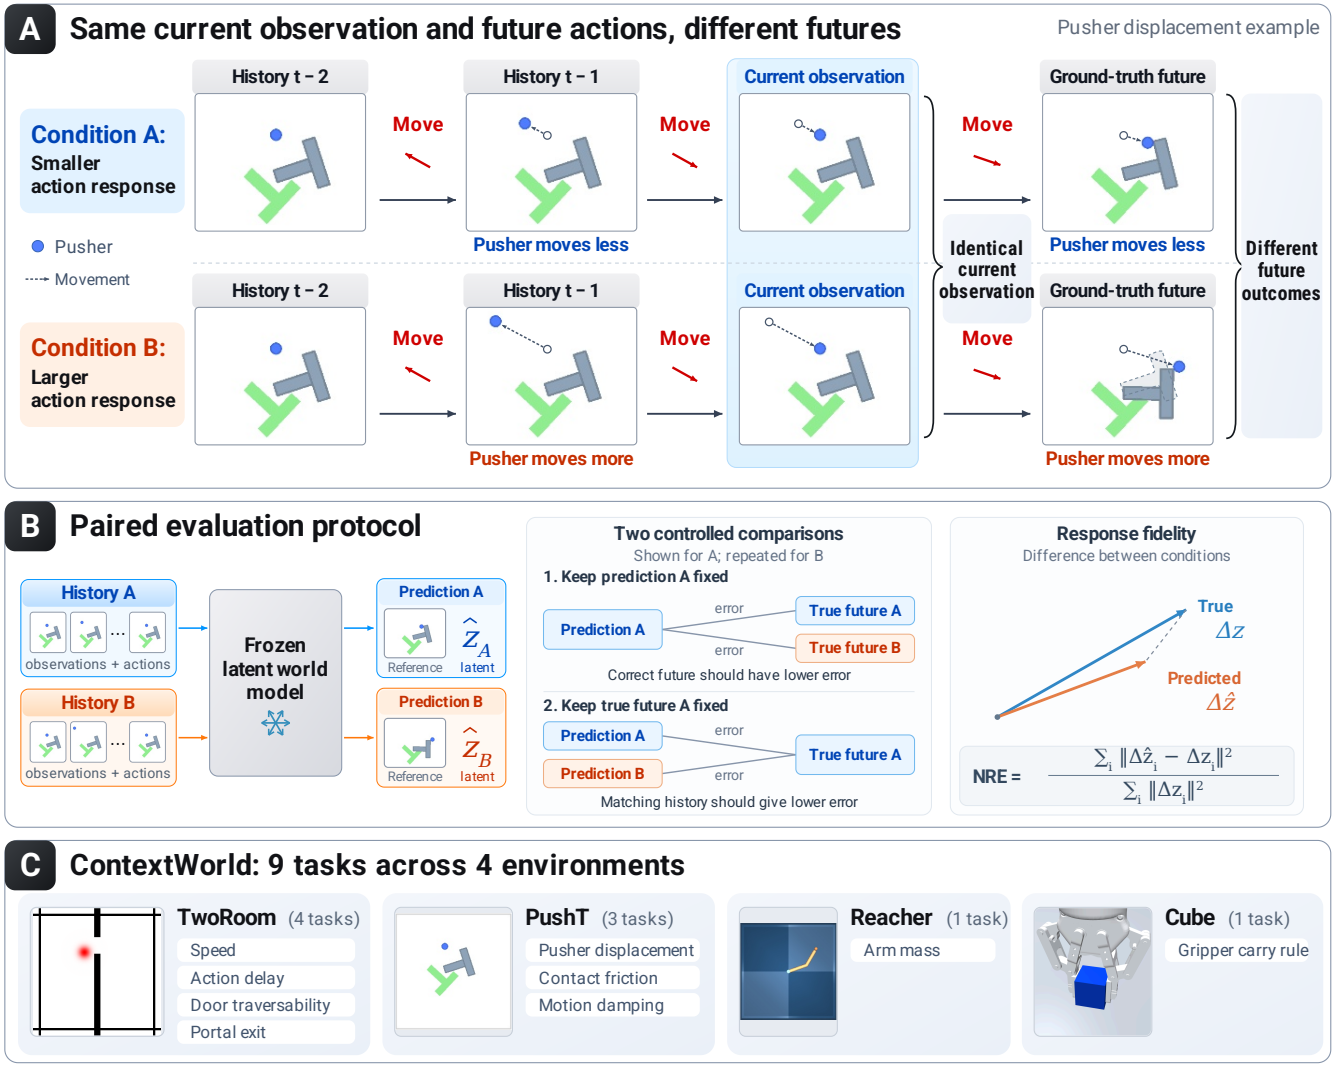

A
Same current observation and future actions, different futures
Pusher displacement example
Condition A:
Smaller action response
Pusher
Movement
Condition B:
Larger action response
History t − 2
History t − 1
Current observation
Ground-truth future
Move
Pusher moves less
Pusher moves more
Identical current observation
Different future outcomes
B
Paired evaluation protocol
History A
observations + actions
History B
observations + actions
Frozen latent world model
Prediction A
Prediction B
Reference
latent
Two controlled comparisons
Shown for A; repeated for B
1. Keep prediction A fixed
Prediction A
error
True future A
True future B
Correct future should have lower error
2. Keep true future A fixed
Prediction A
Prediction B
True future A
Matching history should give lower error
Response fidelity
Difference between conditions
True
Predicted
NRE =
C
ContextWorld: 9 tasks across 4 environments
TwoRoom (4 tasks)
Speed
Action delay
Door traversability
Portal exit
PushT (3 tasks)
Pusher displacement
Contact friction
Motion damping
Reacher (1 task)
Arm mass
Cube (1 task)
Gripper carry rule