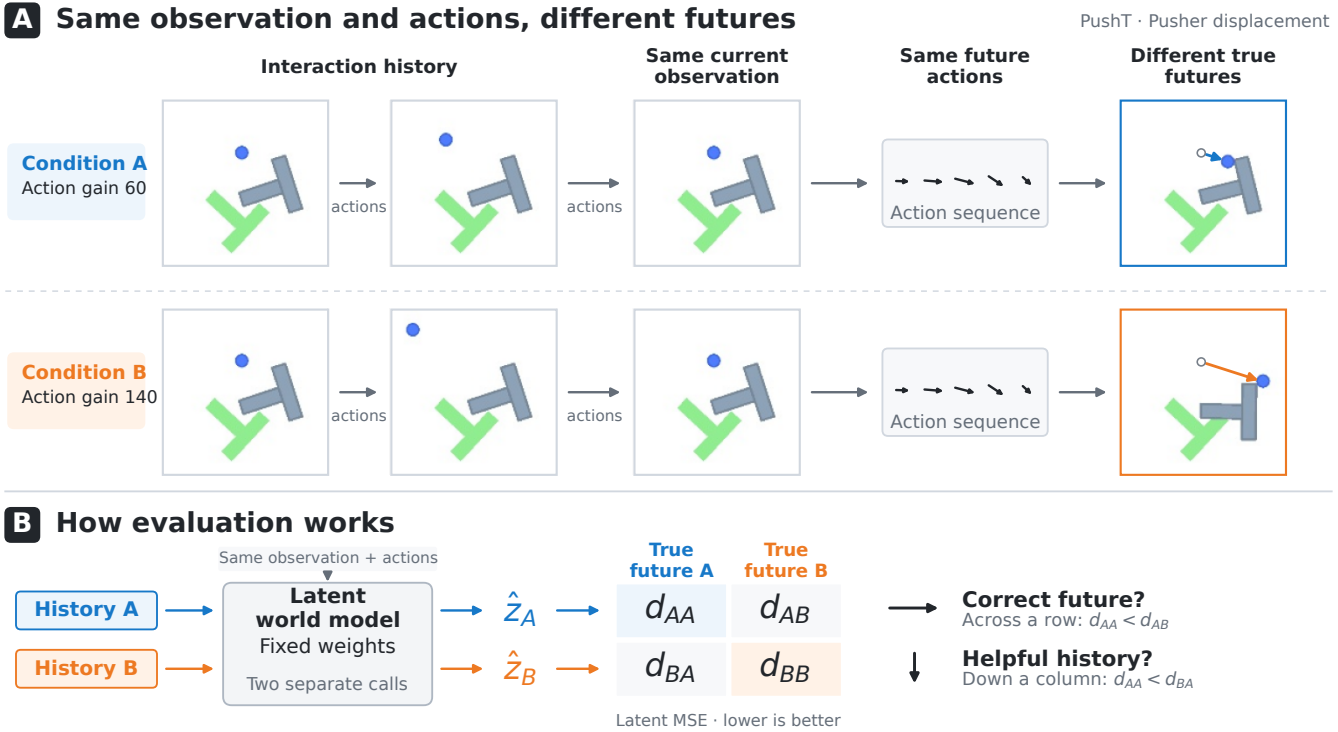

A
Same observation and actions, different futures
PushT · Pusher displacement
Interaction history
Same current observation
Same future actions
Different true futures
Condition A
Action gain 60
actions
actions
Action sequence
Condition B
Action gain 140
actions
actions
Action sequence
B
How evaluation works
Same observation + actions
History A
History B
Latent world model
Fixed weights
Two separate calls
$\hat{z}_A$
$\hat{z}_B$
True future A
True future B
d_{AA}
d_{AB}
d_{BA}
d_{BB}
Correct future?
Across a row: $d_{AA} < d_{AB}$
Helpful history?
Down a column: $d_{AA} < d_{BA}$
Latent MSE · lower is better
ContextWorld
9 tasks · 4 environments
TwoRoom · PushT · Reacher · Cube