An Iterative Two-stage Multi-fidelity Optimization Algorithm for Solving Computationally Expensive Problems

Angus Kenny, Tapabrata Ray, and Hemant Kumar Singh

Abstract—The abstract goes here.

[Angus: Angus can make comments using \angus {comment}]

[Ray: Ray can make comments using \ray{comment}]

[Hemant: Hemant can make comments using \hemant{comment}]

Index Terms—IEEE, IEEEtran, journal, IFIEX, paper, template.

I. Introduction

ANY real-world engineering design problems require estimation of responses that are intractable for exact or analytical methods. In such cases, two alternatives are commonly resorted to: numerical simulations and physical testing of a prototype [1]. When used in-loop during design optimization using iterative methods such as evolutionary algorithms (EAs), both of these methods tend to be prohibitively slow; as well as potentially cost and resource intensive [2]. Such optimization problems where each design evaluation incurs significant cost in any form are referred to as computationally expensive optimization problems.

Simulation-based optimization (SO) refers to the methods that deal with optimization problems involving numerical simulations¹. Typically, the these methods make use of surrogate approximations, also referred to as metamodels, to reduce the computational expense [3]. The basic principle is to use historical information from previously evaluated designs to build a surrogate model of the response landscape. The predicted values from these surrogate models can be then utilized to determine new candidate solutions that are likely to be competent when evaluated using the true (time consuming) simulation. Through this informed pre-selection, the number of expensive evaluations can be significantly reduced during the optimization.

Some numerical simulation processes allow control over the resolution, or fidelity, of the data they produce. For example, in finite element analysis (FEA) or computational fluid dynamic (CFD) simulations, the mesh size can be controlled to yield solutions with different fidelities [4]. A

The authors are with the School of Engineering and Information Technology, The University of New South Wales, Australia. Emails: {angus.kenny, t.ray, h.singh}@adfa.edu.au.

¹For brevity, the discussion is restricted to simulation-based design, but the same principles can be applied to other expensive optimization such as those involving physical prototyping.

coarse mesh yields a low-fidelity (LF) performance estimate that is relatively fast but less accurate, while a fine mesh yields a high-fidelity (HF) estimate that is relatively more time consuming but more accurate. Multi-fidelity SO methods (MFSO) are a special class of SO methods that attempt to efficiently combine the information from different fidelities with an eventual aim of searching for optimal HF designs.

A number of different approaches to MFSO have been explored in the literature. Many of these approaches are based on the co-kriging technique described by Forrester et al. [5] which correlates the two sets of data, cheap and expensive, to produce a single prediction model. This technique is an extension of the autoregressive model first introduced by Kennedy and O'Hagan [6]. The two key aspects in which the different methods in this category deviate from each other, is in how they collect these data and also how they search the model for potential candidates. Laurenceau and Sagaut [7] investigated a number of different sampling methods for use with kriging and co-kriging in an airfoil design problem. Perdikaris et al. [8] incorporate elements of statistical learning into a co-kriging framework to cross-correlate ensembles of multi-fidelity surrogate models. Yang et al. [9] take a physics-informed approach, constructing models based on sparsely observed domain knowledge, representing unknowns as random variables or fields which are regressed using elements of co-kriging. Giraldo et al. [10] provide an extension to co-kriging for use when the secondary variable is functional, based on the work of Goulard and Voltz [11].

Among the approaches that do not use co-kriging models, some of the prominent ones include the following. Lv et al. [12] employ a canonical correlation analysis-based model, in which the least squares method is used to determine optimal parameters. Ariyarit and Kanazaki [13] use a hybrid method which employs a kriging model to estimate local deviations and a radial basis function to approximate the global model in airfoil design problems. Hebbal et al. [14] and Cutajar et al. [15] both use machine learning techniques that treat the layers of a deep Gaussian process as different fidelity levels to capture non-linear correlations between fidelities. Xu et al. [16] use a two-stage process which first uses ordinal transformation to transform the original multi-dimensional design space into a one-

dimensional ordinal space and then samples from this ordinal space using a method based on the optimal computational budget allocation (OCBA) algorithm proposed by Chen and Lee [17]. Branke et al. [4] and Lim et al. [18] both take evolutionary approaches to solving MFSO problems.

Many of these approaches sample the low- and highfidelity data a priori, then build models based on these data and use some global search method to optimize them. To ensure these constructed models are properly representative, it is important to maintain a diversity of samples across the entire the design space; however, sampling without any prior knowledge can result in many computational resources being expended in areas which do not contain any promising candidates. Of those which do sample the data iteratively, information is typically only shared in one direction between the two datasets. Low-fidelity data is sampled randomly, or using some indepenent process, and used to inform where the high-fidelity data should be sampled from; but no information is then shared in the reverse direction, to inform the low-fidelity sampling in the next iteration. Again, this can result in computational resources being consumed unnecessarily in regions of the search space which are unproductive, especially in high-dimensional problems.

To overcome these limitations and improve the performance for MFSO, this paper proposes an iterative twostage, bound-constrained, single-objective multi-fidelity optimisation problems, referred to here as MFITS. It uses previously obtained information about promising areas of the search space to define a restricted neighbourhood using a guided differential evolution (DE) process on a kriging model of the low-fidelity data. This neighbourhood is then sampled from and searched, using a method derived from OCBA, to determine a set of candidates to undergo lowfidelity simulation. The information from these simulations is used to update the low-fidelity model and also a cokriging-based surrogate model of the high-fidelity data, which is searched globally using DE to find a suitable candidate for high-fidelity simulation. Finally, these highfidelity data is used to update the surrogate model and also to help determine the restricted neighbourhood in the next iteration. By using the high-fidelity simulation information to inform and restrict the region of interest while searching the low-fidelity model, MFITS allows two-way information sharing between the sets of data. The performance of the MFITS model is compared against a baseline co-krigingbased MFSO algorithm on two separate datasets. The first is a common set of multi-fidelity test-functions from the literature, and the second is a set of multi-fidelity test functions that are generated from standard test functions using the methods described in the paper by Wang et al. In addition to this, some important properties of MFITSare also investigated.

The remainder of this paper is organized as follows. Section II provides the fundamentals and background of the proposed model, along with a description of the type of problems tackled and related work. The MFITS algorithm

is detailed in Section III, describing all of its constituent parts and detailing some similarities and differences with a related technique from the literature. Experimental design and datasets are discussed in Section IV, with Section V giving the results of these experiments and a discussion of their implications. Finally, Section VI provides the conclusion and outlines any future directions of research.

II. BACKGROUND AND RELATED WORK

This section details the type of problem MFITS is designed to address; provides information about two critical components that are used in its construction; and gives a brief summary of another method which is similar to MFITS from the literature.

A. Problem type

The algorithm presented here is designed to address bound-constrained, single-objective, multi-fidelity optimisation problems with continuous variables. Here, the terms bound-constrained and continuous imply that a variable may have an upper- or lower-bound which it cannot exceed, but that it may take any value (precision issues notwithstanding) between these bounds in the decision space; and that there are no regions in the objective space which are forbidden.

Let P be a problem instance with D decision variables and let $\boldsymbol{x} \in \prod_{i=1}^{D} [l_i, u_i]$ be a *solution* to P, represented by a real vector² \boldsymbol{x} such that $l_i \leq x_i \leq u_i$ for all $i \in [D]$, where $\boldsymbol{l}, \boldsymbol{u} \in \mathbb{R}^D$ are the lower- and upper-bounds, respectively³. The *objective value* of a solution to P is given by the function

$$f: \prod_{i=1}^{D} [l_i, u_i] \to \mathbb{R}, \ \boldsymbol{x} \mapsto f(\boldsymbol{x}),$$
 (1)

which is typically smooth. When this objective value is minimized, the so-called *optimal* solution to P is x^* , such that $f(x^*) \leq f(x)$ for all $x \in \prod_{i=1}^D [l_i, u_i]$, although it may be maximized without loss of generality.

Examples of these types of problems abound in the field of engineering design [1], [19] and often they require some form of numerical simulation to compute the objective value of their solutions. This numerical simulation can be very computationally expensive, therefore researchers often employ artificial test functions when developing algorithms. While not generally being an accurate model for the behaviour of real-world problems, test functions are very fast to evaluate and can be customized to gauge the performance of algorithms on a variety of fitness landscapes.

The dataset in Lv et al. [12] uses the customized addition, removal and modification of terms to produce a transformed function with a desired correlation to the original. While this method allows control over the shape of the fitness

²Bold type is used here to indicate a vector (indexed by superscript) and regular type is used for elements (indexed by subscript). E.g., \boldsymbol{x}^i is the *i*th indexed vector, and x^i_j is the *j*th element of the *i*th vector.

 $^{^3\}text{To}$ conserve space, the following shorthand is used in this paper: $[k]=\{1,2,\ldots,k\}$ and $[k^*]=\{0,1,\ldots,k-1\}.$

landscape, it requires analysing each test function individually and only permits a single level of fidelity for each transformation.

The second strategy introduces external noise which models the errors that occur when simulation fidelity is decreased. Wang et al. [20] analysed the behaviour of many numerical simulations under different fidelity conditions and formulated a generic transformation function to turn any test function f of the form in Equation 1 into a low-fidelity version \tilde{f} :

$$\tilde{f}: \prod_{i=1}^{D} [l_i, u_i] \times [0, 10000] \to \mathbb{R}, \ (\boldsymbol{x}, \phi) \mapsto f(\boldsymbol{x}) + e(\boldsymbol{x}, \phi),$$

where ϕ is the *fidelity level*, with $\tilde{f}(\boldsymbol{x}, 10000) = f(\boldsymbol{x})$ and $\tilde{f}(\boldsymbol{x}, 0)$ having the worst possible correlation to $f(\boldsymbol{x})$. The *error function*, $e(\boldsymbol{x}, \phi)$ — which returns a single real value — can be one of ten different functions, all of which are independent of $f(\boldsymbol{x})$.

Because the error function is always independent of f(x), this method can be applied to any test function at all; and because ϕ is real-valued, many different fidelity levels can be modelled easily— although some analysis must still be performed if specific correlation coefficients are required.

B. Kriging and co-kriging

Originally arising from geostatistical methods used for ore valuation in mining research — but since being applied across a number of domains — is the so-called *kriging* method [1]. Kriging is an interpolation technique that uses a limited set of sampled data to predict the objective value at a point that has not been sampled yet.

Let P be a problem instance with D decision variables and let $X = \{x^1, x^2, \dots, x^n\}$ be a set of n sample points with observed objective values $y = \{y_1, y_2, \dots, y_n\}$, where $x^i \in \mathbb{R}^D$ for $i \in [n]$. A kriging model of these sample data is the Gaussian process

$$Y(\boldsymbol{x}) = f(\boldsymbol{x}) + Z(\boldsymbol{x}),\tag{3}$$

where, f(x) is a polynomial regression function based on the sample data y and encapsulates the main variations in the data. The function Z(x) is a Gaussian process with mean 0, which models the residual error. As the mean of Z(x) is 0, f(x) is the mean of Y(x).

Low-fidelity data is typically much cheaper to produce than high-fidelity data, a fact which the *co-kriging* technique exploits to great effect. Adapted from Kennedy and O'Hagan's autoregressive model [6], co-kriging correlates multiple sets of data with different fidelities to produce a single model that approximates the high-fidelity data. The residual error for a sample point evaluated at a given fidelity is recursively modelled as a function of the error of the same point evaluated at the fidelity below it — until some foundational model with lowest fidelity is reached. Because of this, the Markov property must be assumed, that given a sample point evaluated at some fidelity, no more information

about that point can be gained by evaluating it at a lower fidelity.

Let $X_H = \{x_H^1, x_H^2, \dots, x_H^n\}$ be the set of n high-fidelity sample points with observed objective values $y_H = \{y_{H(1)}, y_{H(2)}, \dots, y_{H(n)}\}$ and $X_L = \{x_L^1, x_L^2, \dots, x_L^m\}$ be the set of m low-fidelity sample points with observed objective values $y_L = \{y_{L(1)}, y_{L(2)}, \dots, y_{L(m)}\}$. A kriging model $Y_L(x)$ of the low-fidelity data is constructed according to Equation 3. Using this, the high-fidelity model is

$$Y_H(\mathbf{x}) = \rho(\mathbf{x})\mu_L(\mathbf{x}) + Z_d(\mathbf{x}),\tag{4}$$

where $\rho(x)$ is a scaling factor, determined as part of the MLE of the second model; $\mu_L(x)$ is the mean of $Y_L(x)$; and $Z_d(x)$ is a Gaussian process which models the difference between $Y_H(x)$ and $\rho(x)\mu_L(x)$.

An in-depth mathematical treatment of kriging, co-kriging and how to use these models to make predictions can be found in [1], [5], [6], [21].

C. Optimal computing budget allocation

Stochastic simulation is a noisy process, requiring multiple simulation replications in order to accurately approximate the true fitness value of a given design.

Assuming a normal distribution, the mean fitness value for a design, μ , is unknown, but it can be estimated by its sample mean $\hat{\mu}$. Given a set of k candidate designs and a finite computing budget T, the optimal computing budget allocation (OCBA) [17] method aims to find an allocation such that $N_1 + N_2 + \cdots + N_k = T$, where N_i is the total replications allocated to design i, in order to select the best design, $b \in [k]$, such that $\hat{\mu}_b < \hat{\mu}_i$ for all $i \in [k]$.

The probability that design *b* actually *is* the the best design is called the probability of correct selection (PCS). The PCS can be estimated using Monte Carlo simulation, but this is time-consuming; therefore, the following problem is formulated in [17] to compute the approximate probability of correct selection (APCS):

$$\begin{array}{ll} \underset{N_1,\ldots,N_k}{\text{maximize}} & 1 - \sum_{i=1,i\neq b}^k P\{\tilde{\mu}_b < \tilde{\mu}_i\}\,, \\ \\ \text{such that} & \sum_{i=1}^k N_i = T\,, \quad N_i \geq 0, \end{array} \tag{5}$$

Based on the work in [17], the APCS is asymptotically maximized (as $T \to \infty$) when

$$\frac{N_i}{N_i} = \left(\frac{\sigma_i/\delta_{b,i}}{\sigma_i/\delta_{b,i}}\right)^2,\tag{6}$$

$$N_b = \sigma_b \sqrt{\sum_{i=1, i \neq b}^k \frac{N_i^2}{\sigma_i^2}}, \tag{7}$$

where N_i is the total replications allocated to design i and $\delta_{b,i} = \hat{\mu}_b - \hat{\mu}_i$, for all $i, j \in \{1, 2, ..., k\}$ with $i \neq j \neq b$.

⁴Although only two fidelity levels are employed here, without loss of generality, the method can be extended to an arbitrary number of fidelities.

The implications of Equations 6 and 7 are such that additional computing resources are not only allocated to those designs with a small sample mean, but also to potentially promising designs that have a high variance. A high variance indicates uncertainty in the prediction, which increased volume of replications will help to address.

Using the above results, Algorithm 1 details an iterative process to select a design, based on maximising APCS.

Algorithm 1: OCBA procedure

```
Input: k, number of designs; T, computing budget; \Delta, replications per update; n_0, initial replications.

Output: b, index of best design.

1: b \leftarrow \emptyset {Initialize b}
2: N_i \leftarrow n_0, \forall i \in [k] {Count initial replications}
3: S^i \leftarrow Sim(n_0), \forall i \in [k] {Perform initial replications}
4: while \sum_{i \in [k]} N_i < T do

5: N' \leftarrow N {Store old allocations}
6: \hat{\mu}, \hat{\sigma} \leftarrow Stats(S), \forall i \in [k] {Compute sample statistics}
7: b \leftarrow \operatorname{argmin}_i \hat{\mu}_i, \forall i \in [k] {Update b}
8: N \leftarrow Allocate(\hat{\mu}, \hat{\sigma}, N, \Delta) {Allocate \Delta replications}
9: S_i \leftarrow Sim(N_i - N_i'), \forall i \in [k] {Perform additional simulations}
```

In this algorithm, Sim(n) is a function that returns the output of running the stochastic simulation n times; $Stats(\mathbf{S})$ computes the sample statistics for a set of simulation outputs; and $Allocate(\hat{\boldsymbol{\mu}}, \hat{\boldsymbol{\sigma}}, \mathbf{N}, \Delta)$ is a function that allocates Δ replications among the designs, in accordance with Equations 6 and 7.

$D. MO^2TOS$

Optimal computing budget allocation (OCBA) operates on the assumption that each stochastic simulation being performed will have the same input parameters, and does not consider the case where the fitness of a solution may be evaluated with different fidelities. The multi-fidelity optimisation with ordinal transformation and optimal sampling (MO^2TOS) [16] framework is a two-stage algorithm that addresses this consideration, by combining ideas from OCBA with ordinal transformation [22].

Given a problem instance P and a finite computing budget T, the MO^2TOS algorithm takes advantage of the relatively low cost of low-fidelity evaluations to identify promising regions of the search space that can subsequently be exploited by iterative high-fidelity evaluations.

A large population of solutions are evaluated in lowfidelity and then ranked by their evaluated value. This ranked population is then partitioned into equal-sized groups. The reason for ranking the solutions before partitioning, is to increase the probability that solutions which share a group are proximate to each other in the transformed objective space, as opposed to the original design space. As a result, regardless of where solutions may be, it is more likely that solutions within a group will have a similar performance.

These partitioned groups are treated as de facto "designs" for the purposes of OCBA allocation; however, instead of multiple simulation replications being performed on the

same design, the allocations will determine how many solutions are selected from a group for high-fidelity evaluation.

Initially, each group has n_0 solutions selected — without replacement — and evaluated in high-fidelity. These results are used to determine the sample statistics of the groups. Equations 6 and 7 are used to allocate a portion of the total budget, Δ , to the set of groups. Solutions are selected from these groups in accordance with this allocation, and evaluated in high-fidelity. The sample statistics are computed once again and the process repeats, while the total budget consumed is less than T.

The value of Δ is typically quite small, as there may be significant bias between the low- and high-fidelity evaluated data. By keeping Δ small, it ensures that the sample statistics of the groups are updated more frequently, meaning that the allocations are based more on the statistics of each group, as opposed to their intial partitioning.

The MO^2TOS framework has some limitations, due to the fact that it samples the low-fidelity data *a priori* and the fact that is a two-step process that operates directly on the high- and low-fidelity functions, as opposed to an iterative one. By sampling the data once, without any prior information, the sampling must occur uniformly across the entire design space. This means that unnecessary computational budget is likely to be expended in areas which are not helpful to the search. Similarly, it is necessary to initially evaluate n_0 solutions with high-fidelity from each partitioned group, which can result in unnecessary expenditure of computational budget as well.

III. MFITS ALGORITHM

The multi-fidelity optimisation algorithm proposed in this paper is an iterative two-stage process, which maintains two separate surrogate models that share information between them. The first surrogate is a kriging model of the lowfidelity data. This model is searched to find the best potential candidates, within a restricted region, to evaluate with lowfidelity. The information from this search is used to update the first model and a co-kriging model that combines both low- and high-fidelity data to approximate the high-fidelity objective function. This second model is globally searched to determine a suitable candidate for high-fidelity evaluation, and these data is used to update the co-kriging model and to determine the neighbourhood for the next search of the low-fidelity surrogate. Algorithm 2 gives a description of this process, and the functions within are defined in the following subsections.

A. Initialisation, evaluation and surrogate models

The function LHS(P) returns an initial population sampled from a latin hypercube with size 6D for high-fidelity and 18D for low-fidelity, where D is the number of decision variables defined in the problem data P. The bounds of the hypercube are also defined in P. Latin hypercube sampling is used in order to start with as broad a picture of the search space as possible. Solutions are evaluated using the function

Algorithm 2: MFITS procedure

```
Input: P, problem data; N_{L_{max}}, max size of low-fidelity population;
      N_{e_{max}}, maximum number of evaluations; \rho, parameter set for
      LocalOCBA.
Output: Best solution found x^{\beta}.
 1: X_v \leftarrow LHS(P), \ \forall v \in \{L, H\} \ \{\text{Generate initial populations}\}\
 2: A_v, N_e \leftarrow f_v(X_v, 0), \forall v \in \{L, H\} {Evaluate initial populations} 3: \boldsymbol{x}^{\beta} \leftarrow \emptyset {Initialize \boldsymbol{x}^{\beta}}
 4: while N_e < N_{e_{max}} do
5: M_L \leftarrow Krige(A_L) {Update low-fidelity kriging model}
           M_C \leftarrow CoKrige(A_L, A_H) {Update co-kriging model}
           \boldsymbol{x} \leftarrow GlobalSearch(M_C) {Globally search co-kriging model}
           \alpha, N_e \leftarrow f_H(\boldsymbol{x}, N_e) {Evaluate and update total cost}
 8:
          A_H \leftarrow A_H \cup \{\alpha\} {Add \alpha to high-fidelity archive} x^{\beta} \leftarrow \min(f_H(x^{\beta}), f_H(x)) {Update best solution} \epsilon \leftarrow Sigmoid(N_e, N_{e_{max}}) {Determine size of neighbourhood} A_L, N_e \leftarrow LocalOCBA(\rho, M_L, A_L, x^{\beta}, \epsilon) {Locally search}
10:
11:
12:
           low-fidelity model}
13:
           if |A_L| > N_{L_{max}} then
14:
                A_L \leftarrow Winnow(A_L, N_{L_{max}}) {Control population size}
15:
           end if
16: end while
```

 $f_v(X,N_e)$, at some fidelity $v\in\{L,H\}$, which returns a set of "archive" pairs comprising the solution and its objective value. It also updates the total cost incurred, N_e .

Two surrogate models are used, $Krige(A_L)$ takes the low-fidelity data and returns a kriging model approximating it, and $CoKrige(A_L,A_H)$ takes both the low- and high-fidelity archive data and returns a co-kriging model that approximates the fitness landscape of the high-fidelity data. The function $GlobalSearch(M_C)$ takes the co-kriging model as input and returns the best solution that can be found using some global search method. This output solution is evaluated in high-fidelity, the information from which is used to update the co-kriging model, and also to determine the restricted neighbourhood used to locally search the low-fidelity kriging model.

B. Restricted neighbourhood

The correlation between the low- and high-fidelity data can vary wildly between problems, meaning identifying a promising region in the low-fidelity kriging model does not necessarily mean identifying a promising region in the high-fidelity co-kriging model. Therefore, instead of searching the low-fidelity model globally, it makes sense to search for promising candidates within a restricted neighbourhood, defined using information from the high-fidelity model. As the goal of performing low-fidelity evaluations in co-kriging models is to gain information about the shape of the fitness landscape, more than it is to find the "best" low-fidelity solution, restricting the neighbourhood in this way allows the algorithm to focus on the region of interest — without getting "distracted" by global optima that might not be useful in the over-all search.

In order to restrict the region of interest, a so-called *guided DE* process is employed. In differential evolution (DE), assuming complete recombination occurs, a candidate

child solution x_c is produced from three parent solutions x^1 , x^2 and x^3 with the following formula:

$$x^{c} = x^{1} + F(x^{2} - x^{3}), (8)$$

with F being a constant called the mutation factor. This is simply scaled vector addition, therefore this produced child x^c can be "nudged" further towards a reference point (in this case x_β) by a similar process:

$$\boldsymbol{x}^{c'} = \boldsymbol{x}^c + \boldsymbol{g}(\boldsymbol{x}^\beta - \boldsymbol{x}^c), \tag{9}$$

where G is the so-called *guide factor*. This is illustrated in Figure 1.

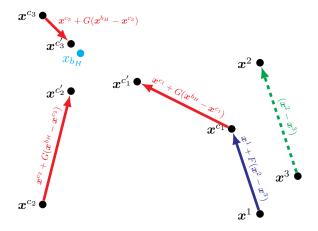


Fig. 1: The DE recombination process can be "guided" towards the best high-fidelity solution found so far.

In this figure, it can be seen that x^{c_1} is produced using x^1 , x^2 and x^3 , and then translated using Equation 9 to produce $x^{c'_1}$. Child solutions x^{c_2} and x^{c_3} are produced using two other sets of solutions that are not pictured, and then translated using the same equation. If this process is continued, the result is a "cloud" of candidate solutions in the vicinity of x^{β} , the centre of the region of interest.

The guide factor determines how far the resulting solution is translated in the direction of \boldsymbol{x}^{β} . At the beginning of the search, \boldsymbol{x}^{β} is determined by optimising a very coarse model built with sparse information, and cannot be trusted to be indicative of a promising region of the search space; as the search continues, the model becomes more accurate and the information it produces more trustworthy. Therefore, the algorithm should be explorative in the beginning of the search, but exploitative towards the end. One function which exhibits these properties is the logistic sigmoid curve

$$\epsilon = \frac{L}{1 + e^{-k(x - x_0)}},\tag{10}$$

where x_0 is the x value of the sigmoid's midpoint, L is the curve's maximum and k is the steepness parameter, which controls how fast the function "ramps up". The function $Sigmoid(N_e, N_{e_{max}})$ uses the total cost and maximum cost to compute this ϵ value. Figure 2 gives a plot of the logistic sigmoid curve with $L=0.99,\ k=10$ and $x_0=0.2$. Using

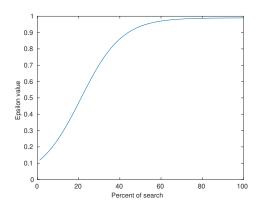


Fig. 2: The logistic sigmoid curve flattens at around 80%.

this value, g can be computed as:

$$\mathbf{g} = \epsilon + (1 - \epsilon)\mathbf{r}, \tag{11}$$

where $r \in [0,1]^D$ is a random vector with D components, making $g \in [\epsilon,1]^D$ also a random vector. This ensures the cloud of candidate solutions around x^β is sparse at the beginning of the search, allowing for better global exploration, while focusing the search more tightly on promising regions towards the end — crucially, without adding any extra parameters.

C. LocalOCBA

Once the candidate solutions have been been generated in the vicinity of \boldsymbol{x}^{β} , they must be selected from. As already stated, the goal of evaluating solutions in low-fidelity is not to optimize the low-fidelity objective function, but to provide as much information for the model as possible. The optimal computing budget allocation (OCBA) algorithm selects from a set of solutions with the goal of reducing uncertainty within simulation models (by allocating computing resources). This principle can be applied here, with some modifications, as described in Algorithm 3.

Here, the $GuidedDE(A_L, \boldsymbol{x}^\beta, \epsilon)$ process is used to generate a set of candidate solutions, which are approximated using $f_M(X)$. This function takes a set of solutions and returns a set of pairs comprising the solution and its approximation on some model M. The solutions are ranked and partitioned using a clustering algorithm, based on their approximated value. The purpose of ranking the solutions first is to increase the probability that solutions within a clustered group will tend to have a similar performance to each other, regardless of their proximity in the decision space. This helps to ensure a diversity of solutions will be selected, while still preferencing the more promising candidates. The function Partition(X) returns a set of solution groups G and the number of groups k.

OCBA principles are used to select — without replacement — from these groups to populate a set of empty groups S. First, sample statistics are computed for all groups of selected solutions in S. If there are fewer than two solutions

Algorithm 3: LocalOCBA procedure

```
Input: \rho = \{\Delta_1, \text{ total to be sampled}; \Delta_2, \text{ samples per statistics update}\};
      M, low-fidelity model; A_L, low-fidelity archive; \boldsymbol{x}^{\beta}, best
      high-fidelity solution; \epsilon, sigmoid value; N_e, total cost incurred.
Output: A_L, updated low-fidelity archive; N_e, updated total cost.
 1: X \leftarrow GuidedDE(A_L, \boldsymbol{x}^{\beta}, \epsilon) {Generate child population}
 2: A_X \leftarrow f_M(X) {Approximate each child by model M}
 3: G, k \leftarrow Partition(A_X) {Partition solutions}
 4: S_i \leftarrow \emptyset, \ \forall i \in [k] {Empty groups for selected solutions} 5: while \sum |S_i| < \Delta_1 do
          \hat{\mu}_i, \hat{\sigma}_i \leftarrow sample statistics for S_i, \forall i \in [k] (if |S_i| < 2, use G_i)
 7:
          R \leftarrow GetRatios(\hat{\boldsymbol{\mu}}, \hat{\boldsymbol{\sigma}}) {compute allocation ratios}
          D \leftarrow Allocate(R, S, G) : \sum |D_i| = \Delta_2  {Allocate \Delta_2
          solutions according to ratios \hat{R}
 9:
          D_i, N_e \leftarrow f_L(D_i, N_e), \ \forall i \in [k]  {Evaluate allocated solutions}
          S_i \leftarrow S_i \cup D_i, \ \forall i \in [k] \ \{ \text{Add to selected solutions} \}

G_i \leftarrow G_i \setminus D_i, \ \forall i \in [k] \ \{ \text{Selection without replacement} \}
10:
11:
13: A_L \leftarrow A_L \cup \bigcup S_i {Combine all selected solutions}
```

in a group, then its corresponding group in G is used. The function $GetRatios(\hat{\mu}, \hat{\sigma})$ uses these statistics to compute allocation ratios in accordance for each group with standard OCBA practice. These ratios are used by Allocate(R, S, G) to allocate Δ_2 solutions to be evaluated as low-fidelity and added to the selected solutions S.

Once Δ_1 solutions have been selected, they are added to the low-fidelity archive, and the updated archive is returned.

D. Population size control

Due to the fact that many more low-fidelity solutions are added to the archive between each high-fidelity evaluation, the size of the low-fidelity archive can become too big for some kriging and co-kriging algorithms, or too concentrated if the search is focused on the same area for too long. Therefore, a maximum population size $N_{L_{max}}$ should be set such that once it reaches that threshold, the population should be maintained at that level. Choosing a steady-state method such as ranking the solutions by their value and selecting the top $N_{L_{max}}$ will cause the population to converge and lose diversity over time. As the purpose of maintaining the low-fidelity population is to provide the co-kriging model with information about the shape of the fitness landscape, this loss of diversity can be very detrimental.

The function $Winnow(A_L, N_{L_{max}})$ takes an archive and a maximum size and returns a winnowed archive with exactly $N_{L_{max}}$ solutions. It does this by partitioning the solutions — in the decision space — into $N_{L_{max}}$ different groups using a clustering algorithm, such as k-means clustering. Most of these clusters will contain only one solution which is added to the winnowed archive; for those that have more than one solution, only the solution with the best value is selected. This ensures that the archive never has more than $N_{L_{max}}$ solutions, but diversity is maintained throughout the population.

E. Similarities and differences to MO^2TOS

There exist some similarities between MFITS and the MO^2TOS framework. For example, both use a two-step process of ordering a population of solutions and then selecting from them using ideas from OCBA. Despite the similarities, there are several key aspects which differentiate the two algorithms from each other.

The biggest difference is that MFITS is an iterative process, whereas MO^2TOS is a two-step algorithm which is only run through one time. As MO^2TOS only performs a single iteration, it cannot use any prior knowledge to determine where it should concentrate its resources when evaluating the initial low-fidelity population. Therefore, it must evaluate uniformly across the whole search space, and subsequently expend computational budget in areas which are not beneficial to the search. In contrast, MFITS uses information from previous iterations, to identify promising areas of the search space that it can exploit.

Another difference is that MO^2TOS operates on the high- and low-fidelity objective functions directly, across the entire search space. Solutions are selected using information from low-fidelity evaluations, to be evaluated in high-fidelity. MFITS uses its ranking and selection phases in order to select from a neighbourhood of solutions that have been identified in a promising region of the search space. These selections are informed by a kriging model of the lowfidelity function, and selected for low-fidelity evaluation. The high-fidelity evaluations are determined by a separate search that is performed on the co-kriging model, updated by the selected low-fidelity evaluations. Because of this, it is not necessary to perform the initial n_0 evaluations before computing the sample statistics, as the goal is not to optimize the low-fidelity objective function, just select from a set of ranked candidates.

Finally, MO^2TOS partitions the ranked population into equal-sized groups, whereas MFITS uses a clustering algorithm to determine the number and size of partitions. This ensures that the average distance between groups in objective space is maximized.

IV. NUMERICAL EXPERIMENTS

The experiments were carried out on [Angus: insert details of machine and OS here]. All code was implemented and executed in MATLAB[Angus: version number], with kriging and co-kriging models constructed using the ooDACE toolbox [23].

The MFITS algorithm was compared against a baseline co-kriging algorithm. Both algorithms were run 30 times on each problem instance for the equivalent of 2000 low-fidelity evaluations, recording the best objective value, the mean and standard deviation of the resulting solutions produced by each run.

A. Datasets

The experiments were run on a collection of boundconstrained, single-objective, multi-fidelity test functions that can be divided into two different datasets. The first set (dataset A) is a selection of problem instances taken from Lv et al. [12]. Problems f10 to f17 were chosen from this dataset as they contain between three and eight decision variables, determined as a representative range of easy to difficult problems. The problem instances here are provided with explicit definitions for both the high- and low-fidelity functions.

The second set of problem instances (dataset B) is generated using the Griewank and Michalewicz test problems (Figures 3 and 4), taken from the Virtual Library of Simulation Experiments [?]. Each problem was instantiated with versions for three, five and eight decision variables. This matches the range of the first dataset, and also allows the performance of the algorithms to be judged across different sized problems in a more controlled environment. These test problems are not naturally multi-fidelity optimisation problems, so low-fidelity evaluations must be made by applying the methods described in [20]. Two different error functions were tested for each instance, modelling two types of fidelity error: resolution and stochastic. An appropriate fidelity level ϕ for each problem was chosen by computing the square of the Pearson correlation coefficient r^2 for different fidelity values and selecting a value for ϕ such that r^2 was between 0.65 and 0.85, to be commensurate with the first dataset.

See Tables III and IV in Appendix A for test function and error function equations, respectively.

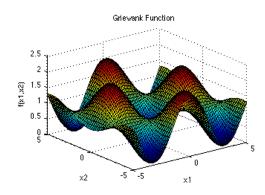


Fig. 3: The Griewank test function in 2D.[Angus: will do a better version]

B. Baseline co-kriging algorithm

Co-kriging is a popular approach to solving many multifidelity problems. The outer-loop of the MFITS algorithm functions by iteratively updating a co-kriging model using data from a modified version of the OCBA procedure. In order to demonstrate the effectiveness of this new technique, the performance of MFITS is compared against the baseline simple co-kriging algorithm given in Algorithm 4.

The functions here have the same definitions as in Algorithm 2. This procedure iteratively updates a co-kriging model by randomly sampling the low-fidelity data using

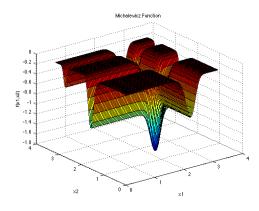


Fig. 4: The Michalewicz test function in 2D.[Angus: will do a better version]

Algorithm 4: Baseline co-kriging procedure

```
Input: P, problem data; N_{L_{max}}, max size of LF pop; N_{e_{max}}, maximum number of evaluations; \Delta, new LF per iteration.
Output: Best solution found x^{\beta}.
 1: X_v \leftarrow LHS(P), \ \forall v \in \{L, H\} \ \{\text{Generate initial populations}\}
2: \boldsymbol{x}^{\beta} \leftarrow \emptyset \ \{\text{Initialize} \ x_{\beta}\}
 3: while N_e < N_{e_{max}} do
           A_L \leftarrow A_L \cup \overset{\dots}{LH}S(\Delta) {Add \Delta new solutions to LF archive}
           if |A_L| > N_{L_{max}} then
 6:
                A_L \leftarrow winnow(A_L, N_{L_{max}}) {Control population size}
 7:
           M_C \leftarrow CoKrige(A_L, A_H) {Update co-kriging model}
           x \leftarrow GlobalSearch(M_C) {Globally search co-kriging model}
           \alpha, N_e \leftarrow f_H(x, N_e) {Evaluate and update total cost}
10:
           A_H \leftarrow A_H \cup \{\alpha\}  {Add \alpha to high-fidelity archive} x^{\beta} \leftarrow \min(f_H(x^{\beta}), f_H(x)) {Update best solution}
12:
13: end while
```

a latin hypercube sampling (LHS) technique; however, the global search method remains the same.

C. Parameters

MFITS can be viewed as a general framework into which various search and modeling methods can be "plugged". Therefore, its components can be divided into two categories: MFITS specific components, which are intrinsic to its operation and whose parameters are also intrinsic; and, generic method components, such as global search techniques and modelling methods which can be substituted for other similar techniques, which come with their own parameters. The MFITS specific parameters are discussed in Section III; this section will detail the parameters for the generic search method used.

Differential evolution (DE) was used to globally search the updated co-kriging model. This DE was run over 30 generations with a crossover rate of 0.9, a mutation factor of 0.5 and a population size of 100.

The kriging models used are from the ooDACE toolbox [23], with the default paramters.

V. RESULTS AND DISCUSSION

The results presented in this section are divided into the two datasets as described in Section IV. Dataset A are taken

from [12] and demonstrate the performance of MFITS on a diversity of problems with different sizes; while dataset B investigates the effect of problem size and error type.

Dataset A

Table I gives the results from 30 runs of MFITS and the base-line co-kriging algorithm on problems f10 to f17 from [12], comprising dataset A.

In this table, it can be seen that MFITS performs as well as, or better than, the base-line co-kriging algorithm, with a few exceptions. For the tests on instances f11, f14 and f16 the base-line co-kriging algorithm was able to find at least one solution that was better than the best solution produced by MFITS, and for the instances f10 and f14 it produced better solutions on average. In all of these instances, the differences between the algorithms are small, with both performing very similarly; whereas MFITS outperforms the co-kriging by some margin in a lot of the other instances.

This is supported by the convergence plots in Figure 5. Here, it is clear that when the size of the problem is small, the performance of the two algorithms is very similar, with similar convergence rates; but as the size increases, the both the average performance, and convergence rate, of MFITS over co-kriging improves significantly — with the most marked improvement being for problem f17.

Dataset B

The purpose of dataset B was to observe the effect of problem size on the performance of MFITS, and to do so using two different error functions to ensure the results obtained are consistent, and not dependent on the simulation error model used.

The results in Table II compare the performance of MFITS and the baseline co-kriging algorithm and are taken over 30 runs on two problem instances from the literature, with varying numbers of decision variables using error functions e_2 and e_6 as described in [20].

The table shows that in the majority of instances MFITS outperforms the co-kriging baseline algorithm, with a few exceptions. For the Michaelwicz problem using error function e_6 and has been instantiated with five decision variables, the co-kriging base-line algorithm managed to find the best over-all solution, however MFITS still performed better on average. The only time when the co-kriging base-line outperformed MFITS on average was the two smallest instantiations of the Griewank problem. The convergence plots in Figures 6a and 6d show that the difference between the performance of both algorithms for these instances is reasonably negligible. The remaining plots in Figure 6 agree with the results on dataset A.

Summary

The results from both datasets suggest a similar pattern. For problems with few decision variables, there is very little difference between MFITS and the base-line co-kriging

TABLE I: Results on dataset A comparing the base-line co-kriging algorithm to MFITS. Given are the number of decision variables (D), the square of the Pearson correlation coefficient (r^2) , the best objective obtained, the mean best objective over the full set of runs (μ) and the corresponding standard deviation (σ) .

			Co-kriging			MFITS			
Instance	D	r^2	best	μ	σ	best	μ	σ	
f10	3	0.64	0	2.2960	3.5445	0	3.9189	5.3296	
f11	3	0.74	0.0001	0.0110	0.0077	0.0004	0.0098	0.0064	
f12	4	0.79	-8.1107	-3.8007	1.3426	-9.5783	-5.8853	1.5123	
f13	4	0.89	0.6290	4.9366	5.0965	0.0519	0.3457	0.1971	
f14	5	0.75	0.2509	0.2583	0.0039	0.2522	0.2607	0.0037	
f15	6	0.78	104.2304	1700.28	2015.04	24.6278	152.9817	144.6451	
f16	8	0.82	7.3904	196.810	171.7771	7.9240	75.2898	59.3423	
f17	8	0.79	-2.5859	42.0074	153.4414	-3.0161	-2.8355	0.0967	

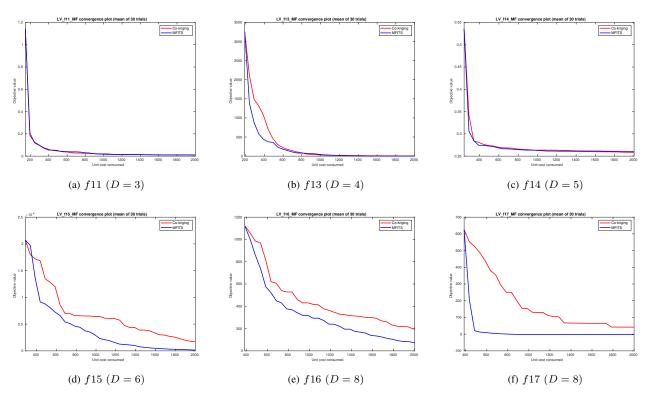


Fig. 5: Mean convergence plots for problem instances f11, f13, f14, f15, f16 and f17 of dataset A, over 30 runs. [Angus: will do pgfplots version]

algorithm, and as the size of the problem increases, the convergence rate and performance of MFITS improves over the simple co-kriging algorithm with the greatest improvements being observed on the largest problem instances.

Although both algorithms contain the co-kriging technique as their principal constituent, the base-line algorithm uses a random sampling technique which gives it a disadvantage in problems with more decision variables, as it must cover an exponentially larger space with the same computational budget. By using the LocalOCBA procedure to focus the sampling on areas of the search space that have been identified as promising, MFITS can use its budget more efficiently to exploit these regions, which is evidenced by the faster convergence rates at larger problem sizes.

Finally, although the numerical results and convergence plots do indicate that there is not a significant difference between the performance of the two algorithms on the smaller instances; it is worth noting that for three out of four of these instances, the co-kriging baseline did perform slightly better on average. One possible explanation for this is that the LocalOCBA procedure makes MFITS more greedy, and therefore more likely to become trapped in local optima — especially for multimodal instances like the Griewank problem (as demonstrated in Figure 3). In these smaller instances, the random sampling of the base-line co-kriging algorithm is not as much of a disadvantage and it is more likely to come across good areas of the search space by chance.

TABLE II: Results on Griewank and Michalewicz test problems using Wang error functions 2 and 6 (indicated by subscript), comparing the base-line co-kriging algorithm to MFITS. Given are the number of decision variables (D), the square of the Pearson correlation coefficient (r^2) , the best objective obtained, the mean best objective over the full set of runs (μ) and the corresponding standard deviation (σ) .

				Co-kriging			MFITS			
Instance	D	r^2	best	μ	σ	best	μ	σ		
$Griewank_2$	3	0.73	0	0.0018	0.0083	0	0.0072	0.0137		
	5	0.54	0	0.0535	0.0733	0	0.0485	0.1055		
	8	0.37	0	0.6538	0.3363	0	0.1864	0.2531		
$Griewank_6$	3	0.74	0	0.0056	0.0114	0	0.0104	0.0130		
	5	0.76	0	0.0730	0.1145	0	0.0361	0.0778		
	8	0.76	0	0.4560	0.4238	0	0.2089	0.3539		
$Michalewicz_2$	3	0.77	-2.7239	-2.3582	0.2587	-2.7360	-2.5305	0.1557		
	5	0.73	-3.5164	-2.9470	0.2921	-3.5653	-2.9953	0.3219		
	8	0.64	-4.1813	-3.0214	0.5671	-4.2150	-3.0818	0.7827		
$Michalewicz_6$	3	0.76	-2.7194	-2.2412	0.2978	-2.7409	-2.3142	0.2411		
	5	0.83	-3.6198	-2.7140	0.3948	-3.5511	-2.9104	0.2823		
	8	0.86	-3.9978	-3.1032	0.4929	-4.2922	-3.1363	0.0909		

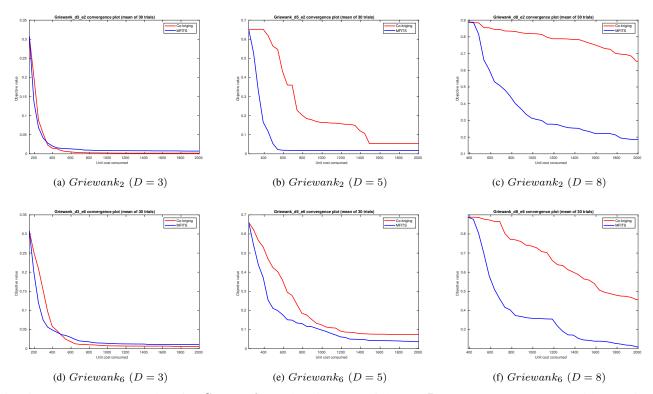


Fig. 6: Mean convergence plots for *Griewank* problem instance of dataset B, over 30 runs. [Angus: will do pgfplots version]

VI. CONCLUSION AND FUTURE WORK

- give conclusion
- · future work includes adding constraints

APPENDIX A FUNCTION EQUATIONS

REFERENCES

[1] A. Forrester, A. Sobester, and A. Keane, *Engineering design via surrogate modelling: a practical guide*. John Wiley & Sons, 2008.

- [2] Y. Jin and B. Sendhoff, "A systems approach to evolutionary multiobjective structural optimization and beyond," *IEEE Computational Intelligence Magazine*, vol. 4, no. 3, pp. 62–76, 2009.
- [3] S. Amaran, N. V. Sahinidis, B. Sharda, and S. J. Bury, "Simulation optimization: a review of algorithms and applications," *Annals of Operations Research*, vol. 240, no. 1, pp. 351–380, 2016.
- [4] J. Branke, M. Asafuddoula, K. S. Bhattacharjee, and T. Ray, "Efficient use of partially converged simulations in evolutionary optimization," *IEEE Transactions on Evolutionary Computation*, vol. 21, no. 1, pp. 52–64, 2016.
- [5] A. I. Forrester, A. Sóbester, and A. J. Keane, "Multi-fidelity optimization via surrogate modelling," *Proceedings of the royal society a: mathematical, physical and engineering sciences*, vol. 463, no. 2088,

TABLE III: Test functions used for experiments in this paper. Given are the instance name, the function, the number of decision variables (D), the bounds (B) and the reference the test function is taken from.

Instance	Function	D	В	Ref.
f10	$f_H(\boldsymbol{x}) = 100 \left(\exp\left(-\frac{2}{x_1^{1.75}}\right) + \exp\left(-\frac{2}{x_2^{1.5}}\right) + \exp\left(-\frac{2}{x_3^{1.25}}\right) \right)$	3	$[0,1]^D$	[12]
	$f_L(\boldsymbol{x}) = 100 \left(\exp\left(-\frac{2}{x_1^{1.75}}\right) + \exp\left(-\frac{2}{x_2^{1.5}}\right) \right)$			
f11	$f_H(\mathbf{x}) = 4(x_1 - 2 + 8x_2 - 8x_2^2)^2 + (3 - 4x_2)^2 + 16\sqrt{x_3 + 1}(2x_3 - 1)^2$	3	$[0,1]^{D}$	[12]
	$f_L(\mathbf{x}) = 4(x_1 - 2 + 8x_2 - 8x_2^2)^2 + (3 - 4x_2)^2 + 5\sqrt{x_3 + 1}(2x_3 - 1)^2$			
f12	$f_H(\mathbf{x}) = -\sum_{i=1}^m \left(\sum_{j=1}^4 (x_j - C_{ji})^2 + \beta_i \right)^{-1}$	4	$[0, 10]^D$	[12]
	$f_L(\boldsymbol{x}) = -\sum_{i=1}^m \left(\sum_{j=1}^4 (x_j - C_{ji})^2 + 0.9\beta_i\right)^{-1}$			
	$m = 10, \beta = \frac{1}{10}(1, 2, 2, 4, 4, 6, 3, 7, 5, 5)^T$			
	$C = \begin{pmatrix} 4.0 & 1.0 & 8.0 & 6.0 & 3.0 & 2.0 & 5.0 & 8.0 & 6.0 & 7.0 \\ 4.0 & 1.0 & 8.0 & 6.0 & 7.0 & 9.0 & 3.0 & 1.0 & 2.0 & 3.6 \\ 4.0 & 1.0 & 8.0 & 6.0 & 3.0 & 2.0 & 5.0 & 8.0 & 6.0 & 7.0 \\ 4.0 & 1.0 & 8.0 & 6.0 & 7.0 & 9.0 & 3.0 & 1.0 & 2.0 & 3.6 \end{pmatrix}$			
f13	$f_H(\mathbf{x}) = (x_1 - 1)^2 + \sum_{i=1}^{d} i (2x_i^2 - x_{i-1})^2$	4	$[-10, 10]^D$	[12]
	$f_L(\mathbf{x}) = (x_1 - 1)^2 + x_2^{4} + 4x_3^{4} + 4x_4^{4}$			
f14	$f_H(\mathbf{x}) = \sum_{i=1}^{5} \left(0.3 + \sin\left(\frac{16}{15}x_i - 1\right) + \sin\left(\frac{16}{15}x_i - 1\right)^2 \right)$	5	$[-1, 1]^D$	[12]
	$f_L(\boldsymbol{x}) = \sum_{i=1}^{5} \left(0.3 + \sin\left(\frac{13}{15}x_i - 1\right) + \sin\left(\frac{13}{15}x_i - 1\right)^2 \right)$			
f15	$f_H(\mathbf{x}) = \sum_{i=1}^{5} \left(100 \left(x_{i+1} - x_i^2\right)^2 + (x_i - 1)^2\right)$	6	$[0,1]^{D}$	[12]
	$f_L(\mathbf{x}) = \sum_{i=1}^{5} (100 (x_{i+1} - x_i^2)^2 + 4 (x_i - 1)^4)$			
f16	$f_H(\mathbf{x}) = \sum_{i=1}^{2} \left[\frac{(4x_{4i-3} - 10x_{4i-2})^2 + 5(x_{4i-1} - x_{4i})^2 + (x_{4i-2} - 2x_{4i-1})^4 + 10(x_{4i-3} - x_{4i})^2}{(x_{4i-2} - 2x_{4i-1})^4 + 10(x_{4i-3} - x_{4i})^2} \right]$	8	$[-4, 5]^D$	[12]
	$f_L(\boldsymbol{x}) = \sum_{i=1}^{2} \left[\frac{(4x_{4i-3} - 10x_{4i-2})^2 + 5(x_{4i-1} - x_{4i})^2 + (x_{4i-2} - 2x_{4i-1})^4 + 4(x_{4i-3} - x_{4i})^2}{(x_{4i-2} - 2x_{4i-1})^4 + 4(x_{4i-3} - x_{4i})^2} \right]$			
f17	$f_H(\boldsymbol{x}) = \sum_{i=1}^{8} (x_i^4 - 16x_i^2 + 5x_i)$	8	$[-5, 5]^D$	[12]
	$f_L(\mathbf{x}) = \sum_{i=1}^{8} (0.8x_i^4 - 16x_i^2 + 5x_i)$			
Griewank	$f_H(\mathbf{x}) = \sum_{i=1}^{D} \frac{x_i^2}{4000} - \prod_{i=1}^{D} \cos\left(\frac{x_i}{\sqrt{i}}\right) + 1$	${3,5,8}$	$[-5, 5]^D$	
Michalewicz	$f_H(\boldsymbol{x}) = \sum_{i=1}^{D} \sin(x_i) \sin^{2m} \left(\frac{ix_i^2}{\pi}\right), m = 10$	{3,5,8}	$[0,\pi]^D$	

pp. 3251-3269, 2007.

- [6] M. C. Kennedy and A. O'Hagan, "Predicting the output from a complex computer code when fast approximations are available," *Biometrika*, vol. 87, no. 1, pp. 1–13, 2000.
- [7] J. Laurenceau and P. Sagaut, "Building efficient response surfaces of aerodynamic functions with kriging and cokriging," *AIAA journal*, vol. 46, no. 2, pp. 498–507, 2008.
- [8] P. Perdikaris, D. Venturi, J. O. Royset, and G. E. Karniadakis, "Multi-

fidelity modelling via recursive co-kriging and gaussian—markov random fields," *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, vol. 471, no. 2179, p. 20150018, 2015.

[9] X. Yang, D. Barajas-Solano, G. Tartakovsky, and A. M. Tartakovsky, "Physics-informed cokriging: A gaussian-process-regression-based multifidelity method for data-model convergence," *Journal of Com*putational Physics, vol. 395, pp. 410–431, 2019.

TABLE IV: Error functions used, as defined in Wang et al. [20]. Function e_2 models resolution errors and e_6 models stochastic errors. Here, $\phi \in [0, 10000]$ determines the fidelity level and D is the number of decision variables.

Name	Function
e_2	$e_2(\boldsymbol{x}, \phi) = \sum_{i=1}^{D} a(\phi) \cos(w(\phi)x_i + b(\phi) + \pi)$ where, $a(\phi) = \theta(\phi)$, $w(\phi) = 10\pi\theta(\phi)$, $b(\phi) = 0.5\pi\theta(\phi)$, $\theta(\phi) = e^{-0.00025\phi}$
e_6	$e_6 = \mathcal{N}\left(\mu(oldsymbol{x},\phi),\sigma(\phi) ight)$
	where, $\mu^2(\phi) = 0$, $\sigma(\phi) = 0.1 \vartheta(\phi)$, $\vartheta(\phi) = e^{-0.0005\phi}$

- [10] R. Giraldo, L. Herrera, and V. Leiva, "Cokriging prediction using as secondary variable a functional random field with application in environmental pollution," *Mathematics*, vol. 8, no. 8, p. 1305, 2020.
- [11] M. Goulard and M. Voltz, "Geostatistical interpolation of curves: a case study in soil science," in *Geostatistics Tróia* '92. Springer, 1993, pp. 805–816.
- [12] L. Lv, C. Zong, C. Zhang, X. Song, and W. Sun, "Multi-fidelity surrogate model based on canonical correlation analysis and least squares," *Journal of Mechanical Design*, vol. 143, no. 2, p. 021705, 2021.
- [13] A. Ariyarit and M. Kanazaki, "Multi-fidelity multi-objective efficient global optimization applied to airfoil design problems," *Applied Sciences*, vol. 7, no. 12, p. 1318, 2017.
- [14] A. Hebbal, L. Brevault, M. Balesdent, E.-G. Talbi, and N. Melab, "Multi-fidelity modeling with different input domain definitions using deep gaussian processes," *Structural and Multidisciplinary Optimiza*tion, vol. 63, no. 5, pp. 2267–2288, 2021.
- [15] K. Cutajar, M. Pullin, A. Damianou, N. Lawrence, and J. González, "Deep gaussian processes for multi-fidelity modeling," arXiv preprint arXiv:1903.07320, 2019.
- [16] J. Xu, S. Zhang, E. Huang, C.-H. Chen, L. H. Lee, and N. Celik, "Mo2tos: Multi-fidelity optimization with ordinal transformation and optimal sampling," *Asia-Pacific Journal of Operational Research*, vol. 33, no. 03, p. 1650017, 2016.
- [17] C.-H. Chen and L. H. Lee, Stochastic simulation optimization: an optimal computing budget allocation. World scientific, 2011, vol. 1.
- [18] D. Lim, Y.-S. Ong, Y. Jin, and B. Sendhoff, "Evolutionary optimization with dynamic fidelity computational models," in *International Conference on Intelligent Computing*. Springer, 2008, pp. 235–242.
- [19] K. Deb, Optimization for engineering design: Algorithms and examples. PHI Learning Pvt. Ltd., 2012.
- [20] H. Wang, Y. Jin, and J. Doherty, "A generic test suite for evolutionary multifidelity optimization," *IEEE Transactions on Evolutionary Computation*, vol. 22, no. 6, pp. 836–850, 2017.
- [21] M. C. Kennedy and A. O'Hagan, "Bayesian calibration of computer models," *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, vol. 63, no. 3, pp. 425–464, 2001.
- [22] J. Xu, S. Zhang, E. Huang, C.-H. Chen, L. H. Lee, and N. Celik, "An ordinal transformation framework for multi-fidelity simulation optimization," in 2014 IEEE International Conference on Automation Science and Engineering (CASE). IEEE, 2014, pp. 385–390.
- [23] I. Couckuyt, T. Dhaene, and P. Demeester, "oodace toolbox: A flexible object-oriented kriging implementation," *Journal of Machine Learning Research*, vol. 15, pp. 3183–3186, 2014.