SLENDERTOKEN

A coding agent for your terminal that finishes the job on **the fewest tokens**, then shows what it cost in **money, energy and carbon**.

- −54% tokens
- ~51% less energy

Anirudh · Apoorv Gadiya · Ananth Pullur

slendertoken.vercel.app

Coding agents pay for the same file again and again. The bill is context, not code.

NAIVE AGENT · 4 BUG FIXES

50,432 tokens

Whole files read, the whole transcript resent every turn.

OF THAT IS INPUT

96 %

Context carried from call to call, not the model's answer.

8-QUESTION SESSION

413 at turn 6

The transcript outgrew the provider's limit. The agent stopped.

THE BIFROST BRIEF ASKS FOR

- Fewest tokens
- Survive outages
- Spending limits
- Local models for private repos
- Approval before risky actions

Read less. Start small. Show the bill.

Ranges, not files

100-line reads, 5 search hits per file, clipped output.

Forget old results

Two newest tool results in full, older ones become stubs.

Small model first


The large model takes over only when the small one fails.

Count the savings

Each call is priced against a naive twin, live.



One binary, one gateway in front of every model.

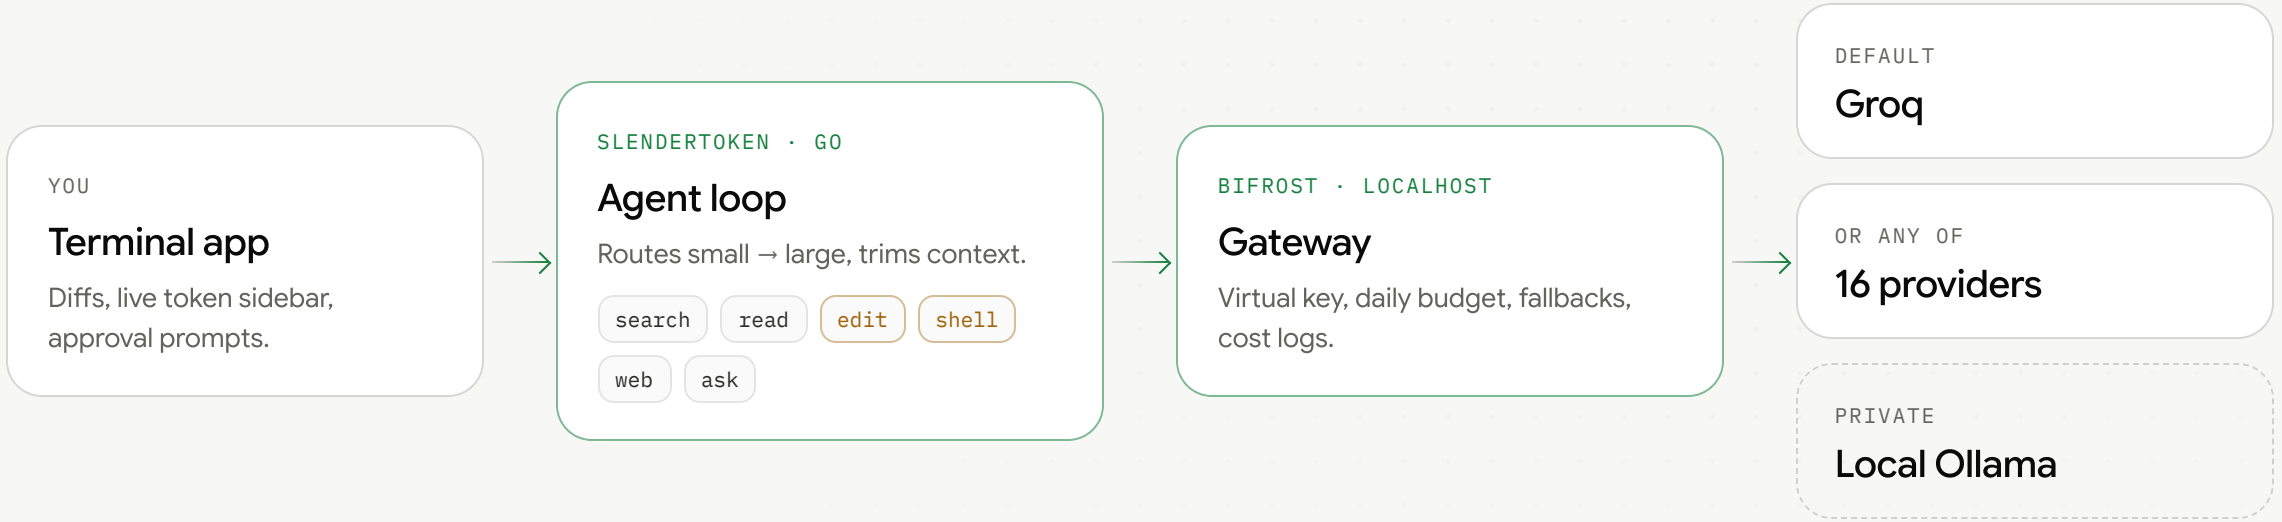

TAVILY

Web search for live docs, three short results.

FOOTPRINT

Tokens, $, Wh and gCO_2e for every task.

INSTALL

One command sets up the app and Bifrost.

Bifrost enforces the hard parts. Every call goes through it.

Outages FALLBACKS	Each request carries a fallback chain. If one model fails, the next answers.
Spending VIRTUAL-KEY BUDGET	A daily dollar limit on the key. The gateway refuses past it.
Privacy PROVIDER ALLOWLIST	Private mode uses a key that allows only a local model.
Any provider ONE API	16 providers, one endpoint, set up by the installer.

every model call

```
POST localhost/v1/chat/completions
x-bf-vk: sk-bf-••••••••
{
  "model": "groq/openai/gpt-oss-20b",
  "fallbacks": [
    "groq/openai/gpt-oss-120b",
    "groq/qwen/qwen3.8-27b"
  ]
}
← routing-info-is-fallback: false
```

A small model does the work. The large one only when stuck.

`gpt-oss-20b` — starts every task

ESCALATES WHEN

- not done after 8 steps
- tool calls keep failing
- tests stay red after edits

`gpt-oss-120b` — finishes the task

`search · read`
small slices only

`edit · shell`
wait for your approval

`web_search · Tavily`
live docs, sources shown


`ask_user`
asks when unsure

You stay in control. Edits show as diffs. `shift+tab` switches between ask, accept-edits and auto.


MEASURED

54% fewer tokens, same 4 of 4 fixed.

TOKENS PER BUG FIX

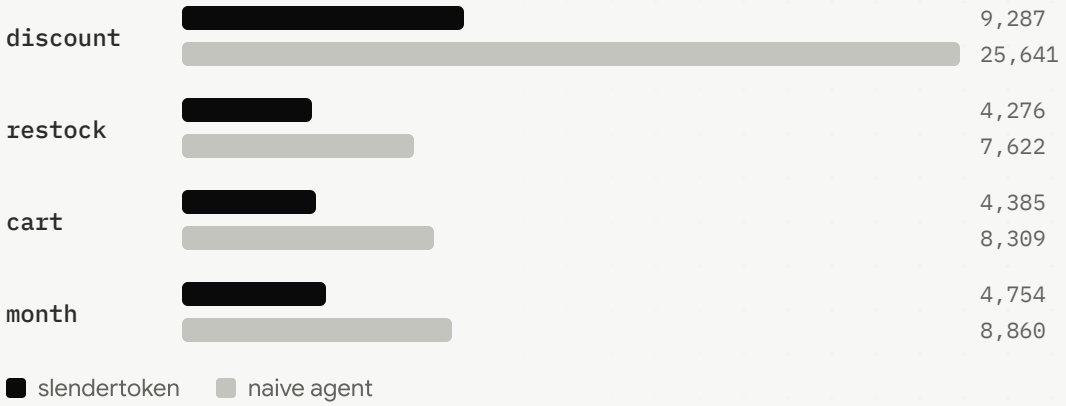

8-QUESTION SESSION · CUMULATIVE TOKENS

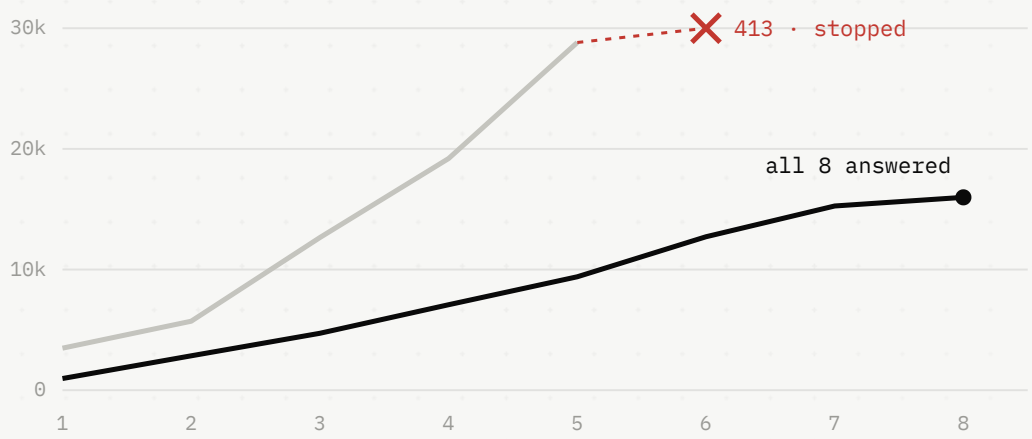

TOKENS

−54%

PASS RATE

4 / 4

COST

−54%

MODEL TIME

−57%

slendertoken


same model and tools for both · one run per arm · bench/results.json · 07 / 10

Every task ends with its footprint. Fewer tokens, less carbon.

end-of-task report

```
-- footprint ------------------------------
verified   tests passing
tokens     4,276
saved      44% fewer than naive
cost       $0.00050
energy     0.0609 Wh
carbon     43.4 mgCO₂e   grid 713 g/kWh
```

FOUR BENCHMARK TASKS · ESTIMATED

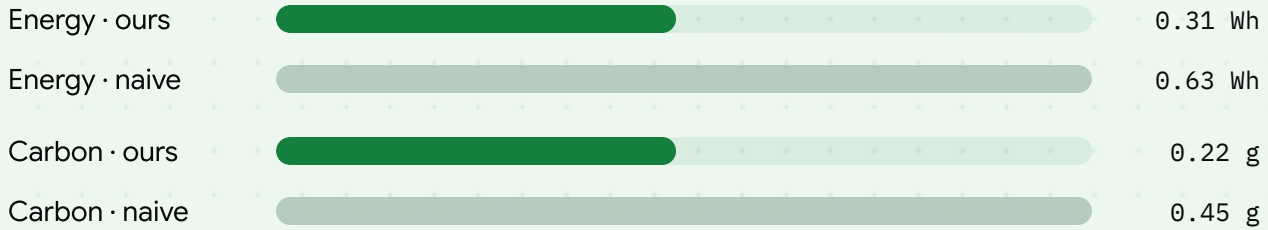

ENERGY AND CARBON

−51%


PER 1M SUCH TASKS

80 kWh saved

One command to install. Never looks frozen.


install

```
# macOS / Linux
curl -fsSL …/install.sh | sh
# Windows · PowerShell
irm …/install.ps1 | iex
```

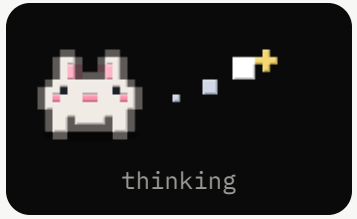





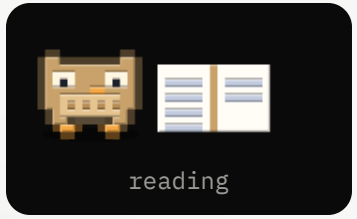





Bifrost
gateway

Tavily
web search

Groq
default models

Go
one binary

Bubble Tea
terminal UI

Lip Gloss
styling

EcoLogits
energy method

Ollama
private mode

Claude Code
assisted the build

Built for one developer. Ready for a team.

Innovation	Small-model routing and a carbon report per task.
Execution	Every call through Bifrost; limits really enforced.
Impact	54% fewer tokens at the same pass rate.
Use of AI	Two-model agent, Tavily research.
Experience	One-command install, approval diffs.
Scale	One key and budget per developer.

NOW
Working agent
Bifrost and Tavily in

NEXT
Cheaper still
prompt caching, repo map

THEN
Teams and CI
per-repo carbon dashboards


Anirudh
@Ani07-05


Apoorv Gadiya
@apoorv7g


Ananth Pullur
@Uncool-dudes