

Title:


Instruction for BIOS/EC/PD/TPM firmware upgrade on Dell Pro Max with GB10 FCM1253

Summary:


This article covers how to run BIOS/EC/PD/TPM FW upgrade on Dell Pro Max with GB10 FCM1253

Instructions:**Method#1: Run System Updates in DGX Dashboard.****Steps:**


1. Click DGX Dashboard App


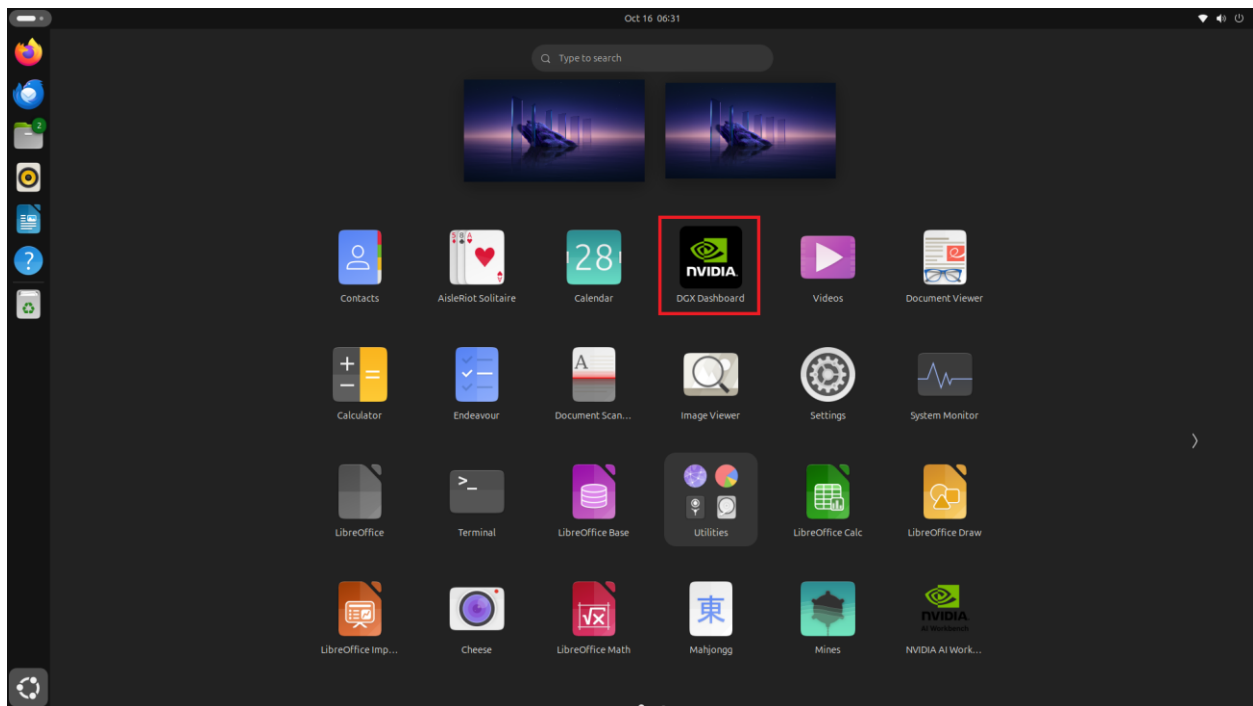


2. Login your username and password of Linux

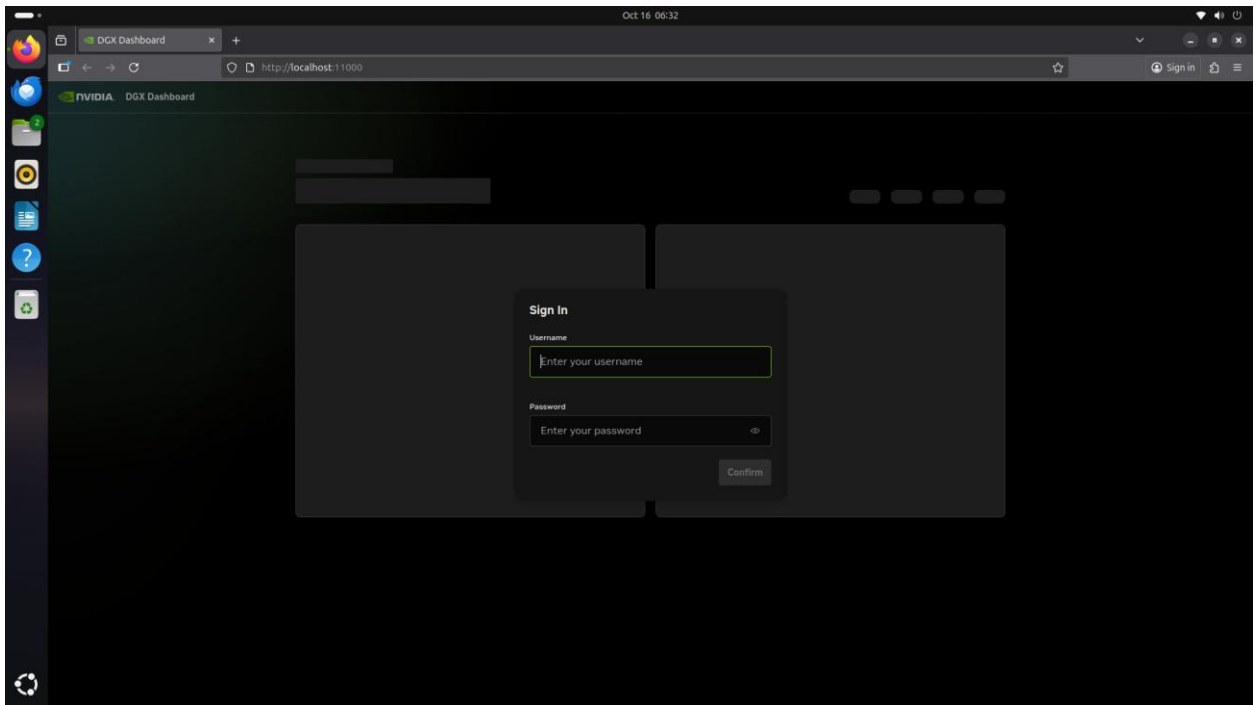


3. Click **Settings**, select the “**Update**” button under **System Updates**, and then click “**Update Now**” when the **Update Confirmation** message appears.

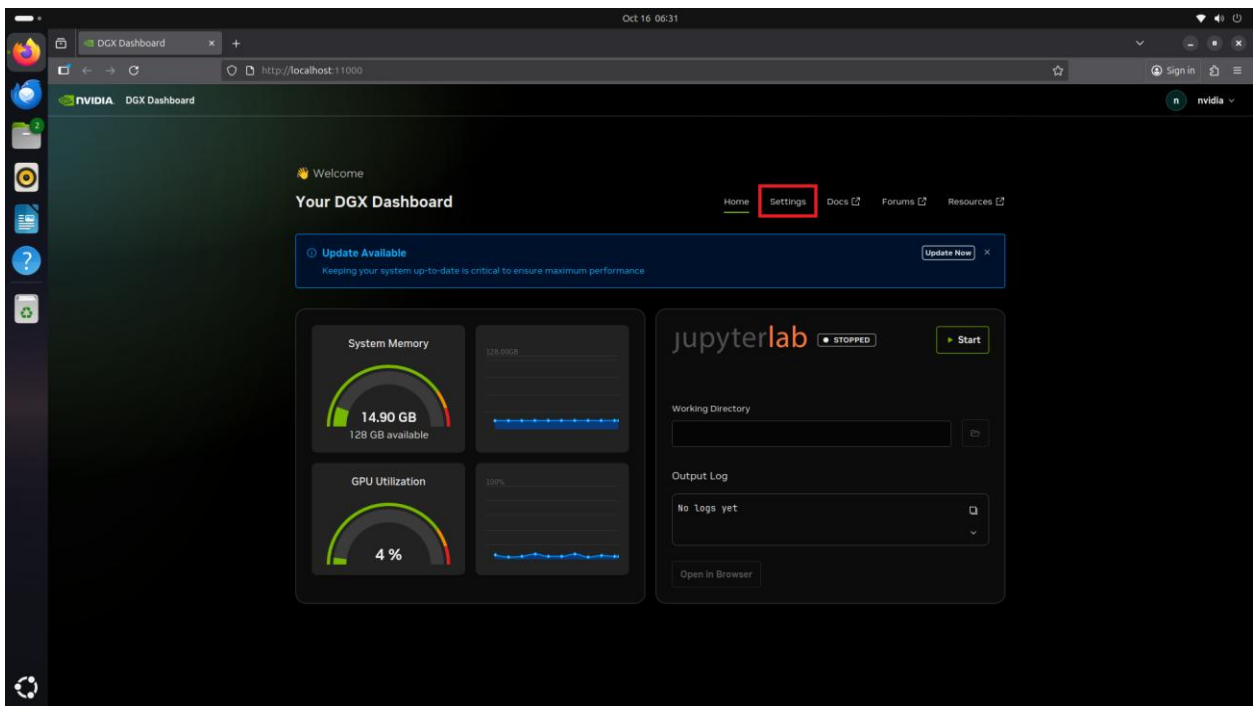

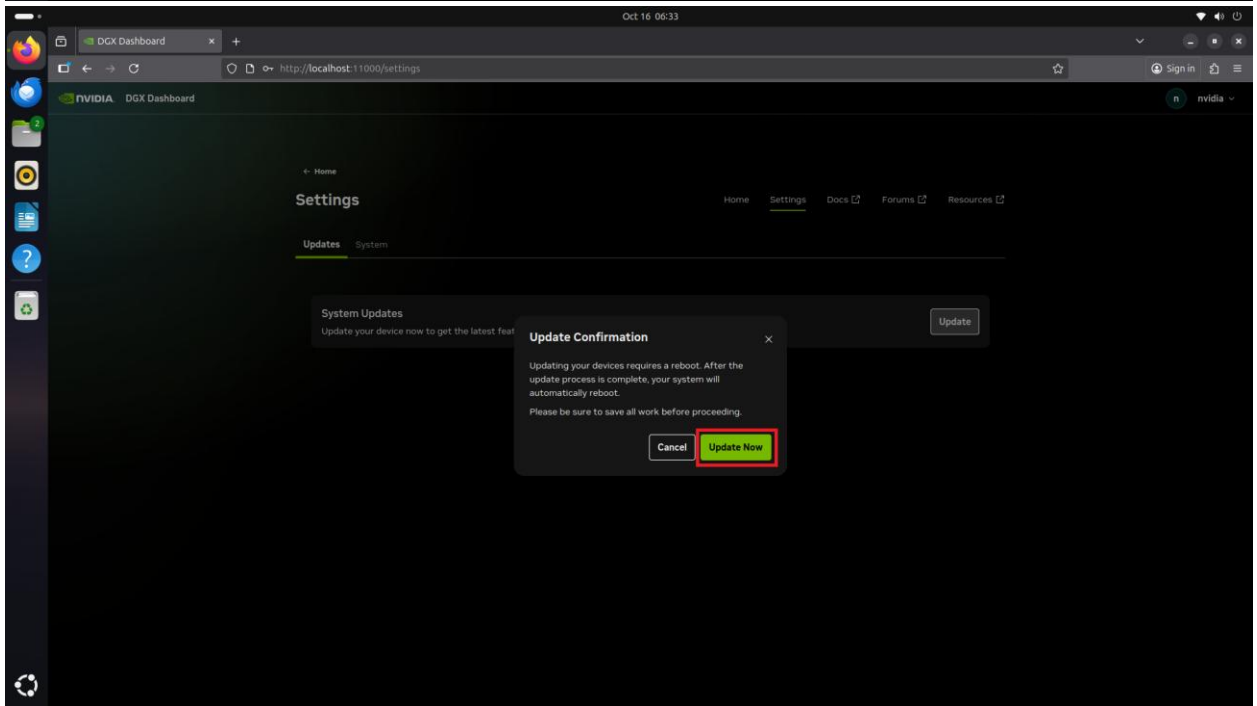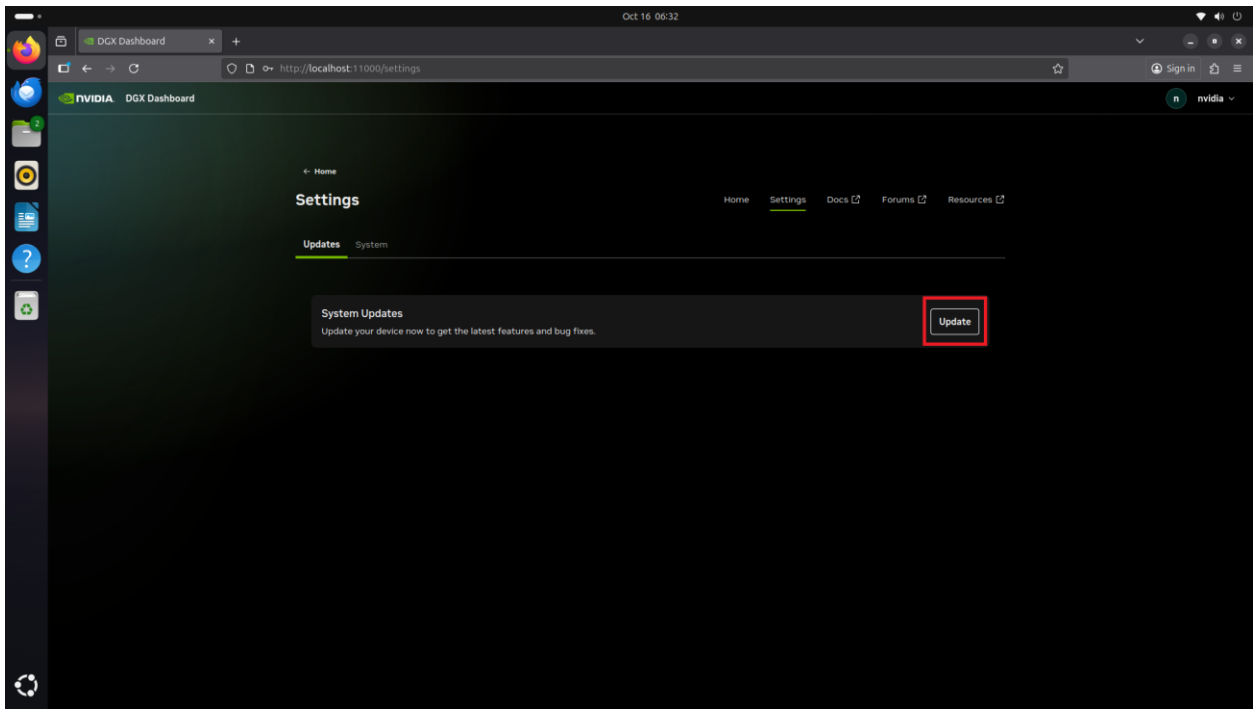

- Then, system will download and install the latest BIOS, EC, PD, and TPM firmware, and automatically restart the Dell Pro Max with GB10 system to complete the firmware upgrade.

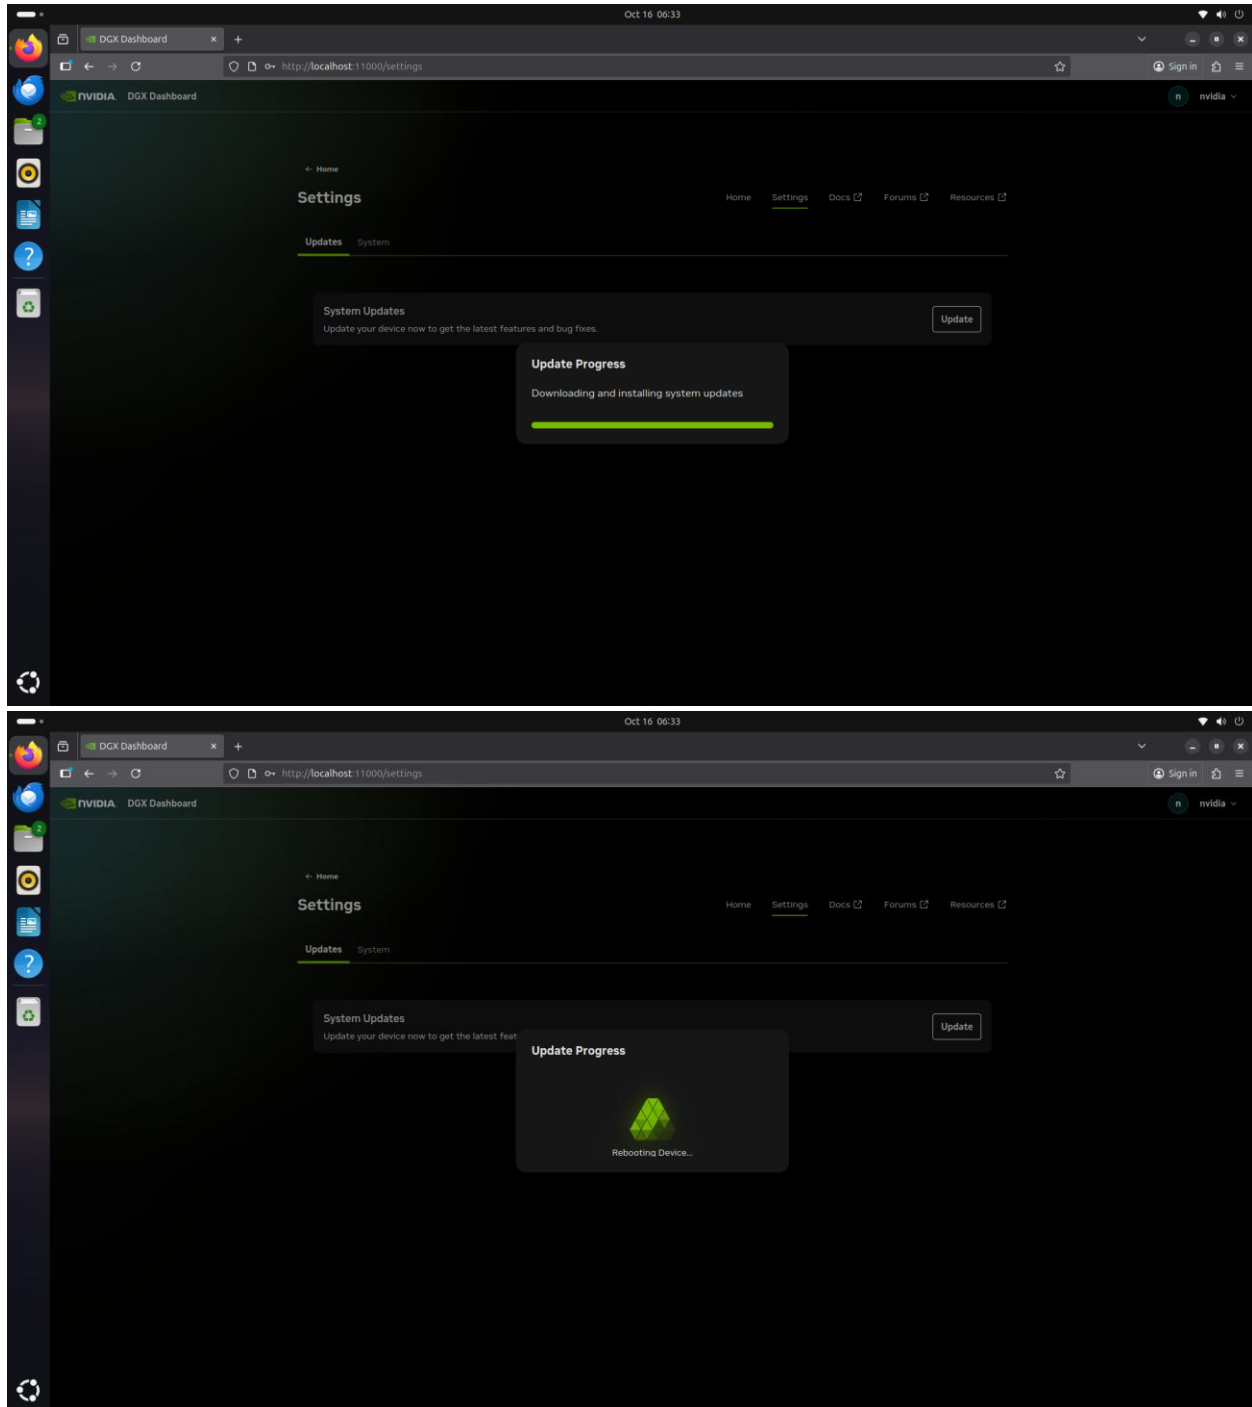

Method#2: Update BIOS firmware on Dell Pro Max with GB10 system via Terminal

Steps:

1. Open Terminal (keyboard shortcut: CTRL+ALT+T).
2. Run the following commands to refresh the firmware metadata, check for available updates, and apply them:

sudo apt update

sudo apt upgrade

```
nvidia@promaxgb10-2ddd: ~  
nvidia@promaxgb10-2ddd: $ sudo apt update  
Hit:1 https://developer.download.nvidia.com/compute/cuda/repos/ubuntu2404/sbsa InRelease  
Hit:2 https://workbench.download.nvidia.com/stable/linux/debian default InRelease  
Hit:3 https://repo.download.nvidia.com/baseos/ubuntu/noble/arm64 noble InRelease  
Hit:4 https://repo.download.nvidia.com/baseos/ubuntu/noble/arm64 noble-updates InRelease  
Hit:5 https://developer.download.nvidia.com/hpc-sdk/ubuntu/arm64 InRelease  
Hit:6 http://ports.ubuntu.com/ubuntu-ports noble InRelease  
Hit:7 http://ports.ubuntu.com/ubuntu-ports noble-updates InRelease  
Hit:8 https://ppa.launchpadcontent.net/canonical-nvidia/linux-firmware-mbssid-patches/ubuntu noble InRelease  
Hit:9 http://ports.ubuntu.com/ubuntu-ports noble-backports InRelease  
Hit:10 https://ppa.launchpadcontent.net/canonical-nvidia/nvidia-desktop-edge/ubuntu noble InRelease  
Hit:11 http://ports.ubuntu.com/ubuntu-ports noble-security InRelease  
Hit:12 https://ppa.launchpadcontent.net/canonical-nvidia/vulkan-packages-nv-desktop/ubuntu noble InRelease  
Reading package lists... Done  
Building dependency tree... Done  
Reading state information... Done  
All packages are up to date.  
nvidia@promaxgb10-2ddd: $ sudo apt upgrade  
Reading package lists... Done  
Building dependency tree... Done  
Reading state information... Done  
Calculating upgrade... Done  
The following package was automatically installed and is no longer required:  
  nvidia-firmware-580  
Use 'sudo apt autoremove' to remove it.  
Get more security updates through Ubuntu Pro with 'esm-apps' enabled:  
  libwinpr2-2t64 libfreerdp-client2-2t64 libfreerdp2-2t64  
Learn more about Ubuntu Pro at https://ubuntu.com/pro  
Your DGX contract entitles you to Extended Security Maintenance updates for additional packages in the Ubuntu repository. Please contact NVIDIA Support to get your key to enable this capability.  
0 upgraded, 0 newly installed, 0 to remove and 0 not upgraded.  
nvidia@promaxgb10-2ddd: $
```

sudo fwupdmgr refresh

sudo fwupdmgr upgrade

```
Oct 14 08:25  
nvidia@promaxgb10-2ddd: ~  
nvidia@promaxgb10-2ddd: $ sudo fwupdmgr refresh  
Metadata is up to date; use --force to refresh again.  
nvidia@promaxgb10-2ddd: $ sudo fwupdmgr upgrade  
Devices with the latest available firmware version:  
  • 2500 Micron 2040GB  
  
Upgrade Embedded Controller from 0x01000000 to 0x01000200?  
This update improves the performance and stability of the Device.  
Dell Pro Max with GB10 FCM1253 must remain plugged into a power source for the duration of the update to avoid damage.  
  
Perform operation? [Y/n]: y  
Waiting... [*****]  
Successfully installed firmware  
Do not turn off your computer or remove the AC adapter while the update is in progress.  
  
Upgrade UEFI Device Firmware from 1.0.0 to 1.1.0?  
This update improves the performance and stability of the Device.  
Dell Pro Max with GB10 FCM1253 must remain plugged into a power source for the duration of the update to avoid damage.  
  
Perform operation? [Y/n]: y  
Updating UEFI Device Firmware... [*****] Less than one minute remaining.  
Waiting... [*****]  
Successfully installed firmware  
Do not turn off your computer or remove the AC adapter while the update is in progress.  
Do not turn off your computer or remove the AC adapter while the update is in progress.
```

```
Upgrade UEFI Device Firmware from 0x0000040a to 0x00000500?

This stable release fixes the following issues: - Improved the stability of
the system.

Dell Pro Max with GB10 FCM1253 must remain plugged into a power source for
the duration of the update to avoid damage.

Perform operation? [Y/n]: y
Updating UEFI Device Firmware_          ] Less than one minute remaining_
Waiting_          [*****]
Successfully installed firmware
Do not turn off your computer or remove the AC adapter while the update is in progress.
Do not turn off your computer or remove the AC adapter while the update is in progress.
Do not turn off your computer or remove the AC adapter while the update is in progress.
An update requires a reboot to complete. Restart now? [y/N]: y
```

After update completed, please restart Dell Pro Max with GB10 system.