Test Run Report




Test Run Overview

Started 22 Jul 2024, 17:15:30 Ended 22 Jul 2024, 17:16:57

Duration (mm:ss) 01:26.473

Test Results Summary

Passed 1 Failed 0 Skipped 0

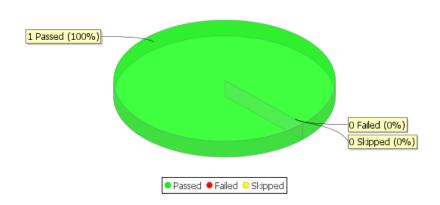


successful

successful

successful

Test Case Summary



Createcontacts.testcase

Summary

Started 22 Jul 2024, 17:15:30 Ended 22 Jul 2024, 17:16:54

Duration (mm:ss) 01:23.846
Outcome successful

Output

Salesforce Connect: SalesForce (Test)

0 17:15:30(00:00.015)

- (i) Connecting to Salesforce as SalesForce
 - ▼ Connection details. Connection name: SalesForce, result name: SalesForce, result scope: Test, urlString:
 sf:user=aniket.pathania@sandbox.com;password={password};securityToken={securityToken};environment=PROD_DEV;lightningMode=true,
 environment: <default>, userName: aniket.pathania@sandbox.com, password: [supplied] securityToken: [supplied]
 - Create object id log file.
 - * Opening Partner connection
 - Opening SOAP connection
 - Opening Metadata connection
- (i) Successfully connected to Salesforce as SalesForce
- On SF Opportunity Home screen

0 17:15:36(00:05.348)

- 1 Start of With Screen. Connection Name: SalesForce, target: sf:ui:target?object=Opportunity&action=ObjectHome
- ① Opening Chrome webdriver instance to https://login.salesforce.com/
 - * Add Chrome browser specific capabilities
- (i) Successfully opened Chrome webdriver to https://login.salesforce.com/
- (1) Opening Page context. Name: screen, data: null, frame: null
- ① Opening Salesforce page. Object: Opportunity, RelatedList: null, Action: ObjectHome, Page URL: /lightning/o/006/list?filterName=Recent, Current URL: chrome://new-tab-page/
- Opening Salesforce user home page
 - * Navigate to home page
 - Perform page load wait
 - 🍀 Perform page load wait
- Successfully opened user home page
- (i) Going to update browser window handles.
 - W Update browser window handles.
- (i) Successfully updated browser window handles.
- Click the New button

0 17:15:52(00:21.461)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity %26action%3DNew, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- ① Locator: ui:locator?name=New&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26action%3DNew
- ① Interaction: ui:interaction?name=action
- 1 Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/list?filterName=Recent
- i Interaction: ui:interaction?name=action
- ① Find action link element using xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]// div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//*[self::ul[contains(@class, 'oneActionsRibbon')] or self::runtime_platform_actions-actions-ribbon] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])// a[contains(@data-aura-rendered-by, '832:0')]
- (i) Waiting for element to be present. Timeout(seconds): 10

- ① Doing before wait. waitUrl: default ① End of <default> wait.
- ① Found element: [[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] -> xpath: (//div[contains(@class, 'active') and (contains(@class, 'oneContent') or contains(@class, 'main-content'))]//div[contains(@class, 'forceObjectHomeDesktop') or contains(@class, 'oneConsoleObjectHome') or contains(@class, 'forceRelatedListDesktop')or (contains(@class, 'slds-table_joined') and contains(@class, 'test-listViewManager'))]//*[self::ul[contains(@class, 'oneActionsRibbon')] or self::runtime_platform_actions-actions-ribbon] | //div[contains(@class, 'forceActionsDropDownMenuList') and contains(@class, 'visible')])// a[contains(@data-aura-rendered-by, '832:0')]]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: New, href: javascript:void(0);]
- i Doing after wait. waitUrl: default
- End of <default> wait.
- (i) Going to update browser window handles.
 - Update browser window handles.
- Successfully updated browser window handles.
- i All Sub-Test Steps were successful.
- (i) Closing Page context. Name: screen, data: null, frame: null
- i Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- (i) Going to update browser window handles.
 - Update browser window handles.
- Successfully updated browser window handles.

On SF Opportunity New screen

0 17:15:56(00:25.599)

- 1 Start of With Screen. Connection Name: SalesForce, target: sf:ui:target?object=Opportunity&action=New&noOverride=true
- (i) Opening Page context. Name: screen, data: null, frame: null
- 1 Hover>Clicking WebElement. WebElement [tag: h2, text: New Opportunity]
- (i) Going to update browser window handles.
 - W Update browser window handles.
- Successfully updated browser window handles.

Set the Amount field to 10000

0 17:16:02(00:31.269)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=Amount&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DAmount, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- $\textbf{\^{0}} \ Locator: ui: locator? name = Amount \& binding = sf\%3 Aui\%3 Abinding \%3 A object\%3 F object\%3 D Opportunity\%26 field\%3 D Amount \%3 A object\%3 F object\%3 D Opportunity\%26 field\%3 D Amount \%3 A object\%3 F object\%3 D Opportunity\%26 field\%3 D Amount \%3 A object\%3 F object\%3 D Opportunity\%26 field\%3 D Amount \%3 A object\%3 F object\%3 D Opportunity\%26 field\%3 D Amount \%3 A object\%3 D Opportunity\%26 field\%3 D Opportunity\%3 D Opportunity\%$
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- i Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection '))][1]//*[((self::label and (contains(@class,'uiLabel') or contains(@class,'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Amount'] or .//text() = 'Amount')]/
 ancestor::div[1]
- Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- 1 Found element: [[[org.openga.selenium.remote.RemoteWebElement@f184b103 -> unknown locator]] -> xpath: .//input]
- ① Got webElement. tagName: INPUT, id: input-197, type: text, class: slds-input

- ① Typing value. tagName: INPUT, type: text, value: 10000, blur: false
- i Doing after wait. waitUrl: default
- End of <default&qt; wait.
- (i) Going to update browser window handles.
 - Update browser window handles.
- (i) Successfully updated browser window handles.

Check the Private field

0 17:16:04(00:33.841)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=IsPrivate&binding=sf%3Aui%3Abinding%3Aobject%3Fobject %3DOpportunity%26field%3DIsPrivate, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- ① Locator: ui:locator?name=lsPrivate&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DIsPrivate
- 1 Interaction: ui:interaction?name=check
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=check
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel')) or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel')) or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Private'] or .//text() = 'Private')]/ ancestor::div[1]
- 1 Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f184b11d -> unknown locator]] -> xpath: .//input
- (1) Got webElement. tagName: INPUT, id: checkbox-202, type: checkbox
- Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
 - Update browser window handles.
- Successfully updated browser window handles.

Set the Close Date field to 2024-07-22

0 17:16:06(00:35.663)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=CloseDate&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DCloseDate, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- ① Locator: ui:locator?name=CloseDate&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DCloseDate
- (i) Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- (i) Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel')) or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()=Close Date'] or .//text() = 'Close Date')]/ancestor::div[1]
- i Find field using relative xpath: .//input
- (1) Waiting for element to be present. Timeout(seconds): 10
- ① Doing before wait. waitUrl: default
- i End of <default> wait.

- 1 Found element: [[[org.openga.selenium.remote.RemoteWebElement@f184b11e -> unknown locator]] -> xpath: .//input]
- ① Typing value. Element: [[[org.openqa.selenium.remote.RemoteWebElement@f184b11e -> unknown locator]] -> xpath: .//input], value: 2024-07-22, blur: false
- (i) Clicking WebElement. WebElement [tag: td, text: 22]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
 - Update browser window handles.
- i Successfully updated browser window handles.

Set the Opportunity Name field to test

0 17:16:08(00:37.639)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity %26field%3DName, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- 🛈 Locator: ui:locator?name=Name&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DName
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forcePageError')])][last()]//*[contains(@class, 'forcePageError')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Opportunity Name'] or .//text() = 'Opportunity Name')/ancestor::div[1]
- i Find field using relative xpath: .//input
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- End of <default> wait.
- ⑤ Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f184b446 -> unknown locator]] -> xpath: .//input]
- ① Got webElement. tagName: INPUT, id: input-212, type: text, class: slds-input
- ① Typing value. tagName: INPUT, type: text, value: test, blur: false
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- (i) Going to update browser window handles.
 - W Update browser window handles.
- Successfully updated browser window handles.

Set the Next Step field to dd

0 17:16:10(00:39.621)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=NextStep&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DNextStep, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- 1 Locator: ui:locator?name=NextStep&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DNextStep
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- (i) Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::section and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Next Step'] or .//text() = 'Next Step')]/ancestor::div[1]

- i) Find field using relative xpath: .//input
- i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- i End of <default> wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f184b449 -> unknown locator]] -> xpath: .//input
- (i) Got webElement. tagName: INPUT, id: input-216, type: text, class: slds-input
- 1 Typing value. tagName: INPUT, type: text, value: dd, blur: false
- i Doing after wait. waitUrl: default
- End of <default> wait.
- Going to update browser window handles.
 - Update browser window handles.
- (i) Successfully updated browser window handles.

Set the Stage picklist to Prospecting

0 17:16:12(00:41.638)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=StageName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject %3DOpportunity%26field%3DStageName, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- ① Locator: ui:locator?name=StageName&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DStageName
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Stage'] or .//text() = 'Stage')]/
 ancestor::div[1]
- 1 Find field using relative xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f184b460 -> unknown locator]] -> xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-226, type: button, class: slds-combobox__input slds-input_faux fix-slds-input_faux slds-combobox input-value
- ① Typing value. tagName: BUTTON, type: button, value: Prospecting, blur: false
- ① Clicking WebElement. WebElement [tag: button, text: --None--]
- ① Clicking WebElement. WebElement [tag: div, text: --None-- Prospecting Qualification Needs Analysis Value Proposition Id. Decision Makers Perception Analysis Proposal/Price Quote Negotiation/Review Closed Won Closed Lost]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- Doing after wait. waitUrl: default
- End of <default> wait.
- (i) Going to update browser window handles.
 - W Update browser window handles.
- Successfully updated browser window handles.

Set the Type picklist to Existing Customer - Upgrade

0 17:16:14(00:43.747)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=Type&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity %26field%3DType, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- ① Locator: ui:locator?name=Type&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DType
- 1 Interaction: ui:interaction?name=set

- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- i Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]//*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[(self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::section and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (//text()[normalize-space()=Type'] or .//text() = 'Type')]/
 ancestor::div[1]
- 1 Find field using relative xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox input')]]
- (i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f184b465 -> unknown locator]] -> xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-235, type: button, class: slds-combobox__input slds-input_faux fix-slds-input_faux slds-combobox__input-value
- ① Typing value. tagName: BUTTON, type: button, value: Existing Customer Upgrade, blur: false
- (i) Clicking WebElement. WebElement [tag: button, text: --None--]
- ① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Existing Customer Upgrade Existing Customer Replacement Existing Customer Downgrade New Customer]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- i Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
 - Update browser window handles.
- Successfully updated browser window handles.

Set the Lead Source picklist to Web

0 17:16:16(00:45.866)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject %3DOpportunity%26field%3DLeadSource, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- ① Locator: ui:locator?name=LeadSource&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DLeadSource
- 1 Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forcePageError')])][last()]/*[contains(@class, 'forcePageError')]/*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][1]//*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide'))) or (self::span and (contains(@class, 'inputLabel') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Lead Source'] or .//text() = 'Lead Source']/ancestor::div[1]
- ⑤ Find field using relative xpath: //*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]
- ① Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- End of <default> wait.
- ① Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f184b47f -> unknown locator]] -> xpath: .//*[self::a or self::input or self::button[contains(@class, 'slds-combobox_input')]]]
- ① Got webElement. tagName: BUTTON, id: combobox-button-247, type: button, class: slds-combobox__input slds-input_faux fix-slds-input_faux slds-combobox input-value
- 1 Typing value. tagName: BUTTON, type: button, value: Web, blur: false
- ① Clicking WebElement. WebElement [tag: button, text: --None--]

- ① Clicking WebElement. WebElement [tag: div, text: --None-- --None-- Web Phone Inquiry Partner Referral Purchased List Other]
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: lightning-base-combobox-item]
- 1 Doing after wait. waitUrl: default
- i End of <default> wait.
- Going to update browser window handles.
 - Update browser window handles.
- (i) Successfully updated browser window handles.

Set the Description field to done with form

0 17:16:18(00:47.894)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=Description&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DDescription, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- 1 Locator: ui:locator?name=Description&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26field%3DDescription
- i Interaction: ui:interaction?name=set
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new? count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=set
- ① Finding field placehoder using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]/*[contains(@class, 'forceDetailPanel') or contains(@class, 'detail-panel-root')]/*[(self::records-record-layout-section) or ((self::section or self::div) and contains(@class, 'forcePageBlockSection'))][3]/*[((self::label and (contains(@class, 'uiLabel') or contains(@class, 'slds-form-element_label')) and not(contains(@class, 'hide '))) or (self::span and (contains(@class, 'input:Label') or contains(@class, 'slds-form-element_label'))) or (self::div and contains(@class, 'test-id_field-label-container')) or (self::lightning-grouped-combobox and contains(@class, 'forceTextEnumLookup')) or (self::div and contains(@class, 'lightningInputRichText') or self::lightning-input-rich-text)) and (.//text()[normalize-space()='Description']/ancestor::div[1]
- i Find field using relative xpath: .//textarea
- (i) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- End of <default> wait.
- 1 Found element: [[[org.openqa.selenium.remote.RemoteWebElement@f184b484 -> unknown locator]] -> xpath: .//textarea]
- 1 Got webElement. tagName: TEXTAREA, id: input-285, type: null, class: slds-textarea
- 1 Typing value. tagName: TEXTAREA, type: null, value: done with form, blur: false
- 1 Doing after wait. waitUrl: default
- End of <default> wait.
- (1) Going to update browser window handles.
 - Update browser window handles.
- (i) Successfully updated browser window handles.

Click the Save button

0 17:16:20(00:49.868)

- ① Start of Interact. Connection: SalesForce, Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity %26action%3Dsave, before wait: default, after wait: default, auto retry: ui:wait:autoRetry:timeout=10
- Locator: ui:locator?name=save&binding=sf%3Aui%3Abinding%3Aobject%3Fobject%3DOpportunity%26action%3Dsave
- 1 Interaction: ui:interaction?name=action
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/o/Opportunity/new?count=1&nooverride=1&useRecordTypeCheck=1&navigationLocation=LIST_VIEW&uid=172164875339923432&backgroundContext=%2Flightning%2Fo%2FOpportunity%2Flist%3FfilterName%3DRecent
- 1 Interaction: ui:interaction?name=action
- ① Find action link element using xpath: //div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-sibling::div[contains(@class, 'forceFormPageError')])][last()]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self::force-form-footer or (self::records-base-record-form/parent::records-lwc-detail-panel)]//runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']//*[self::a or self::button]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] -> xpath: // div[contains(@class, 'open') and (contains(@class, 'forceModal') or contains(@class, 'uiModal')) and (contains(@class, 'active') or following-

sibling::div[contains(@class, 'forceFormPageError')])][last()]//div[(contains(@class, 'footer') and contains(@class, 'active')) or contains(@class, 'footer-visible')]/ancestor::*[self:::force-form-footer or (self::records-base-record-form/parent::records-lwc-detail-panel)]//runtime_platform_actions-action-renderer[@apiname='save' or @apiname='SaveEdit']//*[self::a or self::button]]

- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: button, text: Save]
- i Doing after wait. waitUrl: default
- End of <default> wait.
- (i) Going to update browser window handles.
 - Update browser window handles.
- Successfully updated browser window handles.
- (i) All Sub-Test Steps were successful.
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAI/view
- (i) Injecting script to get created object ID from aura component
- Storing created Salesforce Object ID. Result Name: opportunityId, created ID: 006dM000002gsNpQAI, location: https://provar-fd-deved.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAI/view
- ① Logging Salesforce Object Id for clean up. Object Name: Opportunity, id: 006dM000002gsNpQAI
- (1) Closing Page context. Name: screen, data: null, frame: null
- (i) Main window reselected. Window: main
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAI/view
- (i) Going to update browser window handles.
 - W Update browser window handles.
- Successfully updated browser window handles.

On SF Opportunity View screen

0 17:16:24(00:53.579)

- 1 Start of With Screen. Connection Name: SalesForce, target: sf:ui:target?object=Opportunity&action=View&noOverride=true
- (i) Opening Page context. Name: screen, data: null, frame: null
- Activating detailTab tab
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
- (i) Going to update browser window handles.
 - **W** Update browser window handles.
- Successfully updated browser window handles.
- UI Assert

0 17:16:28(00:57.479)

- 1 Start of UiAssert. Connection: SalesForce
- Resolving field Amount
- ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAl/view
- Activating detailTab tab
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasActiveSubtab')]))))]/*[contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]/*[contains(@data-component-id, 'force_detailPanel')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))])[1]//div[(contains(@class, 'labelCol')) or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Amount' or (.) ='Amount'])]/*ancestor::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]
- (i) Waiting for element to be present. Timeout(seconds): 10
- ① Finding field elements using relativePath: .//lightning-formatted-text
- (1) Waiting for element to be present. Timeout(seconds): 10
- 1 Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'navexWorkspace'))

and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabsarHidden'))]] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]/*[contains(@data-component-id, 'fore_detailPanel')]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Amount' or (.) ='Amount')]/[ancestor::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id_field-value'))]]] -> xpath: .//lightning-formatted-text]

- (i) Asserting field attributes: Amount
- (i) Asserting Attribute: value to #10,000.00
- Assertion successful.#10,000.00 EqualTo #10,000.00
- (i) Object read successfully. Result Name: Values
- (i) Going to update browser window handles.
 - Update browser window handles.
- Successfully updated browser window handles.
- UI Assert © 17:16:31(01:00.681)
 - 1 Start of UiAssert. Connection: SalesForce
 - (i) Resolving field ExpectedRevenue
 - 1 Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAl/view
 - Activating detailTab tab
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]

 - (i) Waiting for element to be present. Timeout(seconds): 10
 - Finding field elements using relativePath: .//lightning-formatted-text
 - (i) Waiting for element to be present. Timeout(seconds): 10
 - (i) Doing before wait. waitUrl: default
 - ① End of <default> wait.
 - ① Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSet') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]/*[contains(@data-component-id, 'force_detailPanel')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))]][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Expected Revenue' or (.) ='Expected Revenue')])/ancestor::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value')))]]] -> xpath: .//lightning-formatted-text]
 - Asserting field attributes: ExpectedRevenue
 - (1) Asserting Attribute: value to #1,000.00
 - Assertion successful.#1,000.00 EqualTo #1,000.00
 - (i) Object read successfully. Result Name: Values
 - (i) Going to update browser window handles.
 - Update browser window handles.
 - Successfully updated browser window handles.
- UI Assert © 17:16:34(01:03.707)
 - (i) Start of UiAssert. Connection: SalesForce
 - Resolving field Name
 - ① Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAI/view
 - Activating detailTab tab

- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasActiveSubtab')]))))]/*[contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]/*[contains(@data-component-id, 'force_detailPanel')]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))]][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Opportunity Name' or (.) ='Opportunity Name'])]/ancestor::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id_field-value'))]
- ① Waiting for element to be present. Timeout(seconds): 10
- ⑤ Finding field elements using relativePath: .//*[self::lightning-formatted-name or self::lightning-formatted-text]
- (i) Waiting for element to be present. Timeout(seconds): 10
- Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSet') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]/*[contains(@data-component-id, 'force_detailPanel')]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))]]1/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Opportunity Name' or (.) ='Opportunity Name')]/*[(self:::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]]] -> xpath: .//*[self::lightning-formatted-name or self::lightning-formatted-text]]
- Asserting field attributes: Name
- Asserting Attribute: value to test
- Assertion successful.test EqualTo test
- (1) Object read successfully. Result Name: Values
- Going to update browser window handles.
 - Update browser window handles.
- i Successfully updated browser window handles.
- UI Assert
 0 17:16:37(01:06.806)
 - Start of UiAssert. Connection: SalesForce
 - Resolving field NextStep
 - 1 Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAl/view
 - Activating detailTab tab
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
 - ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabSet') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[(contains(@class, 'navexWorkspace') or contains(@class, 'hasActiveSubtab')])))]//*[(vir)(contains(@class, 'hasActiveSubtab')]))]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]//*[(vir)(contains(@class, 'hasActiveSubtab')]///*[(vir)(contains(@class, 'hasActiveSubtab')]///*[(vir)(contains(@class, 'hasActiveSubtab')]////*[(vir)(contains(@class, 'hasActiveSubtabb')]//////(vir)(vir)(contains(@cla
 - i) Waiting for element to be present. Timeout(seconds): 10
 - Finding field elements using relativePath: .//lightning-formatted-text
 - (1) Waiting for element to be present. Timeout(seconds): 10
 - Doing before wait. waitUrl: default
 - i End of <default> wait.
 - ① Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] --> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'navexWorkspace')) and contains(@class, 'navexWorkspace')) and contains(@class, 'hasActiveSubtab')]]))]//*[contains(@class, 'hasActiveSubtab')]]))]//*[contains(@class, 'hasActiveSubtab')]])])]//*[contains(@class, 'hasActiveSubtab')]])]]//*[contains(@class, 'hasActiveSubtab')]])]])]//*[contains(@class, 'hasActiveSubtab')]]])]]//*[contains(@class, 'hasActiveSubtab')]]])]]]//*[contains(@class, 'hasActiveSubtab')]]])]]]//*[contains(@class, 'hasActiveSubtab')]]])]]]//*[contains(@class, 'hasActiveSubtab')]]]]]]]]//*[contains(@class, 'hasActiveSubtab')]]]]]]]//*[contains(@class, 'hasActiveSubtab')]]]]]]]]//*[contains(@class, 'hasActiveSubtab')]]]]]]]//*[contains(@class, 'hasActiveSubtab')]]]]]]]//*[contains(@class, 'hasActiveSubtab')]]]]]]]//*[contains(@class, 'hasActiveSubtab')]]]]]//*[contains(@class, 'hasActiveSubtab')]]]]]//*[contains(@class, 'hasActiveSubtab')]]]]//*[contains(@class, 'hasActiveSubtab')]]]//*[contains(@class, 'hasActiveSubtab')]]]//*[contains(@class, 'hasActiveSubtab')]]//*[contains(@class, 'hasActiveSubtab')]]//*[contains(@class, 'hasActiveSubtab')]]//*[contains(@class, 'hasActiveSubtab')]]//*[contains(@class, 'hasActiveSubtab')]]//*[contains(@class, 'hasActiveSubtab')]]//*[contains(@class, 'hasActiveSubtab')]]//*[contains(@class, 'hasActiveSubtab')]]//*[contains(@class, 'hasActiveSubtab')

(span/text()[normalize-space()='Next Step' or (.) ='Next Step'])]/ancestor::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id_field-value'))]]] -> xpath: .//lightning-formatted-text]
① Asserting field attributes: NextStep
① Asserting Attribute: value to dd
☑ Assertion successful.dd EqualTo dd
① Object read successfully. Result Name: Values
① Going to update browser window handles.
❖ Update browser window handles.
① Successfully updated browser window handles.
UI Assert ① 17:16:40(01:09.728) ① Start of UiAssert. Connection: SalesForce
① Resolving field Type
Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAI/view
① Activating detailTab tab
Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@data-component-id, 'force_detailPanel')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))])[1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Type' or (.) ='Type'])]/ancestor::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-idfield-value'))]
① Waiting for element to be present. Timeout(seconds): 10
① Finding field elements using relativePath: .//lightning-formatted-text
① Waiting for element to be present. Timeout(seconds): 10
① Doing before wait. waitUrl: default
① End of <default> wait.</default>
① Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)]> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'neWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))]) and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'navextWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]]))]]/*[contains(@data-component-id, 'force_detailPanel')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))]][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Type' or (.) ='Type'])]/ancestor::div[1]/*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-idfield-value'))]]] -> xpath: .//lightning-formatted-text]
① Asserting field attributes: Type
Asserting Attribute: value to Existing Customer - Upgrade
Assertion successful. Existing Customer - Upgrade EqualTo Existing Customer - Upgrade
① Object read successfully. Result Name: Values
① Going to update browser window handles.
❖ Update browser window handles.
① Successfully updated browser window handles.

• UI Assert

- (i) Start of UiAssert. Connection: SalesForce
- (i) Resolving field StageName
- Activating detailTab tab
- ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
- ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))]

'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]]/*[contains(@data-component-id, 'force_detailPanel')]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))])[1]//div[(contains(@class,'labelCol') or contains(@class,'field-label-container')) and (span/text()[normalize-space()='Stage' or (.) ='Stage'])]/ancestor::div[1]//*[(self::div and contains(@class,'dataCol')) or (self::span and contains(@class,'test-id__field-value'))]

- (i) Waiting for element to be present. Timeout(seconds): 10
- (i) Finding field elements using relativePath: .//lightning-formatted-text
- (i) Waiting for element to be present. Timeout(seconds): 10
- i Doing before wait. waitUrl: default
- i End of <default> wait.
- ① Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/*[contains(@data-component-id, 'force_detailPanel')]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))][1]/div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Stage' or (.) ='Stage'])]/ancestor::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]]] -> xpath: .//lightning-formatted-text]
- (i) Asserting field attributes: StageName
- (i) Asserting Attribute: value to Prospecting
- Assertion successful. Prospecting EqualTo Prospecting
- (i) Object read successfully. Result Name: Values
- (i) Going to update browser window handles.
 - Update browser window handles.
- Successfully updated browser window handles.
- UI Assert
 0 17:16:46(01:15.803)
 - (i) Start of UiAssert. Connection: SalesForce
 - Resolving field LeadSource
 - ⑤ Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAl/view
 - Activating detailTab tab
 - ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)]
 - ① Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')])))]//*[contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') or (self::div and (contains(@class, 'forcePageBlockSectionView')))]/[1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/text()[normalize-space()='Lead Source' or (.) ='Lead Source'])]/ancestor::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, 'test-id__field-value'))]
 - ① Waiting for element to be present. Timeout(seconds): 10
 - 1 Finding field elements using relativePath: .//lightning-formatted-text
 - (i) Waiting for element to be present. Timeout(seconds): 10
 - 1 Doing before wait. waitUrl: default
 - End of <default> wait.
 - ① Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]] or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabset'))]] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace')) or contains(@class, 'active') and contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasActiveSubtab')]]))]/*[contains(@class, 'navexWorkspace')) and contains(@class, 'hasActiveSubtab')]]))]/*[contains(@class, 'hasActiveSubtab')]])])]/*[contains(@class, 'hasActiveSubtab')]]])]/*[contains(@class, 'hasActiveSubtab')]]])]/*[contains(@class, 'hasActiveSubtab')]]])] xpath: //ightning-formatted-text]
 - Asserting field attributes: LeadSource
 - Asserting Attribute: value to Web

- Assertion successful.Web EqualTo Web (i) Object read successfully. Result Name: Values Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. 0 17:16:49(01:18.846) **UI Assert** i Start of UiAssert. Connection: SalesForce Resolving field Probability ⑤ Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAI/view Activating detailTab tab ① Clicking WebElement using Javascript Click. WebElement: WebElement [tag: a, text: Details, href: javascript:void(0)] 1 Finding field placehoder using xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and not(contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'wsTabset') 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')]))))]//*[contains(@data-component-id, 'force_detailPanel')]//*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView')))][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/ text()[normalize-space()='Probability (%)' or (.) ='Probability (%)'])]/ancestor::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class, test-id_field-value))] ① Waiting for element to be present. Timeout(seconds): 10 (1) Finding field elements using relativePath: .//lightning-formatted-number Waiting for element to be present. Timeout(seconds): 10 Doing before wait. waitUrl: default i End of <default> wait. 1 Found element: [[[[ChromeDriver\$\$EnhancerByCGLIB\$\$dace278c: chrome on windows (4cc209db1e93fd1d170317bfa27f4a8c)] -> xpath: (//*[contains(@class, 'active') and ((self::div and contains(@class, 'oneContent')) or (self::section and ((contains(@class, 'oneConsoleTab') and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab'))]) or (contains(@class, 'tabContent') and ancestor::div[contains(@class, 'wsTabset') and not(contains(@class, 'wsTabBarHidden'))] and ancestor::div[contains(@class, 'active') and (contains(@class, 'oneWorkspace') or contains(@class, 'navexWorkspace')) and contains(@class, 'hasPinnedRegionTemplate') and contains(@class, 'hasActiveSubtab')))))]/*[contains(@data-component-id, 'force_detailPanel')]/*[(self::records-record-layout-section) or (self::div and (contains(@class, 'forcePageBlockSectionView'))))][1]//div[(contains(@class, 'labelCol') or contains(@class, 'field-label-container')) and (span/ text()[normalize-space()='Probability (%)' or (.) ='Probability (%)'])]/ancestor::div[1]//*[(self::div and contains(@class, 'dataCol')) or (self::span and contains(@class,'test-id__field-value'))]]] -> xpath: .//lightning-formatted-number] Asserting field attributes: Probability (i) Asserting Attribute: value to 10% Assertion successful.10% EqualTo 10% (i) Object read successfully. Result Name: Values Going to update browser window handles. Update browser window handles. Successfully updated browser window handles. All Sub-Test Steps were successful. (i) Closing Page context. Name: screen, data: null, frame: null (i) Main window reselected. Window: main 1 Switched focus to main window. URL: https://provar-fd-dev-ed.develop.lightning.force.com/lightning/r/Opportunity/006dM000002gsNpQAl/view Going to update browser window handles.
- (i) Handling managed resource. Name: SalesForce

Update browser window handles.
 Successfully updated browser window handles.

- Closing Salesforce Connection because it is no longer being used. Name: SalesForce
- Closing web connection.
- Closing Selenium driver

* Shutting down Soap Connections. logFilePath: SalesForce-objectids.log

① Salesforce Connection handled successfully. Name: SalesForce