

`\a` – alert

`\b` – back

`\n` – new line

`\f` – form feed


`\t` – tab space

`\v` – vertical tab

`\0` – null char

`\r` – carriage return

How to a print a back slash character?

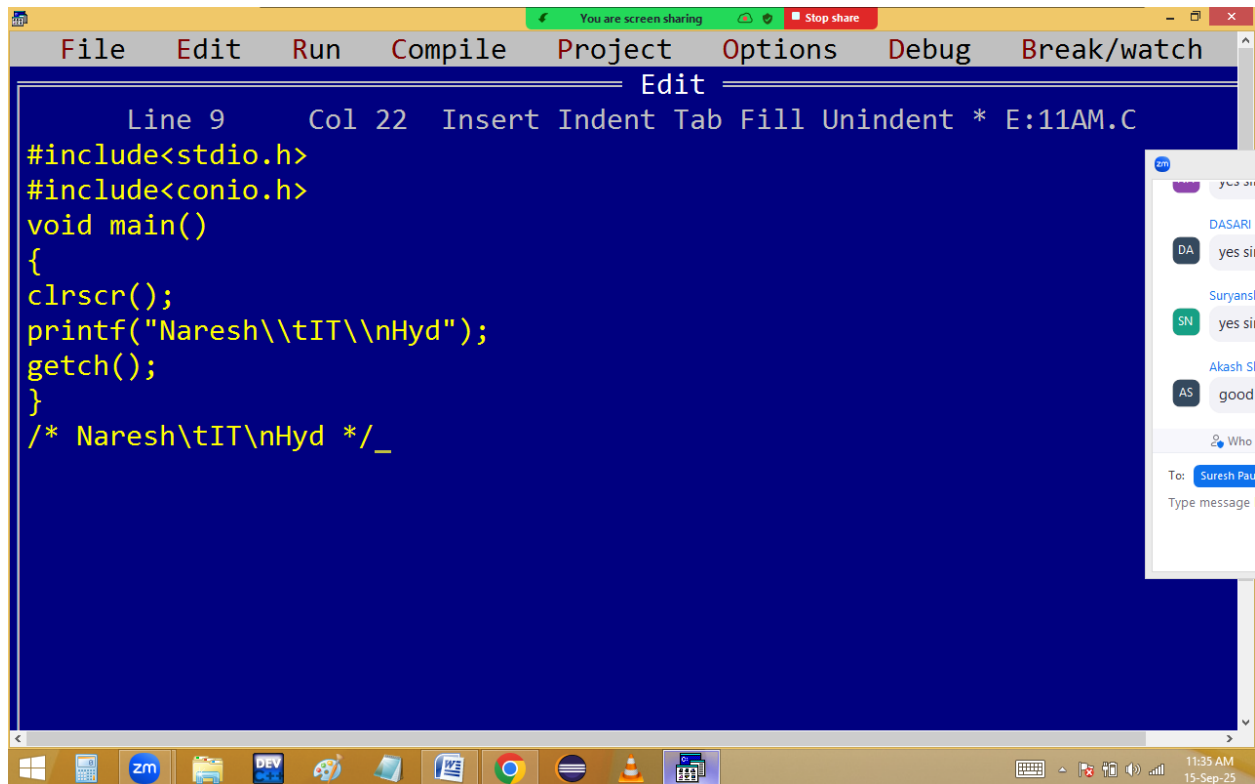


The screenshot shows a code editor window with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a toolbar. The code is as follows:

```
Line 9      Col 22  Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
  clrscr();
  printf("Naresh\\tIT\\nHyd");
  getch();
}
/* Naresh\\tIT\\nHyd */_
```

On the right side, there is a chat window with messages from DASARI, Suryansh, Akash, and Suresh Paul.

printf("Naresh\\tIT\\nHyd");

Naresh\\tIT\\nHyd

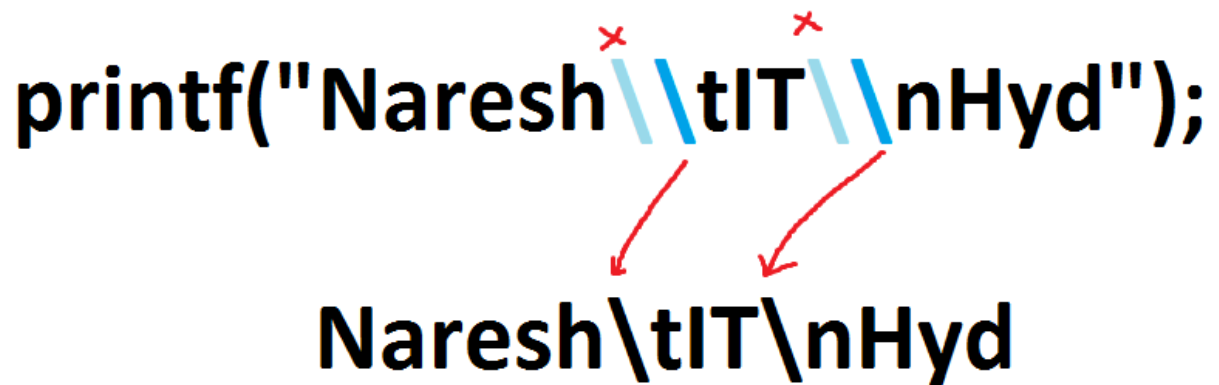

The diagram illustrates the conversion of the C string "Naresh\\tIT\\nHyd" to its actual output. Red 'x' marks are placed above the backslashes in the code. Red arrows point from these backslashes to the corresponding characters in the output string: a tab character for the first backslash and a newline character for the second backslash.

```
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 11 Col 1 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("Naresh\\tIT\\nHyd");
getch();
}
/* Naresh\    IT\
   Hyd
*/
```

printf("Naresh\\tIT\\nHyd");


Naresh\ IT\
Hyd

```
File Edit Run Compile Project Options Debug Break/watch
Edit
Line 15 Col 1 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("12%c34%c56",9,10);
getch();
}
/*
12      34
56

9 = \t ASCII value
10 = \n ASCII value
*/
```

printf("12%c34%c56",9,10);

```
printf("Secunderabad-Biryani\rHyderabad");
```

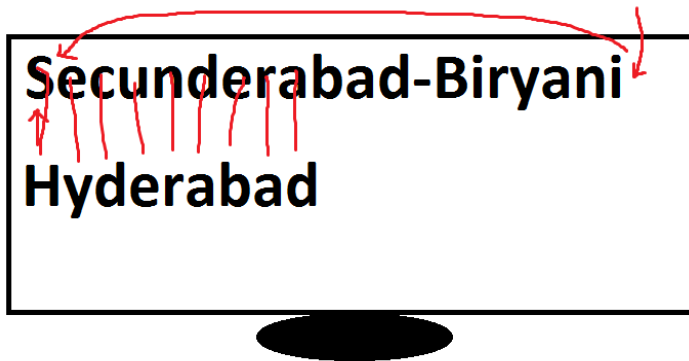

Printf “kishore” in double quotations?

The image shows a Windows desktop environment with a screen share overlay at the top. The overlay includes a status bar with "You are screen sharing" and a "Stop share" button, and a menu bar with "File", "Edit", "Run", "Compile", "Project", "Options", "Debug", and "Break/watch".

The main window is a code editor with a blue background. It displays the following C code:

```
Line 6      Col 20  Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    clrscr();
    printf("\n\"KISHORE\"_");
    getch();
}
```

Below the code editor is a terminal window with a black background. It shows the output of the program: `"KISHORE"`. The terminal window also has a status bar with "You are screen sharing" and a "Stop share" button.

The Windows taskbar at the bottom contains icons for the Start menu, File Explorer, Zoho Mail, DEV, a game controller, a folder, a document, Google Chrome, a globe, a traffic cone, and a calendar. The system tray on the right shows the time as 11:55 AM on 15-Sep-25.

```
printf("\\"KISHORE\\");
```

You are screen sharing Stop share

File Edit Run Compile Project Options Debug Break/watch

Edit


Line 6 Col 27 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
    clrscr();
    printf("%cKISHORE%c", 34, 34);
    getch();
}
```

You are screen sharing Stop share

"KISHORE"

Printf printf as it ?

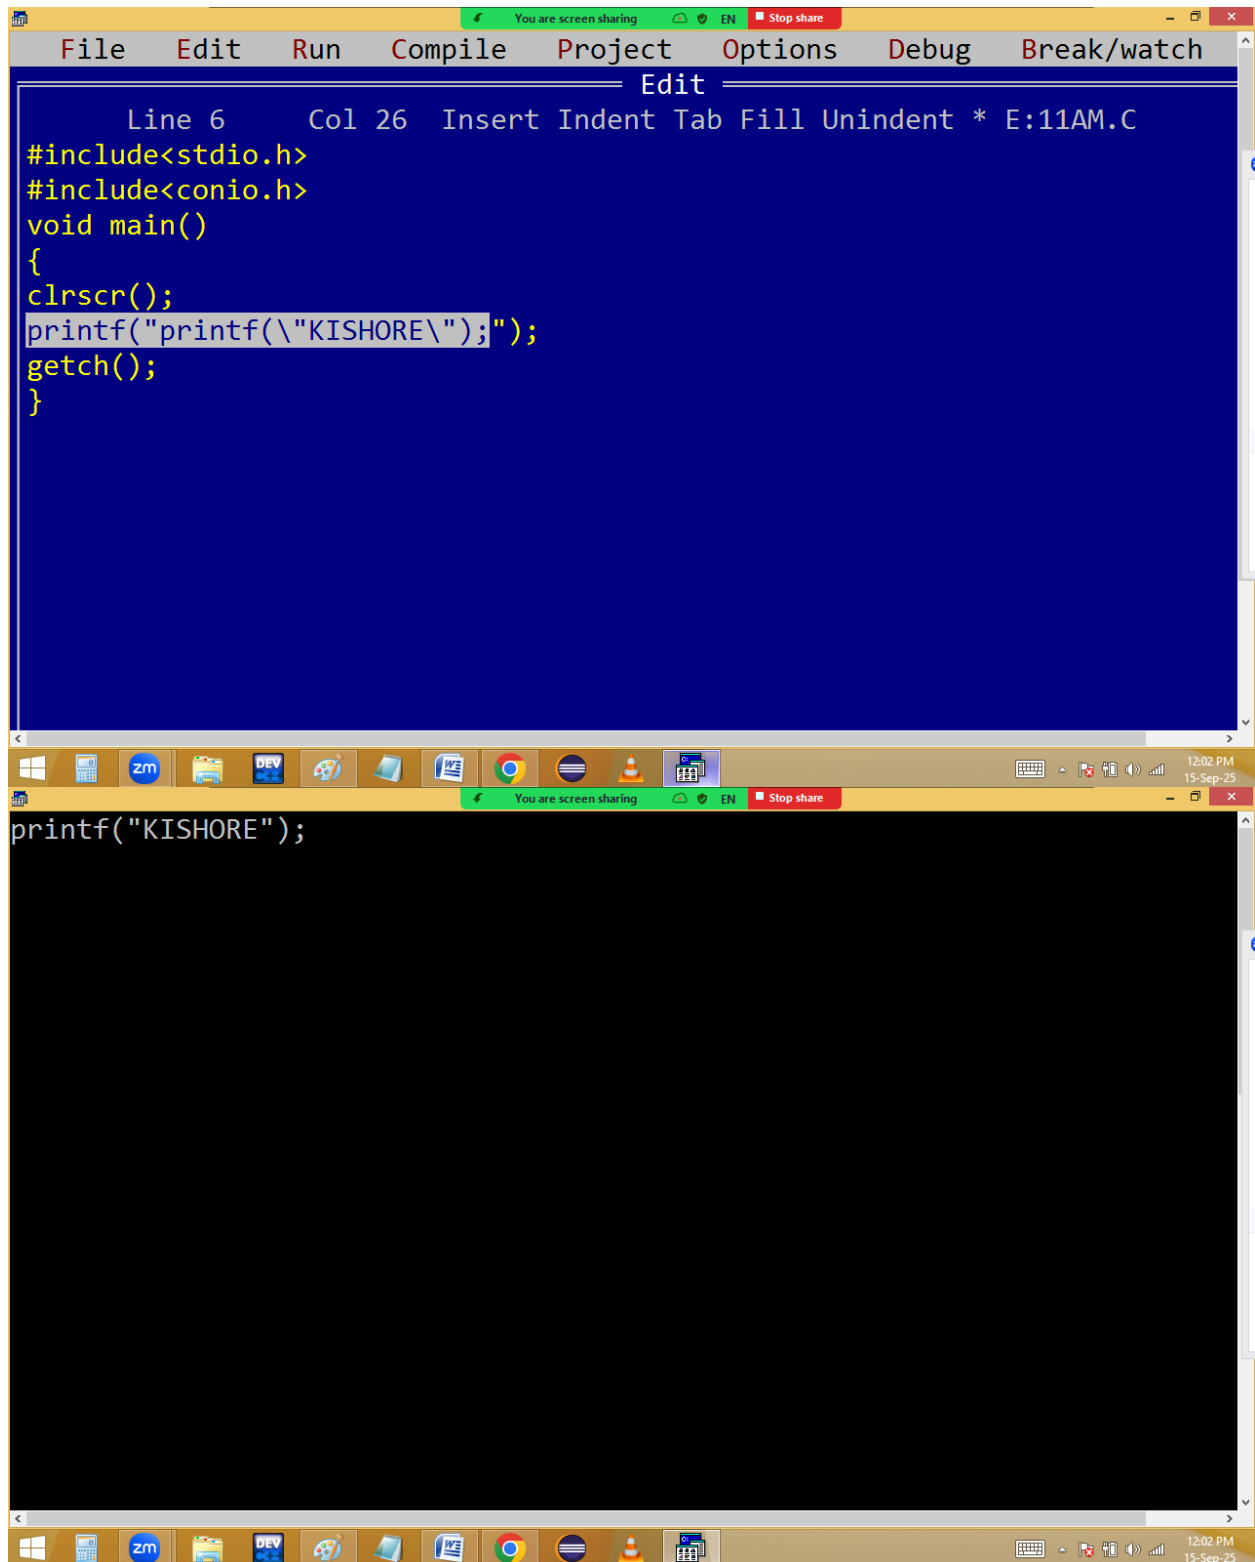


The image shows a Windows desktop with two overlapping windows. The top window is a code editor titled "E:11AM.C" with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a status bar (Line 6, Col 26, Insert, Indent, Tab, Fill, Unindent, *). The code in the editor is:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("printf(\"KISHORE\")");
getch();
}
```

The bottom window is a terminal window showing the output of the program: `printf("KISHORE");`. The terminal has a black background and white text. The Windows taskbar at the bottom shows the Start button, task view button, and several pinned applications (Zotero, DEV, File Explorer, Paint, Word, Chrome, Firefox, VLC, and a calendar). The system tray on the right shows the date and time: 12:02 PM, 15-Sep-25.

Finding ASCII value:

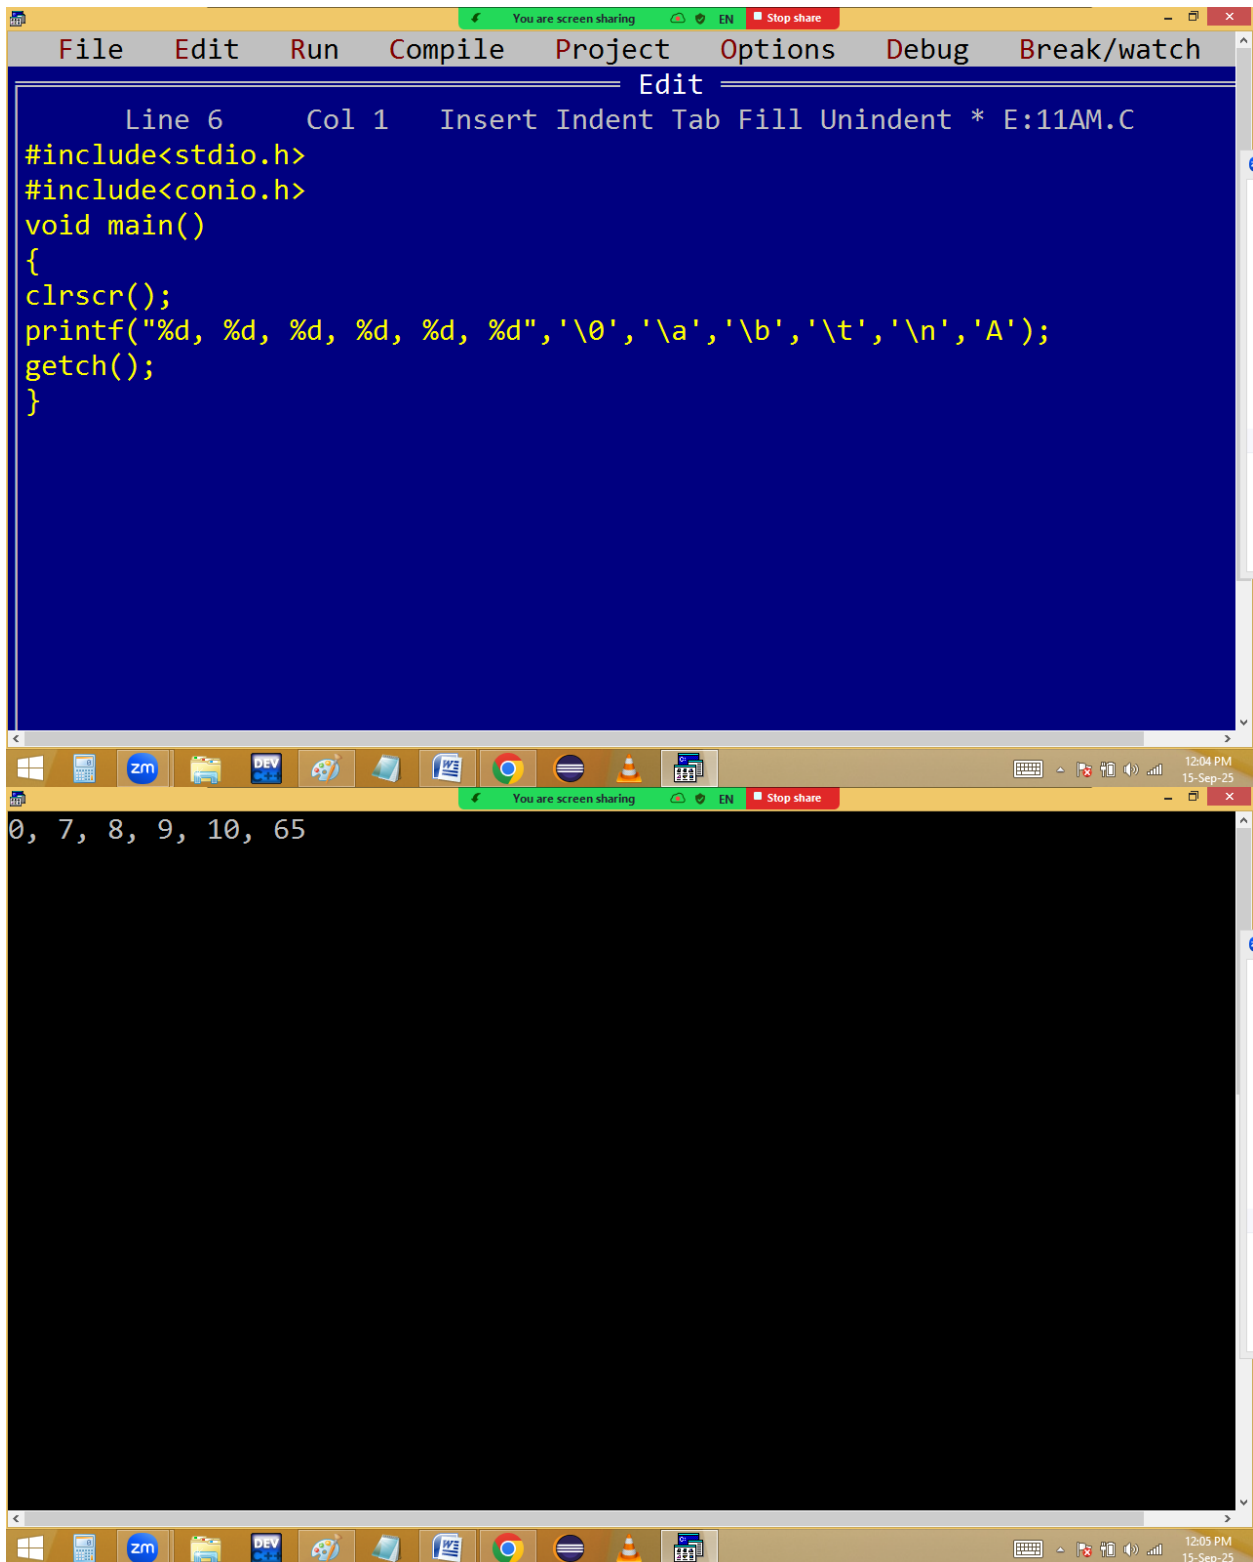

The image shows a C program in a code editor and its output in a terminal window. The code is as follows:

```
Line 6 Col 1 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d, %d, %d, %d, %d, %d", '\0', '\a', '\b', '\t', '\n', 'A');
getch();
}
```


The terminal window shows the output of the program:

```
0, 7, 8, 9, 10, 65
```


Identifiers:

Names of variables, functions, files, array, pointer etc.

Example for variables:

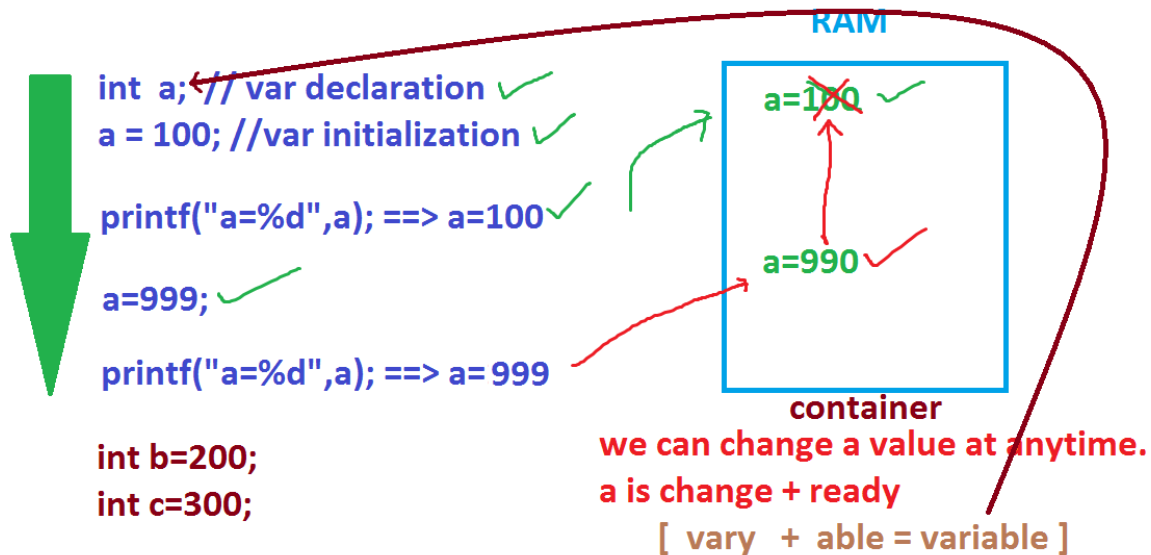

Function example:

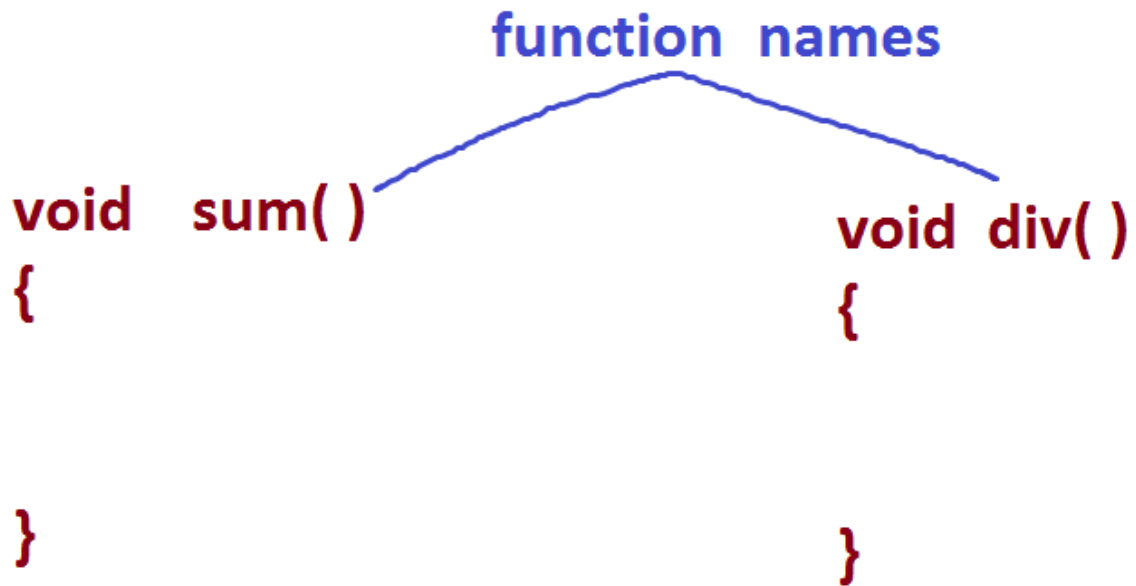

Files example:

a.c, b.cpp, c.java, d.py, e.mp4,....

Array example:


Int a[10]; ← int array variable

Pointer example:

Int * a; ← int pointer variable

Naming conventions [rules]:

1. Identifier name must start with alphabet or underscore only [_]

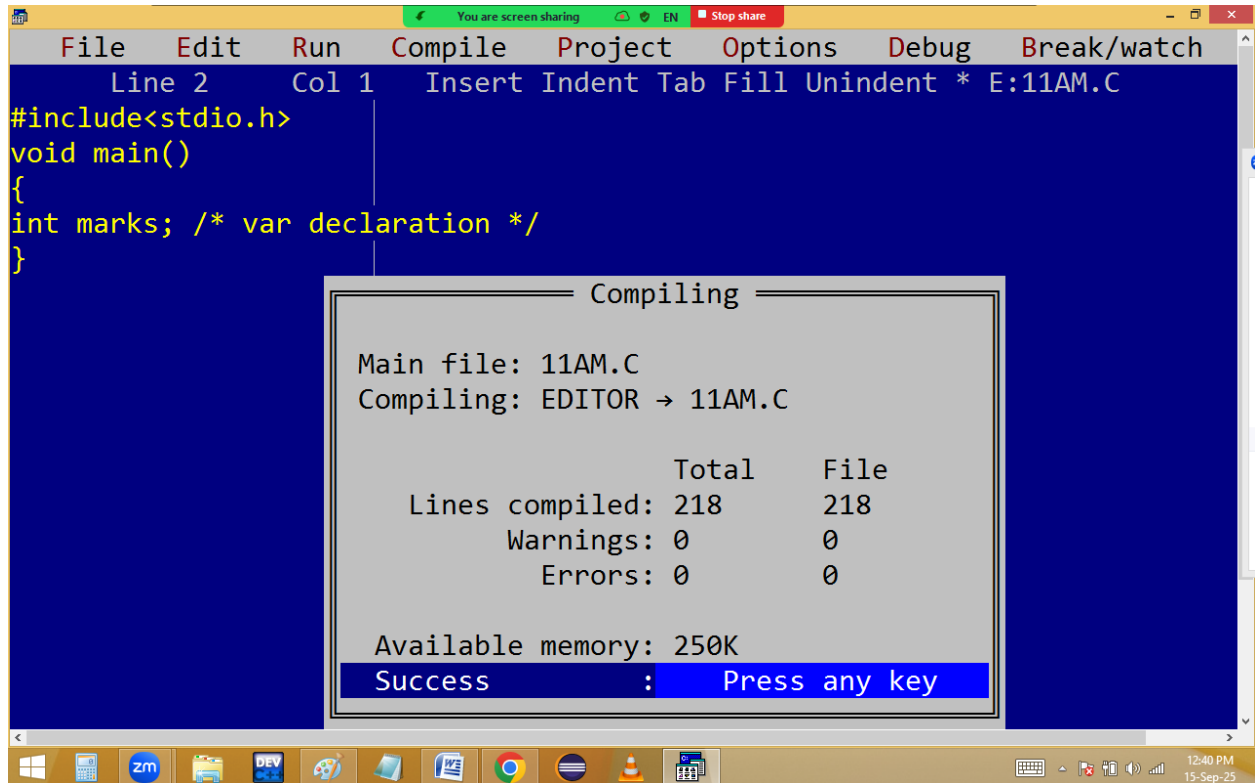

The screenshot shows a C compiler window with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a toolbar. The main text area displays the following C code:

```
Line 2 Col 1 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
void main()
{
int marks; /* var declaration */
}
```

A "Compiling" dialog box is overlaid on the code, showing the following information:

Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	218	218
Warnings:	0	0
Errors:	0	0

Available memory: 250K
Success : Press any key

The Windows taskbar at the bottom shows the time as 12:40 PM on 15-Sep-25.

You are screen sharing EN Stop share

File Edit Run Compile Project Options Debug Break/watch

Line 4 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
void main()
{
int $marks; /* var declaration */
}
```

Compiling

Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	216	216
Warnings:	0	0
Errors:	1	1

Available memory: 250K

Errors : Press any key

12:40 PM
15-Sep-25

You are screen sharing EN Stop share

File Edit Run Compile Project Options Debug Break/watch

Line 4 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
void main()
{
int 9marks; /* var declaration */
}
```

Compiling

Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	216	216
Warnings:	0	0
Errors:	1	1

Available memory: 250K

Errors : Press any key

12:40 PM
15-Sep-25

The screenshot shows a C compiler window with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a toolbar. The main text area displays the following C code:

```
Line 6 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
void main()
{
int _marks; /* var declaration */
}
```

A "Compiling" dialog box is overlaid on the code, showing the following information:

Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	218	218
Warnings:	0	0
Errors:	0	0

Available memory: 250K
Success : Press any key

The Windows taskbar at the bottom shows various icons, including the Start button, task view, and several application icons. The system clock in the bottom right corner indicates 12:41 PM on 15-Sep-25.

2. Numbers allowed but not at first position.

File Edit Run Compile Project Options Debug Break/watch
Line 4 Col 11 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
void main()
{
int marks9; /* var declaration */
}
```

Compiling

Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	218	218
Warnings:	0	0
Errors:	0	0

Available memory: 250K
Success : Press any key

File Edit Run Compile Project Options Debug Break/watch
Line 4 Col 17 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
void main()
{
int jamesbond007; /* var declaration */
}
```

Linking

EXE file : 11AM.EXE
Linking : LIB\CS.LIB

	Total	Link
Lines compiled:	218	PASS 2
Warnings:	0	0
Errors:	0	0

Available memory: 250K
Success : Press any key

3. Spaces not allowed.

The screenshot shows a C compiler window with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a status bar (Line 5, Col 13, Insert, Indent, Tab, Fill, Unindent, * E:11AM.C). The code in the editor is:

```
#include<stdio.h>
void main()
{
int bahubali; /* var declaration */
}
```

A "Compiling" dialog box is displayed in the center, showing the following information:

Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	218	218
Warnings:	0	0
Errors:	0	0

Available memory: 250K
Success : Press any key

The screenshot shows the same C compiler window as above, but with a different code snippet in the editor:

```
#include<stdio.h>
void main()
{
int bahu bali; /* var declaration */
}
```

The "Compiling" dialog box shows the following information:

Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	216	216
Warnings:	0	0
Errors:	1	1

Available memory: 250K
Errors : Press any key

4. No special char except underscore.

```
File Edit Run Compile Project Options Debug Break/watch
Line 5 Col 17 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
void main()
{
int _bahu_bali_ ; /* var declaration */
}
```

Linking

EXE file : 11AM.EXE
Linking : LIB\CS.LIB

	Total	Link
Lines compiled:	218	PASS 2
Warnings:	0	0
Errors:	0	0

Available memory: 250K
Success : Press any key

```
File Edit Run Compile Project Options Debug Break/watch
Error: Illegal character '@' (0x40) in function main
#include<stdio.h>
void main()
{
int _bahu_bali@2 ; /* var declaration */
}
```

5. Keywords are not allowed.

You are screen sharing EN Stop share

File Edit Run Compile Project Options Debug Break/watch

Error: Declaration syntax error in function main

```
#include<stdio.h>
void main()
{
int while_; /* var declaration */
}
```

12:46 PM 15-Sep-25

You are screen sharing EN Stop share

File Edit Run Compile Project Options Debug Break/watch

Line 5 Col 10 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
void main()
{
int float ; /* var declaration */
}
```

Compiling


Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	216	216
Warnings:	0	0
Errors:	1	1

Available memory: 250K

Errors : Press any key

12:46 PM 15-Sep-25

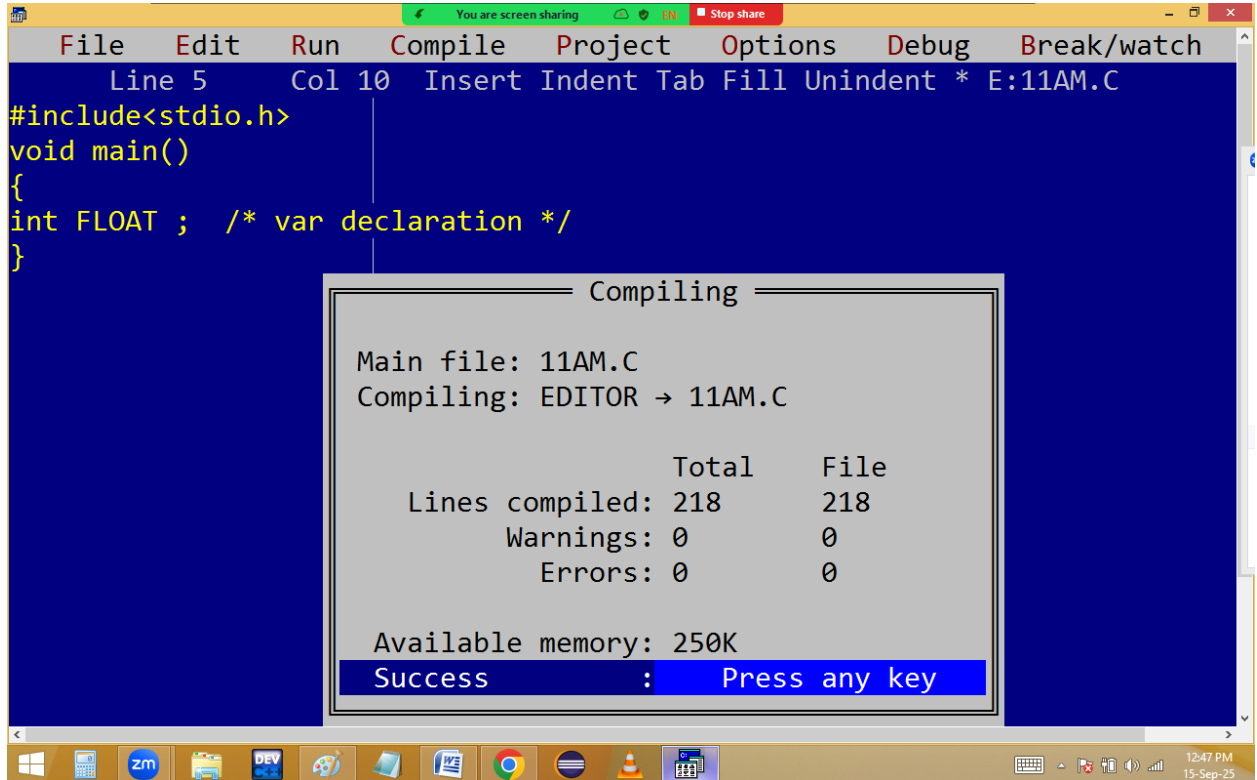

The screenshot shows a C compiler window with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a status bar (Line 5, Col 10, Insert, Indent, Tab, Fill, Unindent, * E:11AM.C). The code in the editor is:

```
#include<stdio.h>
void main()
{
int FLOAT ; /* var declaration */
}
```

A "Compiling" dialog box is displayed in the foreground, showing the following information:

Main file: 11AM.C
Compiling: EDITOR → 11AM.C

	Total	File
Lines compiled:	218	218
Warnings:	0	0
Errors:	0	0

Available memory: 250K
Success : Press any key

6. Names are case sensitive. i.e. lower and upper are different.

You are screen sharing EN Stop share

File Edit Run Compile Project Options Debug Break/watch

Line 1 Col 26 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
void main()
{
int a=10 ; /* var declaration */
int A=20;
printf("a=%d, A=%d",a,A);
}
```

12:48 PM 15-Sep-25


You are screen sharing EN Stop share

```
a=10, A=20
```

12:48 PM 15-Sep-25

Hence c is a case sensitive language.

7. Duplicate identifiers in same program or { } are not allowed.

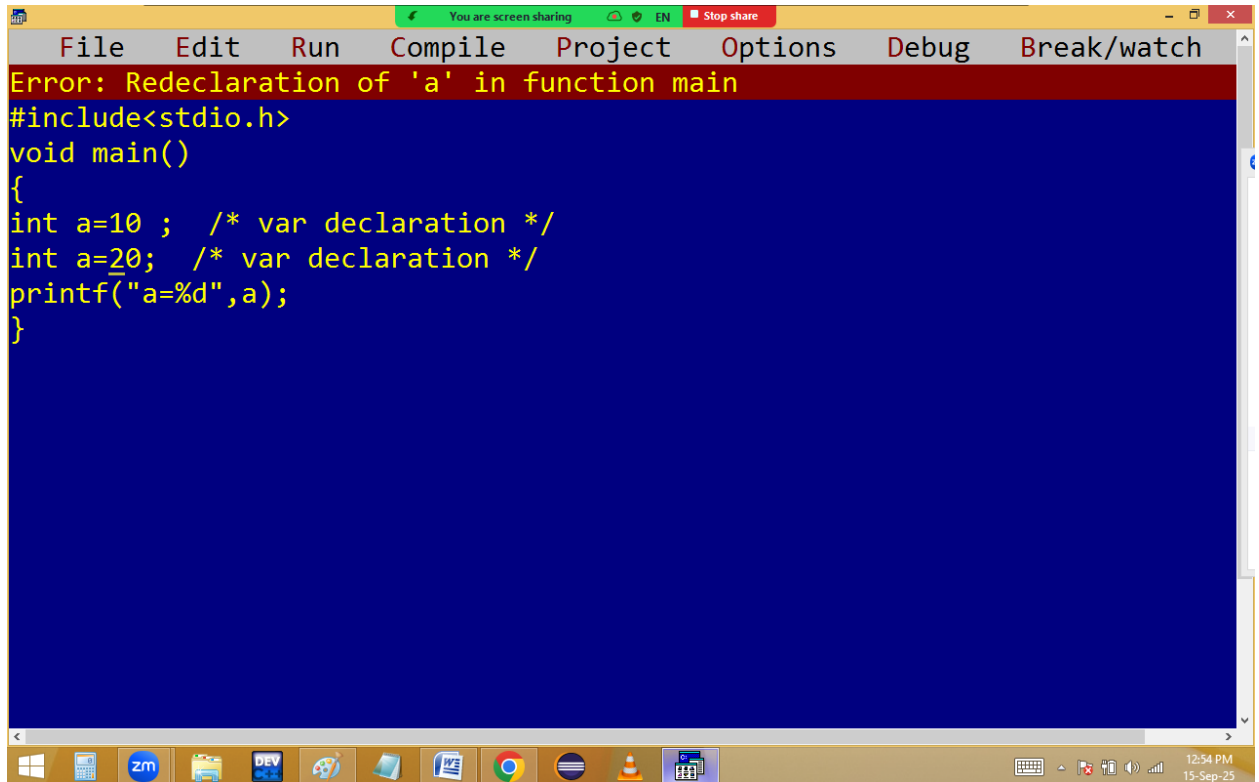

```
File Edit Run Compile Project Options Debug Break/watch
Error: Redclaration of 'a' in function main
#include<stdio.h>
void main()
{
int a=10 ; /* var declaration */
int a=20; /* var declaration */
printf("a=%d",a);
}
```

The screenshot shows a C compiler window with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a status bar (You are screen sharing, EN, Stop share). The main area displays a C program with a redeclaration error. The code is as follows:

```
#include<stdio.h>
void main()
{
int a=10 ; /* var declaration */
int a=20; /* var declaration */
printf("a=%d",a);
}
```

The error message "Error: Redclaration of 'a' in function main" is displayed at the top of the code area. The Windows taskbar at the bottom shows various icons, including the Start button, task view, and several application icons (Zotero, DEV, and others). The system clock in the bottom right corner indicates the time is 12:54 PM on 15-Sep-25.

You are screen sharing EN Stop share

File Edit Run Compile Project Options Debug Break/watch

Error: Redeclaration of 'a' in function main

```
#include<stdio.h>
void main()
{
int a=10 ; /* var declaration */
float a=2.5; /* var declaration */
printf("a=%d",a);
}
```

12:55 PM 15-Sep-25


You are screen sharing EN Stop share

File Edit Run Compile Project Options Debug Break/watch

Line 5 Col 5 Insert Indent Tab Fill Unindent * E:11AM.C

```
#include<stdio.h>
void show()
{
int a=999;
printf("a=%d",a);
}
void main()
{
int a=10 ; /* var declaration */
printf("a=%d\n",a);
show();
}
```

01:01 PM 15-Sep-25

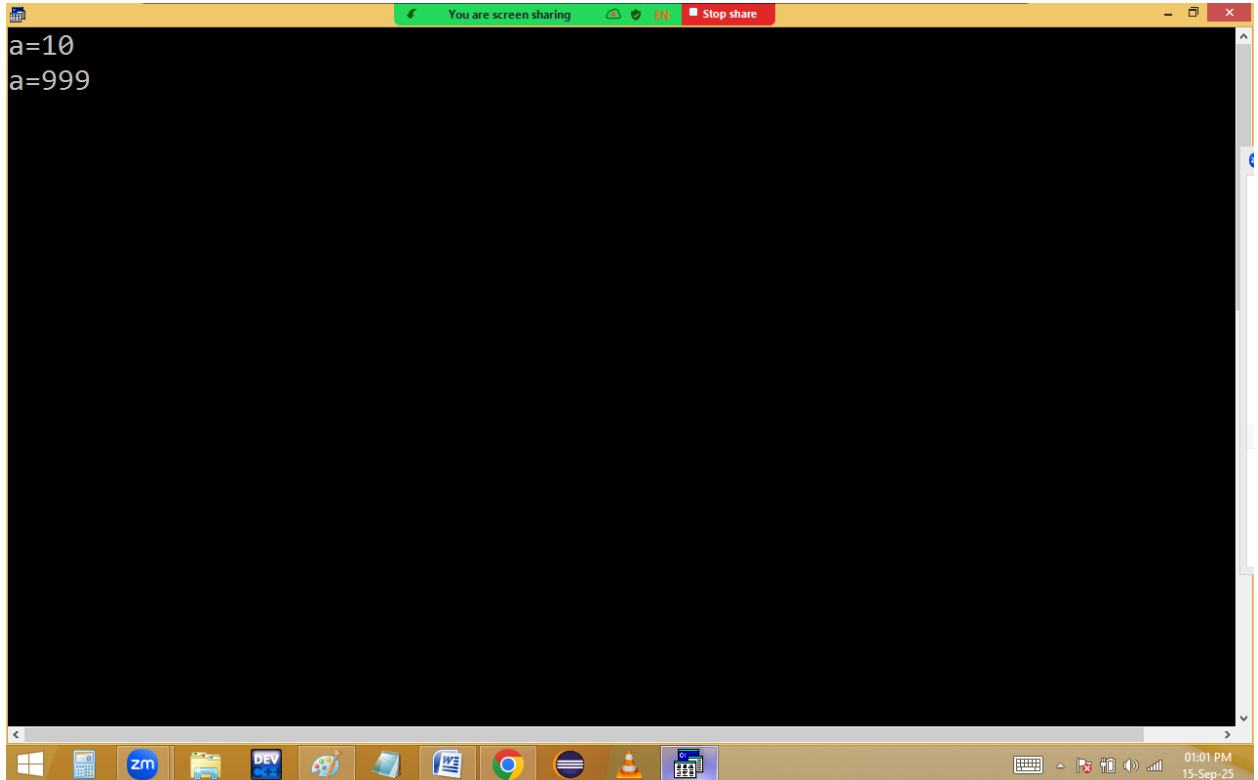

Previous class videos:

Day 1: <https://youtu.be/WpArbywdWI4>

Day 2: <https://youtu.be/ZAUpYkRrZmk>

Day 3: <https://youtu.be/LHq8YcSx35o>

Day 4: https://youtu.be/5_xTEM5w_Uc

Day 5: <https://youtu.be/P5hdVgxDUzA>

Day 6: <https://youtu.be/kztxWbrXa5U>

Day 7: <https://youtu.be/iY-f59WhCfk>

Day 8: <https://youtu.be/grYCwRj7cWo>