


Finding even/odd without using if..else:

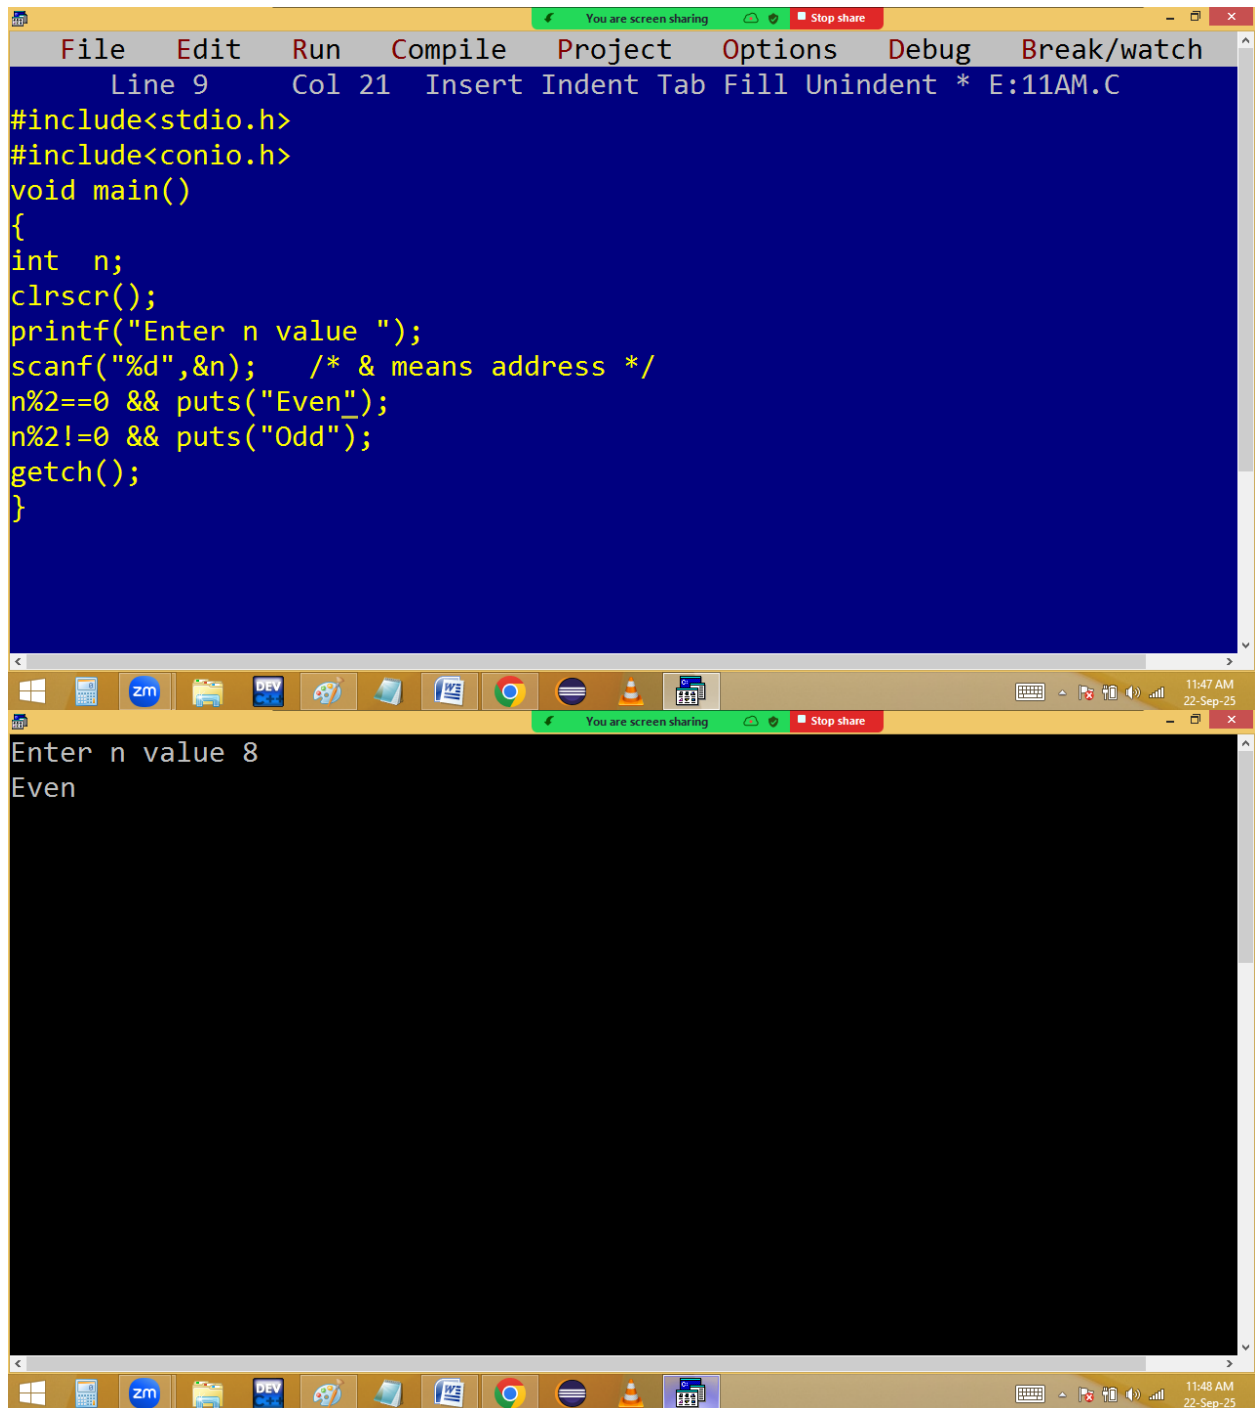

The image shows a C program in a code editor and its execution output. The code is as follows:

```
File Edit Run Compile Project Options Debug Break/watch
Line 9 Col 21 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int n;
    clrscr();
    printf("Enter n value ");
    scanf("%d",&n); /* & means address */
    n%2==0 && puts("Even");
    n%2!=0 && puts("Odd");
    getch();
}
```

The execution output shows the program running and displaying the result:

```
Enter n value 8
Even
```

The screenshot also shows a Windows taskbar at the bottom with various application icons and a system tray on the right indicating the time as 11:47 AM and 11:48 AM on 22-Sep-25.

```
Enter n value 9
Odd
```

$$8 \% 2 = \underline{0} = 0$$


$$9 \% 2 = 1 = 0$$

$$9 \% 2 = \underline{1} \neq 0$$

&& p(even);

~~X~~

&& p(Odd);

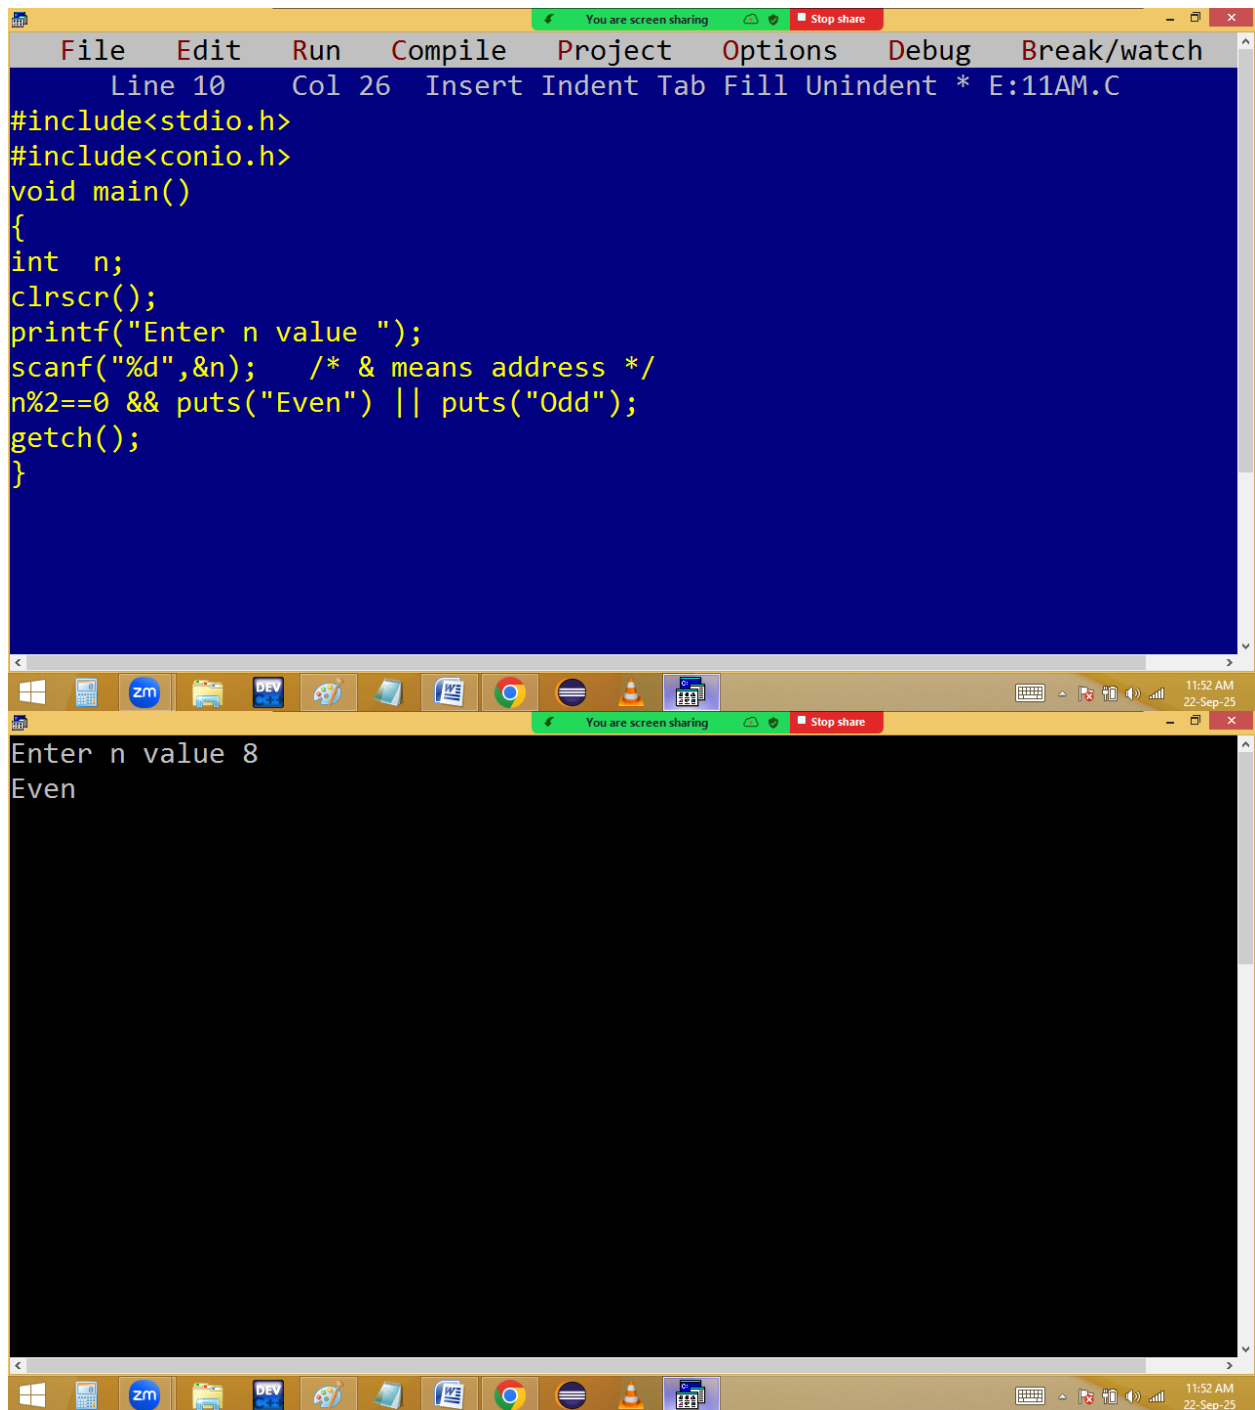

```
File Edit Run Compile Project Options Debug Break/watch
Line 10 Col 26 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter n value ");
scanf("%d",&n); /* & means address */
n%2==0 && puts("Even") || puts("Odd");
getch();
}

Enter n value 8
Even
```

```
Enter n value 9
Odd
```

$8 \% 2 = 0 == 0$ && p(even); || p(Odd);
 $9 \% 2 = 1 == 0$ && p(even); || p(Odd);


Eg: Finding max in 2 numbers without using if..else:

The image shows a Windows desktop environment. At the top, a yellow status bar indicates "You are screen sharing" and "Stop share". Below this is a code editor window with a menu bar (File, Edit, Run, Compile, Project, Options, Debug, Break/watch) and a toolbar. The code editor displays a C program in a blue background with yellow text. The code is as follows:

```
Line 13 Col 2 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int a, b;
    clrscr();
    printf("Enter a value ");
    scanf("%d",&a); /* & means address */
    printf("Enter b value ");
    scanf("%d",&b);
    a>b && puts("a is big");
    b>a && puts("b is big");
    getch();
}
```


Below the code editor is a taskbar with various application icons (Windows, Zm, DEV, etc.). At the bottom, a terminal window is open, showing the output of the program. The terminal has a black background with white text. It displays the prompts "Enter a value" and "Enter b value", followed by the user input "9" and "5", and the program output "a is big". The terminal window also has a yellow status bar at the bottom with "You are screen sharing" and "Stop share" buttons. The system clock in the bottom right corner shows "11:57 AM 22-Sep-25".

Enter a value 9
Enter b value 5
a is big

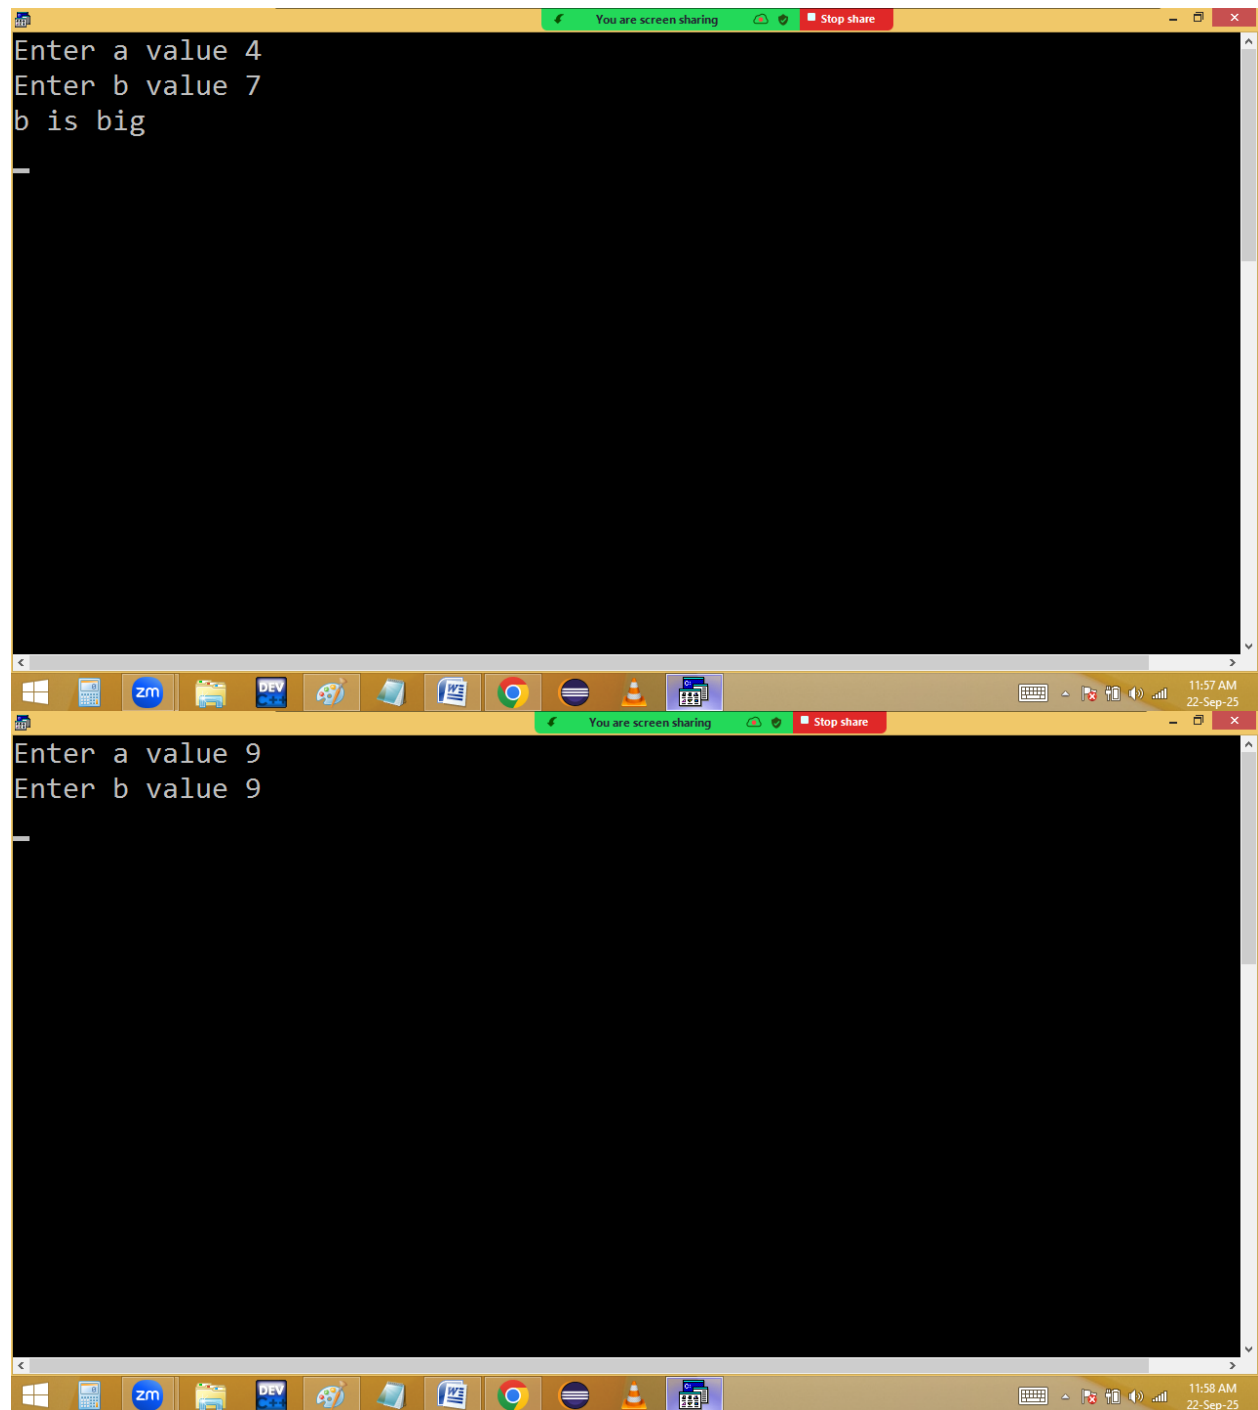

```
void main()
{
int  a, b;
clrscr();
printf("Enter a value ");
scanf("%d",&a);  /* & means address */
printf("Enter b value ");
scanf("%d",&b);
a>b && puts("a is big");
b>a && puts("b is big");
a==b && puts("Both are equal");
getch();
}
```


Enter a value 4
Enter b value 4
Both are equal

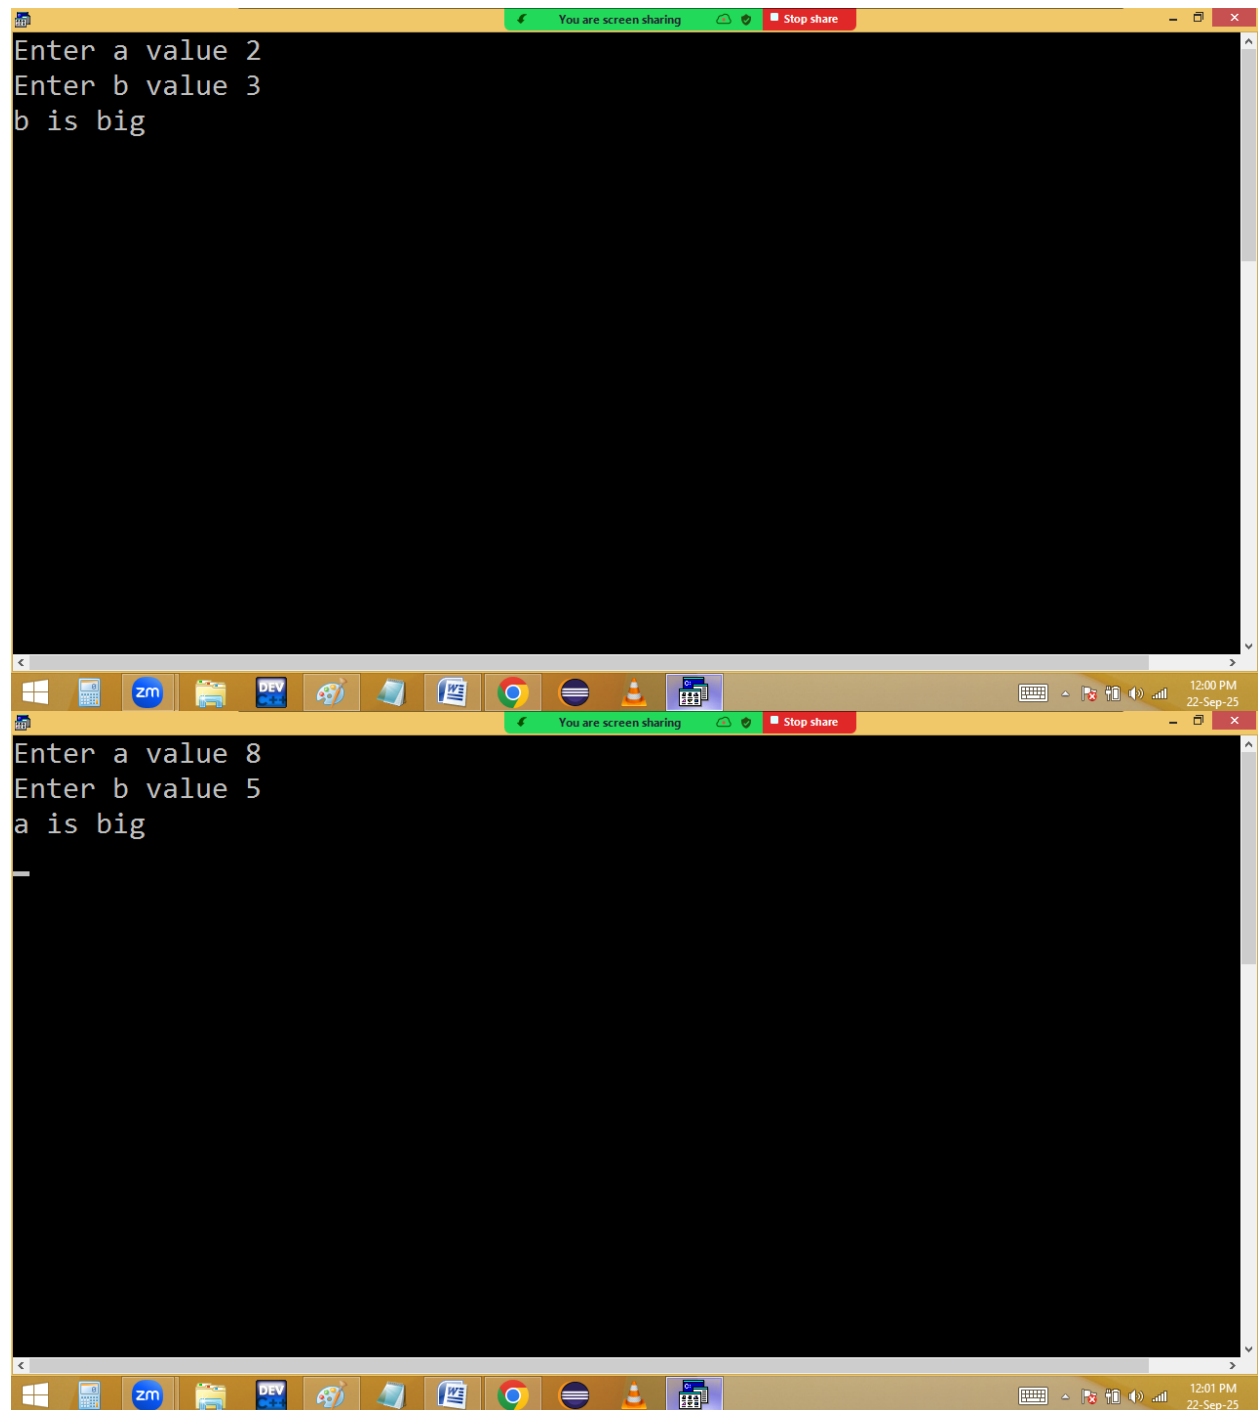

4 > 4 F X
 T
9 > 5 T ✓
a > b && p("a is big");
2 > 5 F X

5 > 2 T
 ~
b > a && p("b is big");

4 > 4 F X
4 == 4 T
a == b && p("Equal");

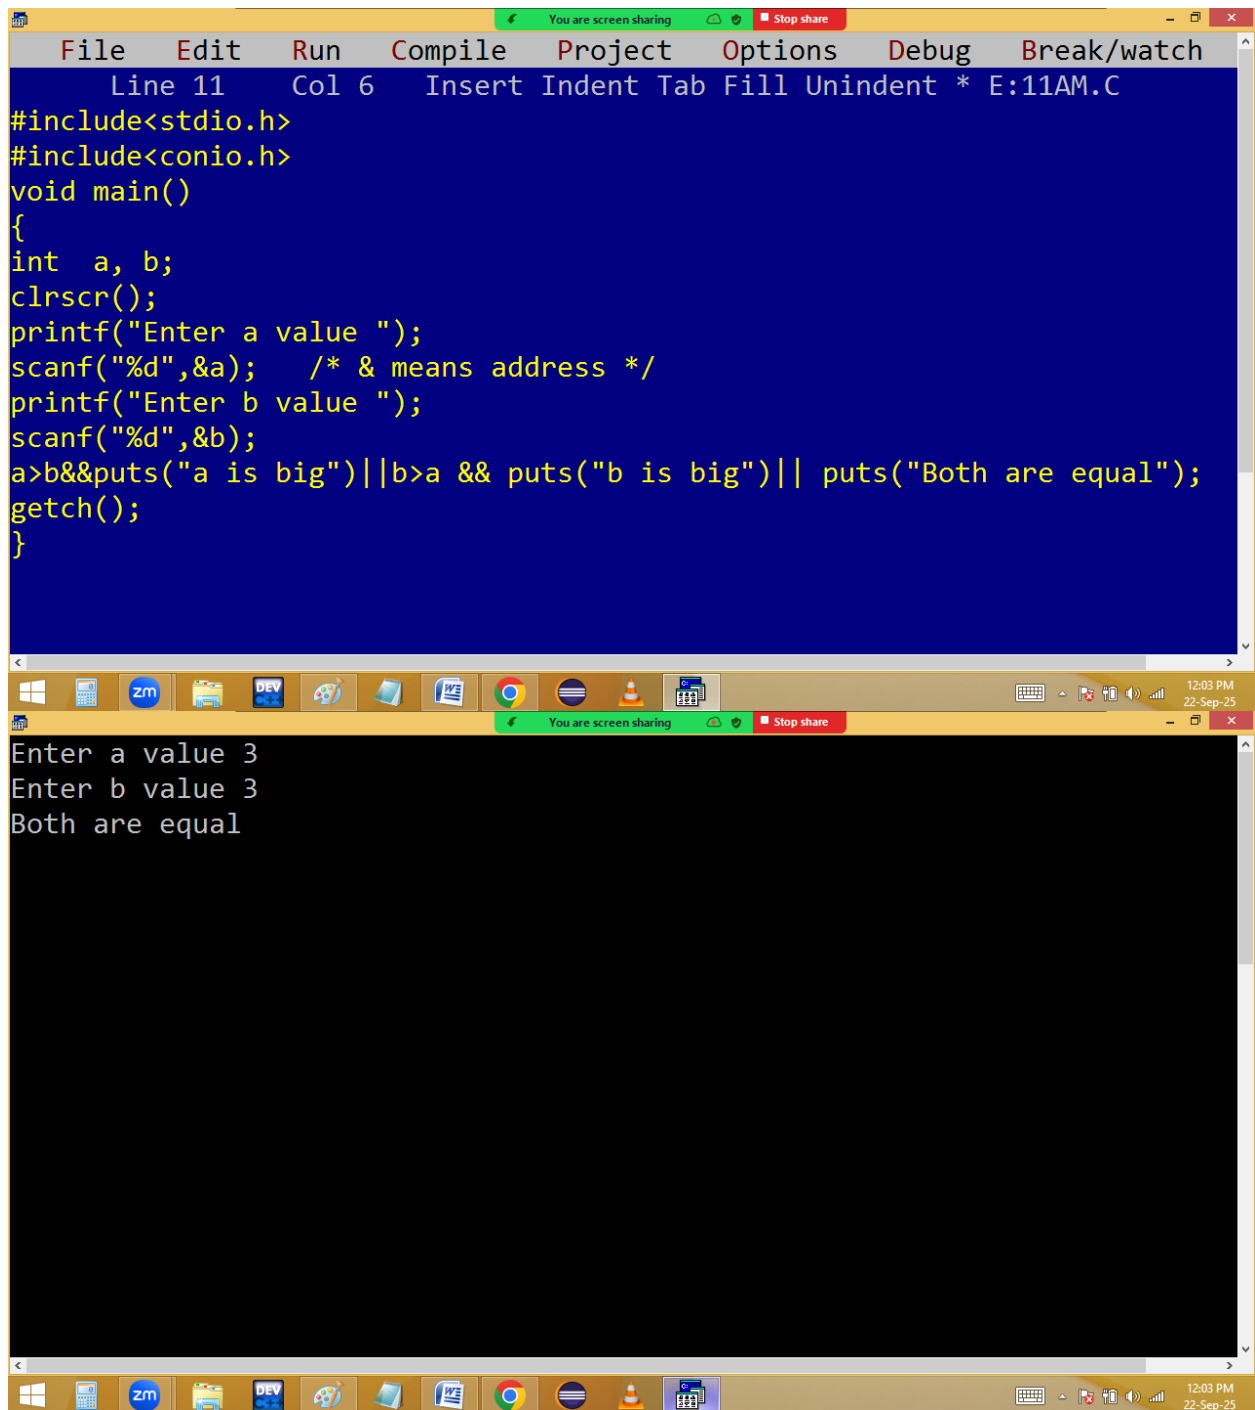


```
File Edit Run Compile Project Options Debug Break/watch
Line 11 Col 6 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a, b;
clrscr();
printf("Enter a value ");
scanf("%d",&a); /* & means address */
printf("Enter b value ");
scanf("%d",&b);
a>b&&puts("a is big")||b>a && puts("b is big")|| puts("Both are equal");
getch();
}
```

Enter a value 3
Enter b value 3
Both are equal

```
Enter a value 1
Enter b value 2
b is big
```

```
Enter a value 7
Enter b value 3
a is big
```


Finding given no is +Ve / -Ve / 0:

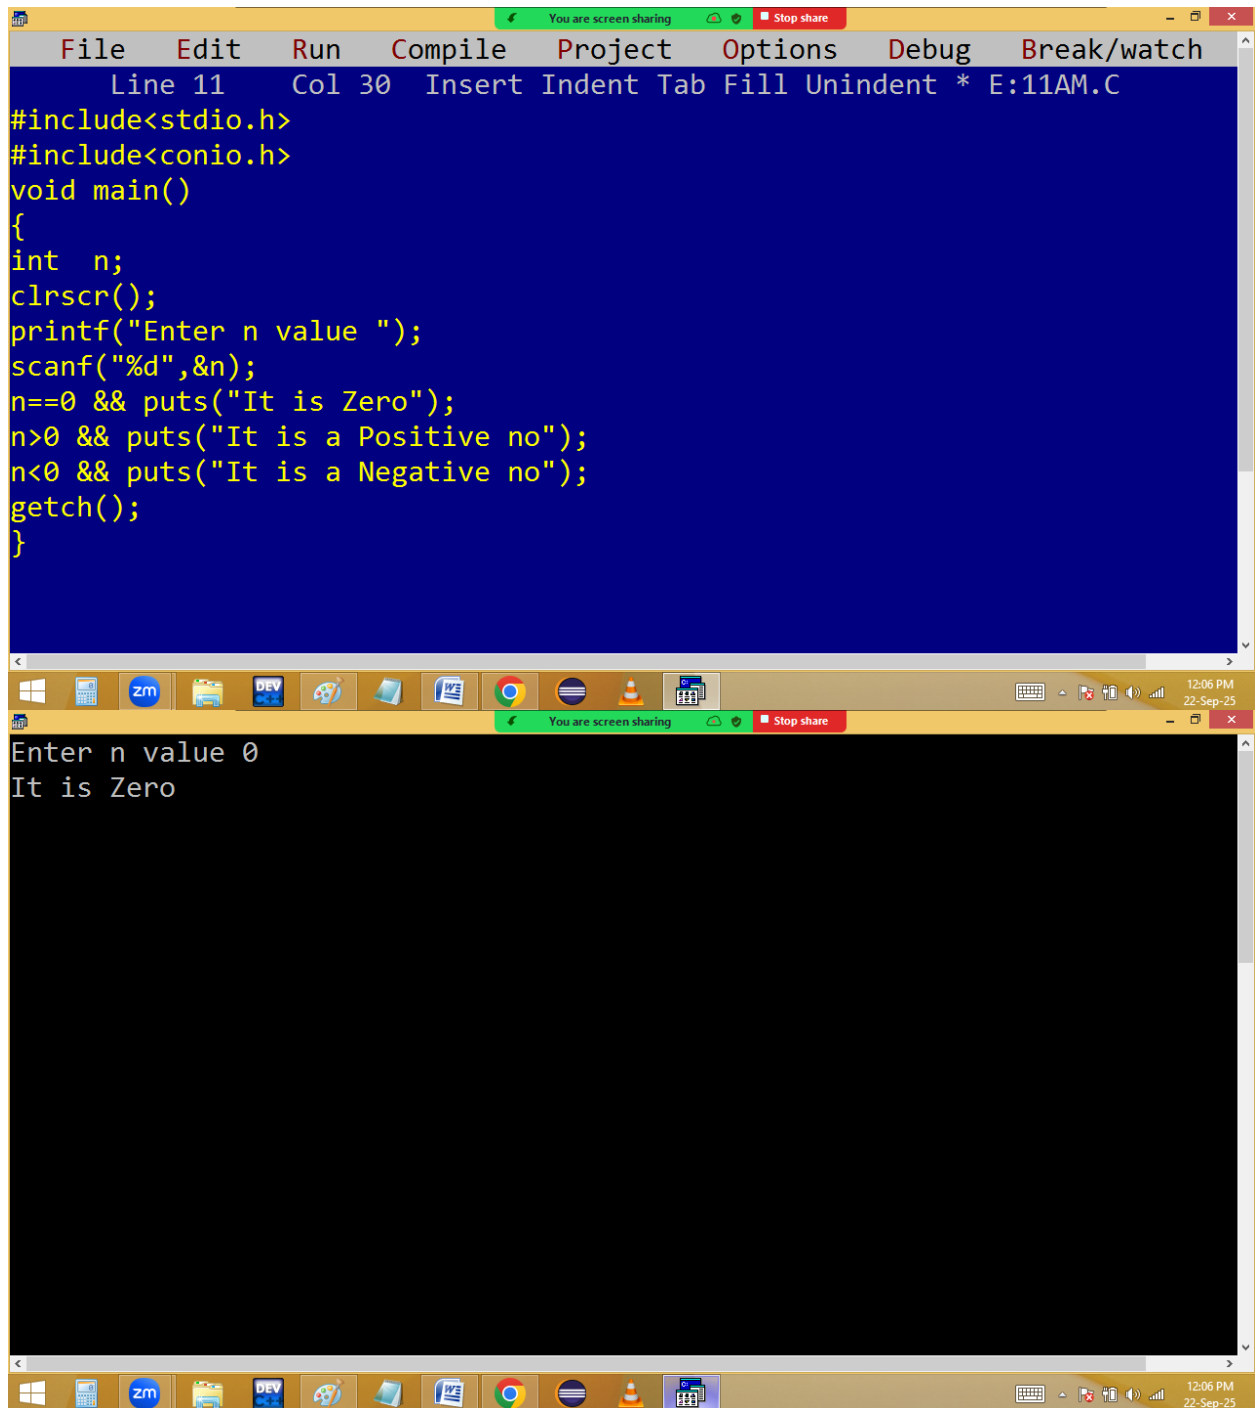


The image shows a screenshot of a C program in a code editor and its execution output. The code editor window has a menu bar with File, Edit, Run, Compile, Project, Options, Debug, and Break/watch. The status bar shows Line 11, Col 30, and Insert mode. The code is as follows:

```
Line 11 Col 30 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int n;
    clrscr();
    printf("Enter n value ");
    scanf("%d",&n);
    n==0 && puts("It is Zero");
    n>0 && puts("It is a Positive no");
    n<0 && puts("It is a Negative no");
    getch();
}
```

The execution output window shows the program running. It prompts "Enter n value 0" and then outputs "It is Zero". The status bar at the bottom of the execution window shows the time as 12:06 PM on 22-Sep-25.

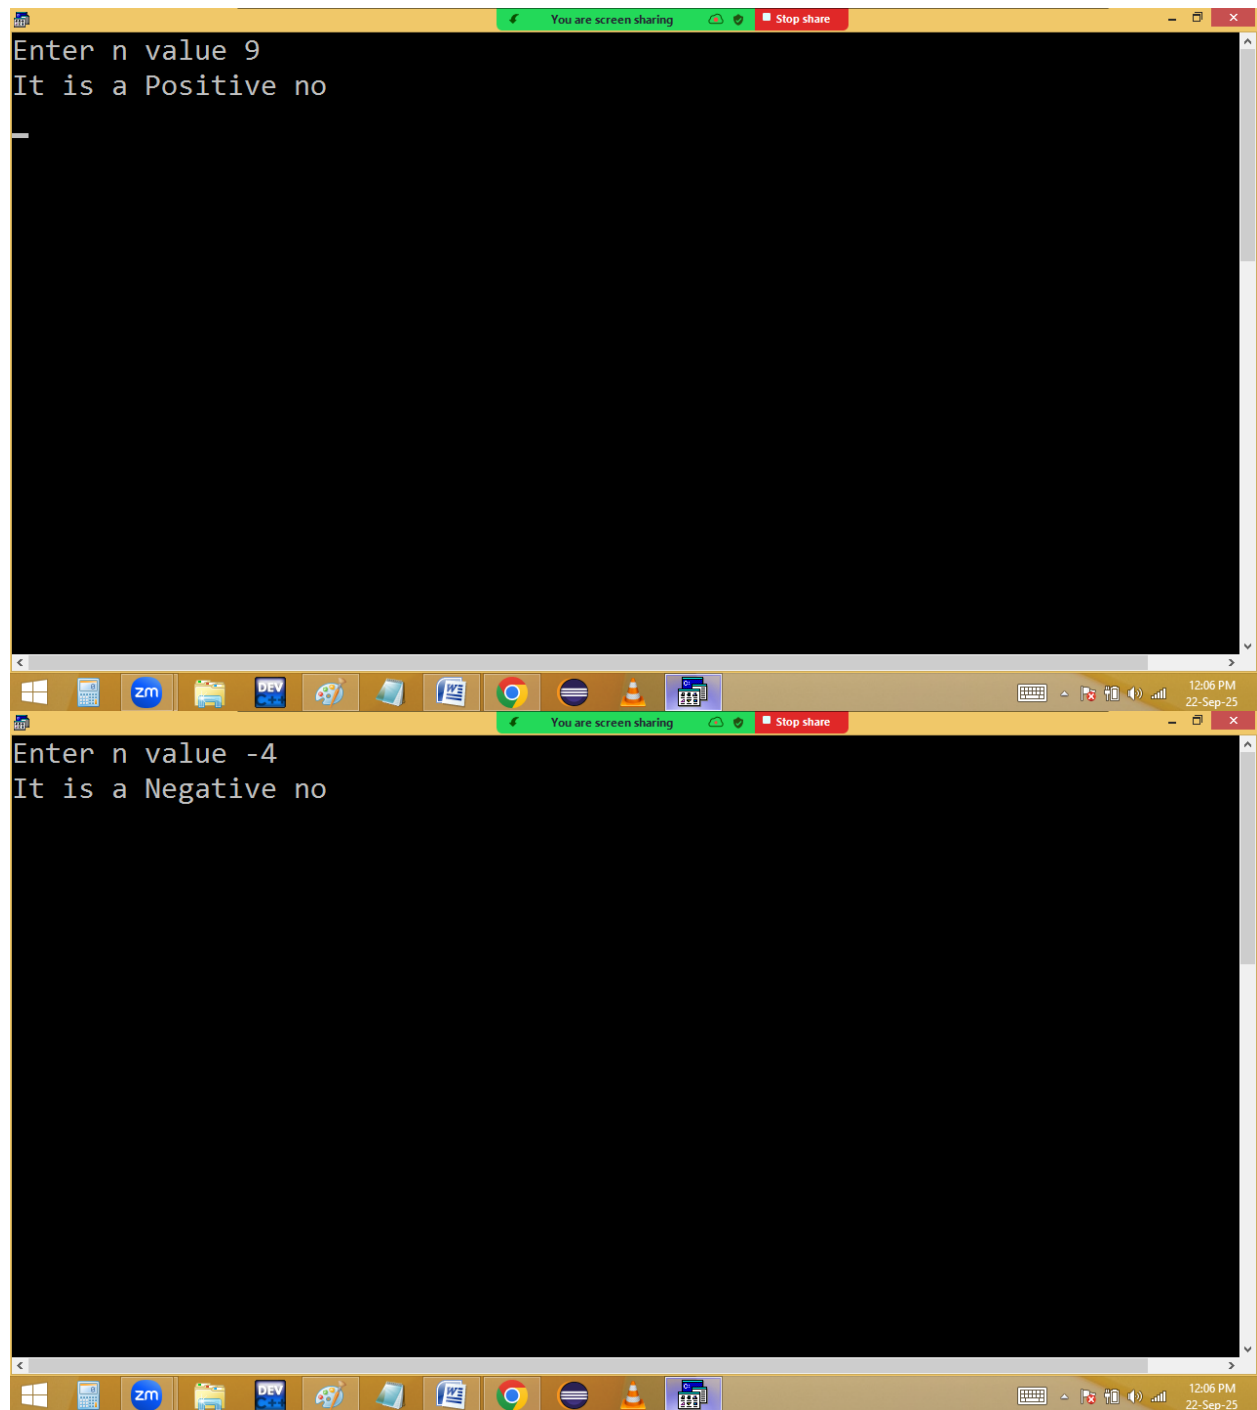




Finding single digit no or not without using if..else?

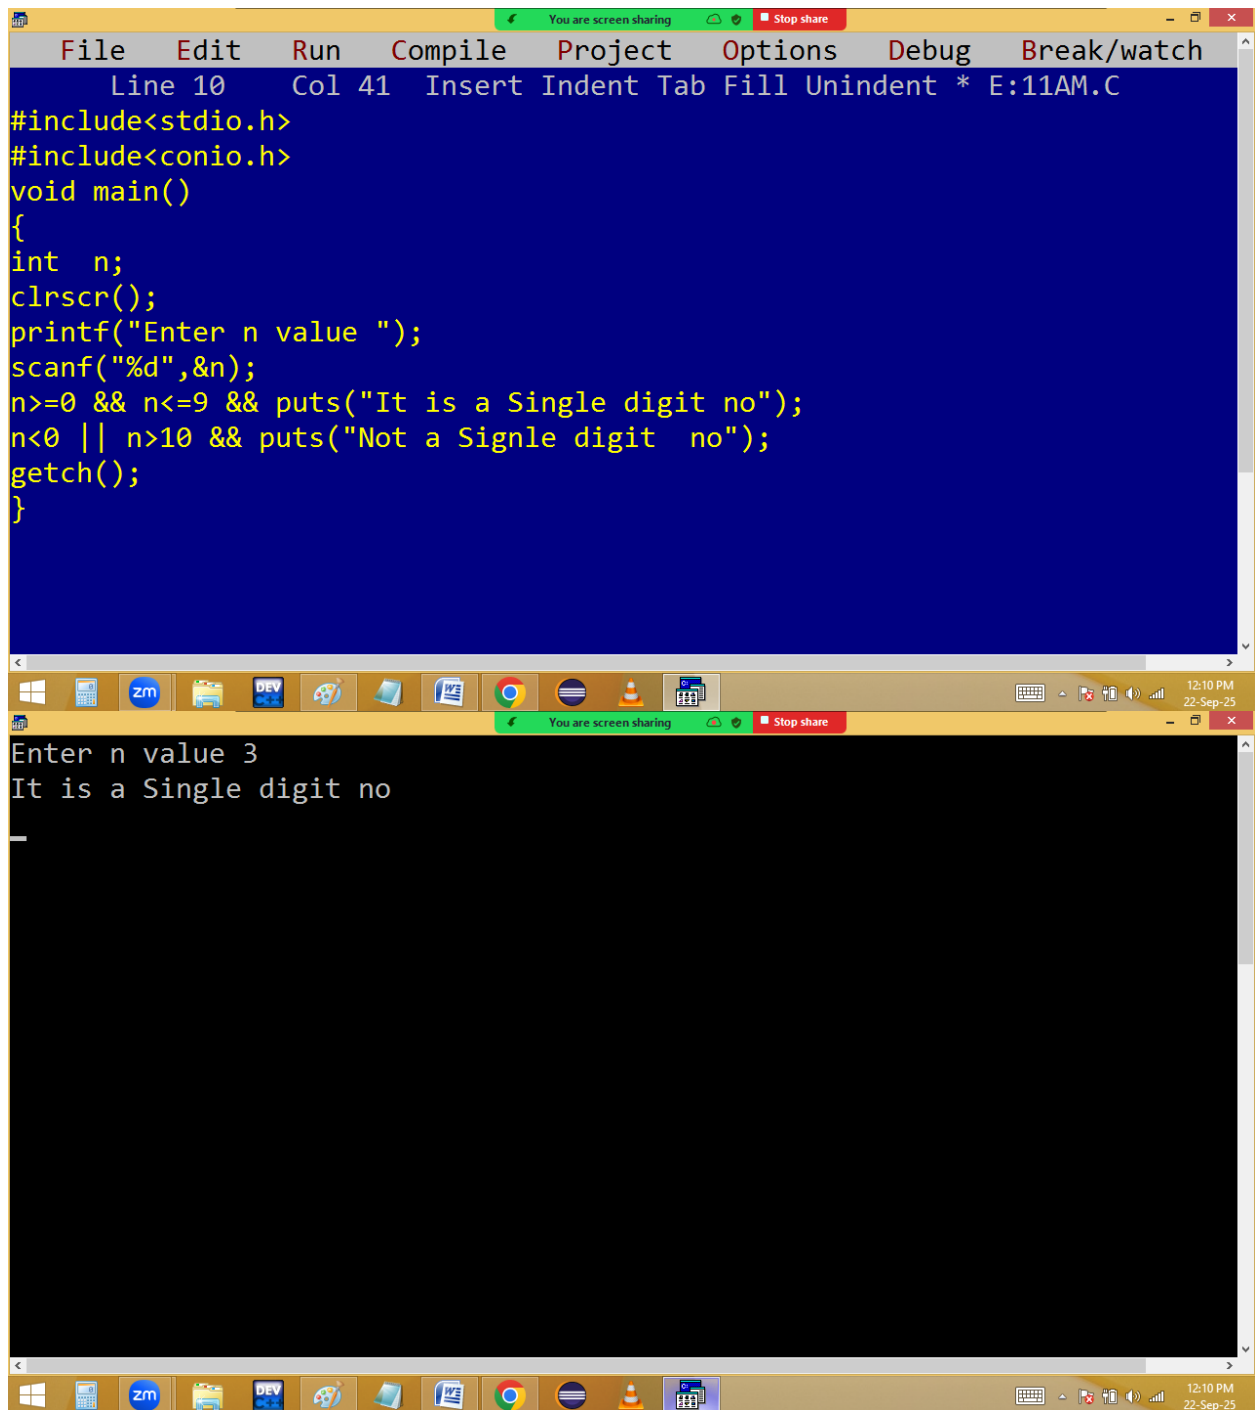


```
File Edit Run Compile Project Options Debug Break/watch
Line 10 Col 41 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int n;
    clrscr();
    printf("Enter n value ");
    scanf("%d",&n);
    n>=0 && n<=9 && puts("It is a Single digit no");
    n<0 || n>10 && puts("Not a Signle digit no");
    getch();
}
```

Enter n value 3
It is a Single digit no

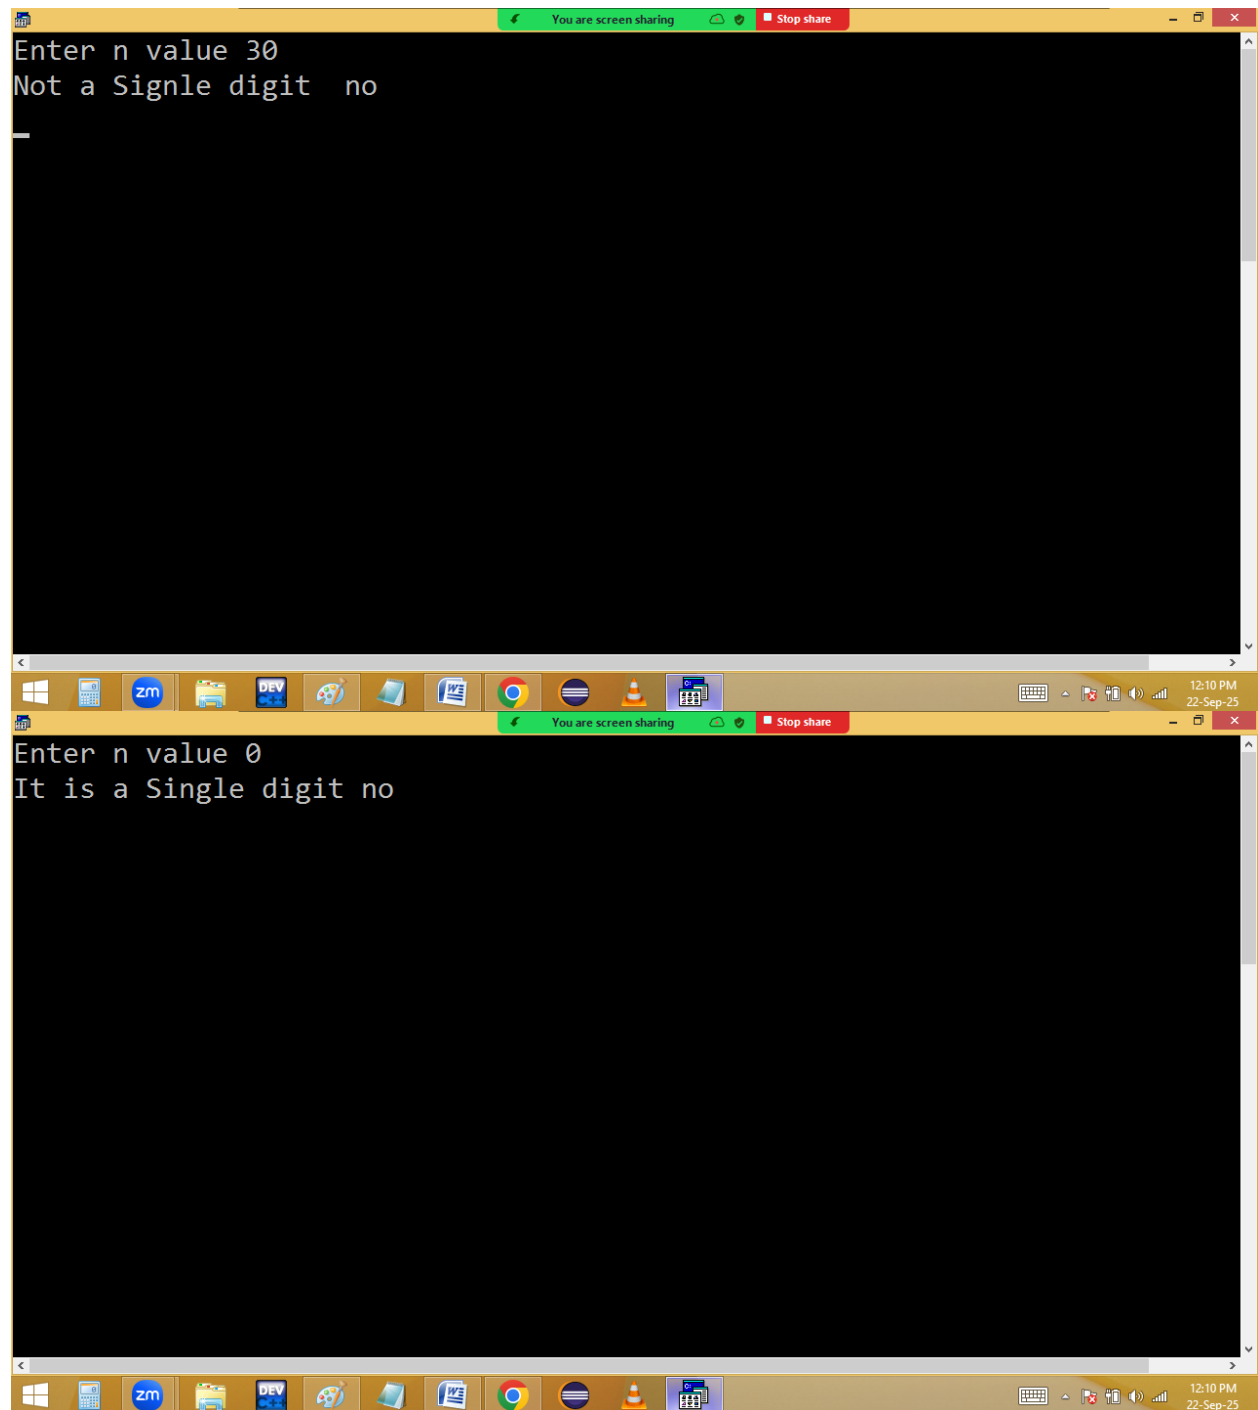

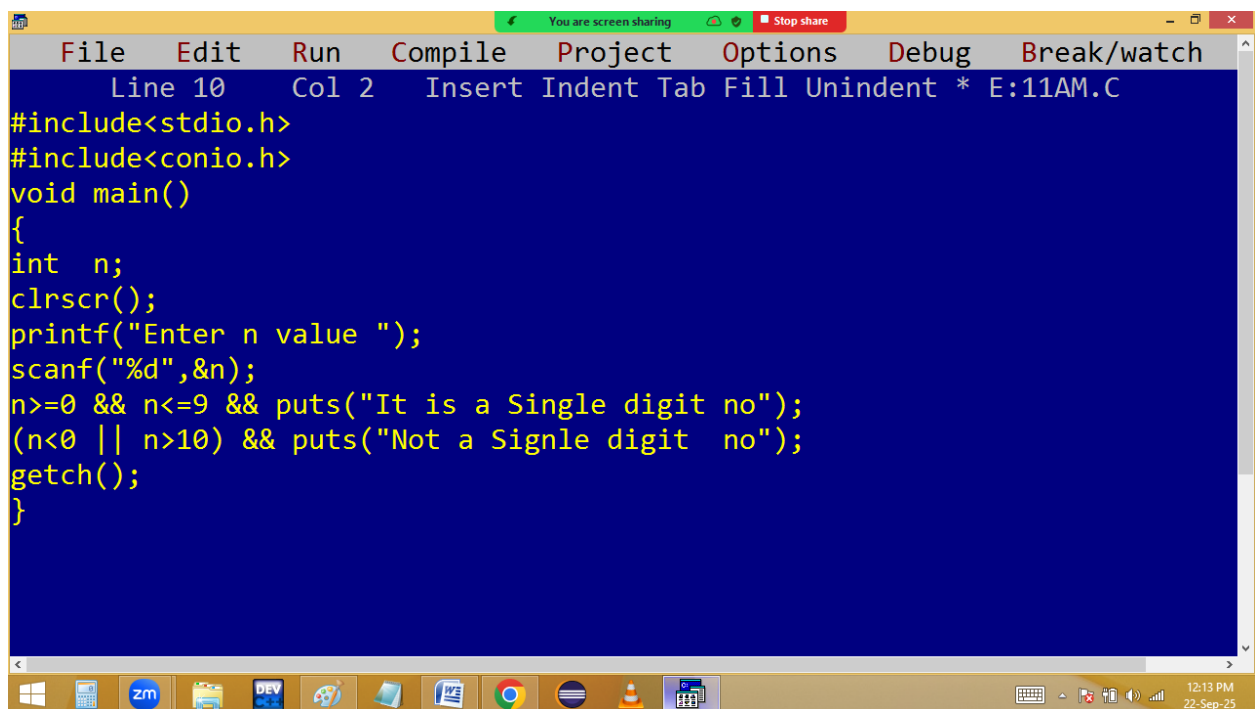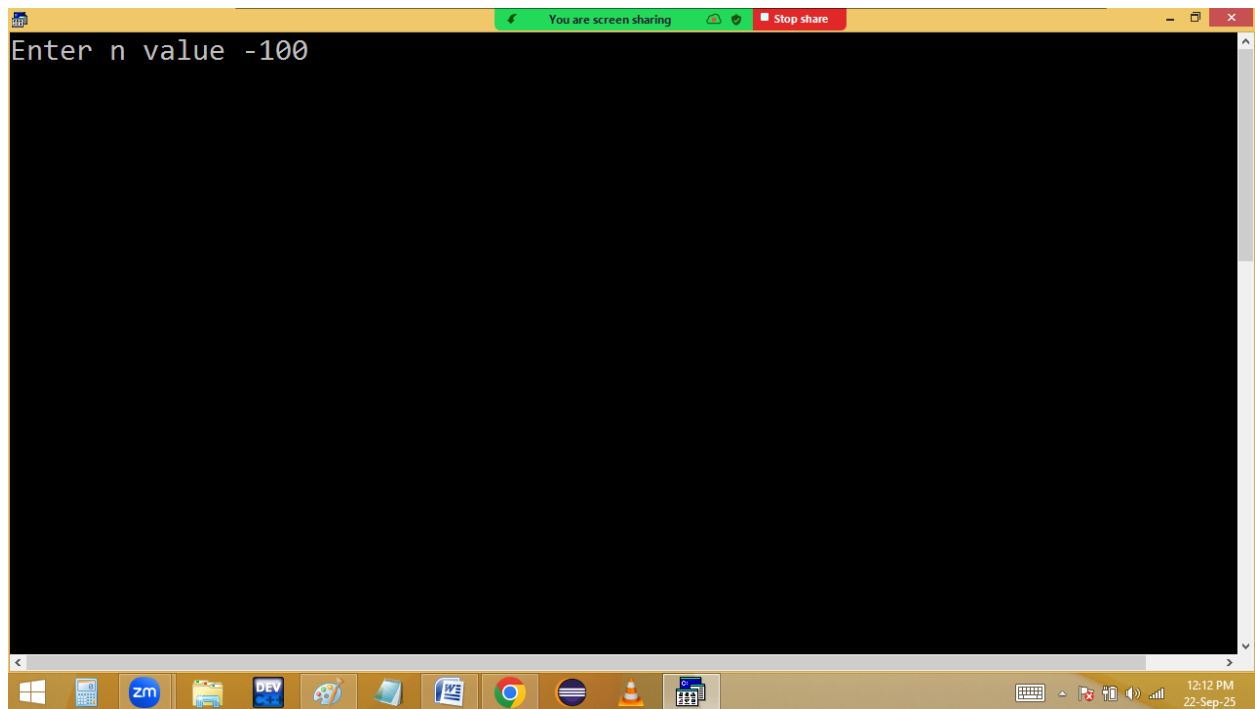


```
Enter n value -100
Not a Signle digit no
```

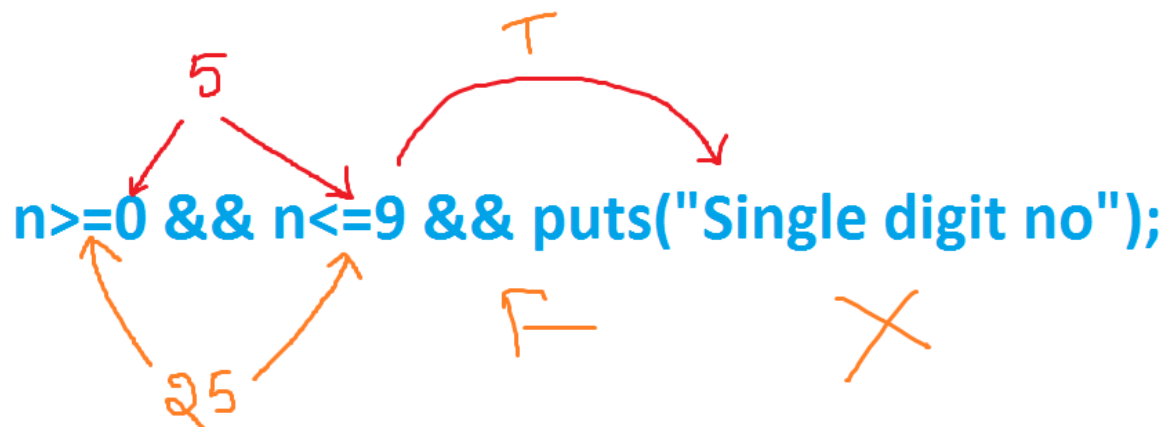


`n < 0 || n > 9` ~~`&& p("Not a single digit no");`~~


-3
T

`(n < 0 || n > 9)` `&&` `p("Not a single digit no");`

-3 < 0 T ✓

Enter n value -3
Not a Signle digit no

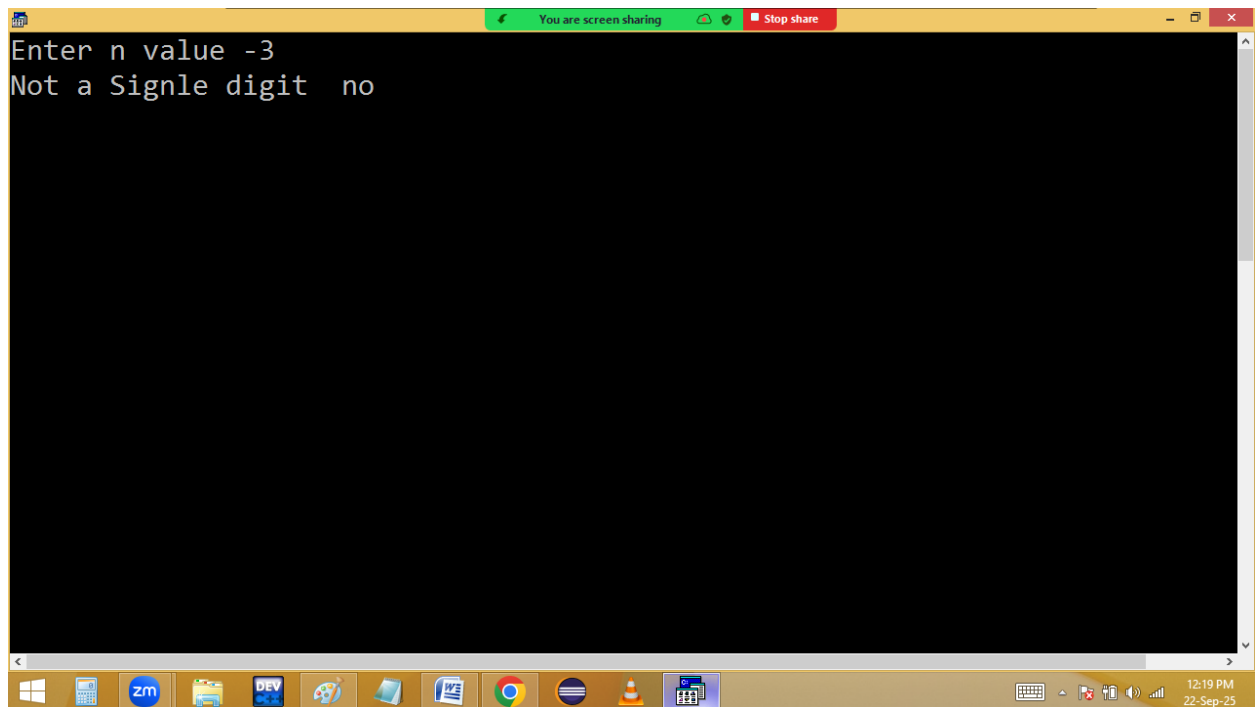

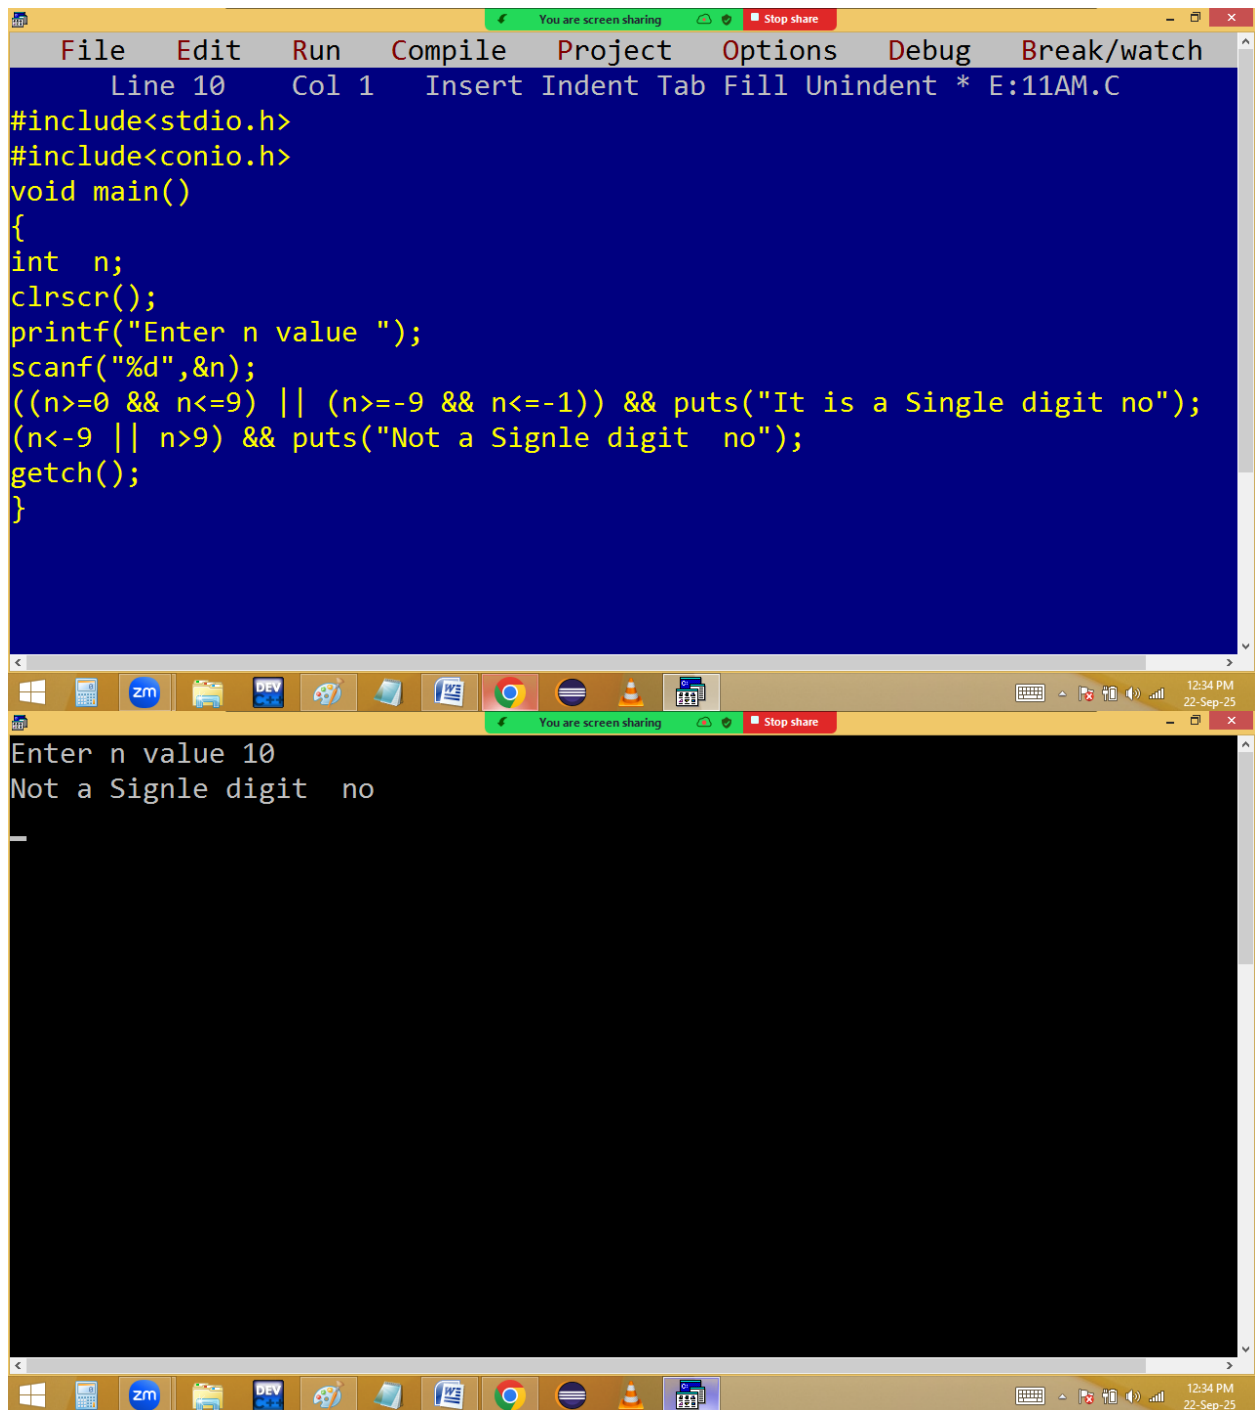

The image shows a Windows desktop environment with a code editor and a terminal window. The code editor displays a C program that checks if a number is a single digit. The terminal window shows the program's execution with the input '10' and the output 'Not a Signle digit no'.


```
File Edit Run Compile Project Options Debug Break/watch
Line 10 Col 1 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int n;
    clrscr();
    printf("Enter n value ");
    scanf("%d",&n);
    ((n>=0 && n<=9) || (n>=-9 && n<=-1)) && puts("It is a Single digit no");
    (n<-9 || n>9) && puts("Not a Signle digit no");
    getch();
}
```

Enter n value 10
Not a Signle digit no


```
Enter n value 8
It is a Single digit no
```

```
Enter n value -4
It is a Single digit no
```

```
Enter n value 20
Not a Signle digit  no
```

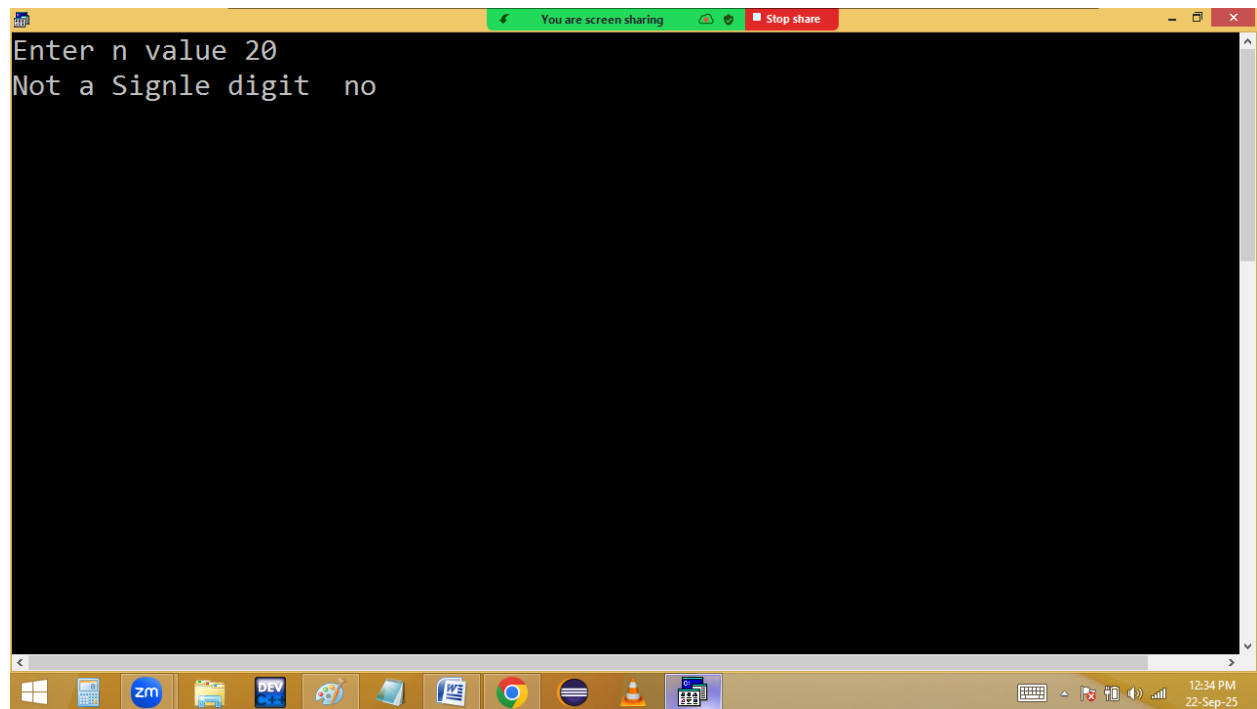A screenshot of a Windows desktop environment. At the top, a yellow status bar indicates "You are screen sharing" with a green icon and a "Stop share" button with a red icon. Below this is a large black terminal window. The terminal displays the text "Enter n value 20" on the first line and "Not a Signle digit no" on the second line. The taskbar at the bottom contains several icons: Windows Start button, Task View, Zoho Mail (zm), File Explorer, DEV, Paint, Word, Google Chrome, Firefox, VLC media player, and a calendar icon. On the right side of the taskbar, there are system icons for keyboard, network, volume, and battery, along with the date and time "12:34 PM 22-Sep-25".

```
Enter n value -23
Not a Signle digit  no
```

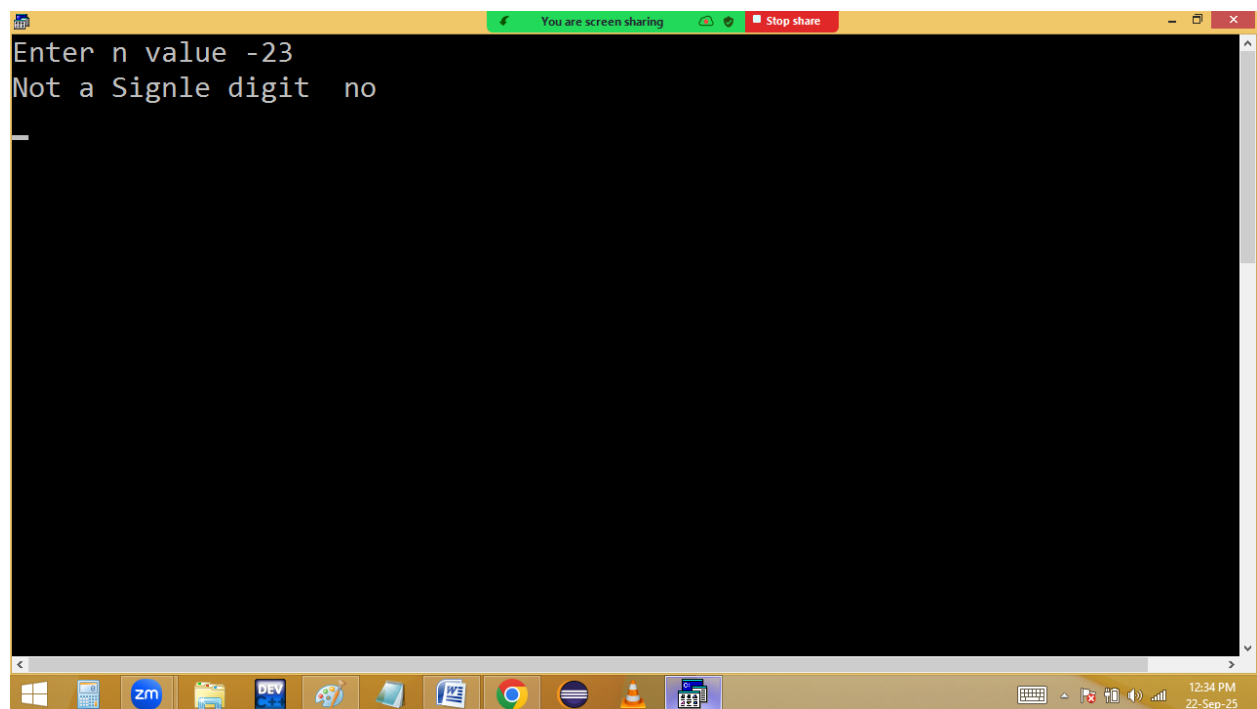A screenshot of a Windows desktop environment, similar to the one above. The yellow status bar at the top shows "You are screen sharing" and a "Stop share" button. The black terminal window displays "Enter n value -23" on the first line and "Not a Signle digit no" on the second line. The taskbar at the bottom is identical to the first screenshot, showing the same set of application icons and system tray information, including the date and time "12:34 PM 22-Sep-25".

Round the no to its next / previous multiple of 10 based on last digit without using if..else.

If last digit ≥ 5 round to next coming int.

If last digit < 5 round to previous int.

Eg:

28 last digit is 8 which is $\geq 5 \rightarrow 30$


24 last digit is 4 which $< 5 \rightarrow 20$

259.51 $\rightarrow 260$

259.49 $\rightarrow 259$



```
File Edit Run Compile Project Options Debug Break/watch
Line 9 Col 37 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
    int n;
    clrscr();
    printf("Enter n value ");scanf("%d",&n);
    n%10>=5 && printf("Next multiple  %d",(n/10+1)*10);
    n%10<5 && printf("Previous multiple %d",n/10*10);
    getch();
}
```

Enter n value 28
Next multiple 30

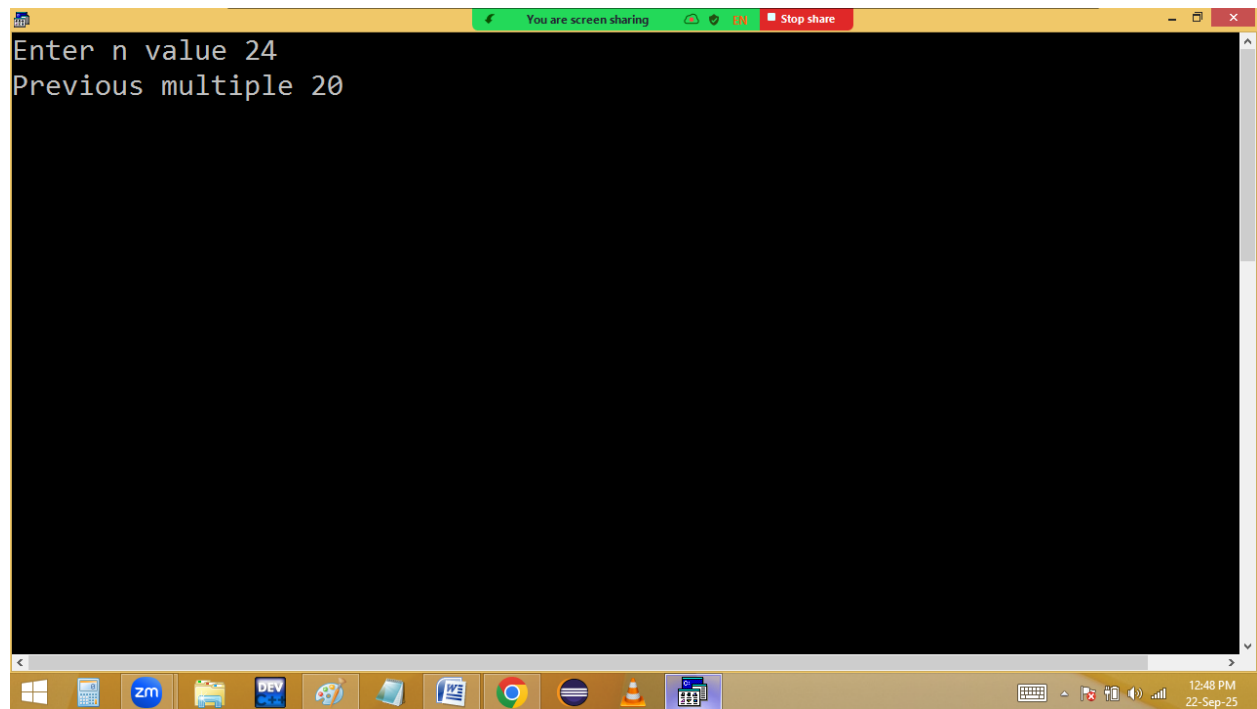


```
Enter n value 45
Next multiple 50_
```

```
Enter n value 20
Previous multiple 20
```

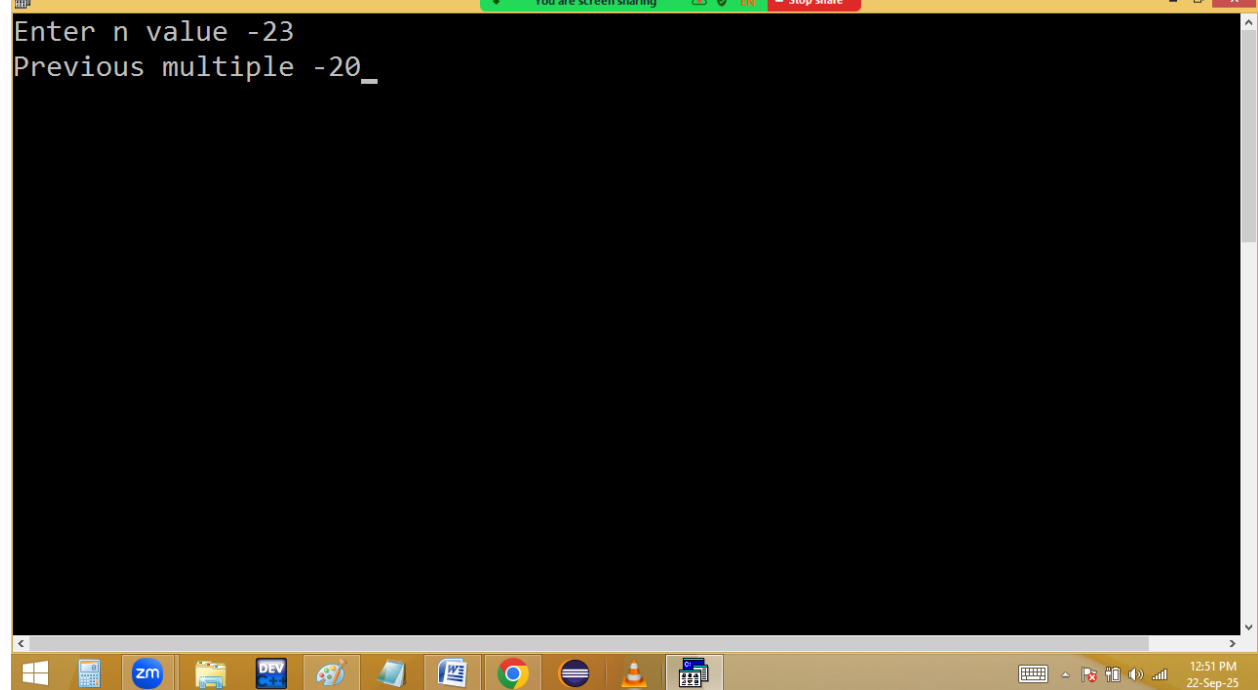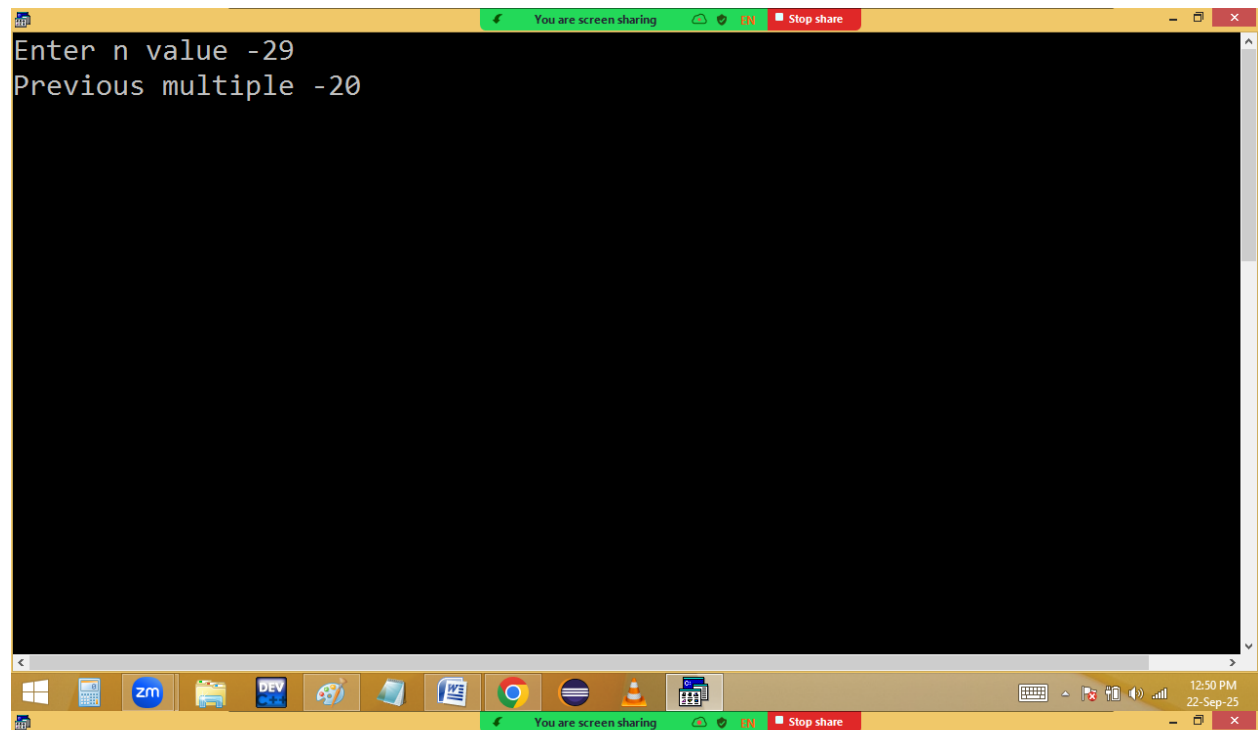

$28 \% 10 = 8 \geq 5$ && p("%d", $28 / 10 = (2 + 1) * 10$) ==> 30

$24 \% 10 = 4 < 5$ && p("%d", $24 / 10 = 2 * 10$); ==> 20

Note: Any $n \% 10$ gives last digit

Any $n / 10$ removes the last digit.

$$\begin{aligned} - 28 \% 10 &= -8 \geq 5 \\ - 24 \% 10 &= -4 < 5 \end{aligned}$$

