

float a = 10; ➔ a=10.000000 ← implicit type casting

int b = 1.2; ➔ b=1 ← implicit type casting

(float)5/2=2.5000000 ← explicit type casting

(int)5.0/2=2 ← explicit type casting

(float)(5/2)=2.000000

```
File Edit Run Compile Project Options Debug Break/watch
Line 10 Col 56 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1.2; /* implicit type casting */
float b=10;
clrscr();
printf("%d\n", a);
printf("%f\n", b);
printf("%f\n", (float)5/2); /* explicit type casting */
printf("%d\n", (int)5.0/2);
printf("%f\n", (float)(5/2));
getch();
}
```

```
1
10.000000
2.500000
2
2.000000
```

$$123/10=12$$

$$12/10=1$$

$$1/10=0$$

**Note:** Any no/10 removes last digit.



$$\begin{array}{r} 10 \overline{) 123} \\ \underline{120} \\ 3 \end{array}$$


$$\begin{array}{r} 10 \overline{) 12} \\ \underline{10} \\ 2 \end{array}$$


$$-5/2=-2$$

$$5/-2=-2$$

$$-5/-2=2$$

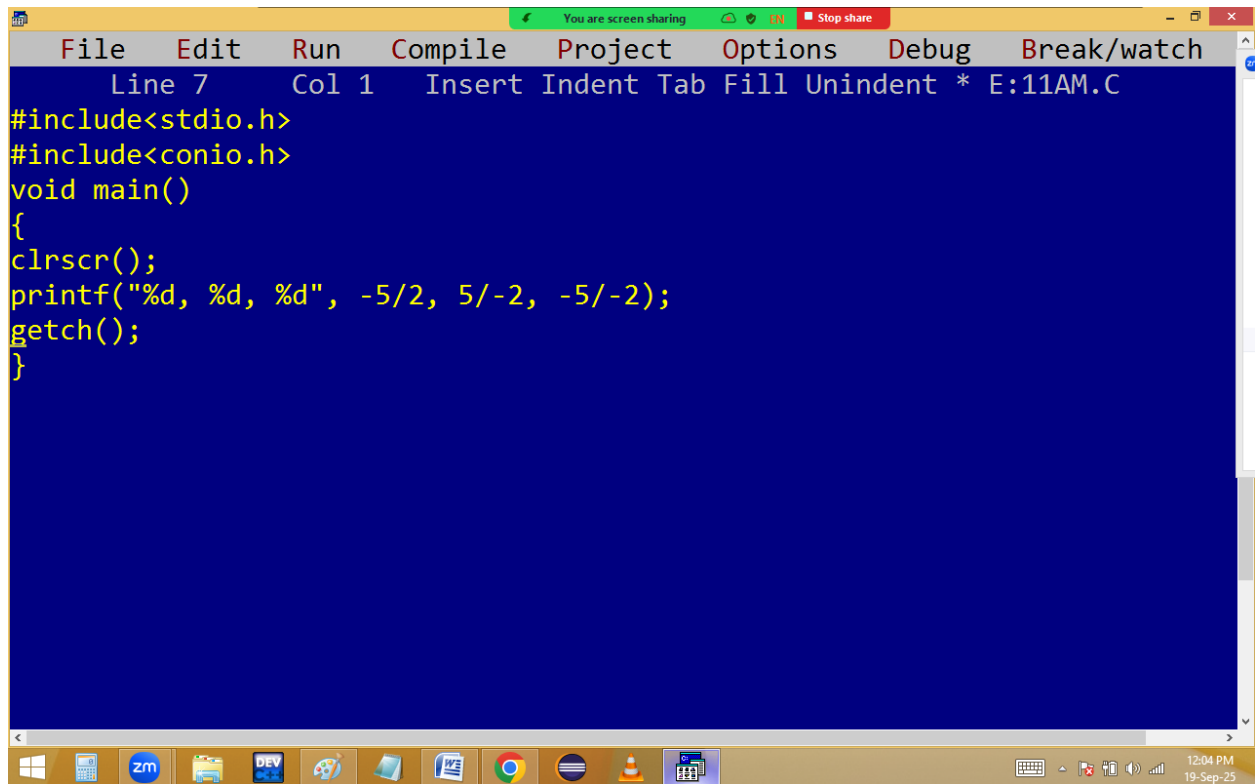


```
File Edit Run Compile Project Options Debug Break/watch
Line 7 Col 1 Insert Indent Tab Fill Unindent * E:11AM.C
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d, %d, %d", -5/2, 5/-2, -5/-2);
getch();
}
```

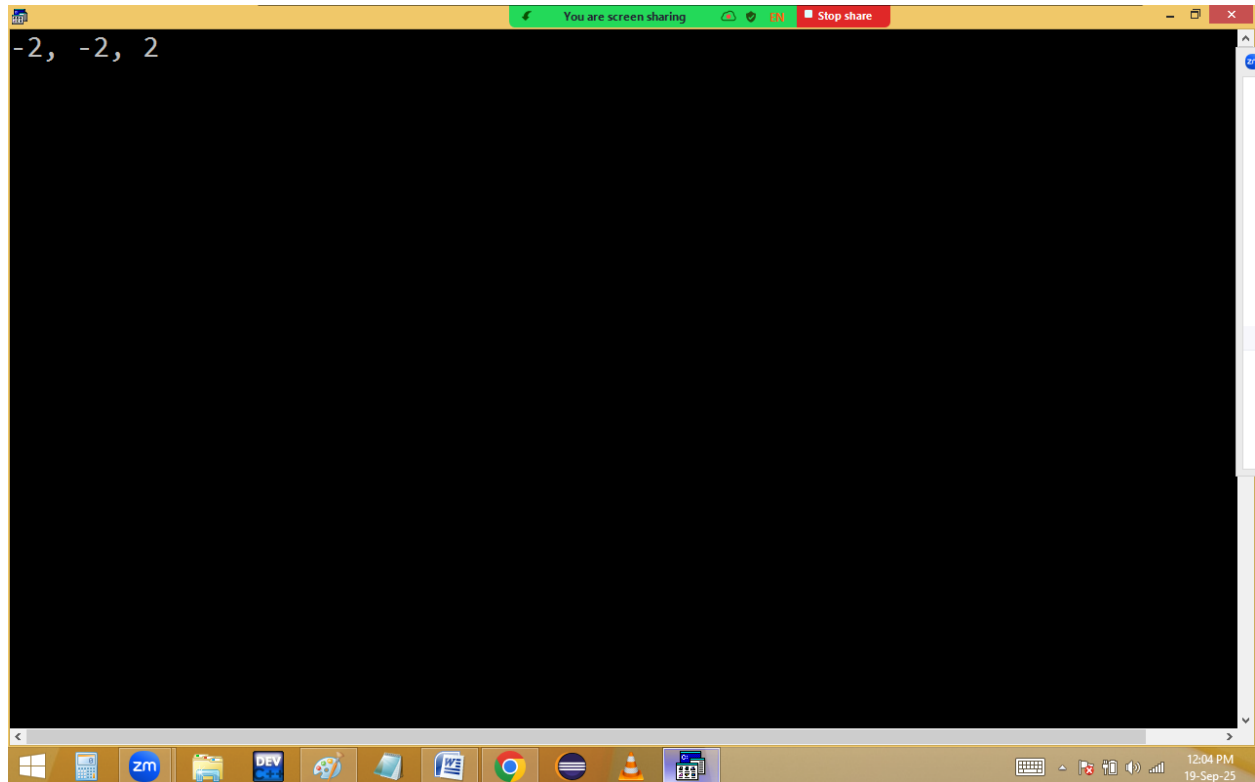

```
-2, -2, 2
```


**Print a 3 digit no in reverse order without using loop?**

Eg: 123 reverse is 321

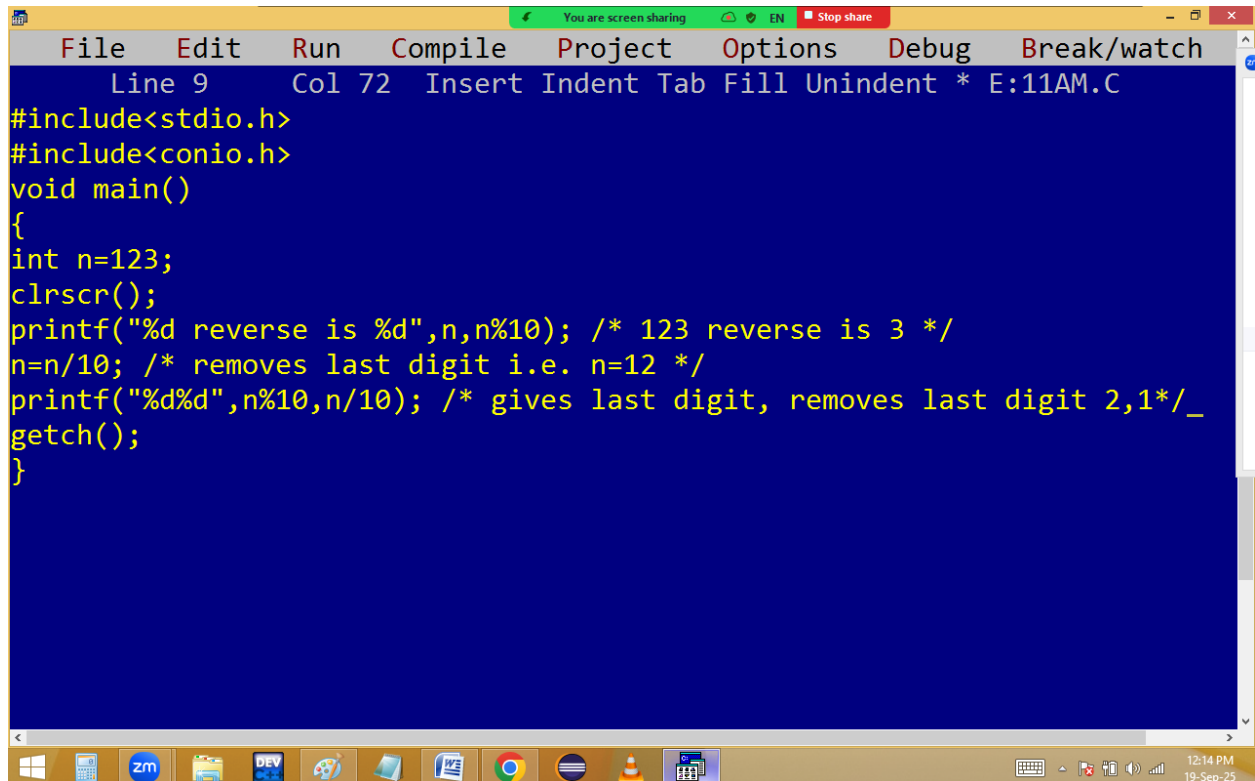A screenshot of a code editor window with a blue background and yellow text. The window has a menu bar with 'File', 'Edit', 'Run', 'Compile', 'Project', 'Options', 'Debug', and 'Break/watch'. Below the menu bar, it shows 'Line 9', 'Col 72', and 'Insert Indent Tab Fill Unindent \* E:11AM.C'. The code is a C program that prints the reverse of the number 123 without using a loop. It uses integer division and modulo operations. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n=123;
clrscr();
printf("%d reverse is %d",n,n%10); /* 123 reverse is 3 */
n=n/10; /* removes last digit i.e. n=12 */
printf("%d%d",n%10,n/10); /* gives last digit, removes last digit 2,1 */
getch();
}
```

The taskbar at the bottom shows various icons including Windows, ZM, DEV, and a clock showing 12:14 PM on 19-Sep-25.

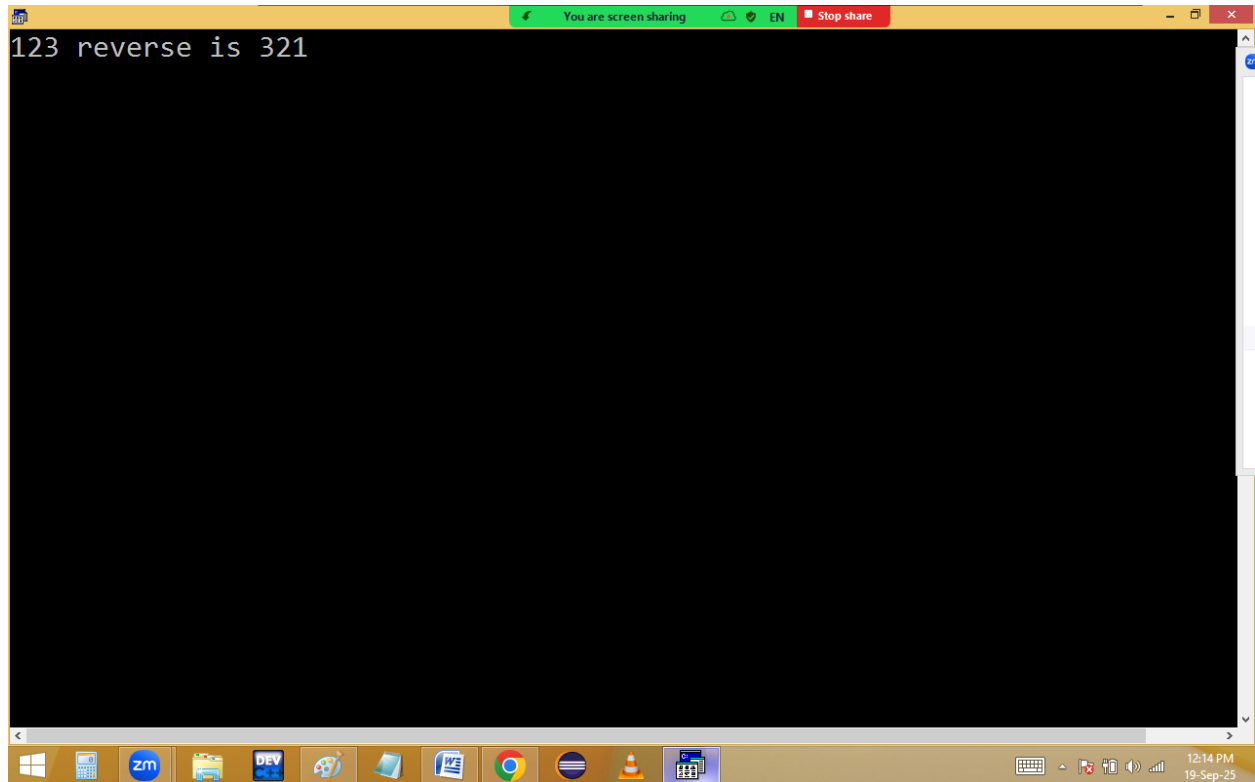


$$123 \% 10 = 3 \checkmark$$

$$123 / 10 = 12$$

$$12 \% 10 = 2 \checkmark$$

$$12 / 10 = 1 \checkmark$$

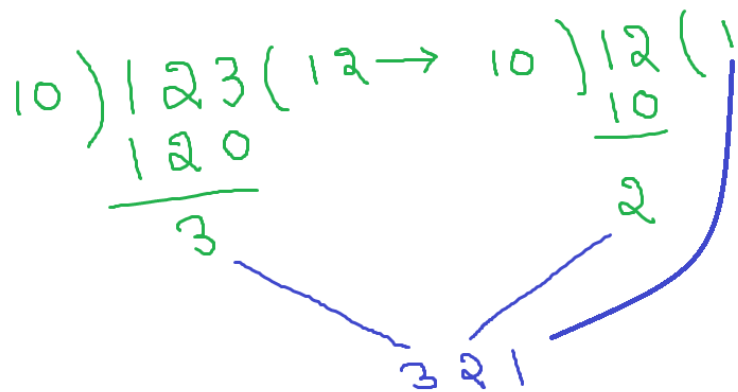

**Note: Any  $\text{no} \% 10$  gives last digit**  
**Any  $\text{no} / 10$  removes last digit**

**Relational operators [ == ( comparison), <, >, <=, >=, != (not equal) ]:**

They are used to check the given condition or expression is true or false. In C language if condition true always it return 1 and condition false it return 0.

You are screen sharing Stop share

File Edit Run Compile Project Options Debug Break/watch

Line 15 Col 24 Insert Indent Tab Fill Unindent \* E:11AM.C

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d\n",2==2);
printf("%d\n",2==3);
printf("%d\n",2.0==2.0);
printf("%d\n",10.0==10);
printf("%d\n",'a'>'B'); /* 97 > 66 */
printf("%d\n",'a'-32<='A'); /* 97-32=65==65 */
printf("%d\n",'a'!=97);
printf("%d\n",'a'!='b');
printf("%d\n",1.5!=1.50);
getch();
}
```

12:36 PM 19-Sep-25

You are screen sharing Stop share

```
1
0
1
1
1
1
0
1
0
```

12:36 PM 19-Sep-25





You are screen sharing Stop share

File Edit Run Compile Project Options Debug Break/watch

Line 3 Col 19 Insert Indent Tab Fill Unindent \* E:11AM.C

```
#include<stdio.h>
#include<conio.h>
#include<string.h>_
void main()
{
clrscr();
printf("%d\n", "ab"=="ab");
printf("%d", strcmp("ab", "ab")==0);
getch();
}
```

12:47 PM 19-Sep-25

You are screen sharing Stop share

```
0
1
```

12:47 PM 19-Sep-25

<https://t.ly/JAVA-53>

\*DotNet-38\*

<https://t.ly/DotNet-38>