



LIBXAAC Encoder

Getting Started Guide

| | |
|-----------------------------|-------------------|
| Document Number | LIBXAAC-Enc-GSG |
| Version | 1.0 |
| Date | September 2, 2025 |
| Ittiam Systems Confidential | |

Ittiam Systems (P) Ltd,
The Consulate, 1 Richmond Road,
Bangalore 560 025, India

Notice

Ittiam Systems reserves the right to make changes to its products or discontinue any of its products or offerings without notice.

Ittiam warrants the performance of its products to the specifications applicable at the time of sale in accordance with Ittiam's standard warranty.

Revision History

| Version | Date | Changes |
|---------|-------------------|----------|
| 1.0 | September 2, 2025 | Original |

Copyright © 2023, Ittiam Systems (P) Ltd

Contents

| | | |
|-----|--------------------------------------|---|
| 1. | Introduction | 1 |
| 1.1 | Motivation | 1 |
| 1.2 | Scope | 3 |
| 1.3 | Glossary | 4 |
| 2. | Running the Sample Application | 5 |
| 2.1 | Parameter file | 5 |
| 2.2 | Configurable Parameters | 6 |
| 3. | Test Procedure | 9 |
| 3.1 | Testing the Encoder | 9 |

Tables

| | |
|---|---|
| Table 2-1 Parameter file commands | 5 |
| Table 2-2 Bitstream header formats supported | 6 |
| Table 2-3 List of Configurable Parameters | 8 |

Figures

Figure 1-1: Block Diagram of libxaac 1

1. Introduction

1.1 Motivation

Extended HE-AAC, the latest innovation member of the MPEG AAC codec family, is ideally suited for adaptive bit rate streaming and digital radio applications. Extended HE-AAC bridges the gap between speech and audio coding and ensures consistent high-quality audio for all signal types, including speech, music, and mixed material. It is the required audio codec for DRM (Digital Radio Mondiale). When it comes to coding, the codec is incredibly effective, generating high-quality audio for music and speech at bitrates as low as 6 kbit/s for mono and 12 kbit/s for stereo services. By switching to extremely low bitrate streams, Extended HE-AAC streaming apps and streaming radio players can provide uninterrupted playback even during very congested network conditions.

As the Extended High Efficiency AAC Profile is a logical evolution of the MPEG Audio's popular AAC Family profiles, the codec supports AAC-LC, HE-AACv1 (AAC+) and HE-AACv2 (eAAC+) audio object type encoding. The bitrate that was saved with AAC family tools can be used to enhance video quality. Extended HE-AAC is a well-liked option for a number of applications since it is a strong and effective audio codec that provides high-quality audio at low bitrates.

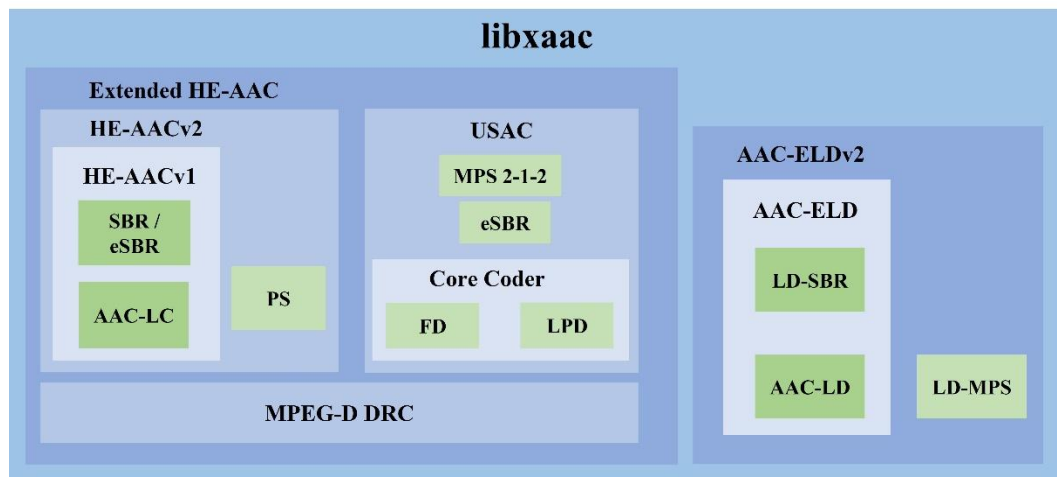


Figure 1-1: Block Diagram of libxaac

One of the key features of libxaac encoder (refer to above image) is that it has support for AAC-LD (Low Delay), AAC-ELD (Enhanced Low Delay), and AAC-ELDv2 (Enhanced

Low Delay version 2) modes. AAC-LD mode provides low latency encoding, making it suitable for applications such as interactive communication and live audio streaming. It helps to reduce the delay in the encoding process to improve the real-time performance of the system. AAC-ELD mode improves the low-delay performance of HE-AAC by reducing the coding delay while maintaining high audio quality. It was observed that minimum delay it can achieve is 15ms. In order to achieve low delay coding scheme and low bitrate, it uses the Low Delay SBR tool. AAC-ELDv2 is the most advanced version of AAC-based low delay coding. It provides an enhanced version of AAC-ELD, which provides even lower coding delay and higher audio quality.

MPEG-D USAC, also known as Unified Speech and Audio Coding, is designed to provide high-quality audio coding at low bit rates. MPEG-D USAC combines advanced audio coding techniques with state-of-the-art speech coding algorithms to achieve significant compression gains while maintaining perceptual audio quality. The standard supports a wide range of audio content, including music, speech, and mixed audio, making it versatile for different use cases. With its ability to deliver high-fidelity audio at reduced bit rates, MPEG-D USAC plays a crucial role in optimizing bandwidth usage and enhancing the user experience in the digital audio domain.

Overall, libxaac encoder, with support for AAC-LD, AAC-ELD, and AAC-ELDv2 modes, is a versatile audio coding technology that can be used for a wide range of applications, such as broadcasting, streaming, and teleconferencing which requires high-quality audio compression with minimal delay.

Also, the libxaac supports MPEG-D DRC (Dynamic Range Control) for the Extended HE-AAC profile in both encoder and decoder. MPEG-D DRC offers a bitrate efficient representation of dynamically compressed versions of an audio signal. This is achieved by adding a low-bitrate DRC metadata stream to the audio signal. DRC includes dedicated sections for metadata-based loudness leveling, clipping prevention, ducking, and for generating a fade-in and fade-out to supplement the main dynamic range compression functionality. The DRC effects available at the DRC decoder are generated at the DRC encoder side. At the DRC decoder side, the audio signal may be played back without applying DRC, or an appropriate DRC effect is selected and applied based on the given playback scenario. It offers flexible solutions to efficiently support the widespread demand for technologies such as loudness normalization and dynamic range compression for various playback scenarios.

Note:

- The operating points for MPEG-D USAC (along with MPEG-D DRC) in libxaac encoder is currently restricted to 64 kbps and 96 kbps. It is recommended to use the encoder at these operating points only. The support shall be extended to other operating points soon.
- Further Quality enhancements for AAC-ELD and AAC-ELDv2 modes may be pushed as quality assessment is in progress.

This document describes the **Application Program Interface** for the libxaac encoder. It also addresses the knowledge requirements of developers to integrate different components of their system with libxaac encoder software solution.

1.2 Scope

This document will provide information to developers in terms of the following:

- Running the sample Application (**Chapter 2**)
 - This chapter gives a complete overview of the procedure to run the sample application provided.
- Testing the encoder (**Chapter 3**)
 - This chapter describes the tools for validation.

1.3 Glossary

| Term | Explanation |
|--------|---------------------------------------|
| AAC | Advanced Audio Coding |
| ADTS | Audio Data Transport Stream |
| MPEG | Motion Pictures Expert Group |
| HE-AAC | High Efficiency Advanced Audio Coding |
| LC | Low Complexity |
| LD | Low Delay |
| ELD | Enhanced Low Delay |
| MPS | MPEG Surround |

2. Running the Sample Application

2.1 Parameter file

The application reads testvector names from the parameter file `paramfilesimple.txt` in `test\encoder`.

The syntax for writing `paramfilesimple.txt` file is:

```
@Input_path <input folder path>
@Output_path <output folder path>
@Start
<command line 1>
<command line 2>
....
@Stop
```

| Command | Explanation |
|------------------|---|
| @Start | All commands following this command will be executed |
| @Stop | All commands until this command will be executed |
| @Input_path | Path specified in this command will be appended to the path and the input file name specified by all -ifile: commands until the next occurrence of this command. |
| @Output_path | Path specified in this command will be appended to the path and the output file name specified by all -ofile: commands until the next occurrence of this command. |
| <command line 1> | For the complete list of configurable parameters, please refer to the table below. |

Table 2-1 Parameter file commands

A sample syntax for the command line is as follows:

```
-ifile:<input_wav_file> -ofile:<output_aac_file> -br:<bit_rate>
-esbr:< 0/1 (eSBR enable/disable) > -aot:<2 (AAC-LC)/23 (AAC-LD)/39 (AAC-ELD) /5 (HE-AACv1)/29 (HE-AACv2)/42 (USAC) > -
adts:<0/1 (ADTS header enable/disable) >
```

Note that the switch `-adts` along with `-aot` determine the format of the encoded bitstream (as shown in Table 2-2) and are not mandatory to be specified.

| -adts | -aot: 2 / 5 / 29 | -aot: 23 / 39 / 42 OR -usac: 1 / 2 |
|-------|-------------------------|---------------------------------------|
| 0 | Raw (.es) + Meta (.txt) | Raw (.es) + Meta (.txt) |
| 1 | ADTS (.aac) | Raw (.es) + Meta (.txt) |

Table 2-2 Bitstream header formats supported

A few examples are shown below:

-ifile:HarryPotter.wav -ofile:HarryPotter_128.es -br:128000 -aot:23 -adts:0 → This generates an AAC-LD stream in **Raw(.es) + Meta(.txt)** format

-ifile:HarryPotter.wav -ofile:HarryPotter_64.aac -br:64000 -aot:5 -adts:1 → This generates HE-AACv1 stream in **ADTS** format

-ifile:HarryPotter.wav -ofile:HarryPotter_64.es -br:64000 -aot:42 -adts:0 → This generates USAC stream in **Raw(.es) + Meta(.txt)** format

-ifile:HarryPotter.wav -ofile:HarryPotter_64.es -br:64000 -aot:42 -rap:1500 → This generates USAC stream with rap interval of 1500 milliseconds.

2.2 Configurable Parameters

The complete list of parameters specified through the command line that can be used with the encoder is listed below. For the valid range of each parameter, please refer to the API Document.

| Parameter | Explanation |
|-----------------------------------|---|
| SPECIFY INPUT/OUTPUT FILES | |
| -ifile: | Provide the name and path for the input file to the encoder |
| -ofile: | Provide the name and path for the output file of the encoder |
| ENCODING OPTIONS | |
| -br: | Provide bit rate to be used for encoding in bps (bits per second). Default is 48000. |
| -aot: | Flag to set encoding profile. The valid values for this option are 2, 5, 23, 29 and 39. Set to 2 (AAC-LC) by default. <ol style="list-style-type: none"> 1. -aot:2 - AAC-LC encoding profile (Default value) 2. -aot:5 - HE-AACv1 (Legacy SBR) encoding |

| | |
|--------------------------------------|--|
| | <p>profile</p> <ol style="list-style-type: none"> 3. <code>-aot:23</code> – AAC-LD encoding profile 4. <code>-aot:29</code> – HE-AACv2 encoding profile 5. <code>-aot:39</code> – AAC-ELD encoding profile 6. <code>-aot:42</code> – USAC encoding profile |
| <code>-esbr:</code> | <p>Flag to enable eSBR for HE-AACv1 encoding profile. The valid values for this option are 0 or 1:</p> <ol style="list-style-type: none"> 1. <code>-esbr:1</code> – Use eSBR 2. <code>-esbr:0</code> – Use legacy SBR (Default value) |
| <code>-mps:</code> | <p>Flag to enable MPS encoding when AOT is set to AAC-ELDv2. The valid values for this option are 0 or 1:</p> <ol style="list-style-type: none"> 1. <code>-mps:1</code> – Use MPS encoding 2. <code>-mps:0</code> – Skip MPS encoding (Default value) |
| <code>-usac:</code> | <p>Flag to enable USAC mode of encoding. The valid values for this option are 0 for <code>usac_switched</code> (switched mode encoding), 1 for <code>usac_fd</code> (frequency domain encoding) and 2 for <code>usac_td</code> (time domain encoding). Default is 1.</p> |
| <code>-cmpx_pred:</code> | <p>Flag to enable complex prediction. The valid values for this option are 0 or 1. Default is 0. This flag is valid for USAC profile only.</p> |
| <code>-tns:</code> | <p>Flag to enable temporal noise shaping. The valid values for this option are 0 or 1. Default value is 1.</p> |
| <code>-nf:</code> | <p>Flag to enable noise filling. The valid values for this option are 0 or 1. Default is 0. This flag is valid for USAC profile only.</p> |
| <code>-adts:</code> | <p>Flag to enable ADTS header. The valid values for this option are 0 and 1 when <code>-aot</code> option is set to 2 or 5 or 29. Default is 0.</p> |
| <code>-full_bandwidth:</code> | <p>Enable use of full bandwidth of input. The valid values for this option are 0 and 1. Default is 0.</p> |
| <code>-max_out_buffer_per_ch:</code> | <p>Bitreservoir size. The valid values for this option are between -1 and 6144. -1 to omit use of bit reservoir. Default value is 384.</p> |
| <code>-ccfl_idx:</code> | <p>Flag to indicate core coder frame length and eSBR ratio. The valid values for this option are 0, 1, 2, 3 and 4.</p> <ol style="list-style-type: none"> 1. <code>-ccfl_idx:0</code> - Core coder frame length of USAC is 768 and eSBR is disabled. 2. <code>-ccfl_idx:1</code> - Core coder frame length of USAC is 1024 and eSBR is disabled. 3. <code>-ccfl_idx:2</code> - Core coder frame length of USAC is 768 and eSBR ratio is 8:3. 4. <code>-ccfl_idx:3</code> - Core coder frame length of USAC is 1024 and eSBR ratio is 2:1. 5. <code>-ccfl_idx:4</code> - Core coder frame length of USAC is 1024 and eSBR ratio is 4:1. <p>Default is 3. This flag is valid for USAC profile only.</p> |

| | |
|----------------------------|---|
| -pvc_enc: | Flag to enable PVC Encoder. The valid values for this option are 0 or 1. Default is 0. This flag is valid for USAC profile only. |
| -drc: | Flag to enable DRC Encoder. The valid values for this option are 0 or 1. Default is 0. This flag is valid for USAC profile only. |
| -inter_tes_enc: | Flag to enable inter-TES Encoder. The valid values for this option are 0 or 1. Default is 0. This flag is valid for USAC profile only. |
| -harmonic_sbr: | Flag to enable Harmonic SBR for USAC profile. The valid values for this option are 0 or 1. Default is 0. This flag is valid for USAC profile only. |
| -esbr_hq: | Flag to enable high quality eSBR for USAC profile. The valid values for this option are 0 or 1. Note that this flag is valid only when Harmonic SBR flag is enabled. Default is 0. This flag is valid for USAC profile only. |
| -tree_cfg: | Flag to denote tree configuration for MPS. The valid values for this option are <ol style="list-style-type: none"> 1. -tree_cfg:0 for 212 configuration 2. -tree_cfg:1 for 5151 configuration 3. -tree_cfg:2 for 5152 configuration 4. -tree_cfg:3 for 525 configuration. Default value is 0 for stereo input and 1 for 6-channel input |
| -framesize: | Flag to denote frame-size (in samples) used by the core coder for AAC-LC / HE-AACv1 / HE-AACv2 / AAC-LD / AAC-ELD / AAC-ELDv2 / USAC profiles. The valid values for this option are 960 or 1024 for AAC-LC / HE-AACv1 / HE-AACv2, 480 or 512 for AAC-LD / AAC-ELD / AAC-ELDv2 and 768 or 1024 for USAC profile. Default value is 1024 for AAC-LC / HE-AACv1 / HE-AACv2, 512 for AAC-LD / AAC-ELD / AAC-ELDv2 and 1024 for USAC. |
| -rap: | It is the time interval between audio preroll frames in ms. It is applicable only for AOT 42. Valid values are -1 (Audio preroll sent only at beginning of file) and greater than 1000 ms. Default is -1. |
| -stream_id: | It is the stream id used to uniquely identify configuration of a stream within a set of associated streams. It is applicable only for AOT 42. Valid values are 0 to 65535. Any value outside this range is type-casted to a value of unsigned short type. Default is 0. |
| -delay_adjust: | Flag to indicate whether to discard algorithmic delay in the decoded file. Valid values are 0 and 1. Default is 1. |
| OUTPUT FILE FORMATS | |
| | Note: <ol style="list-style-type: none"> 1. By default, .es format is used |

Table 2-3 List of Configurable Parameters

3. Test Procedure

This chapter describes the procedure for testing quality of libxaac encoder.

3.1 Testing the Encoder

libxaac decoder is used for validating the encoded bitstream and decoding. The input and output filenames need to be changed appropriately.

The usage of the decoder is described below:

1. Decode the encoder generated file(s) encoded in ADTS format using the libxaac decoder using the following command line:

```
xaacdec.exe -ifile:<adts_input_file>.aac -  
ofile:<adts_output_file>.wav
```

2. Decode the encoder generated file(s) encoded in raw format using the libxaac decoder using the following command line:

```
xaacdec.exe -ifile:<raw_input>.es -ofile:<output>.wav  
-imeta:<meta_input>.txt -mp4:1
```