

# Sequencer64 Developer/Tester's Reference Manual

## 0.9.9.13

Generated by Doxygen 1.8.9.1

Sat Jan 16 2016 15:47:28



# Contents

<b>1</b>	<b>Sequencer64</b>	<b>1</b>
1.1	Introduction . . . . .	1
<b>2</b>	<b>MIDI File Parsing in Sequencer64</b>	<b>3</b>
2.1	Introduction . . . . .	3
2.2	SMF 1 Parsing . . . . .	3
2.2.1	MIDI File Header, MThd . . . . .	3
2.2.2	MIDI Track, MTrk . . . . .	4
2.2.2.1	Channel Events . . . . .	4
2.2.2.2	Meta Events . . . . .	5
2.2.3	Meta Events . . . . .	6
2.2.3.1	Sequence Number (0x00) . . . . .	6
2.2.3.2	Track/Sequence Name (0x03) . . . . .	7
2.2.3.3	End of Track (0x2F) . . . . .	7
2.2.3.4	Set Tempo Event (0x51) . . . . .	7
2.2.3.5	Time Signature Event (0x58) . . . . .	7
2.2.3.6	SysEx Event (0xF0) . . . . .	8
2.2.3.7	Sequencer Specific (0x7F) . . . . .	8
2.2.3.8	Non-Specific End of Sequence . . . . .	9
2.3	SMF 0 Parsing . . . . .	9
<b>3</b>	<b>JACK, Live, and Song Modes in Sequencer64</b>	<b>11</b>
3.1	Introduction . . . . .	11
3.2	JACK Functions . . . . .	11
3.2.1	jack_client_open() . . . . .	12
3.2.2	jack_on_shutdown() . . . . .	12
3.2.3	jack_set_sync_callback() . . . . .	12
3.2.4	jack_set_process_callback() . . . . .	12
3.2.5	jack_set_session_callback() . . . . .	12
3.2.6	jack_activate() . . . . .	12
3.2.7	jack_release_timebase() . . . . .	12
3.2.8	jack_client_close() . . . . .	12

3.2.9	jack_transport_start()	13
3.2.10	jack_transport_stop()	13
3.2.11	jack_transport_locate()	13
3.2.12	jack_transport_reposition()	13
3.3	Modes Operation	13
3.3.1	No JACK, Live Mode	13
3.3.2	No JACK, Song Mode	13
3.3.3	JACK Transport	14
3.4	Breakage	14
3.5	JACK References	15
<b>4</b>	<b>User Testing of Sequencer64 with Yoshimi</b>	<b>17</b>
4.1	Introduction	17
4.2	Smoke Test	17
4.3	Tests in the Patterns Window	18
4.3.1	Button Clicks on a Pattern	18
4.3.2	Patterns Window Key Shortcuts	19
4.3.3	The Sequencer64 User File	19
4.4	Tests Using Valgrind	19
4.4.1	Valgrind Suppressions	19
4.4.2	Full Valgrind Leak-Checking	20
4.4.2.1	Leak-Checking Basic Operation	20
4.5	Specific Fault Debugging	20
4.6	Snipping of a MIDI file.	20
<b>5</b>	<b>Licenses</b>	<b>23</b>
5.1	License Terms for the This Project.	23
5.2	XPC Application License	23
5.3	XPC Library License	24
5.4	XPC Documentation License	24
5.5	XPC Affero License	24
5.6	XPC License Summary	25
<b>6</b>	<b>Todo List</b>	<b>27</b>
<b>7</b>	<b>Deprecated List</b>	<b>29</b>
<b>8</b>	<b>Hierarchical Index</b>	<b>31</b>
8.1	Class Hierarchy	31
<b>9</b>	<b>Data Structure Index</b>	<b>33</b>
9.1	Data Structures	33

<b>10 Data Structure Documentation</b>	<b>37</b>
10.1 seq64::AbstractPerfInput Class Reference	37
10.2 seq64::automutex Class Reference	37
10.2.1 Detailed Description	38
10.3 seq64::click Class Reference	38
10.3.1 Detailed Description	39
10.3.2 Constructor & Destructor Documentation	39
10.3.2.1 click	39
10.3.2.2 click	39
10.3.2.3 click	39
10.3.3 Member Function Documentation	40
10.3.3.1 operator=	40
10.3.4 Field Documentation	40
10.3.4.1 m_x	40
10.3.4.2 m_y	40
10.3.4.3 m_button	40
10.3.4.4 m_modifier	40
10.4 seq64::condition_var Class Reference	40
10.4.1 Detailed Description	41
10.4.2 Field Documentation	42
10.4.2.1 cond	42
10.5 seq64::configfile Class Reference	42
10.5.1 Constructor & Destructor Documentation	43
10.5.1.1 configfile	43
10.5.2 Member Function Documentation	43
10.5.2.1 next_data_line	43
10.5.2.2 line_after	43
10.5.3 Field Documentation	43
10.5.3.1 m_line	43
10.6 seq64::editable_event Class Reference	43
10.6.1 Detailed Description	47
10.6.2 Member Enumeration Documentation	47
10.6.2.1 category_t	47
10.6.2.2 timestamp_format_t	47
10.6.3 Constructor & Destructor Documentation	48
10.6.3.1 editable_event	48
10.6.3.2 editable_event	48
10.6.3.3 editable_event	48
10.6.4 Member Function Documentation	48
10.6.4.1 value_to_name	48

10.6.4.2	<a href="#">name_to_value</a>	48
10.6.4.3	<a href="#">category</a>	49
10.6.4.4	<a href="#">category</a>	49
10.6.4.5	<a href="#">timestamp</a>	49
10.6.4.6	<a href="#">timestamp</a>	49
10.6.4.7	<a href="#">time_as_measures</a>	49
10.6.4.8	<a href="#">time_as_minutes</a>	50
10.6.4.9	<a href="#">set_status_from_string</a>	50
10.6.4.10	<a href="#">format_timestamp</a>	50
10.6.4.11	<a href="#">stock_event_string</a>	50
10.6.4.12	<a href="#">analyze</a>	50
10.6.5	<a href="#">Field Documentation</a>	50
10.6.5.1	<a href="#">sm_category_names</a>	50
10.6.5.2	<a href="#">sm_channel_event_names</a>	51
10.6.5.3	<a href="#">sm_system_event_names</a>	51
10.6.5.4	<a href="#">sm_meta_event_names</a>	51
10.6.5.5	<a href="#">sm_prop_event_names</a>	51
10.6.5.6	<a href="#">sm_category_arrays</a>	51
10.6.5.7	<a href="#">m_parent</a>	51
10.6.5.8	<a href="#">m_category</a>	51
10.6.5.9	<a href="#">m_format_timestamp</a>	51
10.6.5.10	<a href="#">m_name_status</a>	51
10.6.5.11	<a href="#">m_name_meta</a>	52
10.7	<a href="#">seq64::editable_events Class Reference</a>	52
10.7.1	<a href="#">Member Typedef Documentation</a>	53
10.7.1.1	<a href="#">Key</a>	53
10.7.2	<a href="#">Constructor &amp; Destructor Documentation</a>	53
10.7.2.1	<a href="#">editable_events</a>	53
10.7.2.2	<a href="#">editable_events</a>	53
10.7.3	<a href="#">Member Function Documentation</a>	53
10.7.3.1	<a href="#">operator=</a>	53
10.7.3.2	<a href="#">load_events</a>	54
10.7.3.3	<a href="#">save_events</a>	54
10.7.3.4	<a href="#">count</a>	54
10.7.3.5	<a href="#">add</a>	54
10.7.3.6	<a href="#">add</a>	54
10.7.4	<a href="#">Field Documentation</a>	55
10.7.4.1	<a href="#">m_current_event</a>	55
10.7.4.2	<a href="#">m_sequence</a>	55
10.7.4.3	<a href="#">m_midi_parameters</a>	55

10.8 seq64::event Class Reference	55
10.8.1 Detailed Description	59
10.8.2 Constructor & Destructor Documentation	60
10.8.2.1 event	60
10.8.2.2 ~event	60
10.8.3 Member Function Documentation	60
10.8.3.1 operator=	60
10.8.3.2 operator<	60
10.8.3.3 check_channel	61
10.8.3.4 is_channel_msg	61
10.8.3.5 is_one_byte_msg	61
10.8.3.6 is_two_byte_msg	61
10.8.3.7 is_note_msg	62
10.8.3.8 is_desired_cc_or_not_cc	63
10.8.3.9 mod_timestamp	63
10.8.3.10 set_status	63
10.8.3.11 set_status	64
10.8.3.12 set_channel	64
10.8.3.13 set_data	64
10.8.3.14 set_data	64
10.8.3.15 get_data	64
10.8.3.16 append_sysex	64
10.8.3.17 get_rank	65
10.8.4 Field Documentation	65
10.8.4.1 m_status	65
10.8.4.2 m_channel	65
10.8.4.3 m_data	65
10.8.4.4 m_sysex	65
10.8.4.5 m_has_link	65
10.9 seq64::event_list::event_key Class Reference	65
10.9.1 Detailed Description	66
10.9.2 Constructor & Destructor Documentation	66
10.9.2.1 event_key	66
10.9.2.2 event_key	66
10.9.3 Member Function Documentation	66
10.9.3.1 operator<	66
10.9.4 Field Documentation	66
10.9.4.1 m_timestamp	66
10.9.4.2 m_rank	67
10.10 seq64::event_list Class Reference	67

10.10.1 Detailed Description . . . . .	69
10.10.2 Constructor & Destructor Documentation . . . . .	69
10.10.2.1 event_list . . . . .	69
10.10.3 Member Function Documentation . . . . .	69
10.10.3.1 operator= . . . . .	69
10.10.3.2 count . . . . .	69
10.10.3.3 add . . . . .	69
10.10.3.4 unmodify . . . . .	69
10.10.3.5 remove . . . . .	70
10.10.3.6 clear . . . . .	70
10.10.3.7 merge . . . . .	70
10.10.3.8 link_new . . . . .	70
10.10.3.9 verify_and_link . . . . .	70
10.10.3.10 mark_out_of_range . . . . .	70
10.10.3.11 mark_all . . . . .	71
10.10.3.12 any_selected_notes . . . . .	71
10.10.3.13 count_selected_events . . . . .	71
10.10.4 Field Documentation . . . . .	71
10.10.4.1 m_is_modified . . . . .	71
10.11 seq64::eventedit Class Reference . . . . .	71
10.11.1 Constructor & Destructor Documentation . . . . .	74
10.11.1.1 eventedit . . . . .	74
10.11.1.2 ~eventedit . . . . .	75
10.11.2 Member Function Documentation . . . . .	75
10.11.2.1 enqueue_draw . . . . .	75
10.11.2.2 set_seq_title . . . . .	75
10.11.2.3 set_seq_time_sig . . . . .	75
10.11.2.4 set_seq_ppqn . . . . .	75
10.11.2.5 set_seq_count . . . . .	76
10.11.2.6 set_event_category . . . . .	76
10.11.2.7 set_event_timestamp . . . . .	76
10.11.2.8 set_event_name . . . . .	76
10.11.2.9 set_event_data_0 . . . . .	76
10.11.2.10 set_event_data_1 . . . . .	76
10.11.2.11 set_dirty . . . . .	76
10.11.2.12 v_adjustment . . . . .	77
10.11.2.13 v_adjustment . . . . .	78
10.11.2.14 timeout . . . . .	78
10.11.2.15 handle_insert . . . . .	78
10.11.2.16 handle_modify . . . . .	78



10.11.2.17	handle_save	78
10.11.2.18	on_key_press_event	78
10.11.2.19	on_delete_event	79
10.11.3	Field Documentation	79
10.11.3.1	m_redraw_ms	79
10.12	seq64::eventslots Class Reference	79
10.12.1	Member Function Documentation	84
10.12.1.1	load_events	84
10.12.1.2	set_current_event	84
10.12.1.3	insert_event	84
10.12.1.4	insert_event	85
10.12.1.5	delete_current_event	85
10.12.1.6	modify_current_event	86
10.12.1.7	save_events	86
10.12.1.8	select_event	86
10.12.1.9	set_text	87
10.12.1.10	convert_y	87
10.12.1.11	draw_event	87
10.12.1.12	draw_events	88
10.12.1.13	change_vert	88
10.12.1.14	page_movement	88
10.12.1.15	page_topper	88
10.12.1.16	decrement_top	88
10.12.1.17	increment_top	88
10.12.1.18	decrement_current	89
10.12.1.19	increment_current	89
10.12.1.20	decrement_bottom	89
10.12.1.21	increment_bottom	89
10.12.1.22	on_realize	89
10.12.1.23	on_expose_event	89
10.12.1.24	on_focus_in_event	89
10.12.1.25	on_size_allocate	89
10.12.1.26	on_move_up	90
10.12.1.27	on_move_down	90
10.12.2	Field Documentation	90
10.12.2.1	m_slots_chars	90
10.12.2.2	m_char_w	90
10.12.2.3	m_setbox_w	90
10.12.2.4	m_slots_y	90
10.12.2.5	m_xy_offset	90

10.12.2.6 m_top_index . . . . .	90
10.12.2.7 m_current_index . . . . .	90
10.13seq64::font Class Reference . . . . .	90
10.13.1 Member Enumeration Documentation . . . . .	92
10.13.1.1 Color . . . . .	92
10.13.2 Member Function Documentation . . . . .	92
10.13.2.1 init . . . . .	92
10.13.2.2 render_string_on_drawable . . . . .	92
10.13.3 Field Documentation . . . . .	93
10.13.3.1 m_font_w . . . . .	93
10.13.3.2 m_font_h . . . . .	93
10.13.3.3 m_pixmap . . . . .	93
10.13.3.4 m_black_pixmap . . . . .	93
10.13.3.5 m_white_pixmap . . . . .	93
10.13.3.6 m_b_on_y_pixmap . . . . .	93
10.13.3.7 m_y_on_b_pixmap . . . . .	93
10.13.3.8 m_b_on_c_pixmap . . . . .	93
10.13.3.9 m_c_on_b_pixmap . . . . .	93
10.13.3.10m_clip_mask . . . . .	93
10.14seq64::gui_assistant Class Reference . . . . .	94
10.14.1 Detailed Description . . . . .	94
10.14.2 Constructor & Destructor Documentation . . . . .	95
10.14.2.1 gui_assistant . . . . .	95
10.15seq64::gui_assistant_gtk2 Class Reference . . . . .	95
10.15.1 Member Function Documentation . . . . .	96
10.15.1.1 lash_timeout_connect . . . . .	96
10.15.2 Field Documentation . . . . .	96
10.15.2.1 sm_internal_keys . . . . .	96
10.16seq64::gui_drawingarea_gtk2 Class Reference . . . . .	96
10.16.1 Detailed Description . . . . .	99
10.16.2 Member Function Documentation . . . . .	99
10.16.2.1 clear_window . . . . .	99
10.16.2.2 set_line . . . . .	99
10.16.2.3 draw_line . . . . .	99
10.16.2.4 draw_line . . . . .	99
10.16.2.5 draw_line_on_pixmap . . . . .	99
10.16.2.6 draw_line_on_pixmap . . . . .	100
10.16.2.7 draw_line . . . . .	100
10.16.2.8 draw_line . . . . .	100
10.16.2.9 draw_line . . . . .	100

10.16.2.10	<a href="#">draw_line</a>	101
10.16.2.11	<a href="#">render_string</a>	101
10.16.2.12	<a href="#">render_string_on_pixmap</a>	101
10.16.2.13	<a href="#">draw_rectangle</a>	101
10.16.2.14	<a href="#">draw_rectangle</a>	101
10.16.2.15	<a href="#">draw_rectangle</a>	102
10.16.2.16	<a href="#">draw_rectangle</a>	102
10.16.2.17	<a href="#">draw_rectangle</a>	102
10.16.2.18	<a href="#">draw_rectangle</a>	103
10.16.2.19	<a href="#">draw_rectangle_on_pixmap</a>	103
10.16.2.20	<a href="#">draw_rectangle_on_pixmap</a>	103
10.16.2.21	<a href="#">draw_normal_rectangle_on_pixmap</a>	103
10.16.2.22	<a href="#">on_realize</a>	104
10.16.3	<a href="#">Field Documentation</a>	104
10.16.3.1	<a href="#">m_window</a>	104
10.16.3.2	<a href="#">m_pixmap</a>	104
10.16.3.3	<a href="#">m_background</a>	104
10.16.3.4	<a href="#">m_foreground</a>	104
10.16.3.5	<a href="#">m_mainperf</a>	104
10.16.3.6	<a href="#">m_window_x</a>	104
10.16.3.7	<a href="#">m_drop_x</a>	104
10.17	<a href="#">seq64::gui_palette_gtk2 Class Reference</a>	104
10.17.1	<a href="#">Detailed Description</a>	105
10.17.2	<a href="#">Constructor &amp; Destructor Documentation</a>	105
10.17.2.1	<a href="#">gui_palette_gtk2</a>	105
10.18	<a href="#">seq64::gui_window_gtk2 Class Reference</a>	105
10.18.1	<a href="#">Constructor &amp; Destructor Documentation</a>	107
10.18.1.1	<a href="#">gui_window_gtk2</a>	107
10.18.2	<a href="#">Field Documentation</a>	108
10.18.2.1	<a href="#">m_window_x</a>	108
10.19	<a href="#">seq64::jack_assistant Class Reference</a>	108
10.19.1	<a href="#">Detailed Description</a>	109
10.19.2	<a href="#">Constructor &amp; Destructor Documentation</a>	109
10.19.2.1	<a href="#">jack_assistant</a>	109
10.19.2.2	<a href="#">~jack_assistant</a>	109
10.19.3	<a href="#">Member Function Documentation</a>	109
10.19.3.1	<a href="#">init</a>	109
10.19.3.2	<a href="#">start</a>	110
10.19.3.3	<a href="#">stop</a>	110
10.19.3.4	<a href="#">position</a>	110

10.19.3.5 output . . . . .	110
10.19.3.6 info_message . . . . .	110
10.19.3.7 error_message . . . . .	110
10.19.3.8 client_open . . . . .	111
10.19.4 Friends And Related Function Documentation . . . . .	111
10.19.4.1 jack_shutdown_callback . . . . .	111
10.19.4.2 jack_timebase_callback . . . . .	111
10.19.5 Field Documentation . . . . .	111
10.19.5.1 sm_status_pairs . . . . .	111
10.20seq64::jack_scratchpad Struct Reference . . . . .	112
10.20.1 Detailed Description . . . . .	112
10.21seq64::keybindentry Class Reference . . . . .	112
10.21.1 Member Enumeration Documentation . . . . .	112
10.21.1.1 type . . . . .	113
10.21.2 Constructor & Destructor Documentation . . . . .	113
10.21.2.1 keybindentry . . . . .	113
10.21.3 Member Function Documentation . . . . .	113
10.21.3.1 set . . . . .	113
10.21.3.2 on_key_press_event . . . . .	113
10.21.4 Field Documentation . . . . .	113
10.21.4.1 m_key . . . . .	113
10.22seq64::keys_perform Class Reference . . . . .	113
10.22.1 Detailed Description . . . . .	115
10.22.2 Constructor & Destructor Documentation . . . . .	115
10.22.2.1 ~keys_perform . . . . .	115
10.22.3 Member Function Documentation . . . . .	115
10.22.3.1 set_keys . . . . .	115
10.22.3.2 get_keys . . . . .	116
10.22.3.3 show_ui_sequence_key . . . . .	116
10.22.3.4 show_ui_sequence_number . . . . .	116
10.22.3.5 key_name . . . . .	116
10.22.3.6 set_all_key_events . . . . .	116
10.22.3.7 set_all_key_groups . . . . .	116
10.22.3.8 set_key_event . . . . .	116
10.22.3.9 set_key_group . . . . .	117
10.22.4 Field Documentation . . . . .	117
10.22.4.1 m_key_show_ui_sequence_number . . . . .	117
10.22.4.2 m_key_bpm_up . . . . .	117
10.23seq64::keys_perform_gtk2 Class Reference . . . . .	117
10.23.1 Detailed Description . . . . .	119

10.23.2 Constructor & Destructor Documentation . . . . .	119
10.23.2.1 ~keys_perform_gtk2 . . . . .	119
10.23.3 Member Function Documentation . . . . .	119
10.23.3.1 key_name . . . . .	119
10.23.3.2 set_all_key_events . . . . .	119
10.23.3.3 set_all_key_groups . . . . .	119
10.24seq64::keys_perform_transfer Struct Reference . . . . .	119
10.25seq64::keystroke Class Reference . . . . .	119
10.25.1 Detailed Description . . . . .	120
10.25.2 Constructor & Destructor Documentation . . . . .	120
10.25.2.1 keystroke . . . . .	120
10.25.2.2 keystroke . . . . .	121
10.25.3 Member Function Documentation . . . . .	121
10.25.3.1 operator= . . . . .	121
10.25.3.2 is_letter . . . . .	121
10.25.4 Field Documentation . . . . .	121
10.25.4.1 m_is_press . . . . .	121
10.25.4.2 m_key . . . . .	121
10.25.4.3 m_modifier . . . . .	122
10.26seq64::lash Class Reference . . . . .	122
10.26.1 Detailed Description . . . . .	122
10.26.2 Constructor & Destructor Documentation . . . . .	122
10.26.2.1 lash . . . . .	122
10.26.3 Member Function Documentation . . . . .	123
10.26.3.1 set_alsa_client_id . . . . .	123
10.26.3.2 process_events . . . . .	123
10.26.3.3 init . . . . .	123
10.26.3.4 handle_event . . . . .	123
10.26.3.5 handle_config . . . . .	123
10.27seq64::maintime Class Reference . . . . .	123
10.27.1 Detailed Description . . . . .	125
10.27.2 Constructor & Destructor Documentation . . . . .	125
10.27.2.1 maintime . . . . .	125
10.27.3 Member Function Documentation . . . . .	126
10.27.3.1 idle_progress . . . . .	126
10.27.3.2 on_realize . . . . .	127
10.27.3.3 on_expose_event . . . . .	127
10.27.4 Field Documentation . . . . .	127
10.27.4.1 m_beat_width . . . . .	127
10.27.4.2 m_bar_width . . . . .	127

10.27.4.3 m_box_width . . . . .	127
10.27.4.4 m_box_height . . . . .	127
10.27.4.5 m_flash_width . . . . .	127
10.27.4.6 m_flash_height . . . . .	127
10.27.4.7 m_ppqn . . . . .	127
10.28seq64::mainwid Class Reference . . . . .	128
10.28.1 Constructor & Destructor Documentation . . . . .	130
10.28.1.1 mainwid . . . . .	130
10.28.2 Member Function Documentation . . . . .	130
10.28.2.1 set_screenset . . . . .	130
10.28.2.2 redraw . . . . .	130
10.28.2.3 draw_marker_on_sequence . . . . .	130
10.28.2.4 update_markers . . . . .	130
10.28.2.5 valid_sequence . . . . .	131
10.28.2.6 draw_sequence_on_pixmap . . . . .	131
10.28.2.7 draw_sequences_on_pixmap . . . . .	131
10.28.2.8 draw_sequence_pixmap_on_window . . . . .	131
10.28.2.9 seq_from_xy . . . . .	131
10.28.2.10timeout . . . . .	132
10.28.2.11calculate_base_sizes . . . . .	132
10.28.2.12n_realize . . . . .	132
10.28.2.13n_expose_event . . . . .	132
10.28.2.14n_button_press_event . . . . .	132
10.28.2.15n_button_release_event . . . . .	133
10.28.2.16n_motion_notify_event . . . . .	133
10.28.2.17n_focus_in_event . . . . .	133
10.28.2.18n_focus_out_event . . . . .	133
10.28.3 Field Documentation . . . . .	134
10.28.3.1 m_screenset_slots . . . . .	134
10.28.3.2 m_screenset_offset . . . . .	134
10.29seq64::mainwnd Class Reference . . . . .	134
10.29.1 Constructor & Destructor Documentation . . . . .	138
10.29.1.1 mainwnd . . . . .	138
10.29.2 Member Function Documentation . . . . .	138
10.29.2.1 open_file . . . . .	138
10.29.2.2 ppqn . . . . .	139
10.29.2.3 file_import_dialog . . . . .	139
10.29.2.4 about_dialog . . . . .	139
10.29.2.5 adj_callback_ss . . . . .	139
10.29.2.6 adj_callback_bpm . . . . .	139

10.29.2.7 edit_callback_notepad . . . . .	139
10.29.2.8 timer_callback . . . . .	139
10.29.2.9 start_playing . . . . .	140
10.29.2.10 stop_playing . . . . .	140
10.29.2.11 open_performance_edit . . . . .	140
10.29.2.12 open_performance_edit_2 . . . . .	140
10.29.2.13 update_window_title . . . . .	140
10.29.2.14 new_file . . . . .	140
10.29.2.15 save_file . . . . .	140
10.29.2.16 signal_action . . . . .	140
10.29.2.17 on_delete_event . . . . .	140
10.29.2.18 on_key_press_event . . . . .	141
10.29.2.19 on_key_release_event . . . . .	141
10.29.2.20 on_grouplearnchange . . . . .	141
10.29.3 Field Documentation . . . . .	141
10.29.3.1 m_sigpipe . . . . .	141
10.29.3.2 m_main_wid . . . . .	141
10.29.3.3 m_spinbutton_load_offset . . . . .	141
10.30 seq64::midi_container Class Reference . . . . .	141
10.30.1 Member Function Documentation . . . . .	143
10.30.1.1 fill . . . . .	143
10.30.1.2 put . . . . .	143
10.30.1.3 get . . . . .	144
10.30.1.4 position . . . . .	144
10.30.1.5 add_variable . . . . .	144
10.30.1.6 add_long . . . . .	144
10.31 seq64::midi_list Class Reference . . . . .	144
10.31.1 Member Typedef Documentation . . . . .	146
10.31.1.1 CharList . . . . .	146
10.31.2 Member Function Documentation . . . . .	146
10.31.2.1 put . . . . .	146
10.31.2.2 get . . . . .	146
10.32 seq64::midi_measures Class Reference . . . . .	146
10.32.1 Field Documentation . . . . .	147
10.32.1.1 m_divisions . . . . .	147
10.33 seq64::midi_splitter Class Reference . . . . .	147
10.33.1 Detailed Description . . . . .	148
10.33.2 Constructor & Destructor Documentation . . . . .	148
10.33.2.1 midi_splitter . . . . .	148
10.33.3 Member Function Documentation . . . . .	149

10.33.3.1 increment . . . . .	149
10.33.3.2 split . . . . .	149
10.33.3.3 ppqn . . . . .	149
10.33.3.4 split_channel . . . . .	149
10.33.4 Field Documentation . . . . .	150
10.33.4.1 m_smf0_channels_count . . . . .	150
10.33.4.2 m_smf0_channels . . . . .	150
10.33.4.3 m_smf0_seq_number . . . . .	150
10.34seq64::midi_timing Class Reference . . . . .	150
10.34.1 Detailed Description . . . . .	151
10.34.2 Field Documentation . . . . .	151
10.34.2.1 m_beats_per_minute . . . . .	151
10.34.2.2 m_beats_per_measure . . . . .	151
10.34.2.3 m_beat_width . . . . .	151
10.34.2.4 m_ppqn . . . . .	151
10.35seq64::midi_vector Class Reference . . . . .	151
10.35.1 Member Function Documentation . . . . .	153
10.35.1.1 put . . . . .	153
10.35.1.2 get . . . . .	153
10.36seq64::midibus Class Reference . . . . .	153
10.36.1 Member Function Documentation . . . . .	155
10.36.1.1 init_out . . . . .	155
10.36.1.2 init_in . . . . .	155
10.36.1.3 deinit_in . . . . .	155
10.36.1.4 init_out_sub . . . . .	155
10.36.1.5 init_in_sub . . . . .	156
10.36.1.6 play . . . . .	156
10.36.1.7 sysex . . . . .	156
10.36.1.8 clock . . . . .	156
10.36.1.9 continue_from . . . . .	156
10.36.1.10 init_clock . . . . .	156
10.36.1.11 set_input . . . . .	156
10.37seq64::midifile Class Reference . . . . .	156
10.37.1 Detailed Description . . . . .	159
10.37.2 Constructor & Destructor Documentation . . . . .	159
10.37.2.1 midifile . . . . .	159
10.37.3 Member Function Documentation . . . . .	160
10.37.3.1 parse . . . . .	160
10.37.3.2 write . . . . .	161
10.37.3.3 ppqn . . . . .	162



10.37.3.4 parse_smf_0 . . . . .	162
10.37.3.5 parse_smf_1 . . . . .	162
10.37.3.6 parse_prop_header . . . . .	162
10.37.3.7 parse_proprietary_track . . . . .	163
10.37.3.8 pow2 . . . . .	164
10.37.3.9 read_long . . . . .	164
10.37.3.10 read_varinum . . . . .	164
10.37.3.11 write_long . . . . .	164
10.37.3.12 write_short . . . . .	164
10.37.3.13 read_byte_array . . . . .	164
10.37.3.14 write_byte . . . . .	164
10.37.3.15 write_varinum . . . . .	165
10.37.3.16 write_track_name . . . . .	165
10.37.3.17 read_track_name . . . . .	165
10.37.3.18 write_seq_number . . . . .	165
10.37.3.19 read_seq_number . . . . .	165
10.37.3.20 write_prop_header . . . . .	166
10.37.3.21 write_proprietary_track . . . . .	166
10.37.3.22 varinum_size . . . . .	167
10.37.3.23 prop_item_size . . . . .	167
10.37.3.24 errdump . . . . .	167
10.37.3.25 errdump . . . . .	167
10.37.3.26 s_sysex_special_id . . . . .	168
10.37.4 Field Documentation . . . . .	169
10.37.4.1 m_file_size . . . . .	169
10.37.4.2 m_error_message . . . . .	169
10.37.4.3 m_error_is_fatal . . . . .	169
10.37.4.4 m_disable_reported . . . . .	169
10.37.4.5 m_pos . . . . .	169
10.37.4.6 m_data . . . . .	169
10.37.4.7 m_char_list . . . . .	169
10.37.4.8 m_new_format . . . . .	169
10.37.4.9 m_smf0_splitter . . . . .	170
10.38 seq64::mutex Class Reference . . . . .	170
10.38.1 Field Documentation . . . . .	171
10.38.1.1 sm_recursive_mutex . . . . .	171
10.39 seq64::options Class Reference . . . . .	171
10.39.1 Field Documentation . . . . .	171
10.39.1.1 m_notebook . . . . .	171
10.40 seq64::optionsfile Class Reference . . . . .	171

10.40.1 Detailed Description . . . . .	172
10.40.2 Member Function Documentation . . . . .	172
10.40.2.1 parse . . . . .	172
10.40.2.2 write . . . . .	174
10.41 seq64::perfedit Class Reference . . . . .	174
10.41.1 Detailed Description . . . . .	177
10.41.2 Constructor & Destructor Documentation . . . . .	177
10.41.2.1 perfedit . . . . .	177
10.41.2.2 ~perfedit . . . . .	177
10.41.3 Member Function Documentation . . . . .	177
10.41.3.1 init_before_show . . . . .	177
10.41.3.2 enqueue_draw . . . . .	177
10.41.3.3 enregister_peer . . . . .	178
10.41.3.4 set_beats_per_bar . . . . .	178
10.41.3.5 set_beat_width . . . . .	178
10.41.3.6 set_guides . . . . .	178
10.41.3.7 grow . . . . .	178
10.41.3.8 expand . . . . .	178
10.41.3.9 collapse . . . . .	178
10.41.3.10 copy . . . . .	178
10.41.3.11 undo . . . . .	178
10.41.3.12 timeout . . . . .	179
10.41.3.13 start_playing . . . . .	179
10.41.3.14 stop_playing . . . . .	179
10.41.4 Field Documentation . . . . .	179
10.41.4.1 m_bpm . . . . .	179
10.41.4.2 m_bw . . . . .	179
10.41.4.3 m_redraw_ms . . . . .	179
10.42 seq64::perfnames Class Reference . . . . .	179
10.42.1 Detailed Description . . . . .	182
10.42.2 Constructor & Destructor Documentation . . . . .	182
10.42.2.1 perfnames . . . . .	182
10.42.3 Member Function Documentation . . . . .	182
10.42.3.1 enqueue_draw . . . . .	182
10.42.3.2 draw_sequence . . . . .	182
10.42.3.3 on_realize . . . . .	182
10.42.3.4 on_expose_event . . . . .	182
10.42.3.5 on_size_allocate . . . . .	182
10.42.4 Field Documentation . . . . .	182
10.42.4.1 m_parent . . . . .	182

10.42.4.2 m_names_chars . . . . .	182
10.42.4.3 m_char_w . . . . .	183
10.42.4.4 m_setbox_w . . . . .	183
10.42.4.5 m_namebox_w . . . . .	183
10.42.4.6 m_names_y . . . . .	183
10.42.4.7 m_xy_offset . . . . .	183
10.43seq64::perform Class Reference . . . . .	183
10.43.1 Detailed Description . . . . .	190
10.43.2 Constructor & Destructor Documentation . . . . .	190
10.43.2.1 perform . . . . .	190
10.43.2.2 ~perform . . . . .	190
10.43.3 Member Function Documentation . . . . .	190
10.43.3.1 modify . . . . .	190
10.43.3.2 sequence_count . . . . .	190
10.43.3.3 init . . . . .	190
10.43.3.4 clear_all . . . . .	190
10.43.3.5 launch_input_thread . . . . .	190
10.43.3.6 launch_output_thread . . . . .	191
10.43.3.7 init_jack . . . . .	191
10.43.3.8 new_sequence . . . . .	191
10.43.3.9 add_sequence . . . . .	191
10.43.3.10delete_sequence . . . . .	191
10.43.3.11clear_sequence_triggers . . . . .	191
10.43.3.12set_left_tick . . . . .	192
10.43.3.13set_right_tick . . . . .	192
10.43.3.14move_triggers . . . . .	192
10.43.3.15copy_triggers . . . . .	192
10.43.3.16push_trigger_undo . . . . .	192
10.43.3.17get_max_trigger . . . . .	192
10.43.3.18midi_control_toggle . . . . .	192
10.43.3.19midi_control_on . . . . .	193
10.43.3.20midi_control_off . . . . .	193
10.43.3.21handle_midi_control . . . . .	193
10.43.3.22get_screen_set_notepad . . . . .	193
10.43.3.23set_screen_set_notepad . . . . .	193
10.43.3.24set_screenset . . . . .	194
10.43.3.25set_playing_screenset . . . . .	194
10.43.3.26select_group_mute . . . . .	194
10.43.3.27unset_mode_group_learn . . . . .	194
10.43.3.28select_mute_group . . . . .	194

10.43.3.29start	194
10.43.3.30stop	194
10.43.3.31all_notes_off	195
10.43.3.32set_active	195
10.43.3.33set_was_active	195
10.43.3.34s_dirty_main	195
10.43.3.35s_dirty_edit	195
10.43.3.36s_dirty_perf	195
10.43.3.37s_dirty_names	196
10.43.3.38s_active	197
10.43.3.39get_sequence	197
10.43.3.40reset_sequences	197
10.43.3.41play	197
10.43.3.42set_orig_ticks	197
10.43.3.43set_beats_per_minute	198
10.43.3.44set_sequence_control_status	198
10.43.3.45unset_sequence_control_status	198
10.43.3.46sequence_playing_on	198
10.43.3.47sequence_playing_off	198
10.43.3.48set_group_mute_state	198
10.43.3.49get_group_mute_state	198
10.43.3.50output_func	199
10.43.3.51set_offset	199
10.43.3.52save_playing_state	199
10.43.3.53show_ui_sequence_key	199
10.43.3.54show_ui_sequence_number	199
10.43.3.55start_playing	199
10.43.3.56decrement_beats_per_minute	200
10.43.3.57increment_beats_per_minute	200
10.43.3.58highlight	200
10.43.3.59sequence_label	200
10.43.3.60set_input_bus	201
10.43.3.61mainwnd_key_event	201
10.43.3.62perfroll_key_event	201
10.43.3.63seq_in_playing_screen	201
10.43.3.64s_modified	201
10.43.3.65s_midi_control_valid	201
10.43.3.66s_screenset_valid	202
10.43.3.67s_seq_valid	202
10.43.3.68s_mseq_valid	202

10.43.3.6	install_sequence . . . . .	202
10.43.3.7	inner_start . . . . .	203
10.43.3.7.1	clamp_track . . . . .	203
10.43.3.7.2	set_key_event . . . . .	203
10.43.3.7.3	set_key_group . . . . .	203
10.43.4	Field Documentation . . . . .	203
10.43.4.1	sm_mc_dummy . . . . .	203
10.43.4.2	m_playscreen_offset . . . . .	203
10.43.4.3	m_seqs . . . . .	203
10.43.4.4	m_playback_mode . . . . .	204
10.43.4.5	m_one_measure . . . . .	204
10.43.4.6	m_left_tick . . . . .	204
10.43.4.7	m_right_tick . . . . .	204
10.43.4.8	m_starting_tick . . . . .	204
10.43.4.9	m_seqs_in_set . . . . .	204
10.43.4.10	m_max_sets . . . . .	204
10.43.4.11	m_sequence_count . . . . .	204
10.43.4.12	m_sequence_max . . . . .	204
10.43.4.13	m_is_modified . . . . .	204
10.44	seq64::performcallback Struct Reference . . . . .	205
10.44.1	Detailed Description . . . . .	205
10.45	seq64::perroll Class Reference . . . . .	206
10.45.1	Constructor & Destructor Documentation . . . . .	208
10.45.1.1	~perroll . . . . .	208
10.45.2	Member Function Documentation . . . . .	209
10.45.2.1	set_guides . . . . .	209
10.45.2.2	update_sizes . . . . .	209
10.45.2.3	init_before_show . . . . .	209
10.45.2.4	fill_background_pixmap . . . . .	209
10.45.2.5	set_ppqn . . . . .	209
10.45.2.6	convert_xy . . . . .	209
10.45.2.7	convert_x . . . . .	210
10.45.2.8	snap_x . . . . .	210
10.45.2.9	start_playing . . . . .	210
10.45.2.10	stop_playing . . . . .	210
10.45.2.11	draw_sequence_on . . . . .	210
10.45.2.12	draw_drawable_row . . . . .	210
10.45.2.13	enqueue_draw . . . . .	210
10.45.2.14	on_realize . . . . .	210
10.45.2.15	on_expose_event . . . . .	210

10.45.2.16	on_button_press_event . . . . .	211
10.45.2.17	on_button_release_event . . . . .	211
10.45.2.18	on_key_press_event . . . . .	211
10.45.3	Friends And Related Function Documentation . . . . .	211
10.45.3.1	FruityPerfInput . . . . .	211
10.45.4	Field Documentation . . . . .	211
10.45.4.1	m_parent . . . . .	211
10.45.4.2	m_h_page_increment . . . . .	211
10.45.4.3	m_v_page_increment . . . . .	211
10.45.4.4	m_fruity_interaction . . . . .	211
10.46	seq64::perftime Class Reference . . . . .	212
10.46.1	Constructor & Destructor Documentation . . . . .	214
10.46.1.1	perftime . . . . .	214
10.46.2	Member Function Documentation . . . . .	214
10.46.2.1	set_guides . . . . .	214
10.46.2.2	enqueue_draw . . . . .	214
10.46.2.3	on_realize . . . . .	214
10.46.2.4	on_expose_event . . . . .	215
10.46.3	Field Documentation . . . . .	215
10.46.3.1	m_parent . . . . .	215
10.46.3.2	m_measure_length . . . . .	215
10.46.3.3	m_left_marker_tick . . . . .	215
10.46.3.4	m_right_marker_tick . . . . .	215
10.47	seq64::rc_settings Class Reference . . . . .	215
10.47.1	Member Function Documentation . . . . .	217
10.47.1.1	home_config_directory . . . . .	217
10.48	seq64::rect Class Reference . . . . .	217
10.49	seq64::gui_drawingarea_gtk2::rect Struct Reference . . . . .	217
10.50	seq64::Seq24PerfInput Class Reference . . . . .	218
10.50.1	Member Function Documentation . . . . .	219
10.50.1.1	on_button_press_event . . . . .	219
10.50.1.2	on_button_release_event . . . . .	219
10.50.1.3	on_motion_notify_event . . . . .	219
10.50.1.4	set_adding . . . . .	219
10.50.1.5	handle_motion_key . . . . .	219
10.51	seq64::Seq24SeqEventInput Struct Reference . . . . .	220
10.51.1	Member Function Documentation . . . . .	220
10.51.1.1	set_adding . . . . .	220
10.51.1.2	on_button_press_event . . . . .	220
10.51.1.3	on_button_release_event . . . . .	220

10.51.1.4 on_motion_notify_event . . . . .	221
10.52seq64::Seq24SeqRollInput Class Reference . . . . .	221
10.52.1 Member Function Documentation . . . . .	221
10.52.1.1 set_adding . . . . .	221
10.52.1.2 on_button_press_event . . . . .	221
10.52.1.3 on_button_release_event . . . . .	221
10.53seq64::seqdata Class Reference . . . . .	221
10.53.1 Constructor & Destructor Documentation . . . . .	224
10.53.1.1 seqdata . . . . .	224
10.53.2 Member Function Documentation . . . . .	224
10.53.2.1 reset . . . . .	224
10.53.2.2 set_zoom . . . . .	224
10.53.2.3 set_data_type . . . . .	224
10.53.2.4 idle_redraw . . . . .	224
10.53.2.5 update_sizes . . . . .	224
10.53.2.6 xy_to_rect . . . . .	224
10.53.2.7 on_realize . . . . .	225
10.53.2.8 on_button_press_event . . . . .	225
10.53.2.9 on_button_release_event . . . . .	225
10.53.2.10on_motion_notify_event . . . . .	225
10.53.2.11on_scroll_event . . . . .	225
10.53.3 Field Documentation . . . . .	225
10.53.3.1 m_number_w . . . . .	225
10.53.3.2 m_number_h . . . . .	225
10.53.3.3 m_number_offset_y . . . . .	225
10.54seq64::seqedit Class Reference . . . . .	226
10.54.1 Detailed Description . . . . .	229
10.54.2 Constructor & Destructor Documentation . . . . .	229
10.54.2.1 seqedit . . . . .	229
10.54.3 Member Function Documentation . . . . .	229
10.54.3.1 set_zoom . . . . .	229
10.54.3.2 set_snap . . . . .	229
10.54.3.3 set_note_length . . . . .	229
10.54.3.4 set_measures . . . . .	230
10.54.3.5 apply_length . . . . .	230
10.54.3.6 get_measures . . . . .	230
10.54.3.7 set_midi_channel . . . . .	230
10.54.3.8 set_midi_bus . . . . .	230
10.54.3.9 set_scale . . . . .	230
10.54.3.10set_key . . . . .	230

10.54.3.11	set_background_sequence . . . . .	231
10.54.3.12	name_change_callback . . . . .	231
10.54.3.13	set_data_type . . . . .	231
10.54.3.14	create_menus . . . . .	231
10.54.3.15	popup_event_menu . . . . .	231
10.54.3.16	popup_midibus_menu . . . . .	231
10.54.3.17	popup_sequence_menu . . . . .	232
10.54.3.18	popup_tool_menu . . . . .	232
10.54.3.19	do_action . . . . .	232
10.54.3.20	on_delete_event . . . . .	232
10.54.4	Field Documentation . . . . .	232
10.54.4.1	m_initial_snap . . . . .	232
10.55	seq64::seqevent Class Reference . . . . .	233
10.55.1	Member Function Documentation . . . . .	235
10.55.1.1	set_snap . . . . .	235
10.55.1.2	set_data_type . . . . .	235
10.55.1.3	update_sizes . . . . .	235
10.55.1.4	draw_background . . . . .	235
10.55.1.5	draw_pixmap_on_window . . . . .	236
10.55.1.6	idle_redraw . . . . .	236
10.55.1.7	x_to_w . . . . .	236
10.55.1.8	drop_event . . . . .	236
10.55.1.9	draw_events_on . . . . .	236
10.55.1.10	start_paste . . . . .	236
10.55.1.11	convert_x . . . . .	236
10.55.1.12	convert_t . . . . .	236
10.55.1.13	snap_x . . . . .	236
10.55.1.14	on_realize . . . . .	236
10.55.1.15	on_button_press_event . . . . .	237
10.55.1.16	on_button_release_event . . . . .	237
10.55.1.17	on_motion_notify_event . . . . .	237
10.55.1.18	on_key_press_event . . . . .	237
10.56	seq64::seqkeys Class Reference . . . . .	237
10.56.1	Member Function Documentation . . . . .	240
10.56.1.1	set_hint_state . . . . .	240
10.56.1.2	draw_key . . . . .	241
10.56.1.3	on_realize . . . . .	241
10.56.1.4	on_button_press_event . . . . .	241
10.56.1.5	on_button_release_event . . . . .	241
10.56.1.6	on_motion_notify_event . . . . .	241



10.56.1.7 on_enter_notify_event . . . . .	241
10.56.1.8 on_leave_notify_event . . . . .	241
10.57seq64::seqmenu Class Reference . . . . .	242
10.57.1 Detailed Description . . . . .	244
10.57.2 Constructor & Destructor Documentation . . . . .	244
10.57.2.1 seqmenu . . . . .	244
10.57.2.2 ~seqmenu . . . . .	244
10.57.3 Member Function Documentation . . . . .	244
10.57.3.1 popup_menu . . . . .	244
10.57.3.2 seq_edit . . . . .	244
10.57.3.3 seq_event_edit . . . . .	244
10.57.3.4 seq_new . . . . .	245
10.57.3.5 seq_copy . . . . .	245
10.57.3.6 seq_cut . . . . .	245
10.57.3.7 seq_paste . . . . .	245
10.57.3.8 seq_clear_perf . . . . .	245
10.57.4 Field Documentation . . . . .	245
10.57.4.1 m_seqedit . . . . .	245
10.57.4.2 m_modified . . . . .	245
10.58seq64::seqroll Class Reference . . . . .	245
10.58.1 Member Function Documentation . . . . .	249
10.58.1.1 reset . . . . .	249
10.58.1.2 set_data_type . . . . .	249
10.58.1.3 set_background_sequence . . . . .	249
10.58.1.4 update_background . . . . .	249
10.58.1.5 draw_events_on_pixmap . . . . .	249
10.58.1.6 convert_tn . . . . .	249
10.58.1.7 snap_x . . . . .	249
10.58.1.8 draw_events_on . . . . .	249
10.58.1.9 on_key_press_event . . . . .	250
10.58.1.10on_scroll_event . . . . .	250
10.59seq64::seqtime Class Reference . . . . .	250
10.59.1 Member Function Documentation . . . . .	252
10.59.1.1 on_button_press_event . . . . .	252
10.59.1.2 on_button_release_event . . . . .	252
10.60seq64::sequence Class Reference . . . . .	252
10.60.1 Detailed Description . . . . .	260
10.60.2 Member Enumeration Documentation . . . . .	260
10.60.2.1 select_action_e . . . . .	260
10.60.3 Member Function Documentation . . . . .	260

10.60.3.1 partial_assign . . . . .	260
10.60.3.2 event_count . . . . .	260
10.60.3.3 push_undo . . . . .	260
10.60.3.4 pop_undo . . . . .	260
10.60.3.5 pop_redo . . . . .	260
10.60.3.6 push_trigger_undo . . . . .	260
10.60.3.7 set_beats_per_bar . . . . .	261
10.60.3.8 set_beat_width . . . . .	262
10.60.3.9 get_beat_width . . . . .	262
10.60.3.10set_rec_vol . . . . .	262
10.60.3.11get_name . . . . .	262
10.60.3.12set_length . . . . .	262
10.60.3.13get_last_tick . . . . .	262
10.60.3.14mod_last_tick . . . . .	262
10.60.3.15set_playing . . . . .	263
10.60.3.16toggle_queued . . . . .	263
10.60.3.17off_queued . . . . .	263
10.60.3.18set_recording . . . . .	263
10.60.3.19set_snap_tick . . . . .	263
10.60.3.20set_quantized_rec . . . . .	263
10.60.3.21set_thru . . . . .	263
10.60.3.22s_dirty_main . . . . .	263
10.60.3.23s_dirty_edit . . . . .	263
10.60.3.24s_dirty_perf . . . . .	263
10.60.3.25s_dirty_names . . . . .	264
10.60.3.26set_dirty_mp . . . . .	264
10.60.3.27set_dirty . . . . .	264
10.60.3.28set_midi_channel . . . . .	264
10.60.3.29print . . . . .	264
10.60.3.30print_triggers . . . . .	264
10.60.3.31play . . . . .	264
10.60.3.32set_orig_tick . . . . .	264
10.60.3.33add_event . . . . .	264
10.60.3.34add_trigger . . . . .	265
10.60.3.35split_trigger . . . . .	265
10.60.3.36grow_trigger . . . . .	265
10.60.3.37del_trigger . . . . .	265
10.60.3.38get_trigger_state . . . . .	265
10.60.3.39select_trigger . . . . .	265
10.60.3.40unselect_triggers . . . . .	266

10.60.3.41	intersect_triggers	266
10.60.3.42	intersect_notes	266
10.60.3.43	intersect_events	266
10.60.3.44	paste_trigger	268
10.60.3.45	move_selected_triggers_to	268
10.60.3.46	selected_trigger_start	268
10.60.3.47	selected_trigger_end	268
10.60.3.48	get_max_trigger	268
10.60.3.49	move_triggers	268
10.60.3.50	copy_triggers	269
10.60.3.51	clear_triggers	269
10.60.3.52	set_midi_bus	269
10.60.3.53	set_master_midi_bus	269
10.60.3.54	select_note_events	269
10.60.3.55	select_events	269
10.60.3.56	select_events	269
10.60.3.57	get_num_selected_notes	269
10.60.3.58	get_num_selected_events	269
10.60.3.59	select_all	270
10.60.3.60	copy_selected	270
10.60.3.61	cut_selected	270
10.60.3.62	paste_selected	270
10.60.3.63	get_selected_box	270
10.60.3.64	get_clipboard_box	270
10.60.3.65	move_selected_notes	270
10.60.3.66	add_note	270
10.60.3.67	add_event	270
10.60.3.68	stream_event	271
10.60.3.69	change_event_data_range	271
10.60.3.70	increment_selected	271
10.60.3.71	decrement_selected	271
10.60.3.72	grow_selected	272
10.60.3.73	stretch_selected	272
10.60.3.74	remove_marked	272
10.60.3.75	mark_selected	272
10.60.3.76	unpaint_all	272
10.60.3.77	unselect	272
10.60.3.78	verify_and_link	272
10.60.3.79	link_new	273
10.60.3.80	zero_markers	273

10.60.3.81	<code>play_note_on</code>	273
10.60.3.82	<code>play_note_off</code>	273
10.60.3.83	<code>off_playing_notes</code>	273
10.60.3.84	<code>reset_draw_marker</code>	273
10.60.3.85	<code>reset_draw_trigger_marker</code>	273
10.60.3.86	<code>get_next_note_event</code>	273
10.60.3.87	<code>get_lowest_note_event</code>	273
10.60.3.88	<code>get_highest_note_event</code>	273
10.60.3.89	<code>get_next_event</code>	274
10.60.3.90	<code>get_next_event</code>	274
10.60.3.91	<code>fill_container</code>	274
10.60.3.92	<code>transpose_notes</code>	274
10.60.3.93	<code>background_sequence</code>	274
10.60.3.94	<code>copy_events</code>	274
10.60.3.95	<code>put_event_on_bus</code>	275
10.60.3.96	<code>set_trigger_offset</code>	275
10.60.3.97	<code>split_trigger</code>	275
10.60.3.98	<code>adjust_trigger_offsets_to_length</code>	275
10.60.3.99	<code>remove</code>	275
10.60.3.100	<code>remove</code>	275
10.60.3.101	<code>remove_all</code>	275
10.60.4	Field Documentation	275
10.60.4.1	<code>m_midi_channel</code>	275
10.60.4.2	<code>m_playing_notes</code>	276
10.60.4.3	<code>m_seq_number</code>	276
10.60.4.4	<code>m_length</code>	276
10.60.4.5	<code>m_snap_tick</code>	276
10.60.4.6	<code>m_time_beats_per_measure</code>	276
10.60.4.7	<code>m_time_beat_width</code>	276
10.60.4.8	<code>m_musical_key</code>	276
10.60.4.9	<code>m_musical_scale</code>	276
10.60.4.10	<code>m_background_sequence</code>	276
10.60.4.11	<code>m_mutex</code>	276
10.61	<code>seq64::trigger</code> Class Reference	276
10.61.1	Detailed Description	277
10.62	<code>seq64::triggers</code> Class Reference	278
10.62.1	Constructor & Destructor Documentation	280
10.62.1.1	<code>triggers</code>	280
10.62.2	Member Function Documentation	280
10.62.2.1	<code>operator=</code>	280

10.62.2.2	<a href="#">set_length</a>	280
10.62.2.3	<a href="#">play</a>	280
10.62.2.4	<a href="#">add</a>	280
10.62.2.5	<a href="#">adjust_offsets_to_length</a>	281
10.62.2.6	<a href="#">split</a>	281
10.62.2.7	<a href="#">split</a>	281
10.62.2.8	<a href="#">grow</a>	281
10.62.2.9	<a href="#">remove</a>	282
10.62.2.10	<a href="#">get_state</a>	282
10.62.2.11	<a href="#">select</a>	282
10.62.2.12	<a href="#">unselect</a>	282
10.62.2.13	<a href="#">intersect</a>	282
10.62.2.14	<a href="#">paste</a>	283
10.62.2.15	<a href="#">move_selected</a>	283
10.62.2.16	<a href="#">get_selected_start</a>	283
10.62.2.17	<a href="#">get_selected_end</a>	283
10.62.2.18	<a href="#">copy</a>	283
10.62.2.19	<a href="#">next</a>	284
10.62.2.20	<a href="#">next_trigger</a>	284
10.62.2.21	<a href="#">adjust_offset</a>	284
10.62.3	<a href="#">Field Documentation</a>	285
10.62.3.1	<a href="#">m_ppqn</a>	285
10.62.3.2	<a href="#">m_length</a>	285
10.63	<a href="#">seq64::user_instrument Class Reference</a>	285
10.63.1	<a href="#">Detailed Description</a>	286
10.63.2	<a href="#">Member Function Documentation</a>	286
10.63.2.1	<a href="#">set_defaults</a>	286
10.63.2.2	<a href="#">controller_max</a>	286
10.63.2.3	<a href="#">controller_name</a>	286
10.63.2.4	<a href="#">controller_active</a>	286
10.63.2.5	<a href="#">set_controller</a>	286
10.63.2.6	<a href="#">set_name</a>	287
10.63.2.7	<a href="#">copy_definitions</a>	287
10.63.3	<a href="#">Field Documentation</a>	287
10.63.3.1	<a href="#">m_is_valid</a>	287
10.63.3.2	<a href="#">m_controller_count</a>	287
10.64	<a href="#">seq64::user_instrument_t Struct Reference</a>	287
10.64.1	<a href="#">Field Documentation</a>	287
10.64.1.1	<a href="#">instrument</a>	287
10.64.1.2	<a href="#">controllers</a>	287

10.64.1.3 controllers_active . . . . .	288
10.65seq64::user_midi_bus Class Reference . . . . .	288
10.65.1 Detailed Description . . . . .	289
10.65.2 Member Function Documentation . . . . .	289
10.65.2.1 set_defaults . . . . .	289
10.65.2.2 channel_count . . . . .	289
10.65.2.3 channel_max . . . . .	289
10.65.2.4 instrument . . . . .	289
10.65.2.5 set_instrument . . . . .	289
10.65.2.6 copy_definitions . . . . .	289
10.65.3 Field Documentation . . . . .	289
10.65.3.1 m_is_valid . . . . .	289
10.65.3.2 m_channel_count . . . . .	290
10.66seq64::user_midi_bus_t Struct Reference . . . . .	290
10.66.1 Field Documentation . . . . .	290
10.66.1.1 alias . . . . .	290
10.66.1.2 instrument . . . . .	290
10.67seq64::user_settings Class Reference . . . . .	290
10.67.1 Detailed Description . . . . .	296
10.67.2 Member Typedef Documentation . . . . .	297
10.67.2.1 Busses . . . . .	297
10.67.2.2 Instruments . . . . .	297
10.67.3 Member Enumeration Documentation . . . . .	297
10.67.3.1 mainwid_grid_style_t . . . . .	297
10.67.4 Constructor & Destructor Documentation . . . . .	297
10.67.4.1 user_settings . . . . .	297
10.67.5 Member Function Documentation . . . . .	297
10.67.5.1 set_defaults . . . . .	297
10.67.5.2 set_globals . . . . .	297
10.67.5.3 get_globals . . . . .	297
10.67.5.4 bus . . . . .	298
10.67.5.5 instrument . . . . .	298
10.67.5.6 controller_active . . . . .	298
10.67.5.7 controller_name . . . . .	298
10.67.5.8 zoom . . . . .	298
10.67.5.9 mainwnd_rows . . . . .	298
10.67.5.10mainwnd_cols . . . . .	298
10.67.5.11max_sets . . . . .	298
10.67.5.12ext_x . . . . .	298
10.67.5.13ext_y . . . . .	298

10.67.5.14	mainwid_border	298
10.67.5.15	mainwid_spacing	298
10.67.5.16	control_height	299
10.67.5.17	dump_summary	299
10.67.5.18	perf_h_page_increment	299
10.67.5.19	perf_v_page_increment	299
10.67.5.20	midi_ppqn	299
10.67.5.21	midi_buss_override	299
10.67.5.22	midi_beats_per_bar	299
10.67.5.23	midi_beats_per_minute	299
10.67.5.24	midi_beat_width	299
10.67.5.25	private_bus	299
10.67.5.26	private_instrument	299
10.67.6	Field Documentation	300
10.67.6.1	m_midi_buses	300
10.67.6.2	m_instruments	300
10.67.6.3	m_grid_style	300
10.67.6.4	m_grid_brackets	300
10.67.6.5	m_mainwnd_rows	300
10.67.6.6	m_mainwnd_cols	300
10.67.6.7	m_max_sets	300
10.67.6.8	m_mainwid_border	300
10.67.6.9	m_control_height	300
10.67.6.10	m_global_seq_feature_save	300
10.67.6.11	m_seqedit_scale	301
10.67.6.12	m_seqedit_key	301
10.67.6.13	m_seqedit_bgsequence	301
10.67.6.14	m_use_new_font	301
10.67.6.15	m_allow_two_perfedits	301
10.67.6.16	m_h_perf_page_increment	301
10.67.6.17	m_v_perf_page_increment	301
10.67.6.18	m_text_x	301
10.67.6.19	m_seqchars_x	302
10.67.6.20	m_midi_ppqn	302
10.67.6.21	m_midi_beats_per_measure	302
10.67.6.22	m_midi_beats_per_minute	302
10.67.6.23	m_midi_beat_width	302
10.67.6.24	m_midi_buss_override	302
10.67.6.25	m_seqs_in_set	303
10.67.6.26	m_gmute_tracks	303

10.67.6.27m_max_sequence . . . . .	303
10.67.6.28m_seqarea_x . . . . .	303
10.67.6.29m_seqarea_seq_x . . . . .	303
10.67.6.30m_mainwid_x . . . . .	303
10.67.6.31m_save_user_config . . . . .	303
10.67.6.32mc_min_zoom . . . . .	303
10.67.6.33mc_max_zoom . . . . .	304
10.67.6.34mc_baseline_ppqn . . . . .	304
10.68seq64::userfile Class Reference . . . . .	304
10.68.1 Member Function Documentation . . . . .	305
10.68.1.1 parse . . . . .	305
10.68.1.2 write . . . . .	305
10.68.1.3 dump_setting_summary . . . . .	305
<b>Index</b>	<b>307</b>



# Chapter 1

## Sequencer64

**Author(s)** Chris Ahlstrom 2015-11-27

### 1.1 Introduction

Sequencer64 is a major cleanup, refactoring, and documentation of the Seq24 live-play MIDI sequencer.

The current document, generated by Doxygen, describes the functions, classes, modules, and other entities used in this project.

Also read the ROADMAP, README, and contrib/bugs\_to\_investigate files to understand the genesis of this project and the things that still need to be done with Sequencer64.

Also, we have pretty deeply documented *Seq24* and *Sequencer64* with PDF files that can be generated by git-cloning the following projects, installing a number of tools related to PDF and LaTeX, and running "make":

- <https://github.com/ahlstromcj/seq24-doc.git>
- <https://github.com/ahlstromcj/sequencer64-doc.git>

These project also have prebuilt PDFs should one not want to bother building them.

In the present document, we've left out a fair amount of side-code to cut down on the size of the document. For example, the main module, redundant Windows support, utility headers like `easy_macros.h`, standard stuff like the mutex module, the fruity variants (at least the ones already refactored into their own modules), etc., are all left out. Still, the resulting PDF is over 300 pages long.

Some useful references:

- <http://acad.carleton.edu/courses/musc108-00-f14/pages/04/04StandardMIDIFiles.html>
- <http://www.midimusicadventures.com/qs/midi-zips/soundtracks/kq6gm.zip>



## Chapter 2

# MIDI File Parsing in Sequencer64

**Author(s)** Chris Ahlstrom 2016-01-16

### 2.1 Introduction

This section describes the parsing of a MIDI file. We start with the main format that is supported, SMF 1. Once we understood that we, we figured out how to split a SMF 0 tracks correctly.

We split the `midifile::parse()` function into two sections. The first section analyzes the header of the MIDI. Then, based on whether the file is SMF 1 (the normal case) or SMF 0, either the `parse_smf_1()` function or the `parse_smf_0()` function is called. The `parse_smf_0()` function creates one sequence object per channel present in the SMF 0 file, plus the original track. The last pattern slot (sequence 16) will contain the original track data, and the rest will contain common data and then channel data for each channel. After the parsing is done, all the tracks (including the original track) will be added to the performance. The user then has the option of deleting the original track, which will be the last track.

### 2.2 SMF 1 Parsing

This section describes the parsing of the header chunk, MThd, and the track chunk, MTrk.

The `midifile::parse()` function starts by opening the MIDI file, getting its file-size, pre-allocating the data vector to that size, reading all of the characters into that vector, and then closing the file.

#### 2.2.1 MIDI File Header, MThd

The data of the header is read:

Header ID:	"MThd"	<code>read_long()</code>	4 bytes
MThd length:	6	<code>read_long()</code>	4 bytes
Format:	0, 1, 2	<code>read_short()</code>	2 bytes
No. of track:	1 or more	<code>read_short()</code>	2 bytes
PPQN:	192	<code>read_short()</code>	2 bytes

The header ID and it's length are always the same values. The formats that Sequencer64 supports are 0 or 1. SMF 0 has only one track, while SMF 1 can support an arbitrary number of tracks. The last value in the header is the PPQN value, which specifies the "pulses per quarter note", which is the basic time-resolution of events in the MIDI file. Common values are 96 or 192, but higher values are also common. Sequencer64 and its precursor, Seq24, default to 192.

### 2.2.2 MIDI Track, MTrk

Sequencer64 next reads the tracks specified in the file. Each track is assumed to cover a different MIDI channel, but always the same MIDI buss. (The MIDI buss is not a data item in standard MIDI files, but it is a special data item in Seq24/Sequencer64 MIDI files.) Each track is tagged by a standard chunk marker, "MTrk". Other markers are possible, and are to be ignored, if nothing else. Here are the values read at the beginning of a track:

Track ID:	"MTrk"	read_long()	4 bytes
Track length:	varies	read_long()	4 bytes

The track length is the number of bytes that need to be read in order to get all of the data in the track.

Next, a new sequence object is created, with the PPQN value passed to its constructor. The sequence then is hooked to the master MIDI buss object. The "RunningTime" accumulator is set to 0 for that track.

Next, the parse() function loops through the rest of the track, reading data and logging it to the sequence. Let's go through the loop, which is the meat of the processing.

TODO: An empty event is created before track processing, and re-used for every track and event. This seems dangerous. We moved the event constructor two levels of nesting deeper, and it seems to work fine.

**Delta time.** The amount time that passes from one event to the next is the *delta time*. For some events, the time doesn't matter, and is set to 0. This value is a *variable length value*, also known as a "VLV" or a "varinum". It provides a way of encoding arbitrarily large values, a byte at a time. For now, just note that a varinum is 1 or more bytes, and MIDI provides a way to tell when the varinum is complete.

Delta time:	varies	read_varinum()	1 or more bytes
-------------	--------	----------------	-----------------

#### 2.2.2.1 Channel Events

**Status.** The byte after the delta time is examined by masking it against 0x80 to check the high bit. If not set, it is a "running status", it is replaced with the "last status", which is 0 at first.

Status byte:	varies	read_byte()	1 byte
--------------	--------	-------------	--------

If the high bit is set, it is a status, and is passed to the setter `event::set_status()`.

The "RunningTime" accumulator is incremented by the delta-time. The current time is adjusted as per the PPQN ratio, if needed, and passed to the setter `event::set_timestamp()`.

Now what does the status mean? First, the channel part of the status is masked out using the 0xF0 mask.

If it is a 2-data-byte event (note on, note off, aftertouch, control-change, or pitch-wheel), then the two data bytes are read:

Data byte 0:	varies	read_byte()	1 byte
Data byte 1:	varies	read_byte()	1 byte

If the status is a note-on event, with `data[1] = 0`, then it is converted to a note-off event, a fix for the output quirks of some MIDI devices, and the status of the event is amended to `EVENT_NOTE_OFF`.

If it is a 1-data-byte event (program change or channel pressure), then only data byte 0 is read.

Then the one or two data bytes are added to the event by overloads of `event::set_data()`, the event is added to the current sequence by `sequence::add_event()`, and the MIDI channel of the sequence is set by `sequence::set_midi_channel()`.

Note that this is the point where parsing could detect a change in channel, and select a new sequence to support that channel, and add the events to that sequence, if the file were SMF 0.

Also note that the channel of the sequence is set every a new channel event/status is read. This should be done once, and then simply warned about if a non-matching channel occurs.

Lastly, note that it might be better to do the sequence function calls at the end of processing the event.

## 2.2.2.2 Meta Events

If the event status masks off to 0xF0 (0xF0 to 0xFF), then it is a meta event. If the status is 0xFF, it is called a "Sequencer-specific", or "SeqSpec" event. For this kind of event, then a type byte and the length of the event are read.

Meta type:	varies	<code>read_byte()</code>	1 byte
Meta length:	varies	<code>read_varinum()</code>	1 or more bytes

If the type of the SeqSpec (0xFF) meta event is 0x7F, parsing checks to see if it is one of the Seq24 "proprietary" events. These events are tagged with various values that mask off to 0x24240000. The parser reads the tag:

Prop tag:	0x242400nn	<code>read_long()</code>	4 bytes
-----------	------------	--------------------------	---------

These tags provide a way to save and recover Seq24/Sequencer64 properties from the MIDI file: MIDI buss, MIDI channel, time signature, sequence triggers, and (new), the key, scale, and background sequence to use with the track/sequence. Any leftover data for the tagged event is let go. Unknown tags are skipped.

If the type of the SeqSpec (0xFF) meta event is 0x2F, then it is the End-of-Track marker. The current time is set using `sequence::set_length()` and then `sequence::zero_markers()` is called, and parsing is done for that track.

If the type of the SeqSpec (0xFF) meta event is 0x03, then it is the sequence name. The "length" number of bytes are read, and loaded by `sequence::set_name()`.

If the type of the SeqSpec (0xFF) meta event is 0x00, then it is the sequence number, which is read:

Seq number:	varies	<code>read_short()</code>	2 bytes
-------------	--------	---------------------------	---------

Note that the sequence number might be modified later to account for the current screenset in force for a file import operation.

Anything other SeqSpec type is simply skipped by reading the "length" number of bytes.

To summarize the process, here are the relevant event and sequence setter calls typically made while parsing a MIDI track:

1. `perform::add_sequence()`
  - (a) `sequence::sequence()`
  - (b) `sequence::set_master_midi_bus()`
  - (c) `sequence::add_event()`
    - i. `event::event()`
    - ii. `event::set_status()`
    - iii. `event::set_timestamp()`
    - iv. `event::set_data()`
  - (d) `sequence::set_midi_channel()`
  - (e) `sequence::set_length()`
  - (f) `sequence::zero_markers()`
  - (g) `sequence::set_name()`
  - (h) `sequence::set_midi_bus()`
2. `xxxxx::yyyyy()`

### 2.2.3 Meta Events

Here, we summarize the MIDI meta events.

1. FF 00 02 ssss: Sequence Number.
2. FF 01 len text: Text Event.
3. FF 02 len text: Copyright Notice.
4. FF 03 len text: Sequence/Track Name.
5. FF 04 len text: Instrument Name.
6. FF 05 len text: Lyric.
7. FF 06 len text: Marker.
8. FF 07 len text: Cue Point.
9. FF 08 len text: Patch/program Name.
10. FF 09 len text: Device Name.
11. FF 0A through 0F len text: Other kinds of text events.
12. FF 20 01 cc: MIDI channel (obsolete, used by Cakewalk)
13. FF 21 01 pp: MIDI port (obsolete, used by Cakewalk)
14. FF 2F 00: End of Track.
15. FF 51 03 tttttt: Set Tempo, us/qn.
16. FF 54 05 hr mn se fr ff: SMPTE Offset.
17. FF 58 04 nn dd cc bb: Time Signature.
18. FF 59 02 sf mi: Key Signature.
19. FF 7F len data: Sequencer-Specific.

The next sections describe the events that *Sequencer* tries to handle. These are

- Sequence Number (0x00)
- Track Name (0x03)
- End-of-Track (0x2F)
- Set Tempo (0x51) (Sequencer64 only)
- Time Signature (0x58) (Sequencer64 only)
- Sequencer-Specific (0x7F)
- System Exclusive (0xF0) Sort of handled, functionality incomplete..

#### 2.2.3.1 Sequence Number (0x00)

```
FF 00 02 ss ss
```

This optional event must occur at the beginning of a track, before any non-zero delta-times, and before any transmittable MIDI events. It specifies the number of a sequence.

### 2.2.3.2 Track/Sequence Name (0x03)

```
FF 03 len text
```

If in a format 0 track, or the first track in a format 1 file, the name of the sequence. Otherwise, the name of the track.

### 2.2.3.3 End of Track (0x2F)

```
FF 2F 00
```

This event is not optional. It is included so that an exact ending point may be specified for the track, so that it has an exact length, which is necessary for tracks which are looped or concatenated.

### 2.2.3.4 Set Tempo Event (0x51)

The MIDI Set Tempo meta event sets the tempo of a MIDI sequence in terms of the microseconds per quarter note. This is a meta message, so this event is never sent over MIDI ports to a MIDI device.

After the delta time, this event consists of six bytes of data:

```
FF 51 03 tt tt tt
```

Example:

```
FF 51 03 07 A1 20
```

1. 0xFF is the status byte that indicates this is a Meta event.
2. 0x51 the meta event type that signifies this is a Set Tempo event.
3. 0x03 is the length of the event, always 3 bytes.
4. The remaining three bytes carry the number of microseconds per quarter note. For example, the three bytes above form the hexadecimal value 0x07A120 (500000 decimal), which means that there are 500,000 microseconds per quarter note.

Since there are 60,000,000 microseconds per minute, the event above translates to: set the tempo to 60,000,000 / 500,000 = 120 quarter notes per minute (120 beats per minute).

This event normally appears in the first track. If not, the default tempo is 120 beats per minute. This event is important if the MIDI time division is specified in "pulses per quarter note", which does not itself define the length of the quarter note. The length of the quarter note is then determined by the Set Tempo meta event.

Representing tempos as time per beat instead of beat per time allows absolutely exact DWORD-term synchronization with a time-based sync protocol such as SMPTE time code or MIDI time code. This amount of accuracy provided by this tempo resolution allows a four-minute piece at 120 beats per minute to be accurate within 500 usec at the end of the piece.

### 2.2.3.5 Time Signature Event (0x58)

After the delta time, this event consists of seven bytes of data:

```
FF 58 04 nn dd cc bb
```

The time signature is expressed as four numbers. `nn` and `dd` represent the numerator and denominator of the time signature as it would be notated. The numerator counts the number of beats in a measure (beats per measure or

beats per bar). The denominator is a negative power of two: 2 represents a quarter-note, 3 represents an eighth-note, etc. The denominator specifies the unit of the beat (e.g. 4 or 8). In Seq24/Sequencer64, this value is also called the "beat width".

The `cc` parameter expresses the number of MIDI clocks (or "ticks", or "pulses") in a metronome click. The standard MIDI clock ticks 24 times per quarter note, so a value of 6 would mean the metronome clicks every 1/8th note.

The `bb` parameter expresses the number of notated 32nd-notes in a MIDI quarter-note (24 MIDI Clocks). For example, a value of 16 means that the music plays two quarter notes for each quarter note metered out by the MIDI clock, so that the music plays at double speed.

Example:

```
FF 58 04 04 02 18 08
```

1. 0xFF is the status byte that indicates this is a Meta event.
2. 0x58 the meta event type that signifies this is a Time Signature event.
3. 0x04 is the length of the event, always 4 bytes.
4. 0x04 is the numerator of the time signature, and ranges from 0x00 to 0xFF.
5. 0x02 is the log base 2 of the denominator, and is the power to which 2 must be raised to get the denominator. Here, the denominator is 2 to 0x02, or 4, so the time signature is 4/4.
6. 0x18 is the metronome pulse in terms of the number of MIDI clock ticks per click. Assuming 24 MIDI clocks per quarter note, the value here (0x18 = 24) indicates that the metronome will tick every 24/24 quarter note. If the value of the sixth byte were 0x30 = 48, the metronome clicks every two quarter notes, i.e. every half-note.
7. 0x08 defines the number of 32nd notes per beat. This byte is usually 8 as there is usually one quarter note per beat, and one quarter note contains eight 32nd notes.

If a time signature event is not present in a MIDI sequence, 4/4 signature is assumed.

In *Sequencer64*, the `c_timesig` SeqSpec event is given priority. The conventional time signature is used only if the `c_timesig` SeqSpec is not present in the file.

### 2.2.3.6 SysEx Event (0xF0)

If the meta event status value is 0xF0, it is called a "System-exclusive", or "SysEx" event.

```
F0 len data F7
```

*Sequencer64* has some code in place to store these messages, but the data is currently not actually stored or used. Although there is some infrastructure to support storing the SysEx event within a sequence, the SysEx information is simply skipped. *Sequencer64* warns if the terminating 0xF7 SysEx terminator is not found at the expected length. Also, some malformed SysEx events have been encountered, and those are detected and skipped as well.

### 2.2.3.7 Sequencer Specific (0x7F)

This data, also known as SeqSpec data, provides a way to encode information that a specific sequencer application needs, while marking it so that other sequences can safely ignore the information.

```
FF 7F len data
```

In *Seq24* and *Sequencer64*, the data portion starts with four bytes that indicate the kind of data for a particular SeqSpec event:



c_midibus	^	0x24240001	Track buss number
c_midich	^	0x24240002	Track channel number
c_midiclocks	*	0x24240003	Track clocking
c_triggers	^	0x24240004	See c_triggers_new
c_notes	*	0x24240005	Song data, notes
c_timesig	^	0x24240006	Track time signature
c_bpmtag	*	0x24240007	Song beats/minute
c_triggers_new	^	0x24240008	Track trigger data
c_mutegroups	*	0x24240009	Song mute group data
c_midictrl	*	0x24240010	Song MIDI control
c_musickey	+	0x24240011	Track key (Sequencer64 only)
c_musicscale	+	0x24240012	Track scale (Sequencer64 only)
c_backsequence	+	0x24240013	Track background sequence (Sequencer64 only)

\* = global only; ^ = track only; + = both

In *Seq24*, these events are placed at the end of the song, but are not marked as SeqSpec data. Most MIDI applications handle this situation fine, but some (e.g. *midicvt*) do not. Therefore, *Sequencer64* makes sure to wrap each data item in the 0xFF 0x7F wrapper.

Also, the last three items above (key, scale, and background sequence) can also be stored (by *Sequencer64*) with a particular sequence/track, as well as at the end of the song. Not sure if this bit of extra flexibility is useful, but it is there.

### 2.2.3.8 Non-Specific End of Sequence

Any other statuses are deemed unsupportable in *Sequencer64*, and abort parsing with an error.

If the `-bus` option is in force, `sequence::set_midi_bus()` is called to override the buss number (if any) stored with the sequence.

Finally, `perform::add_sequence()` adds the sequence to the encoded tune.

## 2.3 SMF 0 Parsing

After parsing SMF 1 track data, we end up with a number of sequences, each on a different MIDI channel. With SMF 0, data for all channels is present in a single track. *Sequencer64* will read SMF 0 data, but we really need to be able to have one MIDI channel per track. So we need to take the data from the sequence and use it to make more sequences.

TODO:

- `sequence::add_event()`.
- `sequence::set_midi_channel()`.
- `sequence::set_length()`.
- `sequence::set_midi_bus()`.
- `perform::add_sequence()`.

For now, please look at the source code for more details.



## Chapter 3

# JACK, Live, and Song Modes in Sequencer64

**Author(s)** Chris Ahlstrom 2016-01-16

### 3.1 Introduction

This section describes the interactions between JACK settings and the Live/Song Mode settings, with an eye to describing the proper behavior of Sequencer64 with JACK settings, how the Live/Song modes are supposed to work, and what bugs or issues remain in Sequencer64's JACK handling.

I'm not sure why Doxygen is applying the "code" font so often here. Weird, annoying.

### 3.2 JACK Functions

Please study the following URL and note these important points:

<http://jackaudio.org/files/docs/html/transport-design.html>

- The timebase master continuously updates position information, beats, timecode, etc. There is at most one master active at a time. If no client is registered as timebase master, frame numbers will be the only position information available.
- The timebase master registers a callback that updates position information while transport is rolling. Its output affects the following process cycle. This function is called immediately after the process callback in the same thread whenever the transport is rolling, or when any client has set a new position in the previous cycle.
- Clients that don't declare a sync callback are assumed ready immediately, anytime the transport wants to start. If a client doesn't require slow-sync processing, it can set its sync callback to NULL.
- The transport state is always valid; initially it is JackTransportStopped.
- When someone calls `jack_transport_start()`, the engine resets the poll bits and changes to a new state, JackTransportStarting.
- When all slow-sync clients are ready, the state changes to JackTransportRolling.

Does Sequencer64 need a latency callback?

[http://jackaudio.org/files/docs/html/group\\_\\_ClientCallbacks.html](http://jackaudio.org/files/docs/html/group__ClientCallbacks.html)

(We need to see why most of the following is in a monospaced font. Is there a new Doxygen feature?)

Here are summaries of the JACK functions used in the `jack_assistant` module:

### 3.2.1 jack\_client\_open()

Open a client session with a JACK server. More complex and powerful than `jack_client_new()`. Clients choose which of several servers to connect, and how to start the server automatically, if not already running. There is also an option for JACK to generate a unique client name.

### 3.2.2 jack\_on\_shutdown()

Registers a function to call when the JACK server shuts down the client thread. It must be an asynchronous POSIX signal handler: only async-safe functions, executed from another thread. A typical function might set a flag or write to a pipe so that the rest of the application knows that the JACK client thread has shut down. Clients do not need to call this function. It only helps clients understand what is going on. It should be called before `jack_client_activate()`.

### 3.2.3 jack\_set\_sync\_callback()

Register/unregister as a slow-sync client; it can't respond immediately to transport position changes. The callback is run at the first opportunity after registration: if the client is active, this is the next process cycle, otherwise it is the first cycle after `jack_activate()`. After that, it runs as per JackSyncCallback rules. Clients that don't set this callback are assumed ready immediately any time the transport wants to start.

### 3.2.4 jack\_set\_process\_callback()

Tells the JACK server to call the callback whenever there is work. The function must be suitable for real-time execution, it cannot call functions that might block for a long time: `malloc()`, `free()`, `printf()`, `pthread_mutex_lock()`, `sleep()`, `wait()`, `poll()`, `select()`, `pthread_join()`, `pthread_cond_wait()`, etc. In the current class, this function is a do-nothing function.

### 3.2.5 jack\_set\_session\_callback()

Tells the JACK server to call the callback when a session event is delivered. Setting more than one session callback per process is probably a design error. For a multiclient application, it's more sensible to create a JACK client with only one session callback.

### 3.2.6 jack\_activate()

Tells the JACK server that the application is ready to start processing.

### 3.2.7 jack\_release\_timebase()

TODO

### 3.2.8 jack\_client\_close()

TODO

### 3.2.9 jack\_transport\_start()

Starts the JACK transport rolling. Any client can make this request at any time. It takes effect no sooner than the next process cycle, perhaps later if there are slow-sync clients. This function is realtime-safe. No return code.

### 3.2.10 jack\_transport\_stop()

Starts the JACK transport rolling. Any client can make this request at any time. This function is realtime-safe. No return code.

### 3.2.11 jack\_transport\_locate()

Repositions the transport to a new frame number. May be called at any time by any client. The new position takes effect in two process cycles. If there are slow-sync clients and the transport is already rolling, it will enter the JackTransportStarting state and begin invoking their sync\_callbacks until ready. This function is realtime-safe.

### 3.2.12 jack\_transport\_reposition()

Request a new transport position. May be called at any time by any client. The new position takes effect in two process cycles. If there are slow-sync clients and the transport is already rolling, it will enter the JackTransportStarting state and begin invoking their sync\_callbacks until ready. This function is realtime-safe. This call, made in the position() function, is currently disabled.

## 3.3 Modes Operation

### 3.3.1 No JACK, Live Mode

In `~/ .config/sequencer64/sequencer64.rc`, set:

- `jack_transport = 0`
- `jack_master = 0`
- `jack_master_cond = 0`
- `jack_start_mode = 0`

By changing the start mode to 0 (false), Sequencer64 is put into Live Mode. With this setting, control of the muting and unmuting of patterns resides in the main window (the patterns window). One can start the playback in the performance (song) window, but it will not affect which patterns play, at all.

Note that this option is part of the *File / Options / JACK/LASH* configuration page.

### 3.3.2 No JACK, Song Mode

In `~/ .config/sequencer64/sequencer64.rc`, set:

- `jack_transport = 0`
- `jack_master = 0`

- `jack_master_cond = 0`
- `jack_start_mode = 1`

By changing the start mode to 1 (true), Sequencer64 is put into Song Mode.

With this setting, control of the muting and unmuting of patterns resides in the song window (the performance window). The patterns shown in the pattern slots of the main window turn on and off whenever the progress bar is in the pattern as drawn in the performance window.

Note that this option is part of the *File / Options / JACK/LASH* configuration page.

### 3.3.3 JACK Transport

In `~/ .config/sequencer64/sequencer64.rc`, set:

- `jack_transport = 1`
- `jack_master = 0`
- `jack_master_cond = 0`
- `jack_start_mode = 0` or `1` (see previous section)

The current behavior is that `qjackctl` and `sequencer64` playback/progress seem to be independent of each other.

The workaround seems to be to set `seq24/sequencer64` as JACK Master, or if another *application* (e.g. *Qtractor*) is JACK Master.

OLD BEHAVIOR:

Start `qjackctl`, verify that it sets up correctly, then click it's "play" button to start the transport rolling. Run `sequencer64`, load a file. Then note that starting playback (whether in the main window or in the performance window) is ineffective, but resets the time counter in `qjackctl`. Why? With JACK sync enabled by the macro:

```
[JACK transport slave]
jack sync(): zero frame rate [single report]!?
[JackTransportRolling]
[JackTransportStarting] (every time space bar pressed)
[Start playback]
. . .
```

END OF OLD BEHAVIOR.

## 3.4 Breakage

Old message about `seq24` being broken:

<http://lists.linuxaudio.org/pipermail/linux-audio-user/2010-November/073848.html>

```
i dont see the transport synchronisation working with a jack1 svn version.
you are still using only a sync callback.
```

```
and you are relying on the transport to go through the
JackTransportStarting state.
```

```
this issue should be fixed.
iirc we came to the conclusion, that seq24 is broken, and we will not
revert the changes in jack, which break it.
```

the quick and dirty fix on your side, would be to register an empty `process_callback`.

but the issue still remains. `seq24` is NOT a slow sync client. but it registers a `sync_callback`. and it even takes a lock in the sync callback.

the patch for jack-session support didnt get merged either.

Another one (no need for a URL):

I use `seq24` for the majority of my projects but it isn't ideal (I should point out that I never finish anything). I don't like `seq24`'s pianoroll editor, the way you do CC envelopes isn't ideal, it uses `alsa-midi`, there's unnecessary complexity in switching from `pattern-trigger` mode to `song` mode, and its insistence on being transport master while not even being able to adjust tempo when live is annoying

## 3.5 JACK References

- <http://libremusicproduction.com/articles/demystifying-jack-%E2%80%93-beginners-guide>
- <http://jackaudio.org/files/docs/html/transport-design.html>
- <http://kxstudio.linuxaudio.org/Repositories>





## Chapter 4

# User Testing of Sequencer64 with Yoshimi

**Author(s)** Chris Ahlstrom 2015-10-18

### 4.1 Introduction

This section describes user testing of Sequencer64 using Yoshimi. It will expand as we work our way through all the many use-cases that can be achieved with Sequencer64 and Yoshimi.

### 4.2 Smoke Test

Every so often we run Sequencer64 with a software synthesizer to make sure we haven't broken any functionality via our major refactoring efforts. We call it a "smoke test". We fire up the two application, and see if anything smokes.

This smoke test sets up Yoshimi with a very simple ALSA setup, and no instruments are loaded. Instead, only the "Simple Sound" is used on all channels. We've been doing this test with Yoshimi 1.3.6. The current Debian Sid ("testing") version of Yoshimi is 1.3.6-2, pulled from SourceForge. It seems to have issues, so we've been cloning and pulling the code from:

```
https://github.com/Yoshimi/yoshimi.git
```

After getting the application build and installed, the next step is to run it, using ALSA for MIDI and for audio:

```
$ yoshimi -a -A &
```

Next, fix up the configuration files for Sequencer64, `~/.config/sequencer64/sequencer64.rc` and `~/.config/sequencer64/sequencer64.usr`.

First hide `sequencer64.usr` somewhere, or delete it, as it will determine what MIDI devices are available, and we don't want that (yet). Second, make sure that `sequencer64.rc` makes the following setting:

```
[manual-alsa-ports]

# Set to 1 if you want seq24 to create its own ALSA ports and
# not connect to other clients

0    # number of manual ALSA ports
```

Next, run the newly-built version of Sequencer64. If desired, use the `--bus` option described below to force the buss number to the buss you need, as shown in the second version of the command:

```
$ sequencer64/sequencer64 &
$ sequencer64/sequencer64 --bus 5 &
```

In *File / Options / MIDI Clock*, observe the MIDI inputs made available by your system. Our system shows:

```
[0] 14:0 (Midi Through Port-0)
[1] 128:0 (TiMidity port 0)
[2] 128:0 (TiMidity port 1)
[3] 128:0 (TiMidity port 2)
[4] 128:0 (TiMidity port 3)
[5] 129:0 (input)
```

For some reason (a bug in Yoshimi?), input "[5]" doesn't indicate that it is Yoshimi, but it is. Take note of that input number... that is the MIDI buss number that is needed to drive Yoshimi.

Also make sure that of the clock settings for those busses are "Off".

**The next instruction still works, but it is easier to simply pass the option `--bus 5` to Sequencer64 when starting it up.**

Now open the file `sequencer64/contrib/midi/b4uacuse-GM-format.midi` in Sequencer64. For all of the patterns (slots) that have lots of data in them, right click on the pattern and select *Midi Bus / [5] 129:0 (input)* and the desired channel number. (Doesn't matter much, just use up the lower channel numbers first).

Back in Yoshimi, select each Part corresponding to the channels you selected. Make sure *Enabled* is checked for each desired channel.

Back in Sequencer64, click on each pattern you want to hear, which highlights them in black. Now click the play button (green triangle). The song should play, with each part using the "Simple Sound". Not too bad for a bunch of sine waves, eh?

Now we can test the application more fully. Note that the instructions here are very light. Detailed instructions on the usage of Sequencer64 can be found in the following project, which contains a PDF file and the LaTeX code used to build it:

<https://github.com/ahlstromcj/sequencer24-doc.git>

Although it applies to an earlier version of the project, it still mostly holds true for Sequencer64.

## 4.3 Tests in the Patterns Window

The Patterns window is the inside portion of the main window, supported by the `mainwid` class. It contains a grid of boxes or slots, with each slot potentially containing a pattern, sequence, or track. Empty tracks (i.e. tracks that contain no events, like title-only tracks) are highlighted in yellow.

This window supports only a single variant of mouse-handling.

### 4.3.1 Button Clicks on a Pattern

A left-click on a pattern slot should cause the following to happen:

1. The pattern will be highlighted (white on a black background). This won't occur until the button is released.
2. During playback, the pattern will emit MIDI events and play its sequence.
3. If the pattern is dragged to another slot, whether playing is in progress or not, releasing the button in the destination slot will move the pattern to that slot.

A right-click on a pattern slot should cause the following to happen:

1. If the pattern is empty, then a pop-up menu to make a New pattern, paste a pattern, or make other selections will appear.
2. If the pattern is active, then a pop-up menu to Edit the pattern or make other selections will appear.
3. A second right-click, just off the menu, will dismiss the menu.

#### 4.3.2 Patterns Window Key Shortcuts

First, note the selection of the File / Options / Keyboard / Show keys option. The tests here should work whether or not it is selected. The only difference is if the keys are shown.

We got a segfault during this test, when we weren't being systematic about it.

#### 4.3.3 The Sequencer64 User File

To be discussed.

### 4.4 Tests Using Valgrind

Valgrind is a very useful tool for unearthing memory issues and other issues in an application, especially when one has the source code and can build the code with debugging information.

One runs the application from the command line, preceding its command line with valgrind and some of its options.

#### 4.4.1 Valgrind Suppressions

One problem with valgrind is that it also uncovers errors in system libraries that one has no control over. These errors clutter the output, so we suppress them using a valgrind "suppressions" file. Here's how to create one:

```
$ valgrind --gen-suppressions=yes --log-file=val.supp ./Sequencer64/sequencer64
$ valgrind --gen-suppressions=all --log-file=val.supp ./Sequencer64/sequencer64
```

As the program runs, one is asked to print a suppression. If the error is due to a system or third-party library, answer "Y return", and then copy-and-paste the suppression to a file, giving it a name. For example, we provide a file `contrib/seq64.supp` containing suppressions of errors that annoy us. There are way too many "errors" in ALSA, GTK+, gtkmm, glibc, and more.

The second command collects all the suppressions. Passing the val.supp file through sed makes it immediately usable:

```
$ sed -i -e /^==/g val.supp
```

Running valgrind like this then shows mostly the errors we care about:

```
$ valgrind --suppressions=val.supp ./Sequencer64/sequencer64
```

We've added some other suppression files to the `contrib` directory. Too much! For example:

<https://github.com/dtrebbien/GNOME.supp>

However, overall this process is very painful, and we're going to eventually do all the valgrind work on the unit-test project for Sequencer64:

<https://github.com/ahlstromcj/seq64-tests>

### 4.4.2 Full Valgrind Leak-Checking

Here's how to capture errors, while suppressing the system errors and while generating a log file:

```
$ valgrind --suppressions=contrib/seq64.supp --leak-check=full \
  --track-origins=yes --log-file=valgrind.log --show-leak-kinds=all \
  ./Sequencer64/sequencer64
```

The errors can be also be re-routed to a log-file via the "2> valgrind.log" shell redirection.

Another idea is to precede the valgrind command with the following construct:

```
$ G_SLICE=debug-blocks valgrind ...
```

G\_SLICE=debug-blocks will turn off gtk's advanced memory management to allow valgrind to show correct results. This results in an amazing plethora of invalid read and invalid write errors in GNOME-related libraries. Sheesh!

And don't forget about Valgrind's "massif" memory-tracking tool! (More to come!)

#### 4.4.2.1 Leak-Checking Basic Operation

For the first pass, just run Sequencer64, then immediately exit. Then scan the log file to see if any "errors" can be pinpointed to the application and library code.

Don't forget to run the same scenario without valgrind, in a console window, to see if any of our own debug/problem output occurs.

In any case, leakage tagged as "still reachable" isn't as bad as leakage tagged as "definitely lost" or "indirectly lost".

But good luck finding a Sequencer64 bug buried in the chaff of 3rd-party valgrind reports, even with some suppressions enabled. Apparently a lot of them have to do with data structures that are intended to last the full life of the application.

One can make the search a little easier by searching for the "seq64" namespace in the valgrind log.

## 4.5 Specific Fault Debugging

This section goes through specific debugging cases we encountered. They should be part of the regular testing of Sequencer64.

## 4.6 Snipping of a MIDI file.

In order to have a test file for the *seq64-tests* project, we loaded up the *b4uacuse-GM-format.midi* file, removed all but four of the tracks, and saved it as *b4uacuse-snipped.midi*. Loading this file into Sequencer64 caused the following:

```
$ ./Sequencer64/sequencer64
[Reading user configuration /home/ahlstrom/.config/sequencer64/sequencer64.usr]
[Reading rc configuration /home/ahlstrom/.config/sequencer64/sequencer64.rc]
get_sequence(): m_seqs[4] not null
Segmentation fault
```

First step, fire up a debugger and see what happened. We use *cgdb*, a text-based front-end for gdb with a "vi" feel.

```
$ cgdb ./Sequencer64/sequencer64
```

Just hit "r", do *File / Open*, navigate to `b4uacuse-snipped.midi`, select it, and watch what happens.

The "bt" (backtrace) command shows a pretty large stack, 52 items. Page up to the top of the stack, and select frame 1 ("fr 1"). This shows a mutex at a very low address, 0x650! Frame 2 shows we are in the automutex constructor, calling `lock()` on that same badly-located mutex. Frame 3 is in `sequence::event_count()`, same bad mutex, and the `m_events` member is at address 0x0. Obviously, we're dealing with an unallocated sequence.

Frame 4 is in `mainwid::draw_sequence_on_pixmap()`, just after we've retrieved the next sequence via `perform::get_sequence(4)`. But that would be the fifth sequence (the sequence numbers start at 0), and we snipped all but 4 from the file before we saved it.

So, one thing we need to do is *check* the value returned by `get_sequence()` before we try to use it. The other thing to do is figure out how we got to the fifth sequence, and fix that code as well. Using the command "`p perf().sequence_count()`", we verify that there are indeed only 4 sequences allocated.

Frame 5 is in `mainwid::draw_sequences_on_pixmap()`. That function tries to load all sequences on the current screen-set, from 0 to 31, without checking to see how many there actually are. Inefficient and dangerous.

Frame 6 is in `mainwid::reset()`. We could pass `perf().sequence_count()` here for checking, or get it in `mainwid::draw_sequences_on_pixmap()`.

Before we fix this issue, we need to load a file that works, to see why it does not fail for most files. We will put a breakpoint at the top `mainwid::draw_sequences_on_pixmap()`.

We hit the breakpoint before even loading a file, with a `sequence_count()` of 0. The call to `valid_sequence(0)` passes the test. We may want to make `valid_sequence()` take the `sequence_count()` into account. But the call to `perf().is_active(0)` prevents anything bad from happening at startup time.

Once we load a good file, the `sequence_count()` is 14 in `mainwid::draw_sequences_on_pixmap()`. We turn on the display of "offset" using the command "display offset", and "c" (for "continue") until `offset = 14`, which means we are beyond that last sequence. That bad access is prevented by `perf().is_active(14)`.

So the fundamental problem is that `perf().is_active(4)` is not protecting the access when we load the "bad file". We need to find and fix that issue before papering over the problem with better access checks.

Start again, putting a breakpoint in the call to "new sequence(m\_ppqn)" in `midifile`. This call sets up some members and clears the list of 256 playing notes. Add another breakpoint at "`a_perf.add_sequence()`" to see what's happening there.

What we find is that the first two tracks have proper sequence numbers as read from the MIDI file, 0 and 1. But the third one preserves the number from the old file, 4. We have a disjunction between the track number and the sequence number, a conceptual problem. We can leave it as is, and beef up the error-checking, or replace the sequence number with the track number when loading the file. What to do?

- Make sure that the is-active flag for all sequences is "false", that the pointers are always null, and make sure to test both of these items (depending on context) before doing anything with the sequence.
- Convert the sequence number to the track number upon saving the MIDI file, or upon reading the MIDI file, and use that number when adding the sequence to the perform object. This might affect some seq24/sequencer64 functionality, however. It's big move.

We need information on reading and importing.

First, if we look at a file that we created long ago by importing `b4uacuse.mid`, `b4uacuse-GM-format.midi`, it has its fourteen sequence numbers identical to their track numbers. No problem.

Second, if we just read `b4uacuse.mid`, a non-seq24-created MIDI file, we see that each of its tracks have no sequence number – they are all zero. The `perform::add_sequence()` simply iterates from the beginning of `m_seqs[]` until it finds an inactive `m_seqs[i]`, and uses that element to hold the sequence pointer.

But now it also segfaults! Let's fix all the non-checked `get_sequence()` calls right away, it is too big an issue to ignore.

In the end, we have to be aware that a screen-set can have blank (null) slots interspersed amongst the active slots.



## Chapter 5

# Licenses

**Library** This application and its libraries, sub-applications, and documents.

**Author(s)** Chris Ahlstrom 2015-09-10

### 5.1 License Terms for the This Project.

Wherever the tag `$XPC_SUITE_GPL_LICENSE$` appears, or wherever reference to the GPL licensing scheme (any version) is mentioned, substitute the appropriate license text, depending on whether the project is a library, application, documentation, or server software. We're not going to include paragraphs of licensing information in every module; you are responsible for coming here to read the licensing information.

These licenses apply to each sub-project and file artifact in the project with which this license description was packaged.

Wherever the term **XPC** is encountered in this project, it refers to my projects, which go beyond the package that contains this document.

### 5.2 XPC Application License

The **XPC** application license is either the **GNU GPLv2.** or the **GNU GPLv3.** Generally, projects that originate with me use the latter language, while projects I have extended may specify the former license.

Copyright (C) 2015-2015 by Chris Ahlstrom

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the

Free Software Foundation, Inc.  
51 Franklin Street, Fifth Floor  
Boston, MA 02110-1301, USA.

The text of the GNU GPL version 3 license can also be found here:

<http://www.gnu.org/licenses/gpl-3.0.txt>

## 5.3 XPC Library License

The **XPC** library license is the **GNU LGPLv3**.

Copyright (C) 2015-2015 by Chris Ahlstrom

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 3 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Lesser Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the

```
Free Software Foundation, Inc.  
51 Franklin Street, Fifth Floor  
Boston, MA 02110-1301, USA.
```

The text of the GNU LGPL version 3 license can also be found here:

<http://www.gnu.org/licenses/lgpl-3.0.txt>

## 5.4 XPC Documentation License

The **XPC** documentation license is the **GNU FDLv1.3**.

Copyright (C) 2015-2015 by Chris Ahlstrom

This documentation is free documentation; you can redistribute it and/or modify it under the terms of the GNU Free Documentation License as published by the Free Software Foundation; either version 1.3 of the License, or (at your option) any later version.

This documentation is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Free Documentation License for more details.

You should have received a copy of the GNU Free Documentation License along with this documentation; if not, write to the

```
Free Software Foundation, Inc.  
51 Franklin Street, Fifth Floor  
Boston, MA 02110-1301, USA.
```

The text of the GNU FDL version 1.3 license can also be found here:

<http://www.gnu.org/licenses/fdl.txt>

## 5.5 XPC Affero License

The **XPC** "Affero" license is the **GNU AGPLv3**.

Copyright (C) 2015-2015 by Chris Ahlstrom

This server software is free server software; you can redistribute it and/or modify it under the terms of the GNU Affero General Public License as published by the Free Software Foundation; either version 1.3 of the License, or (at your option) any later version.

This documentation is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Free Documentation License for more details.



You should have received a copy of the GNU Affero General Public License along with this server software; if not, write to the

Free Software Foundation, Inc.  
51 Franklin Street, Fifth Floor  
Boston, MA 02110-1301, USA.

The text of the GNU AGPL version 3 license can also be found here:

<http://www.gnu.org/licenses/agpl-3.0.txt>

At the present time, no **XPC** project uses the "Affero" license.

## 5.6 XPC License Summary

Include one of these licenses in your Doxygen documentation with one of the following Doxygen tags specified above:

```
\ref gpl_license_subproject  
\ref gpl_license_application  
\ref gpl_license_library  
\ref gpl_license_documentation  
\ref gpl_license_affero
```

For more information on navigating GNU licensing, see this page:

<http://www.gnu.org/licenses/>

Copies of these licenses (and some logos) are provided in the `licenses` directory of the main project (or you can search for them at *gnu.org*).



## Chapter 6

# Todo List

### File `calculations.cpp`

There are additional user-interface and MIDI scaling variables in the `perroll` module that we need to move here.

### File `perfnames.cpp`

When bringing up this dialog, and starting play from it, some extra horizontal lines are drawn for some of the sequences. This happens even in `seq24`, so this is long standing behavior. Is it useful, and how? Where is it done? In `perroll`?

### Global `seq64::editable_events::save_events ()`

Consider what to do about the `sequence::m_is_modified` flag.

### Global `seq64::eventedit::handle_save ()`

Could also support writing the events to a new sequence, for added flexibility.

### Global `seq64::jack_assistant::output (jack_scratchpad &pad)`

Follow up on this note found "out there": "Maybe I'm wrong but if I understood correctly, recent `jack1` transport no longer goes into `Jack_Transport_Starting` state before going to `Jack_Transport_Rolling` (this was deliberately dropped), but `seq24` currently needs this to start off with `jack` transport." On the other hand, some people have no issues.

### Global `seq64::mainwid::timeout ()`

We should use this callback to display the current time in the playback.

### Global `seq64::mainwnd::mainwnd (perform &a_p, bool allowperf2=true)`

Offload most of the work into an initialization function like `options` does; make the `perform` parameter a reference; `valgrind` flags `m_tooltips` as lost data, but if we try to manage it ourselves, many more leaks occur.

### Global `seq64::mainwnd::on_key_press_event (GdkEventKey *a_ev)`

Test this functionality in old and new application.

### Global `seq64::mainwnd::on_key_release_event (GdkEventKey *a_ev)`

Test this functionality in old and new application.

### Global `seq64::perfedit::perfedit (perform &p, bool second_perfedit=false, int ppqn=SEQ64_USE_DEFAULT_PPQN)`

Offload most of the work into an initialization function like `options` does.

### Global `seq64::perform::add_sequence (sequence *seq, int perf)`

Shouldn't we wrap around the sequence list if we can't find an empty sequence slot after `prefnum`?

### Global `seq64::perform::is_active (int seq)`

We should have the sequence object keep track of its own activity and access that via a reference or pointer.

### Global `seq64::perform::m_seqs [c_max_sequence]`

First, make the sequence array a vector, and second, put all of these flags into a structure and access those members indirectly.

**Global `seq64::perform::set_beats_per_minute` (int bpm)**

I think this logic is wrong, in that it needs only one of the two to be stopped before it sets the BPM, while it seems to me that both should be stopped; to be determined.

**Global `seq64::seqedit::get_measures` ()**

Create a `sequence::set_units()` function or a `sequence::get_measures()` function to forward to.

**Global `seq64::seqedit::seqedit` (perform &perf, sequence &seq, int pos, int ppqn=SEQ64\_USE\_DEFAULT↔\_PPQN)**

Offload most of the work into an initialization function like options does.

**Global `seq64::seqedit::set_background_sequence` (int seq)**

Make the sequence pointer a reference.

**Global `seq64::seqmenu::m_modified`**

We need to make sure that the perform object is in control of the modification flag.

**Global `seq64::seqmenu::seq_clear_perf` ()**

All of `seq_paste()` can be offloaded to a (new) perform member function.

**Global `seq64::seqmenu::seq_copy` ()**

Can be offloaded to a perform member function that accepts a sequence clipboard non-const reference parameter.

**Global `seq64::seqmenu::seq_cut` ()**

A lot of `seq_cut()` can be offloaded to a (new) perform member function that takes a sequence clipboard non-const reference parameter.

**Global `seq64::seqmenu::seq_paste` ()**

All of `seq_paste()` can be offloaded to a (new) perform member function with a const clipboard reference parameter.

**Global `seq64::sequence::remove` (event &e)**

Use find instead in `sequence::remove()`!

**Global `seq64::triggers::next` (midipulse \*tick\_on, midipulse \*tick\_off, bool \*selected, midipulse \*tick\_↔offset)**

It would be a bit simpler to simply return a trigger object, wouldn't it?

## Chapter 7

# Deprecated List

Global `seq64::sequence::get_name` () const



## Chapter 8

# Hierarchical Index

### 8.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

seq64::AbstractPerfInput . . . . .	37
seq64::Seq24PerfInput . . . . .	218
seq64::automutex . . . . .	37
seq64::click . . . . .	38
seq64::configfile . . . . .	42
seq64::optionsfile . . . . .	171
seq64::userfile . . . . .	304
seq64::editable_events . . . . .	52
seq64::event . . . . .	55
seq64::editable_event . . . . .	43
seq64::event_list::event_key . . . . .	65
seq64::event_list . . . . .	67
seq64::font . . . . .	90
seq64::gui_assistant . . . . .	94
seq64::gui_assistant_gtk2 . . . . .	95
seq64::gui_palette_gtk2 . . . . .	104
seq64::gui_drawingarea_gtk2 . . . . .	96
seq64::eventslots . . . . .	79
seq64::maintime . . . . .	123
seq64::mainwid . . . . .	128
seq64::perfnames . . . . .	179
seq64::perfroll . . . . .	206
seq64::perftime . . . . .	212
seq64::seqdata . . . . .	221
seq64::seqevent . . . . .	233
seq64::seqkeys . . . . .	237
seq64::seqroll . . . . .	245
seq64::seqtime . . . . .	250
seq64::gui_window_gtk2 . . . . .	105
seq64::eventedit . . . . .	71
seq64::mainwnd . . . . .	134
seq64::perfedit . . . . .	174
seq64::seqedit . . . . .	226
seq64::jack_assistant . . . . .	108
seq64::jack_scratchpad . . . . .	112
seq64::keybindentry . . . . .	112

seq64::keys_perform . . . . .	113
seq64::keys_perform_gtk2 . . . . .	117
seq64::keys_perform_transfer . . . . .	119
seq64::keystroke . . . . .	119
seq64::lash . . . . .	122
seq64::midi_container . . . . .	141
seq64::midi_list . . . . .	144
seq64::midi_vector . . . . .	151
seq64::midi_measures . . . . .	146
seq64::midi_splitter . . . . .	147
seq64::midi_timing . . . . .	150
seq64::midibus . . . . .	153
seq64::midifile . . . . .	156
seq64::mutex . . . . .	170
seq64::condition_var . . . . .	40
seq64::options . . . . .	171
seq64::perform . . . . .	183
seq64::performcallback . . . . .	205
seq64::mainwnd . . . . .	134
seq64::rc_settings . . . . .	215
seq64::rect . . . . .	217
seq64::gui_drawingarea_gtk2::rect . . . . .	217
seq64::Seq24SeqEventInput . . . . .	220
seq64::Seq24SeqRollInput . . . . .	221
seq64::seqmenu . . . . .	242
seq64::mainwid . . . . .	128
seq64::perfnames . . . . .	179
seq64::sequence . . . . .	252
seq64::trigger . . . . .	276
seq64::triggers . . . . .	278
seq64::user_instrument . . . . .	285
seq64::user_instrument_t . . . . .	287
seq64::user_midi_bus . . . . .	288
seq64::user_midi_bus_t . . . . .	290
seq64::user_settings . . . . .	290



## Chapter 9

# Data Structure Index

### 9.1 Data Structures

Here are the data structures with brief descriptions:

<a href="#">seq64::AbstractPerfInput</a>	Provides an abstract base class to provide the minimal interface for the various "perf input" classes . . . . .	??
<a href="#">seq64::automutex</a>	Provides a mutex that locks automatically when created, and unlocks when destroyed . . . . .	??
<a href="#">seq64::click</a>	Encapsulates any possible mouse click . . . . .	??
<a href="#">seq64::condition_var</a>	A mutex works best in conjunction with a condition variable . . . . .	??
<a href="#">seq64::configfile</a>	This class is the abstract base class for optionsfile and userfile . . . . .	??
<a href="#">seq64::editable_event</a>	Provides for the management of MIDI editable events . . . . .	??
<a href="#">seq64::editable_events</a>	Provides for the management of an ordered collection MIDI editable events . . . . .	??
<a href="#">seq64::event</a>	Provides events for management of MIDI events . . . . .	??
<a href="#">seq64::event_list::event_key</a>	Provides a key value for an event map . . . . .	??
<a href="#">seq64::event_list</a>	Receptable for MIDI events . . . . .	??
<a href="#">seq64::eventedit</a>	This class supports an Event Editor that is used to tweak the details of events and get a better idea of the mix of events in a sequence . . . . .	??
<a href="#">seq64::eventslots</a>	This class implements the left-side keyboard in the patterns window . . . . .	??
<a href="#">seq64::font</a>	This class provides a wrapper for rendering fonts that are encoded as a 16 x 16 pixmap file in XPM format . . . . .	??
<a href="#">seq64::gui_assistant</a>	This class provides an interface for some of the GUI support needed in Sequencer64 . . . . .	??
<a href="#">seq64::gui_assistant_gtk2</a>	This class provides an interface for some of the Gtk/Gdk/Glib support needed in Sequencer64 . . . . .	??
<a href="#">seq64::gui_drawingarea_gtk2</a>	Implements the basic drawing areas of the application . . . . .	??
<a href="#">seq64::gui_palette_gtk2</a>	Implements a stock palette of Gdk::Color elements . . . . .	??

<a href="#">seq64::gui_window_gtk2</a>	This class supports a basic interface for Gtk::Window-derived objects . . . . .	??
<a href="#">seq64::jack_assistant</a>	This class provides the performance mode JACK support . . . . .	??
<a href="#">seq64::jack_scratchpad</a>	Provide a temporary structure for passing data and results between a perform and <a href="#">jack_assistant</a> object . . . . .	??
<a href="#">seq64::keybindentry</a>	Class for management of application key-bindings . . . . .	??
<a href="#">seq64::keys_perform</a>	This class supports the performance mode . . . . .	??
<a href="#">seq64::keys_perform_gtk2</a>	This class supports the performance mode . . . . .	??
<a href="#">seq64::keys_perform_transfer</a>	Provides a data-transfer structure to make it easier to fill in a <a href="#">keys_perform</a> object's members using sscanf() . . . . .	??
<a href="#">seq64::keystroke</a>	Encapsulates any practical keystroke . . . . .	??
<a href="#">seq64::lash</a>	This class supports LASH operations, if compiled with LASH support (i.e . . . . .	??
<a href="#">seq64::maintime</a>	This class provides the drawing of the progress bar at the top of the main window, along with two "pills" that move in time with the beat and measure . . . . .	??
<a href="#">seq64::mainwid</a>	This class implement the piano roll area of the application . . . . .	??
<a href="#">seq64::mainwnd</a>	This class implements the functionality of the main window of the application, except for the Patterns Panel functionality, which is implemented in the mainwid class . . . . .	??
<a href="#">seq64::midi_container</a>	This class is the abstract base class for a container of MIDI track information . . . . .	??
<a href="#">seq64::midi_list</a>	This class is the std::list implementation of the <a href="#">midi_container</a> . . . . .	??
<a href="#">seq64::midi_measures</a>	Provides a data structure to hold the numeric equivalent of the measures string "measures←:beats:divisions" ("m:b:d") . . . . .	??
<a href="#">seq64::midi_splitter</a>	This class handles the parsing and writing of MIDI files . . . . .	??
<a href="#">seq64::midi_timing</a>	We anticipate the need to have a small structure holding the parameters needed to calculate MIDI times within an arbitrary song . . . . .	??
<a href="#">seq64::midi_vector</a>	This class is the std::vector implementation of the <a href="#">midi_container</a> . . . . .	??
<a href="#">seq64::midibus</a>	Provides a class for handling the MIDI buss on Linux . . . . .	??
<a href="#">seq64::midifile</a>	This class handles the parsing and writing of MIDI files . . . . .	??
<a href="#">seq64::mutex</a>	Simple wrapper for the pthread_mutex_t type used as a recursive mutex . . . . .	??
<a href="#">seq64::options</a>	This class supports a full tabbed options dialog . . . . .	??
<a href="#">seq64::optionsfile</a>	Provides a file for reading and writing the application' main configuration file . . . . .	??
<a href="#">seq64::perfedit</a>	This class supports a Performance Editor that is used to arrange the patterns/sequences defined in the patterns panel . . . . .	??
<a href="#">seq64::perfnames</a>	This class implements the left-side keyboard in the patterns window . . . . .	??

<a href="#">seq64::perform</a>	This class supports the performance mode . . . . .	??
<a href="#">seq64::performcallback</a>	Provides for notification of events . . . . .	??
<a href="#">seq64::perfroll</a>	This class implements the performance roll user interface . . . . .	??
<a href="#">seq64::perftime</a>	This class implements drawing the piano time at the top of the "performance window" (the "song editor") . . . . .	??
<a href="#">seq64::rc_settings</a>	This class contains the options formerly named "global_XXXXXX" . . . . .	??
<a href="#">seq64::rect</a>	A small helper class representing a rectangle . . . . .	??
<a href="#">seq64::gui_drawingarea_gtk2::rect</a>	A small helper structure representing a rectangle . . . . .	??
<a href="#">seq64::Seq24PerfInput</a>	Implements the default (Seq24) performance input characteristics of this application . . . . .	??
<a href="#">seq64::Seq24SeqEventInput</a>	This structure implement the normal interaction methods for Seq24 . . . . .	??
<a href="#">seq64::Seq24SeqRollInput</a>	Implements the Seq24 mouse interaction paradigm for the seqroll . . . . .	??
<a href="#">seq64::seqdata</a>	This class supports drawing piano-roll events on a window . . . . .	??
<a href="#">seq64::seqedit</a>	Implements the Pattern Editor, which has references to: . . . . .	??
<a href="#">seq64::seqevent</a>	Implements the piano event drawing area . . . . .	??
<a href="#">seq64::seqkeys</a>	This class implements the left side piano of the pattern/sequence editor . . . . .	??
<a href="#">seq64::seqmenu</a>	This class handles the right-click menu of the sequence slots in the pattern window . . . . .	??
<a href="#">seq64::seqroll</a>	Implements the piano roll section of the pattern editor . . . . .	??
<a href="#">seq64::seqtime</a>	This class implements the piano time, whatever that is . . . . .	??
<a href="#">seq64::sequence</a>	Firstly a receptable for a single track of MIDI data read from a MIDI file or edited into a pattern . . . . .	??
<a href="#">seq64::trigger</a>	This class hold a single trigger for a sequence object . . . . .	??
<a href="#">seq64::triggers</a>	Receptable the triggers that can be used with a sequence object . . . . .	??
<a href="#">seq64::user_instrument</a>	Provides data about the MIDI instruments, readable from the "user" configuration file . . . . .	??
<a href="#">seq64::user_instrument_t</a>	This structure corresponds to [user-instrument-N] definitions in the ~/.seq24usr or ~/.config/sequencer64/sequencer64.usr file . . . . .	??
<a href="#">seq64::user_midi_bus</a>	Provides data about the MIDI busses, readable from the "user" configuration file . . . . .	??
<a href="#">seq64::user_midi_bus_t</a>	This structure corresponds to [user-midi-bus-0] definitions in the ~/.seq24usr ("user") file (~/.config/sequencer64/sequencer64.usr in the latest version of the application) . . . . .	??
<a href="#">seq64::user_settings</a>	Holds the current values of sequence settings and settings that can modify the number of sequences and the configuration of the user-interface . . . . .	??
<a href="#">seq64::userfile</a>	Supports the user's ~/.config/sequencer64/sequencer64.usr and ~/.seq24usr configuration file . . . . .	??




## Chapter 10

# Data Structure Documentation

### 10.1 seq64::AbstractPerfInput Class Reference

Provides an abstract base class to provide the minimal interface for the various "perf input" classes.

Inheritance diagram for seq64::AbstractPerfInput:

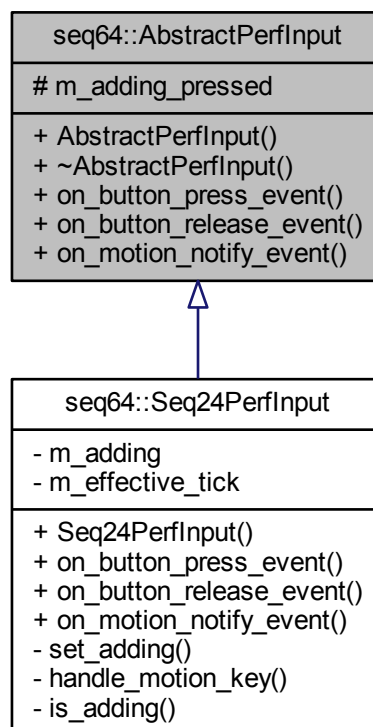

### 10.2 seq64::automutex Class Reference

Provides a mutex that locks automatically when created, and unlocks when destroyed.

## Public Member Functions

- [automutex](#) ([mutex](#) &[my\\_mutex](#))  
*Principal constructor gets a reference to a mutex parameter, and then locks the mutex.*
- [~automutex](#) ()  
*The destructor unlocks the mutex.*

## Private Attributes

- [mutex](#) & [m\\_safety\\_mutex](#)  
*Provides the mutex reference to be used for locking.*

### 10.2.1 Detailed Description

This has a couple of benefits. First, it is more threadsafe in the face of exception handling. Secondly, it can be done with just one line of code.

## 10.3 seq64::click Class Reference

Encapsulates any possible mouse click.

## Public Member Functions

- [click](#) ()  
*The constructor for class click.*
- [click](#) (int [x](#), int [y](#), int [button](#)=SEQ64\_CLICK\_BUTTON\_LEFT, bool [press](#)=true, seq\_modifier\_t [modkey](#)=SEQ64\_NO\_MASK)  
*Principal constructor for class click.*
- [click](#) (const [click](#) &[rhs](#))  
*Provides a stock copy constructor.*
- [click](#) & [operator=](#) (const [click](#) &[rhs](#))  
*Provides a stock principal assignment operator.*
- bool [is\\_press](#) () const  
*'Getter' function for member m\_is\_press*
- bool [is\\_left](#) () const  
*'Getter' function for member m\_button to test for the left button.*
- bool [is\\_middle](#) () const  
*'Getter' function for member m\_button to test for the middle button.*
- bool [is\\_right](#) () const  
*'Getter' function for member m\_button to test for the right button.*
- int [x](#) () const  
*'Getter' function for member m\_x*
- int [y](#) () const  
*'Getter' function for member m\_y*
- int [button](#) () const  
*'Getter' function for member m\_button*
- seq\_modifier\_t [modifier](#) () const  
*'Getter' function for member m\_modifier*
- bool [mod\\_control](#) () const

- *'Getter' function for member `m_modifier` tested for Ctrl key.*
- `bool mod_control_shift () const`  
*'Getter' function for member `m_modifier` tested for Ctrl and Shift key.*
- `bool mod_super () const`  
*'Getter' function for member `m_modifier` tested for Mod4/Super/Windows key.*

## Private Attributes

- `bool m_is_press`  
*Determines if the click was a press or a release event.*
- `int m_x`  
*The x-coordinate of the click.*
- `int m_y`  
*The y-coordinate of the click.*
- `int m_button`  
*The button that was pressed or released.*
- `seq_modifier_t m_modifier`  
*The optional modifier value.*

### 10.3.1 Detailed Description

Useful in passing more generic events to non-GUI classes.

### 10.3.2 Constructor & Destructor Documentation

#### 10.3.2.1 seq64::click::click ( )

Sets all members to false, zero, or the lowest good value.

#### 10.3.2.2 seq64::click::click ( int x, int y, int button = SEQ64\_CLICK\_BUTTON\_LEFT, bool press = true, seq\_modifier\_t modkey = SEQ64\_NO\_MASK )

This function is the only way to set value for the click members (other than the copy constructor and principal assignment operator).

#### Parameters

<code>x</code>	The putative x value of the button click.
<code>y</code>	The putative y value of the button click.
<code>button</code>	The value of the button that was clicked, set to 1, 2, or 3.
<code>press</code>	Set to true if the event was a button press, false if it was a button release.
<code>modkey</code>	Indicates which modifier key (such as Ctrl or Alt), if any, was pressed at the same time as the click action.

#### 10.3.2.3 seq64::click::click ( const click & rhs )

It is nice to be explicit about these kinds of functions, even if it gets tedious.

## Parameters

<i>rhs</i>	Provides the source object to be copied.
------------	--

### 10.3.3 Member Function Documentation

#### 10.3.3.1 `click & seq64::click::operator= ( const click & rhs )`

It is nice to be explicit about these kinds of functions, even if it gets tedious.

## Parameters

<i>rhs</i>	Provides the source object to be assigned from. The assignment is not made if "this" has the same address as this parameter.
------------	--

### 10.3.4 Field Documentation

#### 10.3.4.1 `int seq64::click::m_x [private]`

0 is the left-most coordinate.

#### 10.3.4.2 `int seq64::click::m_y [private]`

0 is the top-most coordinate.

#### 10.3.4.3 `int seq64::click::m_button [private]`

Left is 1, mmiddle is 2, and right is 3. These numbers are defined via macros, and are Linux-specific and Gtk-specific.

#### 10.3.4.4 `seq_modifier_t seq64::click::m_modifier [private]`


Note that SEQ64\_NO\_MASK is our word for 0, meaning "no modifier".

## 10.4 `seq64::condition_var` Class Reference

A mutex works best in conjunction with a condition variable.



Inheritance diagram for seq64::condition\_var:

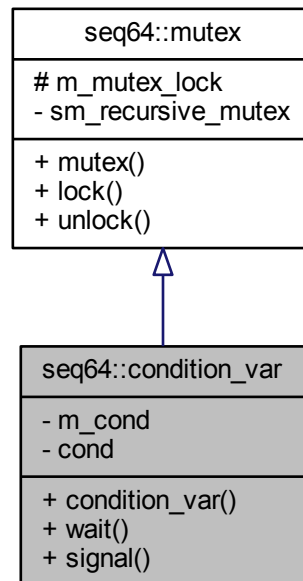

## Public Member Functions

- `condition_var ()`  
*Initialize the condition variable with the global variable.*
- `void wait ()`  
*Waits for the condition variable.*
- `void signal ()`  
*Signals the condition variable.*

## Private Attributes

- `pthread_cond_t m_cond`  
*Provides a class-specific condition variable.*

## Static Private Attributes

- `static const pthread_cond_t cond`  
*Provides a "global" condition variable.*

## Additional Inherited Members

### 10.4.1 Detailed Description

Therefore this class derives from the mutex class. A "has-a" relationship might be more logical than this "is-a" relationship.

### 10.4.2 Field Documentation


10.4.2.1 `const pthread_cond_t seq64::condition_var::cond` `[static], [private]`

Define the static condition variable used by all mutex locks.

## 10.5 seq64::configfile Class Reference

This class is the abstract base class for optionsfile and userfile.

Inheritance diagram for seq64::configfile:

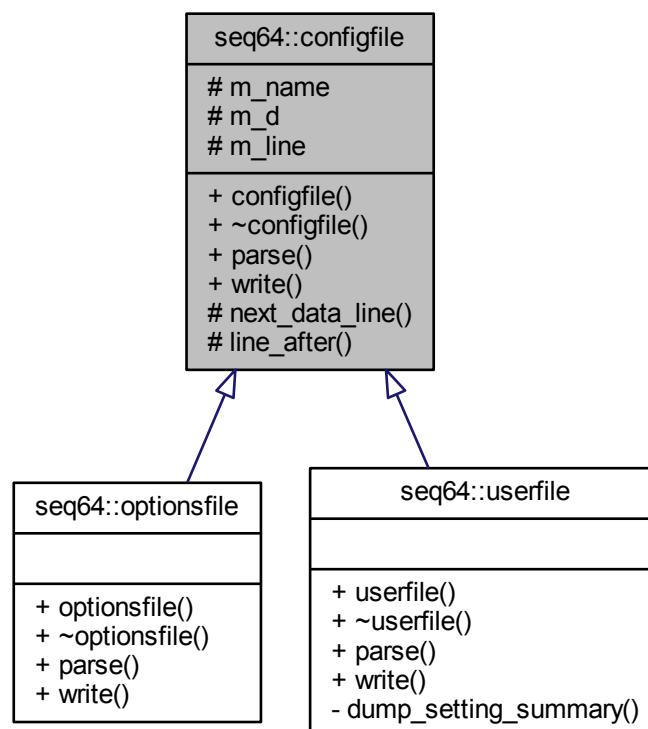

### Public Member Functions

- `configfile` (const std::string &a\_name)  
*Provides the string constructor for a configuration file.*
- virtual `~configfile` ()  
*A rote destructor needed for a base class.*

### Protected Member Functions

- void `next_data_line` (std::ifstream &a\_file)  
*Gets the next line of data from an input stream.*

- void [line\\_after](#) (std::ifstream &a\_file, const std::string &a\_tag)

*This function gets a specific line of text, specified as a tag.*

## Protected Attributes

- std::string [m\\_name](#)  
*Provides the name of the file.*
- char \* [m\\_d](#)  
*Points to an allocated buffer that holds the data for the configuration file.*
- char [m\\_line](#) [SEQ64\_LINE\_MAX]  
*The current line of text being processed.*

## 10.5.1 Constructor & Destructor Documentation

### 10.5.1.1 seq64::configfile::configfile ( const std::string &name )

#### Parameters

<i>name</i>	The name of the configuration file.
-------------	-------------------------------------

## 10.5.2 Member Function Documentation

### 10.5.2.1 void seq64::configfile::next\_data\_line ( std::ifstream &file ) [protected]

If the line starts with a number-sign, a space (!), or a null, it is skipped, to try the next line. This occurs until an EOF is encountered.

We may try to convert this item to a reference; pointers can be subject to problems. For example, what if someone passes a nullpointer? For speed, we don't check it.

Member m\_line is a "global" return value.

#### Parameters

<i>a_file</i>	Points to an input stream.
---------------	----------------------------

### 10.5.2.2 void seq64::configfile::line\_after ( std::ifstream &file, const std::string &tag ) [protected]

#### Parameters

<i>file</i>	Points to the input file stream.
<i>tag</i>	Provides a tag to be found. Lines are read until a match occurs with this tag.

## 10.5.3 Field Documentation


### 10.5.3.1 char seq64::configfile::m\_line[SEQ64\_LINE\_MAX] [protected]

This member receives an input line, and so needs to be a character buffer.

## 10.6 seq64::editable\_event Class Reference

Provides for the management of MIDI editable events.

Inheritance diagram for seq64::editable\_event:

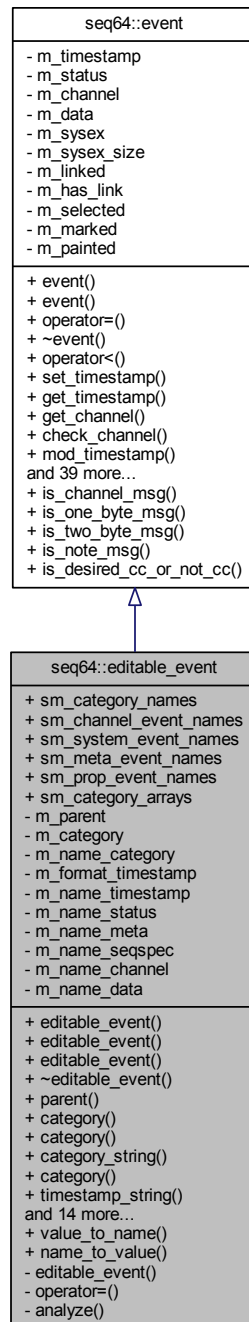

## Public Types

- enum `category_t` {  
`category_name`,  
`category_channel_message`,  
`category_system_message`,  
`category_meta_event`,  
`category_prop_event` }

- enum `timestamp_format_t` {  
    `timestamp_measures`,  
    `timestamp_time`,  
    `timestamp_pulses` }

## Public Member Functions

- `editable_event` (const `editable_events` &`parent`)  
*This constructor simply initializes all of the class members.*
- `editable_event` (const `editable_events` &`parent`, const `event` &`ev`)  
*Event constructor.*
- `editable_event` (const `editable_event` &`rhs`)  
*This copy constructor initializes most of the class members.*
- virtual `~editable_event` ()  
*This destructor current is a rote virtual function override.*
- const `editable_events` & `parent` () const  
*'Getter' function for member m\_parent*
- `category_t` `category` () const  
*'Getter' function for member m\_category*
- void `category` (`category_t` c)  
*This principal assignment operator sets the class members.*
- const std::string & `category_string` () const  
*'Getter' function for member m\_category*
- void `category` (const std::string &`cs`)  
*'Setter' function for member m\_category by value Also keeps the m\_name\_category member in synchrony, but looks up the name, rather than using the name parameter, to avoid storing abbreviations.*
- const std::string & `timestamp_string` () const  
*'Getter' function for member m\_name\_timestamp*
- midipulse `timestamp` () const  
*'Getter' function for member event::get\_timestamp() Implemented to allow a uniform naming convention that is not slavish to the get/set crowd [this ain't Java].*
- void `timestamp` (midipulse ts)  
*'Setter' function for member event::set\_timestamp() Implemented to allow a uniform naming convention that is not slavish to the get/set crowd [this ain't Java].*
- void `timestamp` (const std::string &`ts_string`)  
*'Setter' function for member event::set\_timestamp() [string version]*
- std::string `time_as_pulses` ()  
*Converts the current time-stamp to a string representation in units of pulses.*
- std::string `time_as_measures` ()  
*Converts the current time-stamp to a string representation in units of measures, beats, and divisions.*
- std::string `time_as_minutes` ()  
*Converts the current time-stamp to a string representation in units of hours, minutes, seconds, and fraction.*
- void `set_status_from_string` (const std::string &`ts`, const std::string &`s`, const std::string &`sd0`, const std::string &`sd1`)  
*Converts a string into an event status, along with timestamp and data bytes.*
- std::string `format_timestamp` ()  
*Formats the current timestamp member as a string.*
- std::string `stock_event_string` ()  
*Converts the event into a string desribing the full event.*
- std::string `status_string` () const  
*'Getter' function for member m\_name\_status*
- std::string `meta_string` () const

- *'Getter' function for member m\_name\_meta*  
std::string [seqspec\\_string](#) () const
- *'Getter' function for member m\_name\_seqspec*  
std::string [channel\\_string](#) () const
- *'Getter' function for member m\_name\_channel*  
std::string [data\\_string](#) () const
- *'Getter' function for member m\_name\_data*

## Static Public Member Functions

- static std::string [value\\_to\\_name](#) (midibyte value, [category\\_t](#) cat)  
*Provides a static lookup function that returns the name, if any, associated with a midibyte value.*
- static unsigned short [name\\_to\\_value](#) (const std::string &name, [category\\_t](#) cat)  
*Provides a static lookup function that returns the value, if any, associated with a name string.*

## Static Public Attributes

- static const name\_value\_t [sm\\_category\\_names](#) []  
*An array of event categories and their names.*
- static const name\_value\_t [sm\\_channel\\_event\\_names](#) []  
*An array of MIDI channel events and their names.*
- static const name\_value\_t [sm\\_system\\_event\\_names](#) []  
*An array of MIDI system events and their names.*
- static const name\_value\_t [sm\\_meta\\_event\\_names](#) []  
*An array of Meta events and their names.*
- static const name\_value\_t [sm\\_prop\\_event\\_names](#) []  
*An array of Sequencer64-specific events and their names.*
- static const name\_value\_t \*const [sm\\_category\\_arrays](#) []  
*Provides for fast access (no ifs) to the correct name array for the given category.*

## Private Member Functions

- void [analyze](#) ()  
*Analyzes an editable-event to make all the settings it needs.*

## Private Attributes

- const [editable\\_events](#) & [m\\_parent](#)  
*Provides a reference to the container that holds this event.*
- [category\\_t](#) [m\\_category](#)  
*Indicates the overall category of this event, which will be category\_channel\_message, category\_system\_message, category\_meta\_event, and category\_prop\_event.*
- std::string [m\\_name\\_category](#)  
*Holds the name of the event category for this event.*
- [timestamp\\_format\\_t](#) [m\\_format\\_timestamp](#)  
*Indicates the format to display the time-stamp.*
- std::string [m\\_name\\_timestamp](#)  
*Holds the string version of the MIDI pulses time-stamp.*
- std::string [m\\_name\\_status](#)  
*Holds the name of the status value for this event.*

- `std::string m_name_meta`  
*Holds the name of the meta message, if applicable.*
- `std::string m_name_seqspect`  
*If we eventually implement the editing of the Seq24/Sequencer64 "proprietary" meta sequencer-specific events, the name of the SeqSpec will be stored here.*
- `std::string m_name_channel`  
*Holds the channel description, if applicable.*
- `std::string m_name_data`  
*Holds the data description, if applicable.*

### 10.6.1 Detailed Description

It makes the following members of an event modifiable using human-readable strings:

```
- m_timestamp
- m_status
- m_channel
- m_data[]
```

Eventually, it would be nice to be able to edit, or at least view, the SysEx events and the Meta events. Those two will require extensions to make events out of them (SysEx is partly supported).

To the concepts of event, the `editable_event` class adds a category field and strings to represent all of these members.

### 10.6.2 Member Enumeration Documentation

#### 10.6.2.1 enum seq64::editable\_event::category\_t

Enumerator

**category\_name** These values determine the major kind of event, which determines what types of events are possible for this editable event object. These tags are accompanied by category names in `sm_category_names[]`. The enum values are cast to midibyte values for the purposes of using the lookup infrastructure.

Indicates that the lookup needs to be done on the category names, as listed in `sm_category_names[]`.

**category\_channel\_message** Indicates a channel event, with a value ranging from 0x80 through 0xEF. Some examples are note on/off, control change, and program change. Values are looked up in `sm_channel_event_names[]`.

**category\_system\_message** Indicates a system event, with a value ranging from 0xF0 through 0xFF. Some examples are SysEx start/end, song position, and stop/start/continue/reset. Values are looked up in `sm_system_event_names[]`.

**category\_meta\_event** Indicates a meta event, and there is a second value that is used to look up the name of the meta event, in `sm_meta_event_names[]`.

**category\_prop\_event** Indicates a "proprietary", Sequencer64 event. Indicates to look up the name of the event in `sm_prop_event_names[]`. Not sure if these kinds of events will be stored separately.

#### 10.6.2.2 enum seq64::editable\_event::timestamp\_format\_t

Enumerator

**timestamp\_measures** Provides a code to indicate the desired timestamp format. Three are supported. All editable events will share the same timestamp format, but it seems good to make this a event class member, rather than something imposed from an outside static value. We shall see.

This format displays the time in "measures:beats:divisions" format, where measures and beats start at 1. Thus, "1:1:0" is equivalent to 0 pulses or to "0:0:0.0" in normal time values.

**timestamp\_time** This format displays the time in "hh:mm:second.fraction" format. The value displayed should not depend upon the internal timing parameters of the event.

**timestamp\_pulses** This format specifies a bare pulse format for the timestamp – a long integer ranging from 0 on up. Obviously, this representation depends on the PPQN value for the sequence holding this event.

### 10.6.3 Constructor & Destructor Documentation

#### 10.6.3.1 seq64::editable\_event::editable\_event ( const editable\_events & parent )

editable\_event::editable\_event () : event (), m\_category (category\_name), m\_name\_category (), m\_format\_↵ timestamp (timestamp\_measures), m\_name\_timestamp (), m\_name\_status (), m\_name\_meta (), m\_name\_↵ seqspec (), m\_name\_channel (), m\_name\_data () { // Empty body } Principal constructor.

#### 10.6.3.2 seq64::editable\_event::editable\_event ( const editable\_events & parent, const event & ev )

This function basically adds all of the extra [editable\\_event](#) stuff to a standard event, so that the resulting [editable\\_↵ \\_event](#) is container-ready.

#### 10.6.3.3 seq64::editable\_event::editable\_event ( const editable\_event & rhs )

This function is currently geared only toward support of the SMF 0 channel-splitting feature. Many of the members are not set to useful values when the MIDI file is read, so we don't handle them for now.

#### Warning

This function does not yet copy the SysEx data. The inclusion of SysEx [editable\\_events](#) was not complete in Seq24, and it is still not complete in Sequencer64. Nor does it currently bother with the links.

#### Parameters

<i>rhs</i>	Provides the <a href="#">editable_event</a> object to be copied.
------------	--

### 10.6.4 Member Function Documentation

#### 10.6.4.1 std::string seq64::editable\_event::value\_to\_name ( midibyte value, editable\_event::category\_t cat ) [static]

#### Parameters

<i>value</i>	The MIDI byte value to look up.
<i>cat</i>	The category of the MIDI byte. Each category calls a different name array into play.

#### Returns

Returns the name associated with the value. If there is no such name, then an empty string is returned.

#### 10.6.4.2 unsigned short seq64::editable\_event::name\_to\_value ( const std::string & name, editable\_event::category\_t cat ) [static]

The string\_match() function, which can match abbreviations, case-insensitively, is used to make the string comparisons.



## Parameters

<i>name</i>	The string value to look up.
<i>cat</i>	The category of the MIDI byte. Each category calls a different name array into play.

## Returns

Returns the value associated with the name. If there is no such value, then SEQ64\_END\_OF\_MIDI\_BYTE\_TABLE is returned.

## 10.6.4.3 void seq64::editable\_event::category ( category\_t c )

## Parameters

<i>rhs</i>	Provides the <a href="#">editable_event</a> object to be assigned.
------------	--

## Returns

Returns a reference to "this" object, to support the serial assignment of [editable\\_events](#).

[editable\\_event](#) & editable\_event::operator = (const editable\_event & rhs) { if (this != &rhs) { event::operator =(rhs); m\_category = rhs.m\_category; m\_parent = rhs.m\_parent; m\_name\_category = rhs.m\_name\_category; m\_format\_timestamp = rhs.m\_format\_timestamp; m\_name\_timestamp = rhs.m\_name\_timestamp; m\_name\_status = rhs.m\_name\_status; m\_name\_meta = rhs.m\_name\_meta; m\_name\_seqspect = rhs.m\_name\_seqspect; m\_name\_channel = rhs.m\_name\_channel; m\_name\_data = rhs.m\_name\_data; } return \*this; } 'Setter' function for member *m\_category* by value Also keeps the *m\_name\_category* member in synchrony. Note that a bad value is translated to the value of *category\_name*.

## 10.6.4.4 void seq64::editable\_event::category ( const std::string &amp; name )

Note that a bad value is translated to the value of *category\_name*.

## 10.6.4.5 void seq64::editable\_event::timestamp ( midipulse ts )

Plus, we also have to set the string version at the same time.

## Parameters

<i>ts</i>	Provides the timestamp in units of MIDI pulses.
-----------	---

The format of the string representation is of the format selected by the *m\_format\_timestamp* member and is set by the [format\\_timestamp\(\)](#) function.

## 10.6.4.6 void seq64::editable\_event::timestamp ( const std::string &amp; ts\_string )

## Parameters

<i>ts</i>	Provides the timestamp in units of MIDI pulses.
-----------	---

The format of the string representation is of the format selected by the *m\_format\_timestamp* member and is set by the [format\\_timestamp\(\)](#) function.

## 10.6.4.7 std::string seq64::editable\_event::time\_as\_measures ( )

Cannot be inlined because of a circular dependency between the [editable\\_event](#) and [editable\\_events](#) classes.

#### 10.6.4.8 `std::string seq64::editable_event::time_as_minutes ( )`

Cannot be inlined because of a circular dependency between the `editable_event` and `editable_events` classes.

#### 10.6.4.9 `void seq64::editable_event::set_status_from_string ( const std::string & ts, const std::string & s, const std::string & sd0, const std::string & sd1 )`

Currently, this function handles only the following two messages:

- `category_channel_message`
- `category_system_message`

After all of the numbering member items have been set, they are converted and assigned to the string versions via a call to the `analyze()` function.

##### Parameters

<code>ts</code>	Provides the time-stamp string of the event.
<code>s</code>	Provides the name of the event, such as "Program Change".
<code>sd0</code>	Provides the string defining the first data byte of the event.
<code>sd1</code>	Provides the string defining the second data byte of the event, if applicable to the event.

#### 10.6.4.10 `std::string seq64::editable_event::format_timestamp ( )`

The format of the string representation is of the format selected by the `m_format_timestamp` member.

#### 10.6.4.11 `std::string seq64::editable_event::stock_event_string ( )`

We get the time-stamp as a string, make sure the event is fully analyzed so that all items and strings are set correctly.

#### 10.6.4.12 `void seq64::editable_event::analyze ( ) [private]`

Used in the constructors. Some of the setters indirectly set the appropriate string representation, as well.

##### Category:

```
This function can figure out if the status byte implies a channel
message or a system message, and set the category string as well.
However, at this time, detection of Meta events (0xFF) or
Proprietary/SeqSpec events (0xFF with 0x2424) aren't able to be
detected due to lack of context here (and due to the fact that
currently such events are not yet stored in a sequence, and the
least-significant-byte gets masked off anyway.)
```

##### Status:

```
We distinguish between channel and system messages, and then one- and
two-byte messages, but don't yet distinguish the data values fully.
```

## 10.6.5 Field Documentation

#### 10.6.5.1 `const editable_event::name_value_t seq64::editable_event::sm_category_names [static]`

Initializes the array of event/name pairs for the MIDI events categories.

Terminated by an empty string, the latter being the preferred test, for consistency with the other arrays and because 0 is often a legitimate code value.

10.6.5.2 `const editable_event::name_value_t seq64::editable_event::sm_channel_event_names` `[static]`

Initializes the array of event/name pairs for the channel MIDI events.

We split channel and system messages into two arrays, for semantic reasons and for faster linear lookups.

Terminated by an empty string.

10.6.5.3 `const editable_event::name_value_t seq64::editable_event::sm_system_event_names` `[static]`

Initializes the array of event/name pairs for the system MIDI events.

We split channel and system messages into two arrays, for semantic reasons and for faster linear lookups.

Terminated by an empty string.

10.6.5.4 `const editable_event::name_value_t seq64::editable_event::sm_meta_event_names` `[static]`

Initializes the array of event/name pairs for all of the Meta events.

Terminated only by the empty string.

10.6.5.5 `const editable_event::name_value_t seq64::editable_event::sm_prop_event_names` `[static]`

Initializes the array of event/name pairs for all of the seq24/sequencer64-specific events.

Terminated only by the empty string. Note that the numbers reflect the masking off of the high-order bits by 0x242400FF.

10.6.5.6 `const editable_event::name_value_t *const seq64::editable_event::sm_category_arrays` `[static]`

Contains pointers (references cannot be stored in an array) to the desired array for a given category.

Too bad that an array of references is not possible.

This code could be considered a bit rococo.

10.6.5.7 `const editable_events& seq64::editable_event::m_parent` `[private]`

The container's "children" need to go to their "parent" to get certain items of information.

10.6.5.8 `category_t seq64::editable_event::m_category` `[private]`

The category\_name value is not set here, since that category is used only for looking up the human-readable form of the category.

10.6.5.9 `timestamp_format_t seq64::editable_event::m_format_timestamp` `[private]`

The default is to display in timestamp\_measures format.

10.6.5.10 `std::string seq64::editable_event::m_name_status` `[private]`

It will include the names of the channel messages and the system messages. The latter includes SysEx and Meta messages.

10.6.5.11 `std::string seq64::editable_event::m_name_meta` [private]

If not applicable, this name will be empty.

## 10.7 seq64::editable\_events Class Reference

Provides for the management of an ordered collection MIDI editable events.

### Public Member Functions

- `editable_events` (`sequence` &seq, int bpm)  
*This constructor hooks into the sequence object.*
- `editable_events` (const `editable_events` &rhs)  
*This copy constructor initializes most of the class members.*
- `editable_events` & `operator=` (const `editable_events` &rhs)  
*This principal assignment operator sets most of the class members.*
- virtual `~editable_events` ()  
*This destructor current is a rote virtual function override.*
- const `midi_timing` & `timing` () const  
*'Getter' function for member m\_midi\_parameters*
- midipulse `string_to_pulses` (const std::string &ts\_string) const  
*Calculates the MIDI pulses (divisions) from a string using one of the free functions of the calculations module.*
- bool `load_events` ()  
*Accesses the sequence's event-list, iterating through it from beginning to end, wrapping each event in the list in an editable event and inserting it into the editable-event container.*
- bool `save_events` ()  
*Erases the sequence's event container and recreates it using the edited container of editable events.*
- Events & `events` ()  
*'Getter' function for member m\_events*
- iterator `begin` ()  
*'Getter' function for member m\_events.begin(), non-constant version.*
- const\_iterator `begin` () const  
*'Getter' function for member m\_events.begin(), constant version.*
- iterator `end` ()  
*'Getter' function for member m\_events.end(), non-constant version.*
- const\_iterator `end` () const  
*'Getter' function for member m\_events.end(), constant version.*
- int `count` () const  
*Returns the number of events stored in m\_events.*
- bool `add` (const `event` &e)  
*Adds an event, converted to an `editable_event`, to the internal event list.*
- bool `add` (const `editable_event` &e)  
*Adds an editable event to the internal event list.*
- bool `replace` (iterator ie, const `editable_event` &e)  
*Provides a wrapper for the iterator form of erase(), which is the only one that the `editable_events` container uses.*
- void `remove` (iterator ie)  
*Provides a wrapper for the iterator form of erase(), which is the only one that sequence uses.*
- void `clear` ()  
*Provides a wrapper for `clear()`.*
- iterator `current_event` () const  
*'Getter' function for member m\_current\_event The caller must make sure the iterator is not Events::end().*

## Private Types

- typedef [event\\_list::event\\_key](#) Key  
*Types to use to with the multimap implementation.*

## Private Member Functions

- void [current\\_event](#) (iterator cei)  
*'Setter' function for member m\_current\_event*

## Private Attributes

- Events [m\\_events](#)  
*Holds the [editable\\_events](#).*
- iterator [m\\_current\\_event](#)  
*Points to the current event, which is the event that has just been inserted.*
- [sequence](#) & [m\\_sequence](#)  
*Provides a reference to the sequence containing the events to be edited.*
- [midi\\_timing](#) [m\\_midi\\_parameters](#)  
*Holds the current settings for the sequence (and usually for the whole MIDI tune as well).*

### 10.7.1 Member Typedef Documentation

10.7.1.1 typedef [event\\_list::event\\_key](#) seq64::editable\_events::Key [private]

These typenames are identical to those used in [event\\_list](#), but of course they are in the [editable\\_events](#) scope instead.

### 10.7.2 Constructor & Destructor Documentation

10.7.2.1 seq64::editable\_events::editable\_events ( [sequence](#) & *seq*, int *bpm* )

#### Parameters

<i>seq</i>	Provides a reference to the sequence object, which provides the events and some of the MIDI timing parameters.
<i>bpm</i>	Provides the beats/minute value, which the caller figures out how to get and provides in this parameter.

10.7.2.2 seq64::editable\_events::editable\_events ( const [editable\\_events](#) & *rhs* )

Note that we need to reconstitute the event links here, as well.

#### Parameters

<i>rhs</i>	Provides the <a href="#">editable_events</a> object to be copied.
------------	---

### 10.7.3 Member Function Documentation

10.7.3.1 [editable\\_events](#) & seq64::editable\_events::operator= ( const [editable\\_events](#) & *rhs* )

Note that we need to reconstitute the event links here, as well.

## Parameters

<i>rhs</i>	Provides the <a href="#">editable_events</a> object to be assigned.
------------	---

## Returns

Returns a reference to "this" object, to support the serial assignment of [editable\\_eventss](#).

10.7.3.2 `bool seq64::editable_events::load_events ( )`

Note that the new events will not have valid links (actually, no links). These links are used for associating Note Off events with their respective Note On events. To be consistent, we must take the time to reconstitute these links, using [event\\_list::verify\\_and\\_link\(\)](#).

## Returns

Returns true if the size of the final [editable\\_event](#) container matches the size of the original events container.

10.7.3.3 `bool seq64::editable_events::save_events ( )`

Note that the old events are replaced only if the container of editable events is not empty. There are safer ways for the user to erase all the events.

**Todo** Consider what to do about the `sequence::m_is_modified` flag.

## Returns

Returns true if the size of the final event container matches the size of the original [editable\\_events](#) container.

10.7.3.4 `int seq64::editable_events::count ( ) const [inline]`

We like returning an integer instead of `size_t`, and rename the function so nobody is fooled.

10.7.3.5 `bool seq64::editable_events::add ( const event & e )`

## Parameters

<i>e</i>	Provides the regular event to be added to the list of editable events.
----------	--

## Returns

Returns true if the insertion succeeded, as evidenced by an increment in container size.

10.7.3.6 `bool seq64::editable_events::add ( const editable_event & e )`

For the `std::multimap` implementation, This is an option if we want to make sure the insertion succeed.

```
std::pair<Events::iterator, bool> result = m_events.insert(p);
return result.second;
```

## Parameters

<i>e</i>	Provides the regular event to be added to the list of editable events.
----------	--

## Returns

Returns true if the insertion succeeded, as evidenced by an increment in container size.

**Side-effect(s)** Sets `m_current_event`, which can be used right-away in a single-threaded context to get an iterator to the event via the `current_event()` accessor.

### 10.7.4 Field Documentation

#### 10.7.4.1 iterator seq64::editable\_events::m\_current\_event [private]

(From this event we can get the current time and other parameters.) If the container were a plain map, we could instead use a key to access it. But we can at least use an iterator, rather than a bare pointer.

#### 10.7.4.2 sequence& seq64::editable\_events::m\_sequence [private]

Besides the events, this object also holds the beats/measure, beat-width, and the PPQN value. The beats/minute have to be obtained from the application's perform object, and passed to the `editable_events` constructor by the caller.


#### 10.7.4.3 midi\_timing seq64::editable\_events::m\_midi\_parameters [private]

It holds the beats/minute, beats/measure, beat-width, and PPQN values needed to properly convert MIDI pulse timestamps to time and measure values.

## 10.8 seq64::event Class Reference

Provides events for management of MIDI events.

Inheritance diagram for seq64::event:

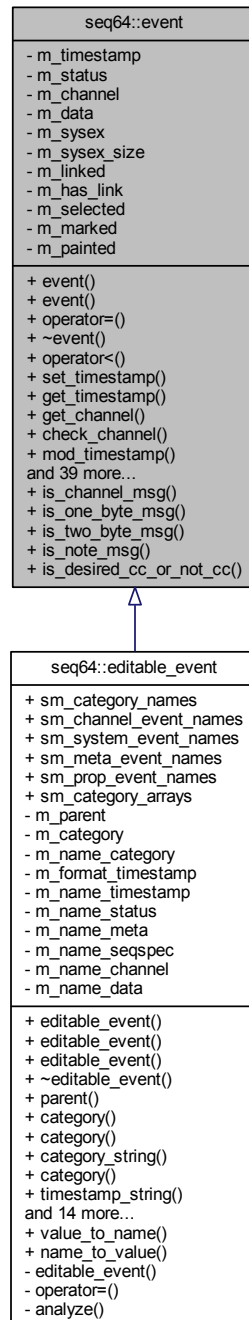

## Public Member Functions

- `event ()`  
*This constructor simply initializes all of the class members.*
- `event (const event &rhs)`  
*This copy constructor initializes most of the class members.*
- `event & operator= (const event &rhs)`



- This principal assignment operator sets most of the class members.*
- virtual `~event` ()
  - This destructor explicitly deletes `m_sysex` and sets it to null.*
- bool `operator<` (const `event` &rhsevent) const
  - If the current timestamp equal the event's timestamp, then this function returns true if the current rank is less than the event's rank.*
- void `set_timestamp` (midipulse time)
  - 'Setter' function for member `m_timestamp`*
- midipulse `get_timestamp` () const
  - 'Getter' function for member `m_timestamp`*
- midibyte `get_channel` () const
  - 'Getter' function for member `m_channel`*
- bool `check_channel` (int channel) const
  - Checks the channel number to see if the event's channel matches it, or if the event has no channel.*
- void `mod_timestamp` (midipulse a\_mod)
  - Calculates the value of the current timestamp modulo the given parameter.*
- void `set_status` (midibyte status)
  - Sets the `m_status` member to the value of status.*
- void `set_status` (midibyte eventcode, midibyte channel)
  - This overload is useful when synthesizing events, such as converting a Note On event with a velocity of zero to a Note Off event.*
- void `set_channel` (midibyte channel)
  - Sets the channel "nybble", without modifying the status "nybble".*
- midibyte `get_status` () const
  - 'Getter' function for member `m_status`*
- void `set_data` (midibyte d1)
  - Clears the most-significant-bit of the `d1` parameter, and sets it into the first byte of `m_data`.*
- void `set_data` (midibyte d1, midibyte d2)
  - Clears the most-significant-bit of both parameters, and sets them into the first and second bytes of `m_data`.*
- void `get_data` (midibyte &d0, midibyte &d1) const
  - Retrieves the two data bytes from `m_data[]` and copies each into its respective parameter.*
- void `increment_data1` ()
  - Increments the first data byte (`m_data[1]`) and clears the most significant bit.*
- void `decrement_data1` ()
  - Decrements the first data byte (`m_data[1]`) and clears the most significant bit.*
- void `increment_data2` ()
  - Increments the second data byte (`m_data[1]`) and clears the most significant bit.*
- void `decrement_data2` ()
  - Decrements the second data byte (`m_data[1]`) and clears the most significant bit.*
- void `restart_sysex` ()
  - Deletes and clears out the SYSEX buffer.*
- bool `append_sysex` (midibyte \*data, int len)
  - Appends SYSEX data to a new buffer.*
- midibyte \* `get_sysex` () const
  - 'Getter' function for member `m_sysex`*
- void `set_sysex_size` (int len)
  - 'Setter' function for member `m_sysex_size`*
- int `get_sysex_size` () const
  - 'Getter' function for member `m_sysex_size`*
- void `link` (`event` \*a\_event)
  - Sets `m_has_link` and sets `m_link` to the provided event pointer.*

- `event * get_linked ()` const  
*'Getter' function for member m\_linked*
- `bool is_linked ()` const  
*'Getter' function for member m\_has\_link*
- `void clear_link ()`  
*'Setter' function for member m\_has\_link*
- `void paint ()`  
*'Setter' function for member m\_painted*
- `void unpaint ()`  
*'Setter' function for member m\_painted*
- `bool is_painted ()` const  
*'Getter' function for member m\_painted*
- `void mark ()`  
*'Setter' function for member m\_marked*
- `void unmark ()`  
*'Setter' function for member m\_marked*
- `bool is_marked ()` const  
*'Getter' function for member m\_marked*
- `void select ()`  
*'Setter' function for member m\_selected*
- `void unselect ()`  
*'Setter' function for member m\_selected*
- `bool is_selected ()` const  
*'Getter' function for member m\_selected*
- `void make_clock ()`  
*Sets m\_status to EVENT\_MIDI\_CLOCK;.*
- `midibyte data (int index)` const  
*'Getter' function for member m\_data[]*
- `midibyte get_note ()` const  
*Assuming m\_data[] holds a note, get the note number, which is in the first data byte, m\_data[0].*
- `void set_note (midibyte note)`  
*Sets the note number, clearing off the most-significant-bit and assigning it to the first data byte, m\_data[0].*
- `midibyte get_note_velocity ()` const  
*'Getter' function for member m\_data[1], the note velocity.*
- `void set_note_velocity (int a_vel)`  
*Sets the note velocity, with is held in the second data byte, m\_data[1].*
- `bool is_note_on ()` const  
*Returns true if m\_status is EVENT\_NOTE\_ON.*
- `bool is_note_off ()` const  
*Returns true if m\_status is EVENT\_NOTE\_OFF.*
- `void print ()`  
*Prints out the timestamp, data size, the current status byte, any SYSEX data if present, or the two data bytes for the status byte.*
- `int get_rank ()` const  
*This function is used in sorting MIDI status events (e.g.*

## Static Public Member Functions

- static bool [is\\_channel\\_msg](#) (midibyte m)  
*Static test for channel messages/statuses.*
- static bool [is\\_one\\_byte\\_msg](#) (midibyte m)  
*Static test for channel messages that have only one data byte.*
- static bool [is\\_two\\_byte\\_msg](#) (midibyte m)  
*Static test for channel messages that have two data bytes.*
- static bool [is\\_note\\_msg](#) (midibyte m)  
*Static test for messages that involve notes and velocity.*
- static bool [is\\_desired\\_cc\\_or\\_not\\_cc](#) (midibyte m, midibyte cc, midibyte datum)  
*Static test for channel messages that are either not control-change messages, or are and match the given controller value.*

## Private Attributes

- midipulse [m\\_timestamp](#)  
*Provides the MIDI timestamp in ticks, otherwise known as the "pulses" in "pulses per quarter note" (PPQN).*
- midibyte [m\\_status](#)  
*This is the status byte without the channel.*
- midibyte [m\\_channel](#)  
*In order to be able to handle MIDI channel-splitting of an SMF 0 file, we need to store the channel, even if we override it when playing the MIDI data.*
- midibyte [m\\_data](#) [SEQ64\_MIDI\_DATA\_BYTE\_COUNT]  
*The two bytes of data for the MIDI event.*
- midibyte \* [m\\_sysex](#)  
*Points to the data buffer for SYSEX messages.*
- int [m\\_sysex\\_size](#)  
*Gives the size of the SYSEX message.*
- event \* [m\\_linked](#)  
*This event is used to link Note Ons and Offs together.*
- bool [m\\_has\\_link](#)  
*Indicates that a link has been made.*
- bool [m\\_selected](#)  
*Answers the question "is this event selected in editing."*
- bool [m\\_marked](#)  
*Answers the question "is this event marked in processing."*
- bool [m\\_painted](#)  
*Answers the question "is this event being painted."*

### 10.8.1 Detailed Description

A MIDI event consists of 3 bytes:

- # Status byte, 1sssnnn, where the sss bits specify the type of message, and the nnnn bits denote the channel number.  
The status byte always starts with 0.
- # The first data byte, 0xxxxxxx, where the data byte always start with 0, and the xxxxxxx values range from 0 to 127.
- # The second data byte, 0xxxxxxx.

This class may have too many member functions.

## 10.8.2 Constructor & Destructor Documentation

### 10.8.2.1 `seq64::event::event ( const event & rhs )`

This function is currently geared only toward support of the SMF 0 channel-splitting feature. Many of the members are not set to useful values when the MIDI file is read, so we don't handle them for now.

Note that now events are also copied when creating the [editable\\_events](#) container, so this function is even more important. The event links, for linking Note Off events to their respective Note On events, are dropped. Generally, they will need to be reconstituted by calling the [event\\_list::verify\\_and\\_link\(\)](#) function.

#### Warning

This function does not yet copy the SysEx data. The inclusion of SysEx events was not complete in Seq24, and it is still not complete in Sequencer64. Nor does it currently bother with the links, as noted above.

#### Parameters

<i>rhs</i>	Provides the event object to be copied.
------------	---

### 10.8.2.2 `seq64::event::~~event ( ) [virtual]`

The [restart\\_sysex\(\)](#) function does what we need.

## 10.8.3 Member Function Documentation

### 10.8.3.1 `event & seq64::event::operator= ( const event & rhs )`

This function is currently geared only toward support of the SMF 0 channel-splitting feature. Many of the member are not set to useful value when the MIDI file is read, so we don't handle them for now.

#### Warning

This function does not yet copy the SysEx data. The inclusion of SysEx events was not complete in Seq24, and it is still not complete in Sequencer64. Nor does it currently bother with the links.

#### Parameters

<i>rhs</i>	Provides the event object to be assigned.
------------	---

#### Returns

Returns a reference to "this" object, to support the serial assignment of events.

### 10.8.3.2 `bool seq64::event::operator< ( const event & rhs ) const`

Otherwise, it returns true if the current timestamp is less than the event's timestamp.

#### Warning

The less-than operator is supposed to support a "strict weak ordering", and is supposed to leave equivalent values in the same order they were before the sort. However, every time we load and save our sample MIDI file, events get reversed. Here are program-changes that get reversed:

```
Save N:      0070: 6E 00 C4 48 00 C4 0C 00  C4 57 00 C4 19 00 C4 26
Save N+1:    0070: 6E 00 C4 26 00 C4 19 00  C4 57 00 C4 0C 00 C4 48
```

The 0070 is the offset within the versions of the b4uacuse-seq24.midi file.

Because of this mis-feature, and the very slow speed of loading a MIDI file when Sequencer64 is built for debugging, we are exploring using an `std::multimap` instead of an `std::list`. Search for occurrences of the `SEQ64_USE_EVENT_MAP` macro. (This actually works better than a list, for loading MIDI event, we have found, but may cause the upper limit of the number of playing sequences to drop a little, due to the overhead of incrementing multimap iterators versus list iterators).

#### Parameters

<i>rhs</i>	The object to be compared against.
------------	------------------------------------

#### Returns

Returns true if the time-stamp and "rank" are less than those of the comparison object.

**10.8.3.3** `bool seq64::event::check_channel ( int channel ) const` `[inline]`

Used in the SMF 0 track-splitting code.

**10.8.3.4** `static bool seq64::event::is_channel_msg ( midibyte m )` `[inline],[static]`

This function requires that the channel data have already been masked off.

#### Parameters

<i>m</i>	The channel status or message byte to be tested.
----------	--

#### Returns

Returns true if the byte represents a MIDI channel message.

**10.8.3.5** `static bool seq64::event::is_one_byte_msg ( midibyte m )` `[inline],[static]`

The rest have two.

#### Parameters

<i>m</i>	The channel status or message byte to be tested.
----------	--

#### Returns

Returns true if the byte represents a MIDI channel message that has only one data byte. However, if this function returns false, it might not be a channel message at all, so be careful.

**10.8.3.6** `static bool seq64::event::is_two_byte_msg ( midibyte m )` `[inline],[static]`

#### Parameters

<i>m</i>	The channel status or message byte to be tested.
----------	--

#### Returns

Returns true if the byte represents a MIDI channel message that has two data bytes. However, if this function returns false, it might not be a channel message at all, so be careful.

10.8.3.7 `static bool seq64::event::is_note_msg ( midibyte m ) [inline],[static]`

## Parameters

<i>m</i>	The channel status or message byte to be tested.
----------	--

## Returns

Returns true if the byte represents a MIDI note message.

**10.8.3.8** `static bool seq64::event::is_desired_cc_or_not_cc ( midibyte m, midibyte cc, midibyte datum ) [inline], [static]`

## Note

The old logic was the first line, but can be simplified to the second line; the third line shows the abstract representation. Also made sure of this using a couple truth tables.

```
(m != EVENT_CONTROL_CHANGE) || (m == EVENT_CONTROL_CHANGE && d == cc)
(m != EVENT_CONTROL_CHANGE) || (d == cc)
a || (! a && b) => a || b
```

```
\param m
    The channel status or message byte to be tested.

\param cc
    The desired cc value, which the datum must match, if the message is
    a control-change message.

\param datum
    The current datum, to be compared to cc, if the message is a
    control-change message.

\return
    Returns true if the message is not a control-change, or if it is
    and the cc and datum parameters match.
```

**10.8.3.9** `void seq64::event::mod_timestamp ( midipulse a_mod ) [inline]`

## Parameters

<i>a_mod</i>	The value to mod the timestamp against.
--------------	---

## Returns

Returns a value ranging from 0 to *a\_mod*-1.

**10.8.3.10** `void seq64::event::set_status ( midibyte status )`

If *a\_status* is a channel event, then the channel portion of the status is cleared using a bitwise AND against `EVENT_CLEAR_CHAN_MASK`.

Found in yet another fork of seq24:

```
// ORL fait de la merde
```

He also provided a very similar routine: `set_status_midibus()`.

## Parameters

<i>status</i>	The status byte, perhaps read from a MIDI file or edited in the sequencer's event editor. Sometime, this byte will have the channel nybble masked off. If that is the case, the event-code/channel overload of this function is more appropriate.
---------------	---

10.8.3.11 `void seq64::event::set_status ( midibyte eventcode, midibyte channel )`

## Parameters

<i>eventcode</i>	The status byte, perhaps read from a MIDI file. This byte is assumed to have already had its low nybble cleared by masking against <code>EVENT_CLEAR_CHAN_MASK</code> .
<i>channel</i>	The channel byte. Combined with the event-code, this makes a valid MIDI "status" byte. This byte is assume to have already had its high nybble cleared by masking against <code>EVENT_GET_CHAN_MASK</code> .

10.8.3.12 `void seq64::event::set_channel ( midibyte channel ) [inline]`

Note that the sequence channel generally overrides this value.

## Parameters

<i>channel</i>	The channel byte.
----------------	-------------------

10.8.3.13 `void seq64::event::set_data ( midibyte d1 ) [inline]`

## Parameters

<i>d1</i>	The byte value to set. We should make these all "midibytes".
-----------	--

10.8.3.14 `void seq64::event::set_data ( midibyte d1, midibyte d2 ) [inline]`

## Parameters

<i>d1</i>	The first byte value to set. We should make these all "midibytes".
<i>d2</i>	The second byte value to set. We should make these all "midibytes".

10.8.3.15 `void seq64::event::get_data ( midibyte & d0, midibyte & d1 ) const [inline]`

## Parameters

<i>d0</i>	[out] The return reference for the first byte.
<i>d1</i>	[out] The return reference for the first byte.

10.8.3.16 `bool seq64::event::append_sysex ( midibyte * data, int dsize )`

First, a buffer of size `m_sysex_size+dsize` is created. The existing SYSEX data (stored in `m_sysex`) is copied to this buffer. Then the data represented by `data` and `dsize` is appended to that data buffer. Then the original SYSEX buffer, `m_sysex`, is deleted, and `m_sysex` is assigned to the new buffer.



## Parameters

<i>data</i>	Provides the additional SYSEX data. If not provided, nothing is done, and false is returned.
<i>dsize</i>	Provides the size of the additional SYSEX data. If not provided, nothing is done.

## Returns

Returns false if there was an EVENT\_SYSEX\_END byte in the appended data, or if an error occurred, and the caller needs to stop trying to process the data.

## 10.8.3.17 int seq64::event::get\_rank ( ) const

The ranking, from high to low, is note off, note on, aftertouch, channel pressure, and pitch wheel, control change, and program changes.

note on/off, aftertouch, control change, etc.) The sort order is not determined by the actual status values.

The lower the ranking the more upfront an item comes in the sort order.

## Returns

Returns the rank of the current m\_status byte.

## 10.8.4 Field Documentation

## 10.8.4.1 midibyte seq64::event::m\_status [private]

The channel will be appended on the MIDI bus. The high nibble = type of event; The low nibble = channel. Bit 7 is present in all status bytes.

## 10.8.4.2 midibyte seq64::event::m\_channel [private]

This member adds another 4 bytes to the event object, most likely.

## 10.8.4.3 midibyte seq64::event::m\_data[SEQ64\_MIDI\_DATA\_BYTE\_COUNT] [private]

Remember that the most-significant bit of a data byte is always 0.

## 10.8.4.4 midibyte\* seq64::event::m\_sysex [private]

This really ought to be a Boost or STD scoped pointer. Currently, it doesn't seem to be used.

## 10.8.4.5 bool seq64::event::m\_has\_link [private]

This item is used [via the get\_link() and [link\(\)](#) accessors] in the sequence class.

## 10.9 seq64::event\_list::event\_key Class Reference

Provides a key value for an event map.

## Public Member Functions

- [event\\_key](#) (midipulse tstamp, int rank)  
*Principal [event\\_key](#) constructor.*
- [event\\_key](#) (const [event](#) &e)  
*Event-based constructor.*
- bool [operator<](#) (const [event\\_key](#) &rhs) const  
*Provides the minimal operator needed to sort events using an [event\\_key](#).*

## Private Attributes

- midipulse [m\\_timestamp](#)  
*The primary key-value for the key.*
- int [m\\_rank](#)  
*The sub-key-value for the key.*

### 10.9.1 Detailed Description

Its types match the [m\\_timestamp](#) and [get\\_rank\(\)](#) function of this event class.

### 10.9.2 Constructor & Destructor Documentation

#### 10.9.2.1 `seq64::event_list::event_key::event_key ( midipulse tstamp, int rank )`

##### Parameters

<i>tstamp</i>	The time-stamp is the primary part of the key. It is the most important key item.
<i>rank</i>	Rank is an arbitrary number used to prioritize events that have the same time-stamp. See the <a href="#">event::get_rank()</a> function for more information.

#### 10.9.2.2 `seq64::event_list::event_key::event_key ( const event & rhs )`

This constructor makes it even easier to create an [event\\_key](#). Note that the call to [event::get\\_rank\(\)](#) makes a simple calculation based on the status of the event.

##### Parameters

<i>rhs</i>	Provides the event key to be copied.
------------	--------------------------------------

### 10.9.3 Member Function Documentation

#### 10.9.3.1 `bool seq64::event_list::event_key::operator< ( const event_key & rhs ) const`

##### Parameters

<i>e</i>	Provides the event key to be compared against.
----------	--

### 10.9.4 Field Documentation

#### 10.9.4.1 `midipulse seq64::event_list::event_key::m_timestamp [private]`

10.9.4.2 int seq64::event\_list::event\_key::m\_rank [private]

## 10.10 seq64::event\_list Class Reference

The [event\\_list](#) class is a receptable for MIDI events.

### Data Structures

- class [event\\_key](#)  
*Provides a key value for an event map.*

### Public Member Functions

- [event\\_list](#) ()  
*Principal constructor.*
- [event\\_list](#) (const [event\\_list](#) &a\_rhs)  
*Copy constructor.*
- [event\\_list](#) & [operator=](#) (const [event\\_list](#) &a\_rhs)  
*Principal assignment operator.*
- [~event\\_list](#) ()  
*A rote destructor.*
- iterator [begin](#) ()  
*'Getter' function for member m\_events.begin(), non-constant version.*
- const\_iterator [begin](#) () const  
*'Getter' function for member m\_events.begin(), constant version.*
- iterator [end](#) ()  
*'Getter' function for member m\_events.end(), non-constant version.*
- const\_iterator [end](#) () const  
*'Getter' function for member m\_events.end(), constant version.*
- int [count](#) () const  
*Returns the number of events stored in m\_events.*
- bool [empty](#) () const  
*Returns true if there are no events.*
- bool [add](#) (const [event](#) &e, bool postsort=true)  
*Adds an event to the internal event list in an optionally sorted manner.*
- bool [is\\_modified](#) () const  
*'Getter' function for member m\_is\_modified*
- void [unmodify](#) ()  
*'Setter' function for member m\_is\_modified This function may be needed by some of the sequence editors.*
- void [remove](#) (iterator ie)  
*Provides a wrapper for the iterator form of erase(), which is the only one that sequence uses.*
- void [clear](#) ()  
*Provides a wrapper for clear().*
- void [merge](#) ([event\\_list](#) &el, bool presort=true)  
*Provides a merge operation for the event multimap analogous to the merge operation for the event list.*
- void [sort](#) ()  
*Wrapper for std::list::sort(), or, since multimaps are always sorted, an empty function.*

## Static Public Member Functions

- static [event](#) & [dref](#) (iterator ie)  
*Dereference access for list or map.*
- static const [event](#) & [dref](#) (const\_iterator ie)  
*Dereference const access for list or map.*

## Private Types

- typedef std::multimap< [event\\_key](#), [event](#) > [Events](#)  
*Types to use to swap between list and multimap implementations.*

## Private Member Functions

- void [link\\_new](#) ()  
*Links a new event.*
- void [clear\\_links](#) ()  
*Clears all event links and unmarks them all.*
- void [verify\\_and\\_link](#) (midipulse slength)  
*This function verifies state: all note-ons have an off, and it links note-offs with their note-ons.*
- void [mark\\_selected](#) ()  
*Marks all selected events.*
- void [mark\\_out\\_of\\_range](#) (midipulse slength)  
*Marks all events that have a time-stamp that is out of range.*
- void [mark\\_all](#) ()  
*Marks all events.*
- void [unmark\\_all](#) ()  
*Unmarks all events.*
- void [unpaint\\_all](#) ()  
*Unpaints all list-events.*
- int [count\\_selected\\_notes](#) () const  
*Counts the selected note-on events in the event list.*
- bool [any\\_selected\\_notes](#) () const  
*Indicates that at least one note is selected.*
- int [count\\_selected\\_events](#) (midibyte status, midibyte cc) const  
*Counts the selected events, with the given status, in the event list.*
- void [select\\_all](#) ()  
*Selects all events, unconditionally.*
- void [unselect\\_all](#) ()  
*Deselects all events, unconditionally.*
- void [print](#) ()  
*Prints a list of the currently-held events.*
- const [Events](#) & [events](#) () const  
*'Getter' function for member m\_events*

## Private Attributes

- [Events m\\_events](#)  
*This list holds the current pattern/sequence events.*
- bool [m\\_is\\_modified](#)  
*A new flag to indicate if an event was added or removed.*

### 10.10.1 Detailed Description

Two implementations, an `std::multimap`, and the original, an `std::list`, are provided for comparison, and are selected at build time, by manually defining the `SEQ64_USE_EVENT_MAP` macro near the top of this module.

### 10.10.2 Constructor & Destructor Documentation

#### 10.10.2.1 seq64::event\_list::event\_list ( const event\_list & rhs )

Parameters

<i>rhs</i>	Provides the event list to be copied.
------------	---------------------------------------

### 10.10.3 Member Function Documentation

#### 10.10.3.1 event\_list & seq64::event\_list::operator= ( const event\_list & rhs )

Follows the stock rules for such an operator, just assigning member values.

Parameters

<i>rhs</i>	Provides the event list to be assigned.
------------	---

#### 10.10.3.2 int seq64::event\_list::count ( ) const [inline]

We like returning an integer instead of `size_t`, and rename the function so nobody is fooled.

#### 10.10.3.3 bool seq64::event\_list::add ( const event & e, bool postsort = true )

It is a wrapper, wrapper for `insert()` or `push_front()`, with an option to call `sort()`.

For the `std::multimap` implementation, This is an option if we want to make sure the insertion succeed.

```
std::pair<Events::iterator, bool> result = m_events.insert(p);
return result.second;
```

#### Warning

This pushing (and, in writing the MIDI file, the popping), causes events with identical timestamps to be written in reverse order. Doesn't affect functionality, but it's puzzling until one understands what is happening. That's why we're exploring using a multimap as the container.

Parameters

<i>e</i>	Provides the event to be added to the list.
<i>postsort</i>	If true, and the <code>std::list</code> implementation has been built in, then the event list is sorted after the addition. This is a time-consuming operation.

Returns

Returns true if the insertion succeeded, as evidenced by an increment in container size.

#### 10.10.3.4 void seq64::event\_list::unmodify ( ) [inline]

But use it with great caution.

10.10.3.5 `void seq64::event_list::remove ( iterator ie ) [inline]`

Currently, no check on removal is performed. Set the modified-flag.

10.10.3.6 `void seq64::event_list::clear ( ) [inline]`

Set the modified-flag.

10.10.3.7 `void seq64::event_list::merge ( event_list & el, bool presort = true )`

We have certain constraints to preserve, as the following discussion shows.

For `std::list`, sequence merges list T into list A by first calling `T.sort()`, and then `A.merge(T)`. The [merge\(\)](#) operation merges T into A by transferring all of its elements, at their respective ordered positions, into A. Both containers must already be ordered.

The merge effectively removes all the elements in T (which becomes empty), and inserts them into their ordered position within container (which expands in size by the number of elements transferred). The operation is performed without constructing nor destroying any element, whether T is an lvalue or an rvalue, or whether the value-type supports move-construction or not.

Each element of T is inserted at the position that corresponds to its value according to the strict weak ordering defined by operator `<`. The resulting order of equivalent elements is stable (i.e. equivalent elements preserve the relative order they had before the call, and existing elements precede those equivalent inserted from x). The function does nothing if (`&x == this`).

For `std::multimap`, sorting is automatic. However, unless move-construction is supported, merging will be less efficient than for the list version. Also, we need a way to include duplicates of each event, so we need to use a multi-map. Once all this setup, merging is really just insertion. And, since sorting isn't needed, the multimap actually turns out to be faster.

#### Parameters

<i>el</i>	Provides the event list to be merged into the current event list.
<i>presort</i>	If true, the events are presorted. This is a requirement for merging an <code>std::list</code> , but is a no-op for the <code>std::multimap</code> implementation.

10.10.3.8 `void seq64::event_list::link_new ( ) [private]`

This function checks for a note on, then look for its note off. This function is provided in the [event\\_list](#) because it does not depend on any external data. Also note that any desired thread-safety must be provided by the caller.

10.10.3.9 `void seq64::event_list::verify_and_link ( midipulse slength ) [private]`

#### Threadsafe

#### Parameters

<i>slength</i>	Provides the length beyond which events will be pruned.
----------------	---

10.10.3.10 `void seq64::event_list::mark_out_of_range ( midipulse slength ) [private]`

Used for killing (pruning) those events not in range. If the current time-stamp is greater than the length, then the event is marked for pruning.

**Note**

This code was comparing the timestamp as greater than or equal to the sequence length. However, being equal is fine. This may explain why the midifile code would add one tick to the length of the last note when processing the end-of-track.

**Parameters**

<i>slength</i>	Provides the length beyond which events will be pruned.
----------------	---

10.10.3.11 `void seq64::event_list::mark_all ( ) [private]`

Not yet used, but might come in handy with the event editor dialog.

10.10.3.12 `bool seq64::event_list::any_selected_notes ( ) const [private]`

Acts like `event_list::count_selected_notes()`, but stops after finding a selected note. We could add a flag to `count_selected_notes()` to break, I suppose.

10.10.3.13 `int seq64::event_list::count_selected_events ( midibyte status, midibyte cc ) const [private]`

If the event is a control change (CC), then it must also match the given CC value.

**10.10.4 Field Documentation**


10.10.4.1 `bool seq64::event_list::m_is_modified [private]`

We may need to give client code a way to reload the sequence. This is currently an issue when a seqroll and an eventedit/eventslots are active for the same sequence.

**10.11 seq64::eventedit Class Reference**

This class supports an Event Editor that is used to tweak the details of events and get a better idea of the mix of events in a sequence.

Inheritance diagram for seq64::eventedit:

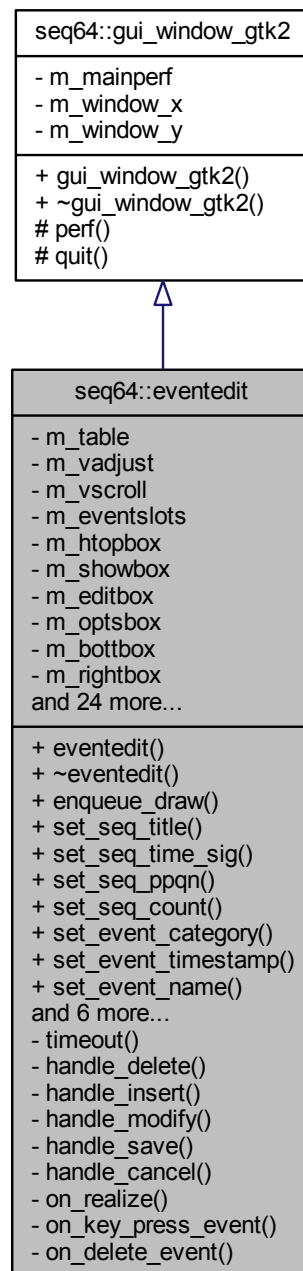

## Public Member Functions

- `eventedit (perform &p, sequence &seq)`  
Principal constructor, has a reference to a perform object.
- `~eventedit ()`  
This rote constructor does nothing.
- `void enqueue_draw ()`



- Helper wrapper for calling `perfroll::queue_draw()` for one or both eventedits.*
- void `set_seq_title` (const std::string &title)  
*Sets `m_label_seq_name` to the title.*
- void `set_seq_time_sig` (const std::string &sig)  
*Sets `m_label_time_sig` to the time-signature string.*
- void `set_seq_ppqn` (const std::string &p)  
*Sets `m_label_ppqn` to the parts-per-quarter-note string.*
- void `set_seq_count` ()  
*Sets `m_label_ev_count` to the number-of-events string.*
- void `set_event_category` (const std::string &c)  
*Sets `m_label_category` to the category string.*
- void `set_event_timestamp` (const std::string &ts)  
*Sets `m_entry_ev_timestamp` to the time-stamp string.*
- void `set_event_name` (const std::string &n)  
*Sets `m_entry_ev_name` to the name-of-event string.*
- void `set_event_data_0` (const std::string &d)  
*Sets `m_entry_ev_data_0` to the first data byte string.*
- void `set_event_data_1` (const std::string &d)  
*Sets `m_entry_data_1` to the second data byte string.*
- void `perf_modify` ()  
*Provides a way to mark the perform object as modified, when the modified sequence is saved.*
- void `set_dirty` (bool flag=true)  
*Sets the "modified" status of the user-interface.*
- void `v_adjustment` (int value)  
*Sets the parameters for the vertical scroll-bar, using only the value parameter.*
- void `v_adjustment` (int value, int lower, int upper)  
*Sets the parameters for the vertical scroll-bar that is associated with the eventslots event-list user-interface.*

## Private Member Functions

- bool `timeout` ()  
*Handles a drawing timeout.*
- void `handle_delete` ()  
*Initiates the deletion of the current editable event.*
- void `handle_insert` ()  
*Initiates the insertion of a new editable event.*
- void `handle_modify` ()  
*Passes the edited fields to the current editable event in the eventslot.*
- void `handle_save` ()  
*Handles saving the edited data back to the original sequence.*
- void `handle_cancel` ()  
*Cancel the edits and closes the dialog box.*
- void `on_realize` ()  
*This callback function calls the base-class `on_realize()` function, and then connects the `eventedit::timeout()` function to the Glib signal-timeout, with a redraw timeout of `m_redraw_ms`.*
- bool `on_key_press_event` (GdkEventKey \*ev)  
*This function is the callback for a key-press event.*
- bool `on_delete_event` (GdkEventAny \*event)  
*Handles an on-delete event.*

## Private Attributes

- `Gtk::Table * m_table`  
*A whole horde of GUI elements.*
- `Gtk::Label * m_label_index`  
*Items to size the `m_indexslots` member.*
- `Gtk::Label * m_label_seq_name`  
*Items for the inside of the `m_showbox` member.*
- `Gtk::Label * m_label_category`  
*Items for the inside of the `m_editbox` member.*
- `Gtk::Label * m_label_right`  
*Padding for the right side of the user-interface.*
- `sequence & m_seq`  
*A reference to the sequence being edited, to control its editing flag.*
- `int m_redraw_ms`  
*Provides the timer period for the `eventedit` timer, used to determine the rate of redrawing.*

## Additional Inherited Members

### 10.11.1 Constructor & Destructor Documentation

#### 10.11.1.1 `seq64::eventedit::eventedit ( perform & p, sequence & seq )`

We've reordered the pointer members and put them in the initializer list to make the constructor a bit cleaner.

Adjustment parameters:

<code>value</code>	initial value
<code>lower</code>	minimum value
<code>upper</code>	maximum value
<code>step_increment</code>	step increment
<code>page_increment</code>	page increment
<code>page_size</code>	page size

Table constructor parameters:

```
rows
columns
homogenous
```

Table `attach()` parameters:

<code>child</code>	widget to add.
<code>left_attach</code>	column number to attach left side of a child widget
<code>right_attach</code>	column number to attach right side of a child widget
<code>top_attach</code>	row number to attach the top of a child widget
<code>bottom_attach</code>	row number to attach the bottom of a child widget
<code>xoptions</code>	properties of the child widget when table resized
<code>yoptions</code>	same as <code>xoptions</code> , except vertical.
<code>xpadding</code>	padding on L and R of widget added to table
<code>ypadding</code>	amount of padding above and below the child widget

Layout:

We're going to change the layout.

```

      0          1  2          3  4
-----|-----
htop | (OLD LAYOUT)          :  : |
-----|----- showbox -----| 1
e'slots | 1-120:0:192 Program Change | ^ | "Sequence name" | |
```

```

|-----| | 4/4 PPQN 192 | r | 2
| 2-120:1:0 Program Change | s | 9999 events | i | 3
|-----| c |----- editbox -----| g | 4
| ... ... | r | Channel Event: Ch. 5 | h |
| ... ... | o |-----| t | 6
| ... ... | l | [Edit field: Note On ] | |
| ... ... | l |-----| b | 7
| ... ... | | [Edit field: Key # ] | o |
| ... ... | b |-----| x | 8
| ... ... | a | [Edit field: Vel # ] | |
| ... ... | r |-----| | 9
| ... ... | | [Optional more data? ] | |
| ... ... | |----- optsbox -----| | 10
| ... ... | | o Pulses | |
| ... ... | | o Measures | |
| ... ... | v | o Time | |
|-----| |----- bottbox -----| | 13
| 56-136:3:133 Program Change | v | | Save | | Close | |
|-----| |-----| 14

```

**Parameters**

<i>p</i>	Refers to the main performance object.
<i>seq</i>	Refers to the sequence holding the event data to be edited.

**10.11.1.2 seq64::eventedit::~~eventedit ( )**

We're going to have to run the application through valgrind to make sure that nothing is left behind.

**10.11.2 Member Function Documentation****10.11.2.1 void seq64::eventedit::enqueue\_draw ( )****Parameters**

<i>forward</i>	If true (the default), pass the call to the peer. When passing this call to the peer, this parameter is set to false to prevent an infinite loop and the resultant stack overflow.
----------------	--

**10.11.2.2 void seq64::eventedit::set\_seq\_title ( const std::string & title )****Parameters**

<i>title</i>	The name of the sequence.
--------------	---------------------------

**10.11.2.3 void seq64::eventedit::set\_seq\_time\_sig ( const std::string & sig )****Parameters**

<i>sig</i>	The time signature of the sequence.
------------	-------------------------------------

**10.11.2.4 void seq64::eventedit::set\_seq\_ppqn ( const std::string & p )**

## Parameters

<i>p</i>	The parts-per-quarter-note string for the sequence.
----------	---

## 10.11.2.5 void seq64::eventedit::set\_seq\_count ( )

## Parameters

<i>c</i>	The number-of-events string for the sequence.
----------	---

## 10.11.2.6 void seq64::eventedit::set\_event\_category ( const std::string &amp; c )

## Parameters

<i>c</i>	The category string for the current event.
----------	--

## 10.11.2.7 void seq64::eventedit::set\_event\_timestamp ( const std::string &amp; ts )

## Parameters

<i>ts</i>	The time-stamp string for the current event.
-----------	--

## 10.11.2.8 void seq64::eventedit::set\_event\_name ( const std::string &amp; n )

## Parameters

<i>n</i>	The name-of-event string for the current event.
----------	---

## 10.11.2.9 void seq64::eventedit::set\_event\_data\_0 ( const std::string &amp; d )

## Parameters

<i>d</i>	The first data byte string for the current event.
----------	---

## 10.11.2.10 void seq64::eventedit::set\_event\_data\_1 ( const std::string &amp; d )

## Parameters

<i>d</i>	The second data byte string for the current event.
----------	--

## 10.11.2.11 void seq64::eventedit::set\_dirty ( bool flag = true )

This includes changing a label and enabling/disabling the Save button.

## Parameters

<i>flag</i>	If true, the modified status is indicated, otherwise it is cleared.
-------------	---

10.11.2.12 void seq64::eventedit::v\_adjustment ( int *value* )

This function overload provides a common use case.

## Parameters

<i>value</i>	The new current value to be indicated by the scroll-bar.
--------------	--

10.11.2.13 void seq64::eventedit::v\_adjustment ( int *value*, int *lower*, int *upper* )

It keeps the frame scroll-bar in sync with the frame movement actions. Some of the parameters are obtained from the eventslots object:

- Page size comes from eventslots::line\_maximum().
- Page increment is a little less than the page-size value.

## Parameters

<i>value</i>	The current value to be indicated by the scroll-bar. It will lie between the lower and upper parameter.
<i>lower</i>	The lowest value to be indicated by the scroll-bar.
<i>upper</i>	The highest value to be indicated by the scroll-bar.

## 10.11.2.14 bool seq64::eventedit::timeout ( ) [private]

It redraws events in the the eventslots objects. This function is called frequently and continuously.

## 10.11.2.15 void seq64::eventedit::handle\_insert ( ) [private]

The event's location will be determined by the timestamp and existing events. Note that we have to recalibrate the scroll-bar when we insert/delete events by calling [v\\_adjustment\(\)](#).

## 10.11.2.16 void seq64::eventedit::handle\_modify ( ) [private]

Note that there are two cases to worry about. If the timestamp has not changed, then we can simply modify the existing current event in place. Otherwise, we need to delete the old event and insert the new one. But that is done for us by [eventslots::modify\\_current\\_event\(\)](#).

## 10.11.2.17 void seq64::eventedit::handle\_save ( ) [private]

The event list in the original sequence is cleared, and the editable events are converted to plain events, and added to the container, one by one.

**Todo** Could also support writing the events to a new sequence, for added flexibility.

10.11.2.18 bool seq64::eventedit::on\_key\_press\_event ( GdkEventKey \* *ev* ) [private]

If the Up or Down arrow is pressed (later, *k* and *j* :-), then we tell the eventslots object to move the "current event" highlighting up or down. In Gtkmm, these arrows also cause movement from one edit field to the next, so we disable that process if the event was handled here.

Note that some vi-like keys were supported, but they are needed for the edit fields, so cannot be used here. Also, the Delete key is needed for the edit fields. For now, we replace it with the asterisk, which is easy to access from the numeric pad of a keyboard, and allows for rapid deletion. The Insert key also causes confusing effects in the edit fields, so we replace it by the slash. Note that the asterisk and slash should not be required in any of the edit fields.

HOWEVER, there are still some issues with "/", so you'll just have to click the button to insert an event.

10.11.2.19 `bool seq64::eventedit::on_delete_event ( GdkEventAny * event )` `[private]`

It sets the sequence object's editing flag to false, and deletes "this". This function is called if the "Close" ("X") button in the window's title bar is clicked. That is a different action from clicking the Close button.

#### Returns

Always returns false.

### 10.11.3 Field Documentation


10.11.3.1 `int seq64::eventedit::m_redraw_ms` `[private]`

This is hardwired to 40 ms in Linux, and 20 ms in Windows.

## 10.12 seq64::eventslots Class Reference

This class implements the left-side keyboard in the patterns window.

Inheritance diagram for seq64::eventslots:

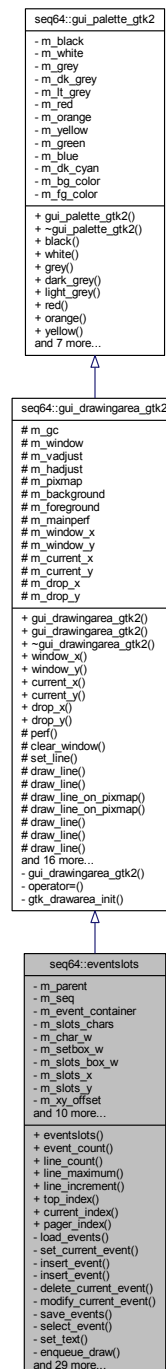

## Public Member Functions

- [eventslots](#) ([perform](#) &p, [eventedit](#) &parent, [sequence](#) &seq, Gtk::Adjustment &vadjust)

*Principal constructor for this user-interface object.*

- int [event\\_count](#) () const

*'Getter' function for member m\_event\_count Returns the number of total events in the sequence represented by the eventslots object.*



- int [line\\_count](#) () const  
*'Getter' function for member m\_line\_count Returns the current number of rows (events) in the eventslots's display.*
- int [line\\_maximum](#) () const  
*'Getter' function for member m\_line\_maximum Returns the maximum number of rows (events) in the eventslots's display.*
- int [line\\_increment](#) () const  
*Provides the "page increment" or "line increment" of the frame, This value is the current line-maximum of the frame minus its overlap value.*
- int [top\\_index](#) () const  
*'Getter' function for member m\_top\_index*
- int [current\\_index](#) () const  
*'Getter' function for member m\_current\_index*
- int [pager\\_index](#) () const  
*'Getter' function for member m\_pager\_index*

### Private Member Functions

- bool [load\\_events](#) ()  
*Grabs the event list from the sequence and uses it to fill the editable-event list.*
- void [set\\_current\\_event](#) (const editable\_events::iterator ei, int index, bool full\_redraw=true)  
*Set the current event, which is the event that is highlighted.*
- bool [insert\\_event](#) (const [editable\\_event](#) &edev)  
*Inserts an event.*
- bool [insert\\_event](#) (const std::string &evtimestamp, const std::string &evname, const std::string &evdata0, const std::string &evdata1)  
*Inserts an event based on the setting provided, which the eventedit object gets from its Entry fields.*
- bool [delete\\_current\\_event](#) ()  
*Deletes the current event, and makes adjustments due to that deletion.*
- bool [modify\\_current\\_event](#) (const std::string &evtimestamp, const std::string &evname, const std::string &evdata0, const std::string &evdata1)  
*Modifies the data in the currently-selected event.*
- bool [save\\_events](#) ()  
*Writes the events back to the sequence.*
- void [select\\_event](#) (int event\_index=SEQ64\_NULL\_EVENT\_INDEX, bool full\_redraw=true)  
*Selects and highlights the event that is located in the frame at the given event index.*
- void [set\\_text](#) (const std::string &evcategory, const std::string &evtimestamp, const std::string &evname, const std::string &evdata0, const std::string &evdata1)  
*Sets the text in the parent dialog, eventedit.*
- void [enqueue\\_draw](#) ()  
*Wraps queue\_draw().*
- int [convert\\_y](#) (int y)  
*Converts a y-value into an event index relative to 0 (the top of the eventslots window/pixmap) and returns it.*
- void [draw\\_event](#) (editable\_events::iterator ei, int index)  
*Draw the given slot/event.*
- void [draw\\_events](#) ()  
*Draws all of the events in the current eventslots frame.*
- void [change\\_vert](#) ()  
*Change the vertical offset of events.*
- void [page\\_movement](#) (int new\_value)  
*Adjusts the vertical position of the frame according to the given new scrollbar/vadjust value.*
- void [page\\_topper](#) (editable\_events::iterator newcurrent)

- Adjusts the vertical position of the frame according to the given new bottom iterator.*

  - int `decrement_top` ()  
*Decrements the top iterator, if possible.*
  - int `increment_top` ()  
*Increments the top iterator, if possible.*
  - int `decrement_current` ()  
*Decrements the current iterator, if possible.*
  - int `increment_current` ()  
*Increments the current iterator, if possible.*
  - int `decrement_bottom` ()  
*Decrements the bottom iterator, if possible.*
  - int `increment_bottom` ()  
*Increments the bottom iterator, if possible.*
  - void `update_pixmap` ()  
*This function does nothing.*
  - void `draw_area` ()  
*This function does nothing.*
  - void `redraw` ()  
*Redraw the given sequence.*
  - void `on_realize` ()  
*Handles the callback when the window is realized.*
  - bool `on_expose_event` (GdkEventExpose \*ev)  
*Handles an on-expose event.*
  - bool `on_button_press_event` (GdkEventButton \*ev)  
*Provides the callback for a button press, and it handles only a left mouse button.*
  - bool `on_button_release_event` (GdkEventButton \*ev)  
*Handles a button-release for the right button, bringing up a popup menu.*
  - bool `on_focus_in_event` (GdkEventFocus \*ev)  
*This callback is an attempt to get keyboard focus into the eventslots pixmap area.*
  - bool `on_focus_out_event` (GdkEventFocus \*ev)  
*This callback handles an out-of-focus event by resetting the flag HAS\_FOCUS.*
  - bool `on_scroll_event` (GdkEventScroll \*ev)  
*Handle the scrolling of the window.*
  - void `on_size_allocate` (Gtk::Allocation &)  
*Handles a size-allocation event.*
  - void `on_move_up` ()  
*Move to the previous event.*
  - void `on_move_down` ()  
*Move to the next event.*
  - void `on_frame_up` ()  
*Move to the previous frame.*
  - void `on_frame_down` ()  
*Move to the next frame.*
  - void `on_frame_home` ()  
*Move to the first frame.*
  - void `on_frame_end` ()  
*Move to the last frame.*

## Private Attributes

- [eventedit](#) & [m\\_parent](#)  
Provides a link to the eventedit that created this object.
- [sequence](#) & [m\\_seq](#)  
Provides a reference to the sequence that this dialog is meant to view or modify.
- [editable\\_events](#) [m\\_event\\_container](#)  
Holds the editable events for this sequence.
- [int](#) [m\\_slots\\_chars](#)  
Provides the number of the characters in the name box.
- [int](#) [m\\_char\\_w](#)  
Provides the "real" width of a character.
- [int](#) [m\\_setbox\\_w](#)  
Provides the width of the "set number" box.
- [int](#) [m\\_slots\\_box\\_w](#)  
Provides the width of the "slot" box.
- [int](#) [m\\_slots\\_x](#)  
Provides the width of the names box, which is the width of a character for 24 characters.
- [int](#) [m\\_slots\\_y](#)  
Provides the height of the names box, which is hardwired to 24 pixels.
- [int](#) [m\\_xy\\_offset](#)  
Provides the horizontal and vertical offsets of the text relative to the names box.
- [int](#) [m\\_event\\_count](#)  
The current number of events in the edited container.
- [int](#) [m\\_line\\_count](#)  
Counts the number of displayed events, which depends on how many events there are ([m\\_event\\_count](#)) and the size of the event list ([m\\_line\\_maximum](#)).
- [int](#) [m\\_line\\_maximum](#)  
Counts the maximum number of displayed events, which depends on the size of the event list (and thus the size of the dialog box for the event editor).
- [int](#) [m\\_line\\_overlap](#)  
Provides a little overlap for paging through the frame.
- [int](#) [m\\_top\\_index](#)  
The index of the event that is 0th in the visible list of events.
- [int](#) [m\\_current\\_index](#)  
Indicates the index of the current event within the frame.
- [editable\\_events::iterator](#) [m\\_top\\_iterator](#)  
Provides the top "pointer" to the start of the editable-events section that is being shown in the user-interface.
- [editable\\_events::iterator](#) [m\\_bottom\\_iterator](#)  
Provides the bottom "pointer" to the end of the editable-events section that is being shown in the user-interface.
- [editable\\_events::iterator](#) [m\\_current\\_iterator](#)  
Provides the "pointer" to the event currently in focus.
- [int](#) [m\\_pager\\_index](#)  
Indicates the event index that matches the index value of the vertical pager.

## Additional Inherited Members

### 10.12.1 Member Function Documentation

#### 10.12.1.1 `bool seq64::eventslots::load_events ( ) [private]`

Determines how many events can be shown in the GUI [later] and adjusts the top and bottom editable-event iterators to show the first page of events.

##### Returns

Returns true if the event iterators were able to be set up as valid.

#### 10.12.1.2 `void seq64::eventslots::set_current_event ( const editable_events::iterator ei, int index, bool full_redraw = true ) [private]`

Note in the `sprintf()` calls that the first digit is part of the data byte, so that translation is easier.

##### Parameters

<i>ei</i>	The iterator that points to the event.
<i>index</i>	The index (re 0) of the event, starting at the top line of the frame. It is a frame index, not a container index.
<i>full_redraw</i>	If true (the default) does a full redraw of the frame. Otherwise, only the current event is drawn. Generally, the only time a single event (actually, two adjacent events) is convenient to draw is when using the arrow keys, where the speed of keystroke auto-repeats makes the full-frame update scrolling very flickery and disconcerting.

#### 10.12.1.3 `bool seq64::eventslots::insert_event ( const editable_event & edev ) [private]`

What actually happens here depends if the new event is before the frame, within the frame, or after the frame, based on the timestamp.

If before the frame: To keep the previous events visible, we do not need to increment the iterators (insertion does not affect multimap iterators), but we do need to increment their indices. The contents shown in the frame should not change.

If at the frame top: The new timestamp equals the top timestamp. We don't know exactly where the new event goes in the multimap, but we do have a new event.

If at the frame bottom: TODO

If after the frame: No action needed if the bottom event is actually at the bottom of the frame. But if the frame is not yet filled, we need to increment the bottom iterator, and its index.

##### Note

Actually, it is far easier to just adjust all the counts and iterators and redraw the screen, as done by the [page\\_topper\(\)](#) function.

##### Parameters

<i>ev</i>	The event to insert, prebuilt.
-----------	--------------------------------

##### Returns

Returns true if the event was inserted.

**10.12.1.4** `bool seq64::eventslots::insert_event ( const std::string & evtimestamp, const std::string & evname, const std::string & evdata0, const std::string & evdata1 ) [private]`

It calls the other `insert_event()` overload.

Note that we need to qualify the temporary event class object we create below, with the seq64 namespace, otherwise the compiler thinks we're trying to access some Gtkmm thing.

#### Parameters

<i>evtimestamp</i>	The time-stamp of the new event, as obtained from the event-edit timestamp field.
<i>evname</i>	The type name (status name) of the new event, as obtained from the event-edit event-name field.
<i>evdata0</i>	The first data byte of the new event, as obtained from the event-edit data 1 field.
<i>evdata1</i>	The second data byte of the new event, as obtained from the event-edit data 2 field. Used only for two-parameter events.

#### Returns

Returns true if the event was inserted.

**10.12.1.5** `bool seq64::eventslots::delete_current_event ( ) [private]`

To delete the current event, this function moves the current iterator to the next event, deletes the previously-current iterator, adjusts the event count and the bottom iterator, and redraws the pixmap. The exact changes depend upon whether the deleted event was at the top of the visible frame, within the visible frame, or at the bottom the visible frame. Note that only visible events can be the current event, and thus get deleted.

```

Event Index
0
1
2           Top
3 <----- Top case: The new top iterator, index becomes 2
4
.
.           Inside of Visible Frame
.
43
44           Bottom
45 <----- Top case: The new bottom iterator, index becomes 44
46           Bottom case: Same result

```

Basically, when an event is deleted, the frame (delimited by the event-index members) stays in place, while the frame iterators move to the previous event. If the top of the frame would move to before the first event, then the frame must shrink.

Top case: If the current iterator is the top (of the frame) iterator, then the top iterator needs to be incremented. The new top event has the same index as the now-gone top event. The index of the bottom event is decremented, since an event before it is now gone. The bottom iterator moves to the next event, which is now at the bottom of the frame. The current event is treated like the top event.

Inside case: If the current iterator is in the middle of the frame, the top iterator and index remain unchanged. The current iterator is incremented, but its index is now the same as the old bottom index. Same for the bottom iterator.

Bottom case: If the current iterator (and bottom iterator) point to the last event in the frame, then both of them need to be decremented. The frame needs to be moved up by one event, so that the current event remains at the bottom (it's just simpler to manage that way).

If there is no event after the bottom of the frame, the iterators that now point to end() must backtrack one event. If the container becomes empty, then everything is invalidated.

**Returns**

Returns true if the delete was possible. If the container was empty or became empty, then false is returned.

**10.12.1.6** `bool seq64::eventslots::modify_current_event ( const std::string & evtimestamp, const std::string & evname, const std::string & evdata0, const std::string & evdata1 ) [private]`

If the timestamp has changed, however, we can't just modify the event in place. Instead, we finish modifying the event, but tell the caller to delete and reinsert the new event (in its proper new location based on timestamp).

This function always copies the original event, modifies the copy, deletes the original event, and inserts the "new" event into the editable-event container.

**Parameters**

<i>evtimestamp</i>	Provides the new event time-stamp as edited by the user.
<i>evname</i>	Provides the event name as edited by the user.
<i>evdata0</i>	Provides the time-stamp as edited by the user.
<i>evtimestamp</i>	Provides the time-stamp as edited by the user.

**Returns**

Returns true simply if the event-count is greater than 0.

**10.12.1.7** `bool seq64::eventslots::save_events ( ) [private]`

Also sets the dirty flag for the sequence, via the [sequence::add\\_event\(\)](#) function, but this doesn't seem to set the perform dirty flag. So now we pass the modification buck to the parent, who passes it to the perform object.

We added a `copy_events()` function in the sequence class to replace `add_event()` for the purpose of reconstructing the events container for the sequence. It is locked by a mutex, and so will not draw until all is done, preventing a nasty segfault (all segfaults are nasty).

We create a new plain event container here, and then passing it to the new locked/threadsafe [sequence::copy\\_events\(\)](#) function that clears the sequence container and copies the events from the parameter container.

Note that this code will operate event if all events were deleted.

**Returns**

Returns true if the operations succeeded.

**10.12.1.8** `void seq64::eventslots::select_event ( int event_index = SEQ64_NULL_EVENT_INDEX, bool full_redraw = true ) [private]`

The event index is provided by converting the y-coordinate of the mouse pointer into a slot number, and then an event index (actually the slot-distance from the `m_top_iterator`. Confusing, yes no?

Note that, if the event index is negative, then we just queue up a draw operation, which should paint an empty frame – the event container is empty.

**Parameters**

<i>event_index</i>	Provides the numeric index of the event in the event frame, or SEQ64_NULL_EVENT if there is no event to draw.
--------------------	---

<i>full_redraw</i>	Defaulting to true, this parameter can be set to false in some case to reduce the flickering of the frame under fast movement.
--------------------	--

10.12.1.9 `void seq64::eventslots::set_text ( const std::string & evcategory, const std::string & evtimestamp, const std::string & evname, const std::string & evdata0, const std::string & evdata1 ) [private]`

#### Parameters

<i>evtimestamp</i>	The event time-stamp to be set in the parent.
<i>evname</i>	The event name to be set in the parent.
<i>evdata0</i>	The first event data byte to be set in the parent.
<i>evdata1</i>	The second event data byte to be set in the parent.

10.12.1.10 `int seq64::eventslots::convert_y ( int y ) [private]`

#### Parameters

<i>y</i>	The y coordinate of the position of the mouse click in the eventslot window/pixmap.
----------	---

#### Returns

Returns the index of the event position in the user-interface, which should range from 0 to `m_line_count`.

10.12.1.11 `void seq64::eventslots::draw_event ( editable_events::iterator ei, int index ) [private]`

The slot contains the event details in (so far) one line of text in the box:

| timestamp | event kind | channel | data 0 name + value | data 1 name + value

Currently, this view shows only events that get copied to the sequence's event list. This rules out the following items from the view:

- MThd (song header)
- MTrk and Meta TrkEnd (track marker, a sequence has only one track)
- SeqNr (sequence number)
- SeqSpec (but there are three that might appear, see below)
- Meta TrkName

The events that are shown in this view are:

- One-data-value events:
  - Program Change
  - Channel Pressure
- Two-data-value events:
  - Note Off
  - Note On
  - Aftertouch
  - Control Change
  - Pitch Wheel
- Other:
  - SysEx events, with partial show of data bytes
  - SeqSpec events (TBD):
    - Key
    - Scale
    - Background sequence

The index of the event is shown in the editor portion of the eventedit dialog.

#### 10.12.1.12 void seq64::eventslots::draw\_events ( ) [private]

It first clears the whole bitmap to white, so that no artifacts from the previous state of the frame are left behind.  
Need to figure out how to calculate the number of displayable events.

`m_line_maximum = ???`

#### 10.12.1.13 void seq64::eventslots::change\_vert ( ) [private]

Note that `m_vadjust` is the `Gtk::Adjustment` object that the `eventedit` parent passes to the [gui\\_drawingarea\\_gtk2](#) constructor.

The top-event and bottom-event indices (and their corresponding editable-event iterators) delimit the part of the event container that is displayed in the eventslots user-interface. The top-event index starts at 0, and the bottom-event is larger (initially, by 42 slots).

When the scroll-bar thumb moves up or down, we need to change both event indices and both event iterators by the corresponding amount. Luckily, the `std::multimap` iterator is bidirectional.

Note that we may need to reduce the movement of events to a value less than a page; it can be limited backwards by the value of the top index, and forward by the value of the bottom index.

#### 10.12.1.14 void seq64::eventslots::page\_movement ( int new\_value ) [private]

The adjustment is done via movement from the current position.

Do we even need a way to detect excess movement? The scrollbar, if properly set up, should never move the frame too high or too low. Verified by testing.

##### Parameters

<i>new_value</i>	Provides the new value of the scrollbar position.
------------------	---

#### 10.12.1.15 void seq64::eventslots::page\_topper ( editable\_events::iterator newcurrent ) [private]

The adjustment is done "from scratch". We've found page movement to be an insoluble problem in some editing circumstances. So now we move to the inserted event, and make it the top event.

However, always moving an inserted event to the top is a bit annoying. So now we backtrack so that the inserted event is at the bottom.

##### Parameters

<i>newcurrent</i>	Provides the iterator to the event to be shown at the bottom of the frame.
-------------------	--

#### 10.12.1.16 int seq64::eventslots::decrement\_top ( ) [private]

##### Returns

Returns 0, or `SEQ64_NULL_EVENT_INDEX` if the iterator could not be decremented.

#### 10.12.1.17 int seq64::eventslots::increment\_top ( ) [private]

Also handles the top-event index, so that the GUI can display the proper event numbers.



**Returns**

Returns the top index, or SEQ64\_NULL\_EVENT\_INDEX if the iterator could not be incremented, or would increment to the end of the container.

10.12.1.18 `int seq64::eventslots::decrement_current ( ) [private]`

**Returns**

Returns the decremented index, or SEQ64\_NULL\_EVENT\_INDEX if the iterator could not be decremented. Remember that the index ranges only from 0 to m\_line\_count-1, and that is enforced here.

10.12.1.19 `int seq64::eventslots::increment_current ( ) [private]`

**Returns**

Returns the incremented index, or SEQ64\_NULL\_EVENT\_INDEX if the iterator could not be incremented. Remember that the index ranges only from 0 to m\_line\_count-1, and that is enforced here.

10.12.1.20 `int seq64::eventslots::decrement_bottom ( ) [private]`

**Returns**

Returns 0, or SEQ64\_NULL\_EVENT\_INDEX if the iterator could not be decremented.

10.12.1.21 `int seq64::eventslots::increment_bottom ( ) [private]`

There is an issue in paging down using the scrollbar where, at the bottom of the scrolling, the bottom iterator ends up bad. Not yet sure how this happens, so for now we backtrack one event if this happens.

**Returns**

Returns the incremented index, or SEQ64\_NULL\_EVENT\_INDEX if the iterator could not be incremented.

10.12.1.22 `void seq64::eventslots::on_realize ( ) [private]`

It first calls the base-class version of [on\\_realize\(\)](#). Then it allocates any additional resources needed.

10.12.1.23 `bool seq64::eventslots::on_expose_event ( GdkEventExpose * ev ) [private]`

It draws all of the sequences.

10.12.1.24 `bool seq64::eventslots::on_focus_in_event ( GdkEventFocus * ev ) [private]`

See the same function in the perfroll module.

10.12.1.25 `void seq64::eventslots::on_size_allocate ( Gtk::Allocation & a ) [private]`

It first calls the base-class version of this function.

10.12.1.26 `void seq64::eventslots::on_move_up( ) [private]`

We must scroll up if the event is now before the frame, and should be made the new top event of the frame. Note that this function isn't really an event-response callback. It is called by `eventedit::on_key_press_event()`.

10.12.1.27 `void seq64::eventslots::on_move_down( ) [private]`

We must scroll down if the event is now after the frame. Note that this function isn't really an event-response callback. It is called by `eventedit::on_key_press_event()`.

## 10.12.2 Field Documentation

10.12.2.1 `int seq64::eventslots::m_slots_chars [private]`

Pretty much hardwired to 24 at present.

10.12.2.2 `int seq64::eventslots::m_char_w [private]`

This value is obtained from a font-renderer accessor function.

10.12.2.3 `int seq64::eventslots::m_setbox_w [private]`

This used to be hardwired to  $6 * 2$  (character-width times two).

10.12.2.4 `int seq64::eventslots::m_slots_y [private]`

This value was once 22 pixels, but we need a little extra room for our new font. This extra room is compatible enough with the old font, as well.

10.12.2.5 `int seq64::eventslots::m_xy_offset [private]`

Currently hardwired.

10.12.2.6 `int seq64::eventslots::m_top_index [private]`

It is used in numbering the events that are shown in the event-slot frame. Do not confuse it with `m_current_index`, which is relative to the frame, not the container-beginning.

10.12.2.7 `int seq64::eventslots::m_current_index [private]`

This event will also be pointed to by the `m_current_event` iterator. Do not confuse it with `m_top_index`, which is relative to the container-beginning, not the frame.

## 10.13 seq64::font Class Reference

This class provides a wrapper for rendering fonts that are encoded as a 16 x 16 pixmap file in XPM format.

## Public Types

- enum [Color](#) {  
[BLACK](#),  
[WHITE](#),  
[BLACK\\_ON\\_YELLOW](#),  
[YELLOW\\_ON\\_BLACK](#),  
[BLACK\\_ON\\_CYAN](#),  
[CYAN\\_ON\\_BLACK](#) }

## Public Member Functions

- [font](#) ()  
*rote default constructor.*
- void [init](#) (Glib::RefPtr< Gdk::Window > windo)  
*Initialization function for a window on which fonts will be drawn.*
- void [render\\_string\\_on\\_drawable](#) (Glib::RefPtr< Gdk::GC > m\_gc, int x, int y, Glib::RefPtr< Gdk::Drawable > drawable, const char \*str, [font::Color](#) col) const  
*Draws a text string.*
- int [char\\_width](#) () const  
*'Getter' function for member m\_font\_w*
- int [char\\_height](#) () const  
*'Getter' function for member m\_font\_h*
- int [padded\\_height](#) () const  
*'Getter' function for member m\_padded\_h*

## Private Attributes

- bool [m\\_use\\_new\\_font](#)  
*If true, use the new font, which is a little bit more modern looking.*
- int [m\\_cell\\_w](#)  
*Specifies the cell width of the whole cell.*
- int [m\\_cell\\_h](#)  
*Specifies the cell height of the whole cell.*
- int [m\\_font\\_w](#)  
*Specifies the exact width of a character cell, in pixels.*
- int [m\\_font\\_h](#)  
*Specifies the exact height of a character cell, in pixels.*
- int [m\\_offset](#)  
*Provides an ad hoc small horizontal or vertical offset for printing strings.*
- int [m\\_padded\\_h](#)  
*Provides a common constant used by much of the drawing code, but only marginally related to the padded character height.*
- const Glib::RefPtr< Gdk::Pixmap > \* [m\\_pixmap](#)  
*Points to the current pixmap (m\_black\_pixmap or m\_white\_pixmap) to use to render a string.*
- Glib::RefPtr< Gdk::Pixmap > [m\\_black\\_pixmap](#)  
*The pixmap in the file src/pixmaps/font\_b.xpm is loaded into this object.*
- Glib::RefPtr< Gdk::Pixmap > [m\\_white\\_pixmap](#)  
*The pixmap in the file src/pixmaps/font\_w.xpm is loaded into this object.*
- Glib::RefPtr< Gdk::Pixmap > [m\\_b\\_on\\_y\\_pixmap](#)  
*The pixmap in the file src/pixmaps/font\_y.xpm is loaded into this object.*
- Glib::RefPtr< Gdk::Pixmap > [m\\_y\\_on\\_b\\_pixmap](#)

*The pixmap in the file `src/pixmaps/font_yb.xpm` is loaded into this object.*

- Glib::RefPtr< Gdk::Pixmap > [m\\_b\\_on\\_c\\_pixmap](#)

*The pixmap in the file `src/pixmaps/cyan_wenfont_y.xpm` is loaded into this object.*

- Glib::RefPtr< Gdk::Pixmap > [m\\_c\\_on\\_b\\_pixmap](#)

*The pixmap in the file `src/pixmaps/cyan_wenfont_yb.xpm` is loaded into this object.*

- Glib::RefPtr< Gdk::Bitmap > [m\\_clip\\_mask](#)

*This object is instantiated as a default object.*

## 10.13.1 Member Enumeration Documentation

### 10.13.1.1 enum seq64::font::Color

#### Enumerator

**BLACK** A simple enumeration to describe the basic colors used in writing text. Basically, these two values cause the selection of one or another pixmap (`font_b_xpm` and `font_w_xpm`). We've added two more pixmaps to draw black text on a yellow background (`font_y.xpm`) and yellow text on a black background (`font_yb.xpm`).

The first supported color. A black font on a white background.

**WHITE** The second supported color. A white font on a black background.

**BLACK\_ON\_YELLOW** A new color, for drawing black text on a yellow background.

**YELLOW\_ON\_BLACK** A new color, for drawing yellow text on a black background.

**BLACK\_ON\_CYAN** A new color, for drawing black text on a cyan background.

**CYAN\_ON\_BLACK** A new color, for drawing cyan text on a black background.

## 10.13.2 Member Function Documentation

### 10.13.2.1 void seq64::font::init ( Glib::RefPtr< Gdk::Window > wp )

This function loads four pixmaps that contain the characters to be used to draw text strings.

One pixmap has white characters on a black background, one has black characters on a white background, one has yellow characters on a black background, and one has black characters on a yellow background.

### 10.13.2.2 void seq64::font::render\_string\_on\_drawable ( Glib::RefPtr< Gdk::GC > a\_gc, int x, int y, Glib::RefPtr< Gdk::Drawable > a\_draw, const char \* str, font::Color col ) const

This function grabs the proper font bitmap, extracts the current character pixmap from it, and slaps it down where it needs to be to render the character in the string.

#### Parameters

<code>a_gc</code>	Provides the graphics context for drawing the text using GTK+.
<code>x</code>	The horizontal location of the text.
<code>y</code>	The vertical location of the text.
<code>a_draw</code>	The drawable object on which to draw the text.
<code>str</code>	The string to draw. Should use a constant string reference instead.
<code>col</code>	The font color to use to draw the string. The supported values are <a href="#">font::BLACK</a> , <a href="#">font::WHITE</a> , <a href="#">font::BLACK_ON_YELLOW</a> , <a href="#">font::YELLOW_ON_BLACK</a> . The actual correct colors are provided by selecting one of four font pixmaps, as described in the <a href="#">init()</a> function.

### 10.13.3 Field Documentation

#### 10.13.3.1 `int seq64::font::m_font_w` `[private]`

Currently defaults to `cf_text_w = 6`. Note that a lot of stuff depends on this being 6 at present, even with our new, slightly wider, font.

#### 10.13.3.2 `int seq64::font::m_font_h` `[private]`

Currently defaults to `cf_text_h = 10`. Note that a lot of stuff depends on this being 10 at present, even with our new, slightly wider, font. But some of the drawing code doesn't use the character height, but the padded character height.

#### 10.13.3.3 `const Glib::RefPtr<Gdk::Pixmap>* seq64::font::m_pixmap` `[mutable], [private]`

This member used to be an object, but it's probably a bit faster to just use a pointer (or a reference).

#### 10.13.3.4 `Glib::RefPtr<Gdk::Pixmap> seq64::font::m_black_pixmap` `[private]`

It contains a black font on a white background. The new-style font, if selected, is `resources/pixmaps/wenfont↵_b.xmp` pixmap.

#### 10.13.3.5 `Glib::RefPtr<Gdk::Pixmap> seq64::font::m_white_pixmap` `[private]`

It contains a black font on a white background. The new-style font, if selected, is `resources/pixmaps/wenfont↵_w.xmp` pixmap.

#### 10.13.3.6 `Glib::RefPtr<Gdk::Pixmap> seq64::font::m_b_on_y_pixmap` `[private]`

It contains a black font on a yellow background. The new-style font, if selected, is `resources/pixmaps/wenfont↵_y.xmp` pixmap.

#### 10.13.3.7 `Glib::RefPtr<Gdk::Pixmap> seq64::font::m_y_on_b_pixmap` `[private]`

It contains a yellow font on a black background. The new-style font, if selected, is `resources/pixmaps/wenfont↵_yb.xmp` pixmap.

#### 10.13.3.8 `Glib::RefPtr<Gdk::Pixmap> seq64::font::m_b_on_c_pixmap` `[private]`

It contains a black font on a cyan background. It is available only for the new font-style.

#### 10.13.3.9 `Glib::RefPtr<Gdk::Pixmap> seq64::font::m_c_on_b_pixmap` `[private]`

It contains a cyan font on a black background. It is available only for the new font-style.


#### 10.13.3.10 `Glib::RefPtr<Gdk::Bitmap> seq64::font::m_clip_mask` `[private]`

All we know is it seems to be a requirement for creating a pixmap object from an XMP file.

## 10.14 seq64::gui\_assistant Class Reference

This class provides an interface for some of the GUI support needed in Sequencer64.

Inheritance diagram for seq64::gui\_assistant:

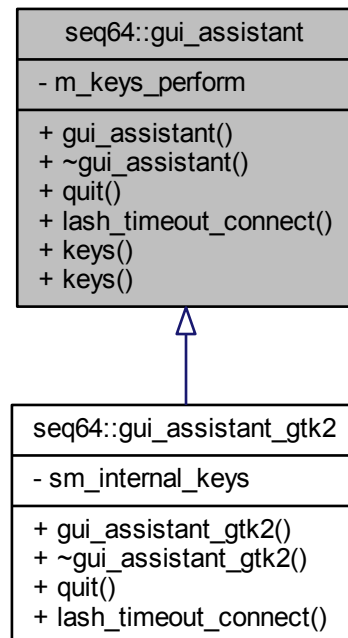

### Public Member Functions

- `gui_assistant (keys_perform &kp)`  
*This constructor wires in some externally (for now) created objects.*
- `virtual ~gui_assistant ()`  
*Stock base-class implementation of a virtual destructor.*
- `const keys_perform & keys () const`  
*'Getter' function for member m\_keys\_perform The const getter.*
- `keys_perform & keys ()`  
*'Getter' function for member m\_keys\_perform The un-const getter.*

### Private Attributes

- `keys_perform & m_keys_perform`  
*Provides a reference to the app-specific GUI-specific keys\_perform-derived object that an application is going to use for handling sequence-control keys.*

#### 10.14.1 Detailed Description

It also contain a number of helper objects that all kind of go together; only this assistant object will need to be passed around (by non-GUI code).

### 10.14.2 Constructor & Destructor Documentation

#### 10.14.2.1 seq64::gui\_assistant::gui\_assistant ( keys\_perform & kp )


Parameters

<i>kp</i>	Provides a set of key codes to be used by the perform object to control patterns and their performance.
-----------	---

## 10.15 seq64::gui\_assistant\_gtk2 Class Reference

This class provides an interface for some of the Gtk/Gdk/Glib support needed in Sequencer64.

Inheritance diagram for seq64::gui\_assistant\_gtk2:

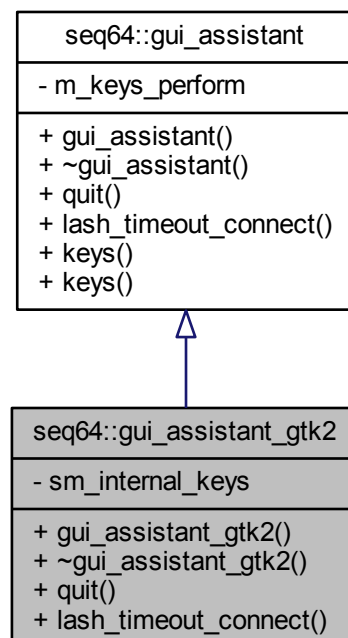

### Public Member Functions

- [gui\\_assistant\\_gtk2 \(\)](#)  
*This class provides an interface for some of the Gtk/Gdk/Glib support needed in Sequencer64.*
- virtual void [quit \(\)](#)  
*Calls the Glib Main object's [quit\(\)](#) function.*
- virtual void [lash\\_timeout\\_connect \(lash \\*lashobject\)](#)  
*Connects the JACK session-event callback to the Glib idle object.*





## Public Member Functions

- [gui\\_drawingarea\\_gtk2](#) ([perform](#) &p, int [window\\_x](#)=0, int [window\\_y](#)=0)  
*Perform-only constructor.*
- [gui\\_drawingarea\\_gtk2](#) ([perform](#) &a\_perf, Gtk::Adjustment &a\_hadjust, Gtk::Adjustment &a\_vadjust, int [window\\_x](#)=0, int [window\\_y](#)=0)  
*Principal constructor.*
- [~gui\\_drawingarea\\_gtk2](#) ()  
*Provides a destructor to delete allocated objects.*
- int [window\\_x](#) () const  
*'Getter' function for member m\_window\_x*
- int [window\\_y](#) () const  
*'Getter' function for member m\_window\_y*
- int [current\\_x](#) () const  
*'Getter' function for member m\_current\_x*
- int [current\\_y](#) () const  
*'Getter' function for member m\_current\_y*
- int [drop\\_x](#) () const  
*'Getter' function for member m\_drop\_x*
- int [drop\\_y](#) () const  
*'Getter' function for member m\_drop\_y*

## Protected Member Functions

- [perform](#) & [perf](#) ()  
*'Getter' function for member m\_mainperf*
- void [clear\\_window](#) ()  
*Clears the main window.*
- void [set\\_line](#) (Gdk::LineStyle ls, int width=1)  
*A small wrapper function for readability in line-drawing.*
- void [draw\\_line](#) (int x1, int y1, int x2, int y2)  
*A small wrapper function to draw a line on the window.*
- void [draw\\_line](#) (const [Color](#) &c, int x1, int y1, int x2, int y2)  
*A small wrapper function to draw a line on the window after setting the given foreground color.*
- void [draw\\_line\\_on\\_pixmap](#) (int x1, int y1, int x2, int y2)  
*A small wrapper function to draw a line on the pixmap.*
- void [draw\\_line\\_on\\_pixmap](#) (const [Color](#) &c, int x1, int y1, int x2, int y2)  
*A small wrapper function to draw a line on the pixmap after setting the given foreground color.*
- void [draw\\_line](#) (Glib::RefPtr< Gdk::Pixmap > &pixmap, int x1, int y1, int x2, int y2)  
*A small wrapper function to draw a line on any pixmap (not a drawable, though, due to a compiler error after setting the given foreground color.*
- void [draw\\_line](#) (Glib::RefPtr< Gdk::Pixmap > &pixmap, const [Color](#) &c, int x1, int y1, int x2, int y2)  
*A small wrapper function to draw a line on the pixmap after setting the given foreground color.*
- void [draw\\_line](#) (Glib::RefPtr< Gdk::Drawable > &drawable, int x1, int y1, int x2, int y2)  
*A small wrapper function to draw a line on any pixmap (not a drawable, though, due to a compiler error after setting the given foreground color.*
- void [draw\\_line](#) (Glib::RefPtr< Gdk::Drawable > &drawable, const [Color](#) &c, int x1, int y1, int x2, int y2)  
*A small wrapper function to draw a line on the drawable after setting the given foreground color.*
- void [render\\_string](#) (int x, int y, const std::string &s, [font::Color](#) color)  
*A small wrapper function for readability in string-drawing to the window.*
- void [render\\_string\\_on\\_pixmap](#) (int x, int y, const std::string &s, [font::Color](#) color)

- A small wrapper function for readability in string-drawing to the pixmap.*

  - void [draw\\_rectangle](#) (int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing on the window.*

  - void [draw\\_rectangle](#) (const [Color](#) &c, int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing.*

  - void [draw\\_rectangle](#) (Glib::RefPtr< Gdk::Drawable > &drawable, int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing on a "drawable" context, where the foreground color has already been specified.*

  - void [draw\\_rectangle](#) (Glib::RefPtr< Gdk::Drawable > &drawable, const [Color](#) &c, int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing on any drawable context.*

  - void [draw\\_rectangle](#) (Glib::RefPtr< Gdk::Pixmap > &pixmap, int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing on a "pixmap" context, where the foreground color has already been specified.*

  - void [draw\\_rectangle](#) (Glib::RefPtr< Gdk::Pixmap > &pixmap, const [Color](#) &c, int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing on any pixmap context.*

  - void [draw\\_rectangle\\_on\\_pixmap](#) (int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing on the pixmap.*

  - void [draw\\_rectangle\\_on\\_pixmap](#) (const [Color](#) &c, int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing on the pixmap.*

  - void [draw\\_normal\\_rectangle\\_on\\_pixmap](#) (int x, int y, int lx, int ly, bool fill=true)

*A small wrapper function for readability in box-drawing on the pixmap.*

  - void [draw\\_drawable](#) (int xsrc, int ysrc, int xdest, int ydest, int width, int height)

*Provides the most common use case for redrawing.*

  - void [on\\_realize](#) ()

*For this GTK callback, on realization of window, initialize the shiz.*

## Protected Attributes

- Glib::RefPtr< Gdk::GC > [m\\_gc](#)

*The graphics context, which is required for ever drawing and rendering operation.*
- Glib::RefPtr< Gdk::Window > [m\\_window](#)

*Provides the default "window".*
- Gtk::Adjustment & [m\\_vadjust](#)

*Provides an object for vertical "adjustments".*
- Gtk::Adjustment & [m\\_hadjust](#)

*Provides an object for horizontal "adjustments".*
- Glib::RefPtr< Gdk::Pixmap > [m\\_pixmap](#)

*Provides the default "pixmap".*
- Glib::RefPtr< Gdk::Pixmap > [m\\_background](#)

*Another pixmap, used for backgrounds.*
- Glib::RefPtr< Gdk::Pixmap > [m\\_foreground](#)

*Another pixmap, used for foregrounds.*
- [perform](#) & [m\\_mainperf](#)

*A frequent hook into the main perform object.*
- int [m\\_window\\_x](#)

*Window sizes.*
- int [m\\_current\\_x](#)

*The x and y value of the current location of the mouse (during dragging?)*
- int [m\\_drop\\_x](#)

*These values are used when roping and highlighting a bunch of events.*

## Private Member Functions

- void [gtk\\_drawarea\\_init](#) ()

*Does basic initialization for each of the constructors.*

## Additional Inherited Members

### 10.16.1 Detailed Description

Note that this class really "isn't a" `gui_palette_gtk2`; it should simply have one. But that base class must be derived from `Gtk::DrawingArea`. We don't want to waste some space by using a "has-a" relationship, and also put up with having to access the palette indirectly. So, in this case, we tolerate the less strict implementation.

### 10.16.2 Member Function Documentation

10.16.2.1 void `seq64::gui_drawingarea_gtk2::clear_window ( )` `[inline]`, `[protected]`

One less need to access `m_window` directly.

10.16.2.2 void `seq64::gui_drawingarea_gtk2::set_line ( Gdk::LineStyle ls, int width = 1 )` `[inline]`, `[protected]`

Sets the attributes of a line to be drawn.

#### Parameters

<i>ls</i>	Provides the Gtk-specific line style.
<i>width</i>	Provides the width of the line to be drawn. It defaults to the most common value, 1.

10.16.2.3 void `seq64::gui_drawingarea_gtk2::draw_line ( int x1, int y1, int x2, int y2 )` `[inline]`, `[protected]`

#### Parameters

<i>x1</i>	The x coordinate of the starting point.
<i>y1</i>	The y coordinate of the starting point.
<i>x2</i>	The x coordinate of the ending point.
<i>y2</i>	The y coordinate of the ending point.

10.16.2.4 void `seq64::gui_drawingarea_gtk2::draw_line ( const Color & c, int x1, int y1, int x2, int y2 )` `[protected]`

#### Parameters

<i>c</i>	The foreground color in which to draw the line.
<i>x1</i>	The x coordinate of the starting point.
<i>y1</i>	The y coordinate of the starting point.
<i>x2</i>	The x coordinate of the ending point.
<i>y2</i>	The y coordinate of the ending point.

10.16.2.5 void `seq64::gui_drawingarea_gtk2::draw_line_on_pixmap ( int x1, int y1, int x2, int y2 )` `[inline]`, `[protected]`

## Parameters

<i>x1</i>	The x coordinate of the starting point.
<i>y1</i>	The y coordinate of the starting point.
<i>x2</i>	The x coordinate of the ending point.
<i>y2</i>	The y coordinate of the ending point.

10.16.2.6 `void seq64::gui_drawingarea_gtk2::draw_line_on_pixmap ( const Color & c, int x1, int y1, int x2, int y2 )`  
`[protected]`

## Parameters

<i>c</i>	The foreground color in which to draw the line.
<i>x1</i>	The x coordinate of the starting point.
<i>y1</i>	The y coordinate of the starting point.
<i>x2</i>	The x coordinate of the ending point.
<i>y2</i>	The y coordinate of the ending point.

10.16.2.7 `void seq64::gui_drawingarea_gtk2::draw_line ( Glib::RefPtr< Gdk::Pixmap > & pixmap, int x1, int y1, int x2, int y2 )`  
`[inline], [protected]`

## Parameters

<i>pixmap</i>	Provides the Gdk::Pixmap pointer needed to draw the line.
<i>x1</i>	The x coordinate of the starting point.
<i>y1</i>	The y coordinate of the starting point.
<i>x2</i>	The x coordinate of the ending point.
<i>y2</i>	The y coordinate of the ending point.

10.16.2.8 `void seq64::gui_drawingarea_gtk2::draw_line ( Glib::RefPtr< Gdk::Pixmap > & pixmap, const Color & c, int x1, int y1, int x2, int y2 )`  
`[protected]`

## Parameters

<i>drawable</i>	Provides the Gdk::Drawable pointer needed to draw the line.
<i>c</i>	The foreground color in which to draw the line.
<i>x1</i>	The x coordinate of the starting point.
<i>y1</i>	The y coordinate of the starting point.
<i>x2</i>	The x coordinate of the ending point.
<i>y2</i>	The y coordinate of the ending point.

10.16.2.9 `void seq64::gui_drawingarea_gtk2::draw_line ( Glib::RefPtr< Gdk::Drawable > & drawable, int x1, int y1, int x2, int y2 )`  
`[inline], [protected]`

## Parameters

<i>drawable</i>	Provides the Gdk::Drawable pointer needed to draw the line.
<i>x1</i>	The x coordinate of the starting point.
<i>y1</i>	The y coordinate of the starting point.

<i>x2</i>	The x coordinate of the ending point.
<i>y2</i>	The y coordinate of the ending point.

**10.16.2.10** `void seq64::gui_drawingarea_gtk2::draw_line ( Glib::RefPtr< Gdk::Drawable > & drawable, const Color & c, int x1, int y1, int x2, int y2 )` `[protected]`

#### Parameters

<i>drawable</i>	Provides the Gdk::Drawable pointer needed to draw the line.
<i>c</i>	The foreground color in which to draw the line.
<i>x1</i>	The x coordinate of the starting point.
<i>y1</i>	The y coordinate of the starting point.
<i>x2</i>	The x coordinate of the ending point.
<i>y2</i>	The y coordinate of the ending point.

**10.16.2.11** `void seq64::gui_drawingarea_gtk2::render_string ( int x, int y, const std::string & s, font::Color color )` `[inline], [protected]`

#### Parameters

<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>s</i>	The string to be drawn.
<i>color</i>	The color with which to draw the string.

**10.16.2.12** `void seq64::gui_drawingarea_gtk2::render_string_on_pixmap ( int x, int y, const std::string & s, font::Color color )` `[inline], [protected]`

#### Parameters

<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>s</i>	The string to be drawn.
<i>color</i>	The color with which to draw the string.

**10.16.2.13** `void seq64::gui_drawingarea_gtk2::draw_rectangle ( int x, int y, int lx, int ly, bool fill = true )` `[inline], [protected]`

#### Parameters

<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.
<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

**10.16.2.14** `void seq64::gui_drawingarea_gtk2::draw_rectangle ( const Color & c, int x, int y, int lx, int ly, bool fill = true )` `[protected]`

It adds setting the foreground color to the [draw\\_rectangle\(\)](#) function.

## Parameters

<i>c</i>	Provides the foreground color to set.
<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.
<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

10.16.2.15 `void seq64::gui_drawingarea_gtk2::draw_rectangle ( Glib::RefPtr< Gdk::Drawable > & drawable, int x, int y, int lx, int ly, bool fill = true ) [inline], [protected]`

## Parameters

<i>drawable</i>	The object on which to draw the rectangle.
<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.
<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

10.16.2.16 `void seq64::gui_drawingarea_gtk2::draw_rectangle ( Glib::RefPtr< Gdk::Drawable > & drawable, const Color & c, int x, int y, int lx, int ly, bool fill = true ) [protected]`

It also supports setting the foreground color to the [draw\\_rectangle\(\)](#) function.

We have a number of such functions: for the main window, for the main pixmap, and for any drawing surface. Is the small bit of conciseness worth it?

## Parameters

<i>drawable</i>	The surface on which to draw the box.
<i>c</i>	Provides the foreground color to set.
<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.
<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

10.16.2.17 `void seq64::gui_drawingarea_gtk2::draw_rectangle ( Glib::RefPtr< Gdk::Pixmap > & pixmap, int x, int y, int lx, int ly, bool fill = true ) [inline], [protected]`

## Parameters

<i>drawable</i>	The object on which to draw the rectangle.
<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.

<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

**10.16.2.18** `void seq64::gui_drawingarea_gtk2::draw_rectangle ( Glib::RefPtr< Gdk::Pixmap > & pixmap, const Color & c, int x, int y, int lx, int ly, bool fill = true ) [protected]`

It also supports setting the foreground color to the [draw\\_rectangle\(\)](#) function.

We have a number of such functions: for the main window, for the main pixmap, and for any drawing surface. Is the small bit of conciseness worth it?

#### Parameters

<i>pixmap</i>	The surface on which to draw the box.
<i>c</i>	Provides the foreground color to set.
<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.
<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

**10.16.2.19** `void seq64::gui_drawingarea_gtk2::draw_rectangle_on_pixmap ( int x, int y, int lx, int ly, bool fill = true ) [inline], [protected]`

#### Parameters

<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.
<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

**10.16.2.20** `void seq64::gui_drawingarea_gtk2::draw_rectangle_on_pixmap ( const Color & c, int x, int y, int lx, int ly, bool fill = true ) [protected]`

It adds setting the foreground color to the [draw\\_rectangle\(\)](#) function.

#### Parameters

<i>c</i>	Provides the foreground color to set.
<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.
<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

**10.16.2.21** `void seq64::gui_drawingarea_gtk2::draw_normal_rectangle_on_pixmap ( int x, int y, int lx, int ly, bool fill = true ) [protected]`

It uses Gtk to get the proper background styling for the rectangle.

**Parameters**

<i>x</i>	The x-coordinate of the origin.
<i>y</i>	The y-coordinate of the origin.
<i>lx</i>	The width of the box.
<i>ly</i>	The height of the box.
<i>fill</i>	If true, fill the rectangle with the current foreground color, as set by <code>m_gc-&gt;set_foreground(color)</code> . Defaults to true.

10.16.2.22 `void seq64::gui_drawingarea_gtk2::on_realize ( )` [protected]

It allocates any additional resources that weren't initialized in the constructor.

**10.16.3 Field Documentation**

10.16.3.1 `Glib::RefPtr<Gdk::Window> seq64::gui_drawingarea_gtk2::m_window` [protected]

Wrapper functions with undecorated wrapper names are used for accessing this item. We hope to be able to hide this items completely some day.

10.16.3.2 `Glib::RefPtr<Gdk::Pixmap> seq64::gui_drawingarea_gtk2::m_pixmap` [protected]

Wrapper functions with undecorated wrapper names are used for accessing this item. We hope to be able to hide this items completely some day.

10.16.3.3 `Glib::RefPtr<Gdk::Pixmap> seq64::gui_drawingarea_gtk2::m_background` [protected]

Our wrappers still leave this member exposed <giggle>.

10.16.3.4 `Glib::RefPtr<Gdk::Pixmap> seq64::gui_drawingarea_gtk2::m_foreground` [protected]

Our wrappers still leave this member exposed.

10.16.3.5 `perform& seq64::gui_drawingarea_gtk2::m_mainperf` [protected]

We could move this into yet another base class, since a number of classes don't need it. Probably not worth the effort at this time.

10.16.3.6 `int seq64::gui_drawingarea_gtk2::m_window_x` [protected]

Could make this constant, but some windows are resizable.

10.16.3.7 `int seq64::gui_drawingarea_gtk2::m_drop_x` [protected]

Provides the x and y value of where the dragging started.

**10.17 seq64::gui\_palette\_gtk2 Class Reference**

Implements a stock palette of `Gdk::Color` elements.



[illegible]

- `gui_palette_gtk2 ()`  
*Principal constructor.*
- `~gui_palette_gtk2 ()`  
*Provides a destructor to delete allocated objects.*

- `typedef Gdk::Color Color`  
*Provides a type for the color object.*


Note that this class must be derived from `Gtk::DrawingArea` (or `Gtk::Widget`) in order to get access to the `get_← default_colormap()` function used in the constructor.

#### 10.17.2.1 seq64::gui\_palette\_gtk2::gui\_palette\_gtk2 ( )

## 10.18 seq64::gui\_window\_gtk2 Class Reference

Generated on Sat Jan 16 2016 15:47:28 for Sequencer64 Developer/Tester's Reference Manual by Doxygen

Inheritance diagram for seq64::gui\_window\_gtk2:

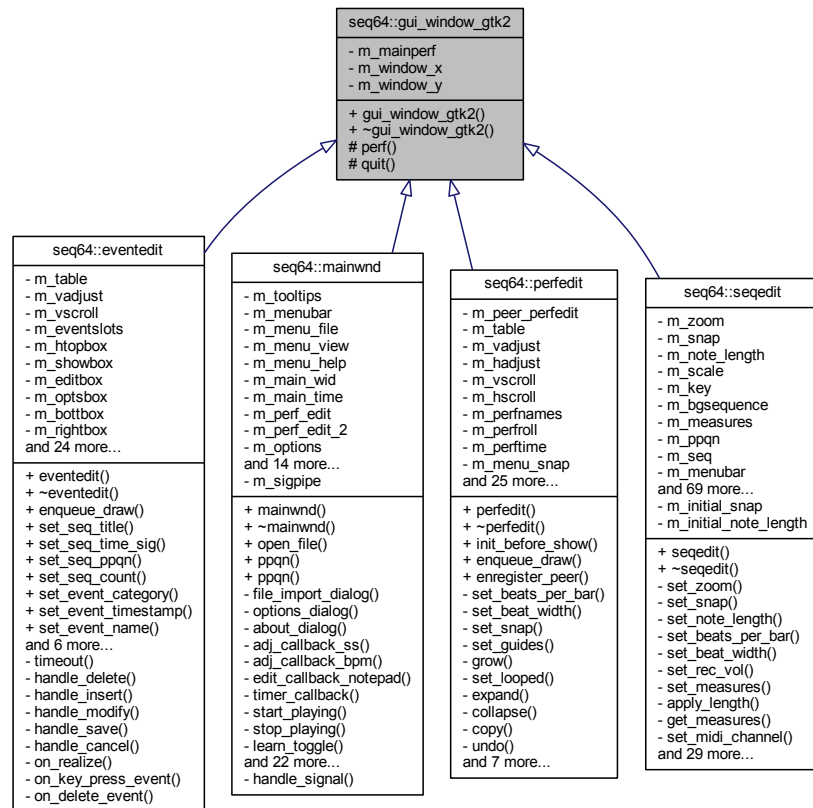

## Public Member Functions

- `gui_window_gtk2 (perform &p, int window_x=0, int window_y=0)`  
Principal constructor, has a reference to the all-important perform object.
- `~gui_window_gtk2 ()`  
This rote constructor does nothing.

## Protected Member Functions

- `perform & perf ()`  
'Getter' function for member `m_mainperf`

## Private Attributes

- `perform & m_mainperf`  
The master object, sort of a sequence buss.
- `int m_window_x`  
Window sizes.

### 10.18.1 Constructor & Destructor Documentation

10.18.1.1 seq64::gui\_window\_gtk2::gui\_window\_gtk2 ( *perform* & *p*, int *window\_x* = 0, int *window\_y* = 0 )

## Parameters

<code>a_perf</code>	Refers to the main performance object.
---------------------	--

## 10.18.2 Field Documentation

### 10.18.2.1 `int seq64::gui_window_gtk2::m_window_x` [private]

Could make this constant, but some windows are resizable.

## 10.19 `seq64::jack_assistant` Class Reference

This class provides the performance mode JACK support.

### Public Member Functions

- `jack_assistant` (`perform` & `parent`, `int ppqn=SEQ64_USE_DEFAULT_PPQN`)  
*This constructor initializes a number of member variables, some of them public!*
- `~jack_assistant` ()  
*The destructor doesn't need to do anything yet.*
- `bool is_running` () const  
*'Getter' function for member m\_jack\_running*
- `bool is_master` () const  
*'Getter' function for member m\_jack\_master*
- `perform` & `parent` ()  
*'Getter' function for member m\_jack\_parent Needed for external callbacks.*
- `bool init` ()  
*Initializes JACK support.*
- `void deinit` ()  
*Tears down the JACK infrastructure.*
- `void start` ()  
*If JACK is supported, starts the JACK transport.*
- `void stop` ()  
*If JACK is supported, stops the JACK transport.*
- `void position` (`bool a_state`)  
*If JACK is supported and running, sets the position of the transport.*
- `bool output` (`jack_scratchpad` & `pad`)  
*Performance output function for JACK, called by the perform function of the same name.*

### Private Member Functions

- `bool info_message` (`const std::string &msg`)  
*Common-code for console messages.*
- `bool error_message` (`const std::string &msg`)  
*Common-code for error messages.*
- `jack_client_t * client_open` (`const std::string &clientname`)  
*A more full-featured initialization for a JACK client, which is meant to be called by the `init()` function.*
- `void show_statuses` (`unsigned bits`)  
*Loops through the full set of JACK bits, showing the information for any bits that are set in the given parameter.*
- `int sync` (`jack_transport_state_t state=(jack_transport_state_t)(-1)`)  
*A helper function for syncing up with JACK parameters.*

## Static Private Attributes

- static jack\_status\_pair\_t [sm\\_status\\_pairs](#) []  
*Provides a list of JACK status bits, and a brief string to explain the status bit.*

## Friends

- int [jack\\_sync\\_callback](#) (jack\_transport\_state\_t state, jack\_position\_t \*pos, void \*arg)  
*Global functions for JACK support and JACK sessions.*
- void [jack\\_shutdown\\_callback](#) (void \*arg)  
*This callback is to shutdown JACK by clearing the `jack_assistant::m_jack_running` flag.*
- void [jack\\_timebase\\_callback](#) (jack\_transport\_state\_t state, jack\_nframes\_t nframes, jack\_position\_t \*pos, int new\_pos, void \*arg)  
*Another `init()` helper function to keep `init()` clean and easy to read.*

### 10.19.1 Detailed Description

WHY PERFORMANCE MODE? Only works in that mode???

### 10.19.2 Constructor & Destructor Documentation

10.19.2.1 `seq64::jack_assistant::jack_assistant ( perform & parent, int ppqn = SEQ64_USE_DEFAULT_PPQN )`

Note that the perform object currently calls `jack_assistant::init()`, but that call could be made here instead.

Parameters

<i>parent</i>	Provides a reference to the main perform object that needs to control JACK event.
---------------	---

10.19.2.2 `seq64::jack_assistant::~~jack_assistant ( )`

The perform object currently calls `jack_assistant::deinit()`, but that call could be made here instead.

### 10.19.3 Member Function Documentation

10.19.3.1 `bool seq64::jack_assistant::init ( )`

Then we become a new client of the JACK server.

Note the `USE_JACK_SYNC_CALLBACK` macro. A sync callback is needed for polling of slow-sync clients. But `seq24/sequencer64` are not slow-sync clients. Therefore, let's conditionally comment out the sync callback code. one of the author's of JACK notes that `seq24` is wrong to set up a sync callback.

`jack_set_process_callback()` patch:

```
Implemented first patch from freddix/seq24 GitHub project, to fix JACK
transport. One line of code. Well, we added some error-checking. :-)
```

```
Found some old notes on the Web the this patch really only works (to
prevent seq24 freeze) if seq24 is set as JACK Master, or if another
client application, such as Qtractor, is running as JACK Master (and
then seq24 will apparently follow it).
```

## Returns

Returns true if JACK is now considered to be running (or if it was already running.)

### 10.19.3.2 void seq64::jack\_assistant::start ( )

This function assumes that m\_jack\_client is not null, if m\_jack\_running is true.

### 10.19.3.3 void seq64::jack\_assistant::stop ( )

Should it also set m\_jack\_running to false? Let's do that, just for consistency. This function assumes that m\_jack\_client is not null, if m\_jack\_running is true.

### 10.19.3.4 void seq64::jack\_assistant::position ( bool a\_state )

<http://jackaudio.org/files/docs/html/transport-design.html>

This function is called via [perform::position\\_jack\(\)](#) in the mainwnd, perfedit, perfroll, and seqroll graphical user-interface support objects.

#### Warning

A lot of this code is effectively disabled by an early return statement.

#### Parameters

<i>state</i>	If true, the current tick is set to the leftmost tick.
--------------	--

### 10.19.3.5 bool seq64::jack\_assistant::output ( jack\_scratchpad & pad )

This code comes from [perform::output\\_func\(\)](#) from seq24.

**Todo** Follow up on this note found "out there": "Maybe I'm wrong but if I understood correctly, recent jack1 transport no longer goes into Jack\_Transport\_Starting state before going to Jack\_Transport\_Rolling (this was deliberately dropped), but seq24 currently needs this to start off with jack transport." On the other hand, some people have no issues.

#### Parameters

<i>pad</i>	Provide a JACK scratchpad, whatever that is.
------------	--

#### Returns

Returns true if JACK is running.

### 10.19.3.6 bool seq64::jack\_assistant::info\_message ( const std::string & msg ) [private]

Adds markers and a newline.

#### Parameters

<i>msg</i>	The message to print, sans the newline.
------------	---

#### Returns

Returns true.

### 10.19.3.7 bool seq64::jack\_assistant::error\_message ( const std::string & msg ) [private]

Adds markers, and sets m\_jack\_running to false.

## Parameters

<i>msg</i>	The message to print, sans the newline.
------------	---

## Returns

Returns false for convenience/brevity in setting function return values.

### 10.19.3.8 jack\_client\_t\* seq64::jack\_assistant::client\_open ( const std::string & *clientname* ) [private]

Status bits for jack\_status\_t return pointer:

JackNameNotUnique means that the client name was not unique. With JackUseExactName, this is fatal. Otherwise, the name was modified by appending a dash and a two-digit number in the range "-01" to "-99". The jack\_get\_client\_name() function returns the exact string used. If the specified client\_name plus these extra characters would be too long, the open fails instead.

JackServerStarted means that the JACK server was started as a result of this operation. Otherwise, it was running already. In either case the caller is now connected to jackd, so there is no race condition. When the server shuts down, the client will find out.

## Returns

Returns true if JACK ...

## 10.19.4 Friends And Related Function Documentation

### 10.19.4.1 void jack\_shutdown\_callback ( void \* *arg* ) [friend]

## Parameters

<i>arg</i>	Points to the <a href="#">jack_assistant</a> in charge of JACK support for the perform object.
------------	--

### 10.19.4.2 void jack\_timebase\_callback ( jack\_transport\_state\_t *state*, jack\_nframes\_t *nframes*, jack\_position\_t \* *pos*, int *new\_pos*, void \* *arg* ) [friend]

## Returns

Returns true if the function succeeded.

bool [jack\\_assistant::](#) This function sets the JACK position structure.

## Parameters

<i>state</i>	Indicates the current state of JACK transport.
<i>nframes</i>	The number of JACK frames.
<i>pos</i>	Provides the position structure to be filled in.
<i>new_pos</i>	The new positions to be set.
<i>arg</i>	Provides the <a href="#">jack_assistant</a> pointer, currently unchecked for nullity.

## 10.19.5 Field Documentation

### 10.19.5.1 jack\_status\_pair\_t seq64::jack\_assistant::sm\_status\_pairs [static], [private]

Terminated by a 0 value and an empty string.

## 10.20 seq64::jack\_scratchpad Struct Reference

Provide a temporary structure for passing data and results between a perform and [jack\\_assistant](#) object.

### 10.20.1 Detailed Description

The [jack\\_assistant](#) class already has access to the members of perform, but it needs access to and modification of local variables in [perform::output\\_func\(\)](#).

This scratchpad is useful even if JACK support is not enabled.

## 10.21 seq64::keybindentry Class Reference

Class for management of application key-bindings.

Inherits Entry.

### Public Member Functions

- [keybindentry](#) ([type](#) t, unsigned int \*location\_to\_write=NULLPTR, [perform](#) \*p=NULLPTR, long s=0)  
*This constructor initializes the member with values dependent on the value type provided in the first parameter.*
- void [set](#) (unsigned int val)  
*Gets the key name from the integer value; if there is one, then it is printed into a temporary buffer, otherwise the value is printed into that buffer as is.*
- virtual bool [on\\_key\\_press\\_event](#) (GdkEventKey \*event)  
*Handles a key press by calling [set\(\)](#) with the event's key value.*

### Private Types

- enum [type](#) {  
[location](#),  
[events](#),  
[groups](#) }

### Private Attributes

- unsigned int \* [m\\_key](#)  
*Points to the value of the key that is part of this key-binding.*
- [type](#) [m\\_type](#)  
*Stores the type of key-binding.*
- [perform](#) \* [m\\_perf](#)  
*Stores an optional pointer to a perform object.*
- long [m\\_slot](#)  
*Provides???*

### 10.21.1 Member Enumeration Documentation



10.21.1.1 `enum seq64::keybindentry::type` `[private]`

#### Enumerator

**location** Provides the type of keybindings that can be made. Used for handling a keystroke made while a keyboard-options field is active, for selecting a key via the keyboard, and binding to pattern/sequence boxes, we think. It is used in the options class to associate a key with the binding.

**events** Used for binding to events.

**groups** Used for binding to groups.

### 10.21.2 Constructor & Destructor Documentation

10.21.2.1 `seq64::keybindentry::keybindentry ( type t, unsigned int * location_to_write = nullptr, perform * p = nullptr, long s = 0 )`

**Usage** In options, a pointer to a new key-binding entry is managed by calling `keybindentry (keybindentry<::location, &perf->keyname).`

#### Parameters

<i>t</i>	Provides the type of key-binding: location, events, or groups.
<i>location_to_write</i>	The location that holds the value of the key associated with the key-binding. The default value of this parameter is the null pointer.
<i>p</i>	Points to the performance object used with this key-binding. The default value of this parameter is the null pointer.
<i>s</i>	Provides the slot value for this key-binding. The default value of this parameter is zero.

### 10.21.3 Member Function Documentation

10.21.3.1 `void seq64::keybindentry::set ( unsigned int val )`

Then we call `set_text(buf)`. The `set_width_char()` function is then called.

10.21.3.2 `bool seq64::keybindentry::on_key_press_event ( GdkEventKey * event )` `[virtual]`

This value is used to set the event or key depending on the value of `m_type`.

### 10.21.4 Field Documentation

10.21.4.1 `unsigned int* seq64::keybindentry::m_key` `[private]`

Not yet sure by the address of this key value is needed. It can be a null pointer, as well.

## 10.22 seq64::keys\_perform Class Reference

This class supports the performance mode.

Inheritance diagram for seq64::keys\_perform:



## Public Member Functions

- [keys\\_perform](#) ()

*This construction initializes a vast number of member variables, some of them public!*

- [~keys\\_perform](#) ()

*The destructor sets some running flags to false, signals this condition, then joins the input and output threads if the were launched.*

- void [set\\_keys](#) (const [keys\\_perform\\_transfer](#) &kpt)  
*Copies fields from the transfer structure in this object.*
- void [get\\_keys](#) ([keys\\_perform\\_transfer](#) &kpt)  
*Copies fields from this object into the transfer structure.*
- bool [show\\_ui\\_sequence\\_key](#) () const  
**Accessor** *m\_key\_show\_ui\_sequency\_key*
- bool [show\\_ui\\_sequence\\_number](#) () const  
**Accessor** *m\_key\_show\_ui\_sequency\_number*
- virtual std::string [key\\_name](#) (unsigned int key) const  
*Obtains the name of the key.*
- virtual void [set\\_all\\_key\\_events](#) ()  
*Provides base class functionality.*
- virtual void [set\\_all\\_key\\_groups](#) ()  
*Provides base class functionality.*
- void [set\\_key\\_event](#) (unsigned int keycode, long sequence\_slot)  
*At construction time, this function sets up one keycode and one event slot.*
- void [set\\_key\\_group](#) (unsigned int keycode, long group\_slot)  
*At construction time, this function sets up one keycode and one group slot.*

## Protected Types

- typedef std::map< unsigned int, long > [SlotMap](#)  
*This typedef defines a map in which the key is the keycode, that is, the integer value of a keystroke, and the value is the pattern/sequence number or slot.*
- typedef std::map< long, unsigned int > [RevSlotMap](#)  
*This typedef is like SlotMap, but used for lookup in the other direction.*

## Private Attributes

- bool [m\\_key\\_show\\_ui\\_sequence\\_key](#)  
*If set, shows the shortcut-keys on each filled pattern slot in the main window.*
- bool [m\\_key\\_show\\_ui\\_sequence\\_number](#)  
*If set, shows the sequence number on each filled pattern and empty pattern slot in the main window.*
- unsigned int [m\\_key\\_bpm\\_up](#)  
*Provides key assignments for some key sequencer features.*

### 10.22.1 Detailed Description

It has way too many data members, many of the public. Might be ripe for refactoring.

### 10.22.2 Constructor & Destructor Documentation

#### 10.22.2.1 seq64::keys\_perform::~~keys\_perform ( )

Finally, any active patterns/sequences are deleted.

### 10.22.3 Member Function Documentation

#### 10.22.3.1 void seq64::keys\_perform::set\_keys ( const [keys\\_perform\\_transfer](#) & kpt )

This structure holds all of the key settings from the File / Options / Keyboard tab dialog.

## Parameters

<i>kpt</i>	The structure that holds the values of the keys to be used for various purposes in controlling a performance live.
------------	--

10.22.3.2 `void seq64::keys_perform::get_keys ( keys_perform_transfer & kpt )`

## Parameters

<i>kpt</i>	The structure that holds the values of the keys to be used for various purposes in controlling a performance live.
------------	--

10.22.3.3 `bool seq64::keys_perform::show_ui_sequence_key ( ) const [inline]`

Used in mainwid, options, optionsfile, userfile, and perform.

10.22.3.4 `bool seq64::keys_perform::show_ui_sequence_number ( ) const [inline]`

Used in mainwid, options, optionsfile, userfile, and perform.

10.22.3.5 `std::string seq64::keys_perform::key_name ( unsigned int key ) const [virtual]`

In gtkmm, this is done via the `gdk_keyval_name()` function. Here, in the base class, we just provide an easy-to-create string.

## Parameters

<i>key</i>	Provides the numeric value of the keystroke.
------------	--

## Returns

Returns the name of the key, in the format "Key 0xkkkk".

Reimplemented in [seq64::keys\\_perform\\_gtk2](#).

10.22.3.6 `virtual void seq64::keys_perform::set_all_key_events ( ) [inline],[virtual]`

Must be called by the derived-class's override of this function.

Reimplemented in [seq64::keys\\_perform\\_gtk2](#).

10.22.3.7 `virtual void seq64::keys_perform::set_all_key_groups ( ) [inline],[virtual]`

Must be called by the derived-class's override of this function.

Reimplemented in [seq64::keys\\_perform\\_gtk2](#).

10.22.3.8 `void seq64::keys_perform::set_key_event ( unsigned int keycode, long sequence_slot )`

It is called 32 times, corresponding the pattern/sequence slots in the Patterns window.

## Parameters

<i>keycode</i>	The key to be assigned.
<i>sequence_slot</i>	The perform event slot into which the keycode will be assigned.

10.22.3.9 void seq64::keys\_perform::set\_key\_group ( unsigned int *keycode*, long *group\_slot* )

It is called 32 times, corresponding the pattern/sequence slots in the Patterns window.

## Parameters

<i>keycode</i>	The key to be assigned.
<i>group_slot</i>	The perform group slot into which the keycode will be assigned.

## 10.22.4 Field Documentation

10.22.4.1 bool seq64::keys\_perform::m\_key\_show\_ui\_sequence\_number [private]

Also show the sequence number as part of the sequence name in the performance window (song editor).

10.22.4.2 unsigned int seq64::keys\_perform::m\_key\_bpm\_up [private]

Used in mainwnd, options, optionsfile, perfedit, seqroll, userfile, and perform.

## 10.23 seq64::keys\_perform\_gtk2 Class Reference

This class supports the performance mode.

Inheritance diagram for seq64::keys\_perform\_gtk2:



## Public Member Functions

- [keys\\_perform\\_gtk2 \(\)](#)

*This construction initializes a vast number of member variables, some of them public!*

- virtual [~keys\\_perform\\_gtk2 \(\)](#)

*The destructor sets some running flags to false, signals this condition, then joins the input and output threads if the were launched.*

- virtual std::string [key\\_name](#) (unsigned int key) const  
*Obtains the name of the key.*
- virtual void [set\\_all\\_key\\_events](#) ()  
*Sets up the keys for arming/unmuting events in the Gtk-2 environment.*
- virtual void [set\\_all\\_key\\_groups](#) ()  
*Sets up the keys for group events in the Gtk-2 environment.*

## Additional Inherited Members

### 10.23.1 Detailed Description

It has way too many data members, many of the public. Might be ripe for refactoring.

### 10.23.2 Constructor & Destructor Documentation

10.23.2.1 `seq64::keys_perform_gtk2::~~keys_perform_gtk2 ( )` [virtual]

Finally, any active patterns/sequences are deleted.

### 10.23.3 Member Function Documentation

10.23.3.1 `std::string seq64::keys_perform_gtk2::key_name ( unsigned int key ) const` [virtual]

In gtkmm, this is done via the `gdk_keyval_name()` function. Here, in the base class, we just provide an easy-to-create string.

Reimplemented from [seq64::keys\\_perform](#).

10.23.3.2 `void seq64::keys_perform_gtk2::set_all_key_events ( )` [virtual]

The base-class function call makes sure the the related lists are cleared before rebuilding them here.

Reimplemented from [seq64::keys\\_perform](#).

10.23.3.3 `void seq64::keys_perform_gtk2::set_all_key_groups ( )` [virtual]

The base-class function call makes sure the the related lists are cleared before rebuilding them here.

Reimplemented from [seq64::keys\\_perform](#).

## 10.24 seq64::keys\_perform\_transfer Struct Reference

Provides a data-transfer structure to make it easier to fill in a [keys\\_perform](#) object's members using `sscanf()`.

## 10.25 seq64::keystroke Class Reference

Encapsulates any practical keystroke.

## Public Member Functions

- [keystroke](#) ()  
*The default constructor for class keystroke.*
- [keystroke](#) (unsigned int [key](#), bool press=SEQ64\_KEYSTROKE\_PRESS, int modkey=int(SEQ64\_NO\_MASK))  
*The principal constructor.*
- [keystroke](#) (const [keystroke](#) &rhs)  
*Provides the rote copy constructor.*
- [keystroke](#) & [operator=](#) (const [keystroke](#) &rhs)  
*Provides the rote principal assignment operator.*
- bool [is\\_press](#) () const  
*'Getter' function for member m\_is\_press*
- bool [is\\_letter](#) (int ch=SEQ64\_KEYSTROKE\_BAD\_VALUE) const  
*'Getter' function for member m\_key to test letters, handles ASCII only.*
- bool [is\\_delete](#) () const  
*m\_key to test for a delete-causing key.*
- unsigned int [key](#) () const  
*'Getter' function for member m\_key*
- seq\_modifier\_t [modifier](#) () const  
*'Getter' function for member m\_modifier*
- bool [mod\\_control](#) () const  
*'Getter' function for member m\_modifier tested for Ctrl key.*
- bool [mod\\_control\\_shift](#) () const  
*'Getter' function for member m\_modifier tested for Ctrl and Shift key.*
- bool [mod\\_super](#) () const  
*'Getter' function for member m\_modifier tested for Mod4/Super/Windows key.*

## Private Attributes

- bool [m\\_is\\_press](#)  
*Determines if the key was a press or a release.*
- unsigned int [m\\_key](#)  
*The key that was pressed or released.*
- seq\_modifier\_t [m\\_modifier](#)  
*The optional modifier value.*

### 10.25.1 Detailed Description

Useful in passing more generic events to non-GUI classes.

### 10.25.2 Constructor & Destructor Documentation

- 10.25.2.1 [seq64::keystroke::keystroke](#) ( unsigned int *key*, bool *press* = SEQ64\_KEYSTROKE\_PRESS, int *modkey* = int (SEQ64\_NO\_MASK) )



## Parameters

<i>key</i>	The keystroke number of the key that was pressed or released.
<i>press</i>	If true, the keystroke action was a press, otherwise it was a release.
<i>modkey</i>	The modifier key combination that was pressed, if any, in the form of a bit-mask, as defined in the gdk_basic_keys module. Common mask values are SEQ64_SHIFT_MASK, SEQ64_↵_CONTROL_MASK, SEQ64_MOD1_MASK, and SEQ64_MOD4_MASK. If no modifier, this value is SEQ64_NO_MASK.

## 10.25.2.2 seq64::keystroke::keystroke ( const keystroke &amp; rhs )

## Parameters

<i>rhs</i>	The object to be copied.
------------	--------------------------

## 10.25.3 Member Function Documentation

## 10.25.3.1 keystroke &amp; seq64::keystroke::operator= ( const keystroke &amp; rhs )

## Parameters

<i>rhs</i>	The object to be assigned.
------------	----------------------------

## Returns

Returns the reference to the current object, for use in assignment chains.

## 10.25.3.2 bool seq64::keystroke::is\_letter ( int ch = SEQ64\_KEYSTROKE\_BAD\_VALUE ) const

## Parameters

<i>ch</i>	An optional character to test as an ASCII letter.
-----------	---

## Returns

If a character is not provided, true is returned if it is an upper or lower-case letter. Otherwise, true is returned if the m\_key value matches the character case-insensitively.

## Tricky Code

## 10.25.4 Field Documentation

## 10.25.4.1 bool seq64::keystroke::m\_is\_press [private]

See the SEQ64\_KEYSTROKE\_PRESS and SEQ64\_KEYSTROKE\_RELEASE readability macros.

## 10.25.4.2 unsigned int seq64::keystroke::m\_key [private]

Generally, the extended ASCII range (0 to 255) is supported. However, Gtk-2.x/3.x will generally support the full gamut of characters defined in the gdk\_basic\_keys.h module. We define minimum and maximum range macros for keystrokes that are a bit generous.

10.25.4.3 `seq_modifier_t seq64::keystroke::m_modifier` [private]

Note that SEQ64\_NO\_MASK is our word for 0, meaning "no modifier".

## 10.26 seq64::lash Class Reference

This class supports LASH operations, if compiled with LASH support (i.e.

### Public Member Functions

- `lash` (`perform` &p, int argc, char \*\*argv)  
*This constructor calls `lash_extract()`, using the command-line arguments, if `SEQ64_LASH_SUPPORT` is enabled.*
- void `set_alsa_client_id` (int id)  
*Make ourselves a LASH ALSA client.*
- void `start` ()  
*Process any LASH events every 250 msec, which is an arbitrarily chosen interval.*
- bool `process_events` ()  
*Process LASH events.*

### Private Member Functions

- bool `init` ()  
*Initializes LASH support, if enabled.*
- void `handle_event` (lash\_event\_t \*conf)  
*Handle a LASH event.*
- void `handle_config` (lash\_config\_t \*conf)  
*Handle a LASH configuration item.*

### Private Attributes

- `perform` & `m_perform`  
*A hook into the single perform object in the application.*

#### 10.26.1 Detailed Description

SEQ64\_LASH\_SUPPORT is defined). All of the #ifdef skeleton work is done in this class in such a way that any other part of the code can use this class whether or not lash support is actually built in; the functions will just do nothing.

#### 10.26.2 Constructor & Destructor Documentation

10.26.2.1 `seq64::lash::lash ( perform & p, int argc, char ** argv )`

We fixed the crazy usage of argc and argv here and in the client code in the seq24 module.

##### Parameters

---

<i>p</i>	The perform object that needs to implement LASH support.
<i>argc</i>	The number of command-line arguments.
<i>argv</i>	The command-line arguments.

### 10.26.3 Member Function Documentation

#### 10.26.3.1 void seq64::lash::set\_alsa\_client\_id ( int *id* )

/param *id* The ALSA client ID to be set.

#### 10.26.3.2 bool seq64::lash::process\_events ( )

##### Returns

Always returns true.

#### 10.26.3.3 bool seq64::lash::init ( ) [private]

##### Returns

Returns true if the LASH subsystem was able to be initialized, and a LASH client representative (*m\_client*) was allocated.

#### 10.26.3.4 void seq64::lash::handle\_event ( lash\_event\_t \* *ev* ) [private]

##### Parameters

<i>ev</i>	Provides the event to be handled.
-----------	-----------------------------------

#### 10.26.3.5 void seq64::lash::handle\_config ( lash\_config\_t \* *conf* ) [private]

Currently incomplete.


##### Parameters

<i>conf</i>	Provides the configuration item to handle.
-------------	--

## 10.27 seq64::maintime Class Reference

This class provides the drawing of the progress bar at the top of the main window, along with two "pills" that move in time with the beat and measure.

Inheritance diagram for seq64::maintime:

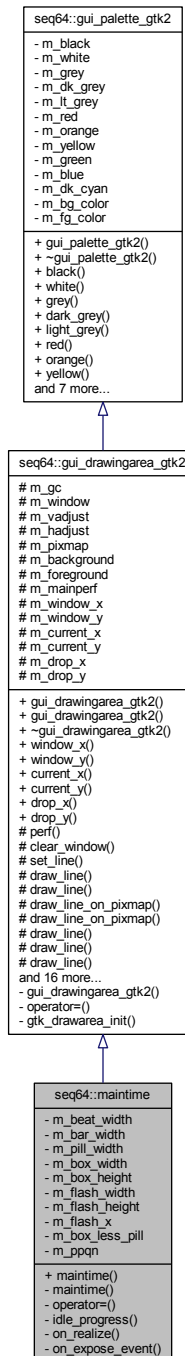

## Public Member Functions

- [maintime](#) ([perform](#) &p, int ppqn=SEQ64\_USE\_DEFAULT\_PPQN)

*This constructor sets up the colors black, white, and grey, and then allocates them.*

## Private Member Functions

- int [idle\\_progress](#) (midipulse ticks)  
*This function clears the window, sets the foreground to black, draws the "time" window's rectangle, and then draws a rectangle for noting the progress of the beat, and the progress for a bar.*
- void [on\\_realize](#) ()  
*Handles realization of the window.*
- bool [on\\_expose\\_event](#) (GdkEventExpose \*ev)  
*This function merely idles.*

## Private Attributes

- const int [m\\_beat\\_width](#)  
*Provides the divisor for ticks to produce a beat value.*
- const int [m\\_bar\\_width](#)  
*Provides the divisor for ticks to produce a bar value.*
- const int [m\\_pill\\_width](#)  
*Provides the width of the pills, little black squares that show the progress of a beat and a bar (measure).*
- const int [m\\_box\\_width](#)  
*The width/length of the rectangle to be drawn inside the maintime window.*
- const int [m\\_box\\_height](#)  
*The height of the rectangle to be drawn inside the maintime window.*
- const int [m\\_flash\\_width](#)  
*The width/length of the flashing rectangle to be drawn inside the maintime window.*
- const int [m\\_flash\\_height](#)  
*The height of the flashing rectangle to be drawn inside the maintime window.*
- const int [m\\_flash\\_x](#)  
*The x value at which a flash should occur.*
- const int [m\\_box\\_less\\_pill](#)  
*The width/length of the maintime window minus the width of the pill.*
- int [m\\_ppqn](#)  
*Provides the active PPQN value.*

## Additional Inherited Members

### 10.27.1 Detailed Description

We added a lot of members to hold the results of calculations that involve what are essentially constant. This saves CPU time, and maybe a little memory for the code to make those calculations more than once.

### 10.27.2 Constructor & Destructor Documentation

#### 10.27.2.1 seq64::maintime::maintime ( **perform** & *p*, int *ppqn* = SEQ64\_USE\_DEFAULT\_PPQN )

In the constructor you can only allocate colors; `get_window()` would return 0 because the windows has not yet been realized.

### 10.27.3 Member Function Documentation

10.27.3.1 `int seq64::maintime::idle_progress ( midipulse ticks ) [private]`

Idle hands do the devil's work. We should eventually support some generic coloring for "dark themes". The default coloring is better for "light themes".

## Parameters

<i>ticks</i>	Provides the main tick setting. This setting is provided by mainwnd(), in its timer callback.
--------------	---

## Returns

Always returns 1 (it used to return "true!").

### 10.27.3.2 void seq64::maintime::on\_realize ( ) [private]

It performs the base class's [on\\_realize\(\)](#) function. It then allocates some additional resources: a window, a GC (?), and it clears the window. Then it sets the default size of the window, specified by GUI constructor parameters.

### 10.27.3.3 bool seq64::maintime::on\_expose\_event ( GdkEventExpose \* a\_e ) [private]

We don't need the m\_tick member, the function works as well if 0 is passed in. We've removed m\_tick permanently.

## 10.27.4 Field Documentation

### 10.27.4.1 const int seq64::maintime::m\_beat\_width [private]

Currently, this value is hardwired to 4, but will eventually be wired up as usr().midi\_beat\_width().

### 10.27.4.2 const int seq64::maintime::m\_bar\_width [private]

Currently, this value is hardwired to 16, but will eventually be wired up as usr().midi\_beat\_width() \* usr().midi\_beats\_per\_bar().

### 10.27.4.3 const int seq64::maintime::m\_box\_width [private]

This item absolutely depends on the main window being non-resizable.

### 10.27.4.4 const int seq64::maintime::m\_box\_height [private]

This item absolutely depends on the main window being non-resizable.

### 10.27.4.5 const int seq64::maintime::m\_flash\_width [private]

Just a bit smaller than m\_box\_width.

### 10.27.4.6 const int seq64::maintime::m\_flash\_height [private]

Just a bit smaller than m\_box\_width.

### 10.27.4.7 int seq64::maintime::m\_ppqn [private]

While this is effectively a constant for the duration of a tune, it might change as different tunes are loaded.





- `~mainwid ()`  
*A rote destructor.*
- `void set_screenset (int ss)`  
*Set the current screen-set.*

### Private Member Functions

- `virtual void redraw (int seq)`  
*This virtual function, overridden from the seqmenu base class, draws the the given pattern/sequence again.*
- `void reset ()`  
*This function redraws everything and queues up a redraw operation.*
- `void draw_marker_on_sequence (int seq, int tick)`  
*Does the actual drawing of one pattern/sequence position marker, a vertical progress bar.*
- `void update_sequences_on_window ()`  
*Updates the image of multiple sequencers.*
- `void update_markers (int ticks)`  
*Draw the cursors (long vertical bars) on each sequence, so that they follow the playing progress of each sequence in the mainwid (Patterns Panel.)*
- `bool valid_sequence (int seq)`  
*Common-code helper function.*
- `void draw_sequence_on_pixmap (int seq)`  
*This function draws a specific pattern/sequence on the pixmap located in the main window of the application, the Patterns Panel.*
- `void draw_sequences_on_pixmap ()`  
*This function fills the pixmap with sequences.*
- `void fill_background_window ()`  
*This function updates the background window, clearing it.*
- `void draw_pixmap_on_window ()`  
*This function queues the blit of pixmap to window.*
- `void draw_sequence_pixmap_on_window (int seq)`  
*This function draws a sequence pixmap in the Patterns Panel.*
- `int seq_from_xy (int x, int y)`  
*Translates XY coordiinates in the Patterns Panel to a sequence number.*
- `int timeout ()`  
*Provides a stock callback, because some kind of callback is need.*
- `void calculate_base_sizes (int seq, int &basex, int &basey)`  
*Provides a way to calculate the base x and y size values for the pattern map.*
- `void on_realize ()`  
*For this GTK callback, on realization of window, initialize the shiz.*
- `bool on_expose_event (GdkEventExpose *ev)`  
*Implements the GTK expose event callback.*
- `bool on_button_press_event (GdkEventButton *ev)`  
*Handles a press of a mouse button.*
- `bool on_button_release_event (GdkEventButton *ev)`  
*Handles a release of a mouse button.*
- `bool on_motion_notify_event (GdkEventMotion *p0)`  
*Handle the motion of the mouse if a mouse button is down and in another sequence and if the current sequence is not in edit mode.*
- `bool on_focus_in_event (GdkEventFocus *)`  
*Handles an on-focus event.*
- `bool on_focus_out_event (GdkEventFocus *)`  
*Handles an out-of-focus event.*

## Private Attributes

- int [m\\_mainwnd\\_rows](#)

*These values are assigned to the values given by the constants of similar names in `globals.h`, and we will make them parameters later.*

- int [m\\_screenset\\_slots](#)

*Provides a convenience variable for avoiding multiplications.*

- int [m\\_screenset\\_offset](#)

*Provides a convenience variable for avoiding multiplications.*

## Additional Inherited Members

### 10.28.1 Constructor & Destructor Documentation

#### 10.28.1.1 `seq64::mainwid::mainwid ( perform & p )`

And it asks for a size of `c_mainwid_x` by `c_mainwid_y`. It adds GDK masks for button presses, releases, and motion, and key presses and focus changes.

##### Parameters

<code>p</code>	Provides the reference to the all-important perform object.
----------------	---

### 10.28.2 Member Function Documentation

#### 10.28.2.1 `void seq64::mainwid::set_screenset ( int ss )`

##### Parameters

<code>a_ss</code>	Provides the screen-set number to set.
-------------------	--

#### 10.28.2.2 `void seq64::mainwid::redraw ( int seqnum )` `[private]`, `[virtual]`

##### Parameters

<code>seqnum</code>	Provides the number of the sequence to draw.
---------------------	--

Implements [seq64::seqmenu](#).

#### 10.28.2.3 `void seq64::mainwid::draw_marker_on_sequence ( int seqnum, int tick )` `[private]`

If the sequence has no events, this function doesn't bother even drawing a position marker.

Note that, when Sequencer64 first comes up, and [perform::is\\_dirty\\_main\(\)](#) is called, no sequences exist yet.

##### Parameters

<code>seqnum</code>	Provides the number of the sequence to draw.
<code>tick</code>	Provides the location to draw the marker.

#### 10.28.2.4 `void seq64::mainwid::update_markers ( int ticks )` `[private]`

## Parameters

<i>ticks</i>	Starting point for drawing the markers.
--------------	---

10.28.2.5 `bool seq64::mainwid::valid_sequence ( int seqnum ) [private]`

## Parameters

<i>seqnum</i>	Provides the number of the sequence to validate.
---------------	--

## Returns

Returns true if the sequence number is valid for the current `m_screenset` value.

10.28.2.6 `void seq64::mainwid::draw_sequence_on_pixmap ( int seqnum ) [private]`

The sequence is drawn only if it is in the current screen set (indicated by `m_screenset`).

Also, we now ignore the sequence if it does not exist. :-D

## Note

If only the main window is up, then the sequences just play (muted by default) – the progress bars move in each pattern. Gaps in the sequence in the Song (performance) Editor don't change the appearance of the patterns if only the main window is up. But, if the Song Editor window is up, and the song is started using the controls in the Song Editor, then the active patterns are black while playing, and white when gaps in the sequence are encountered. The muting status in the main window is ignored. The muting in the Song (performance) windows is in force.

## Parameters

<i>seqnum</i>	Provides the number of the sequence slot that needs to be drawn.
---------------	--

10.28.2.7 `void seq64::mainwid::draw_sequences_on_pixmap ( ) [private]`

Please note that [draw\\_sequence\\_on\\_pixmap\(\)](#) also draws the empty slots of inactive sequences, so we cannot take shortcuts here.

10.28.2.8 `void seq64::mainwid::draw_sequence_pixmap_on_window ( int seqnum ) [private]`

The sequence is drawn only if it is in the current screen set (indicated by `m_screenset`). This function is used when dragging a pattern from one pattern-slot to another pattern-slot.

We have to add 1 pixel to the y height in order to avoid leaving behind a line at the bottom of an empty pattern-slot.

## Parameters

<i>seqnum</i>	Provides the number of the sequence to draw.
---------------	--

10.28.2.9 `int seq64::mainwid::seq_from_xy ( int x, int y ) [private]`

## Parameters

<i>a_x</i>	Provides the x coordinate.
<i>a_y</i>	Provides the y coordinate.

## Returns

Returns -1 if the sequence number cannot be calculated.

10.28.2.10 `int seq64::mainwid::timeout ( ) [private]`

**Todo** We should use this callback to display the current time in the playback.

## Returns

Always returns true.

10.28.2.11 `void seq64::mainwid::calculate_base_sizes ( int seqnum, int & base_x, int & base_y ) [private]`

The values are returned as side-effects.

## Parameters

<i>seqnum</i>	Provides the number of the sequence to calculate.
<i>base_x</i>	A return parameter for the x coordinate of the base size.
<i>base_y</i>	A return parameter for the y coordinate of the base size.

10.28.2.12 `void seq64::mainwid::on_realize ( ) [private]`

It allocates any additional resources that weren't initialized in the constructor.

This function used to call `font::init()`, and was the only place where the `font::init()` function was called. The `init()` function gets a color-map from the window. We need a more fool-proof way to do this!

10.28.2.13 `bool seq64::mainwid::on_expose_event ( GdkEventExpose * ev ) [private]`

## Parameters

<i>ev</i>	The expose event.
-----------	-------------------

## Returns

Always returns true.

10.28.2.14 `bool seq64::mainwid::on_button_press_event ( GdkEventButton * p ) [private]`

If the press is a single left-click, and no Ctrl key is pressed, then this function grabs the focus, calculates the pattern/sequence over which the button press occurred, and sets the `m_button_down` flag if it is over a pattern. In the release event callback, this then causes the sequence arming/muting to be toggled.

If the press is a single Ctrl-left-click, this function brings up the New or Edit menu. The New menu is brought up if the grid slot is empty, and the Edit menu otherwise. Another way to bring up the same functionality is described in the next paragraph.

If the press is a double-click, it first acts just like two single-clicks (which might confuse the user at first). Then it brings up the Edit menu for the sequence. This new behavior is closer to what users have come to expect from a double-click.

We also handle a Ctrl-double-click as a signal to do an event edit, instead of a sequence edit. The event editor provides a way to look at all events in detail, without having to select the type of event to see.

#### Parameters

<i>p</i>	Provides the parameters of the button event.
----------	--

#### Returns

Always returns true.

**10.28.2.15** `bool seq64::mainwid::on_button_release_event ( GdkEventButton * p ) [private]`

This event is a lot more complex than a press. The left button toggles playback status. The right button brings up a popup menu. If the slot is empty, then a "New" popup is presented, otherwise an "Edit" and selection popup is presented.

#### Parameters

<i>p</i>	Provides the parameters of the button event.
----------	--

#### Returns

Always returns true.

**10.28.2.16** `bool seq64::mainwid::on_motion_notify_event ( GdkEventMotion * p ) [private]`

This function moves the selected pattern to another pattern slot.

The [perform::delete\\_sequence\(\)](#) function sets the perform modification flag.

#### Parameters

<i>p</i>	Provides the parameters of the button event.
----------	--

#### Returns

Always returns true.

**10.28.2.17** `bool seq64::mainwid::on_focus_in_event ( GdkEventFocus * ) [private]`

Just sets the Gtk::HAS\_FOCUS flag.

#### Returns

Always returns false.

**10.28.2.18** `bool seq64::mainwid::on_focus_out_event ( GdkEventFocus * ) [private]`

Just unsets the Gtk::HAS\_FOCUS flag.

#### Returns

Always returns false.

### 10.28.3 Field Documentation

10.28.3.1 `int seq64::mainwid::m_screenset_slots` `[private]`

It is equally to `m_mainwnd_rows * m_mainwnd_cols`.


10.28.3.2 `int seq64::mainwid::m_screenset_offset` `[private]`

It is equally to `m_screenset_slots * m_screenset`.

## 10.29 seq64::mainwnd Class Reference

This class implements the functionality of the main window of the application, except for the Patterns Panel functionality, which is implemented in the mainwid class.

Inheritance diagram for seq64::mainwnd:

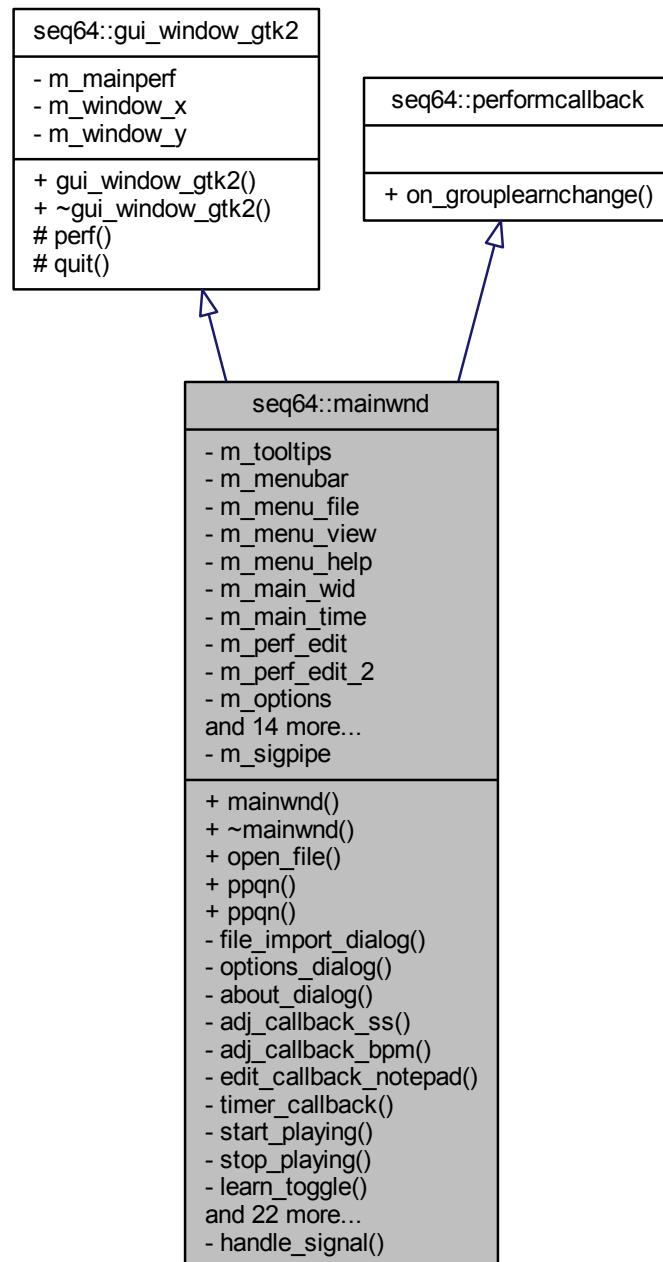

## Public Member Functions

- `mainwnd` (`perform` &a\_p, bool allowperf2=true)  
The constructor the main window of the application.
- `~mainwnd` ()  
This destructor must explicitly delete some allocated resources.
- void `open_file` (const std::string &)

- *Opens and parses (reads) a MIDI file.*
- `int ppqn () const`  
*'Getter' function for member m\_ppqn*
- `void ppqn (int ppqn)`  
*'Setter' function for member m\_ppqn We can't set the PPQN value when the mainwnd is created, we have to do it later, using this function.*

## Private Member Functions

- `void file_import_dialog ()`  
*Presents a file dialog to import a MIDI file.*
- `void options_dialog ()`  
*Opens the File / Options dialog.*
- `void about_dialog ()`  
*Presents a Help / About dialog.*
- `void adj_callback_ss ()`  
*This function is the callback for adjusting the screen-set value.*
- `void adj_callback_bpm ()`  
*This function is the callback for adjusting the BPM value.*
- `void edit_callback_notepad ()`  
*A callback function for handling an edit to the screen-set notepad.*
- `bool timer_callback ()`  
*This function is the GTK timer callback, used to draw our current time and BPM on \_events (the main window).*
- `void start_playing ()`  
*Starts playing of the song.*
- `void stop_playing ()`  
*Stops the playing of the song.*
- `void learn_toggle ()`  
*Toggle the group-learn status.*
- `void open_performance_edit ()`  
*Opens the Performance Editor (Song Editor).*
- `void open_performance_edit_2 ()`  
*Opens the second Performance Editor (Song Editor).*
- `void enregister_perfedits ()`  
*This function brings together the two perfedit objects, so that they can tell each other when to queue up a draw operation.*
- `void sequence_key (int seq)`  
*Use the sequence key to toggle the playing of an active pattern in the current screen-set.*
- `void update_window_title ()`  
*Updates the title shown in the title bar of the window.*
- `void toLower (std::string &)`  
*Converts a string to lower-case letters.*
- `void file_new ()`  
*A callback function for the File / New menu entry.*
- `void file_open ()`  
*A callback function for the File / Open menu entry.*
- `void file_save ()`  
*A callback function for the File / Save menu entry.*
- `void file_save_as ()`  
*A callback function for the File / Save As menu entry.*
- `void file_exit ()`



- A callback function for the File / Exit menu entry.*

  - void [new\\_file](#) ()

*Actually does the work of setting up for a new file.*
- bool [save\\_file](#) ()

*Saves the current state in a MIDI file.*
- void [choose\\_file](#) ()

*Creates a file-chooser dialog.*
- int [query\\_save\\_changes](#) ()

*Queries the user to save the changes made while the application was running.*
- bool [is\\_save](#) ()

*If the data is modified, then the user is queried, and the file is save if okayed.*
- bool [install\\_signal\\_handlers](#) ()

*Installs the signal handlers and pipe code.*
- bool [signal\\_action](#) (Glib::IOCondition condition)

*Handles saving or exiting actions when signalled.*
- bool [on\\_delete\\_event](#) (GdkEventAny \*a\_e)

*This callback function handles a delete event from ...?*
- bool [on\\_key\\_press\\_event](#) (GdkEventKey \*a\_ev)

*Handles a key press event.*
- bool [on\\_key\\_release\\_event](#) (GdkEventKey \*a\_ev)

*Handles a key release event.*
- virtual void [on\\_grouplearnchange](#) (bool state)

*Notification handler for learn mode toggle.*

## Static Private Member Functions

- static void [handle\\_signal](#) (int sig)

*This function is the handler for system signals (SIGUSR1, SIGINT...) It writes a message to the pipe and leaves as soon as possible.*

## Private Attributes

- Gtk::MenuBar \* [m\\_menubar](#)

*Theses objects support the menu and its sub-menus.*
- mainwid \* [m\\_main\\_wid](#)

*The biggest sub-components of mainwnd.*
- maintime \* [m\\_main\\_time](#)

*Is this the bar at the top that shows moving squares?*
- [perfedit](#) \* [m\\_perf\\_edit](#)

*A pointer to the song/performance editor.*
- [perfedit](#) \* [m\\_perf\\_edit\\_2](#)

*A pointer to an optional second song/performance editor.*
- [options](#) \* [m\\_options](#)

*A pointer to the program options.*
- Gdk::Cursor [m\\_main\\_cursor](#)

*Mouse cursor?*
- Gtk::Button \* [m\\_button\\_learn](#)

*This button is the learn button, otherwise known as the "L" button.*
- Gtk::Button \* [m\\_button\\_stop](#)

*Implements the red square stop button.*

- `Gtk::Button * m_button_play`  
*Implements the green triangle play button.*
- `Gtk::Button * m_button_perfedit`  
*The button for bringing up the Song Editor (Performance Editor).*
- `Gtk::SpinButton * m_spinbutton_bpm`  
*The spin/adjustment controls for the BPM (beats-per-minute) value.*
- `Gtk::SpinButton * m_spinbutton_ss`  
*The spin/adjustment controls for the screen set value.*
- `Gtk::SpinButton * m_spinbutton_load_offset`  
*The spin/adjustment controls for the load offset value.*
- `Gtk::Entry * m_entry_notes`  
*What is this?*
- `sigc::connection m_timeout_connect`  
*Provides a timeout handler.*
- `int m_ppqn`  
*Saves the PPQN value obtained from the MIDI file (or the default value, the global ppqn, if SEQ64\_USE\_DEFAULT\_PPQN was specified in reading the MIDI file.*

### Static Private Attributes

- `static int m_sigpipe [2]`  
*Interesting; what is this used for.*

### Additional Inherited Members

#### 10.29.1 Constructor & Destructor Documentation

##### 10.29.1.1 `seq64::mainwnd::mainwnd ( perform & p, bool allowperf2 = true )`

This constructor is way too large; it would be nicer to provide a number of well-named initialization functions.

##### Parameters

<i>p</i>	Refers to the main performance object.
<i>allowperf2</i>	Indicates if a second perfedit window should be created. This is currently a run-time option, selectable in the "user" configuration file.

**Todo** Offload most of the work into an initialization function like options does; make the perform parameter a reference; valgrind flags `m_tooltips` as lost data, but if we try to manage it ourselves, many more leaks occur.

View menu items and their hot keys.

View menu items and their hot keys.

Help menu items

Top panel items, including the logo (updated for the new version of this application) and the "timeline" progress bar.

#### 10.29.2 Member Function Documentation

##### 10.29.2.1 `void seq64::mainwnd::open_file ( const std::string & fn )`

We leave the `ppqn` parameter set to the `SEQ64_USE_DEFAULT` for now, to preserve the legacy behavior of using the global `ppqn`, and scaling the running time against the PPQN read from the MIDI file. Later, we can provide a value like 0, that will certainly be changed by reading the MIDI file.

We don't need to specify the "oldformat" or "global sequence" parameters of the midifile constructor when reading the MIDI file, since reading handles both the old and new formats, dealing with new constructs only if they are present in the file.

#### Parameters

<i>fn</i>	Provides the file-name for the MIDI file to be opened.
-----------	--

**10.29.2.2** void seq64::mainwnd::ppqn ( int *ppqn* ) [inline]

```
m_ppqn = choose_ppqn(ppqn);
```

**10.29.2.3** void seq64::mainwnd::file\_import\_dialog ( ) [private]

Note that every track of the MIDI file will be imported, even if the track is only a label track (without any MIDI events), or a very long track.

The main difference between the Open operation and the Import operation seems to be that the latter can read MIDI files into a screen-set greater than screen-set 0. No, that's not true, so far. No matter what the current screen-set setting, the import is appended after the current data in screen-set 0. Then, if it overflows that screen-set, the overflow goes into the next screen-set.

It might be nice to have the option of importing a MIDI file into a specific screen-set, for better organization, as well as being able to offset the sequence number.

Also, it is important to note that `perf().clear_all()` is not called by this routine, as we are merely adding to what might already be there.

**10.29.2.4** void seq64::mainwnd::about\_dialog ( ) [private]

I (Chris) took the liberty of tacking my name at the end, and hope to eventually have done enough work to warrant having it there.

**10.29.2.5** void seq64::mainwnd::adj\_callback\_ss ( ) [private]

Sets the screen-set value in the Performance/Song window, the Patterns, and something about setting the text based on a screen-set notepad from the Performance/Song window.

Let the perform object keep track of modifications.

Screen-set notepad?

**10.29.2.6** void seq64::mainwnd::adj\_callback\_bpm ( ) [private]

Let the perform object keep track of modifications.

**10.29.2.7** void seq64::mainwnd::edit\_callback\_notepad ( ) [private]

Let the perform object keep track of modifications.

**10.29.2.8** bool seq64::mainwnd::timer\_callback ( ) [private]

## Note

When Sequencer64 first starts up, and no MIDI tune is loaded, the call to [mainwnd::update\\_markers\(\)](#) leads to trying to do some work on sequences that don't yet exist. Also, if a sequence is changed by the event editor, we get a crash; need to find out how seqedit gets away with the changes.

10.29.2.9 `void seq64::mainwnd::start_playing ( ) [inline],[private]`

The [rc\\_settings::jack\\_start\\_mode\(\)](#) function is used (if jack is running) to determine if the playback mode is "live" (false) or "song" (true). An accessor to [perform::start\\_playing\(\)](#).

10.29.2.10 `void seq64::mainwnd::stop_playing ( ) [inline],[private]`

An accessor to [perform::stop\\_playing\(\)](#).

10.29.2.11 `void seq64::mainwnd::open_performance_edit ( ) [private]`

We will let perform keep track of modifications, and not just set an is-modified flag just because we opened the song editor. We're going to centralize the modification flag in the perform object, and see if it can work.

10.29.2.12 `void seq64::mainwnd::open_performance_edit_2 ( ) [private]`

Experiment: open a second one and see what happens. It works, but one needs to tell the other to redraw if a change is made.

10.29.2.13 `void seq64::mainwnd::update_window_title ( ) [private]`

Note that the name of the application is obtained by the "(SEQ64\_PACKAGE)" construction.

The format of the caption bar is the name of the package/application, followed by the file-specification (shortened if necessary so that the name of the file itself can be seen), ending with the PPQN value in parentheses.

10.29.2.14 `void seq64::mainwnd::new_file ( ) [private]`

Not sure that we need to clear the modified flag here, especially since it is now centralized in the perform object. Let [perf\(\).clear\\_all\(\)](#) handle it now.

10.29.2.15 `bool seq64::mainwnd::save_file ( ) [private]`

Here we specify the current value of `m_ppqn`, which was set when reading the MIDI file. We also let midifile tell the perform that saving worked, so that the "is modified" flag can be cleared. The midifile class is already a friend of perform.

10.29.2.16 `bool seq64::mainwnd::signal_action ( Glib::IOCondition condition ) [private]`

## Returns

Returns true if the signalling was able to be completed, even if it was an unexpected signal.

10.29.2.17 `bool seq64::mainwnd::on_delete_event ( GdkEventAny * a_e ) [private]`

Any changed data is saved. If the pattern is playing, then it is stopped.

10.29.2.18 `bool seq64::mainwnd::on_key_press_event ( GdkEventKey * ev ) [private]`

It also handles the control-key and modifier-key combinations matching the entries in its list of if statements.

**Todo** Test this functionality in old and new application.

10.29.2.19 `bool seq64::mainwnd::on_key_release_event ( GdkEventKey * ev ) [private]`

Is this worth turning into a switch statement? Or offloading to a perform member function? The latter.

**Todo** Test this functionality in old and new application.

#### Returns

Always returns false.

10.29.2.20 `void seq64::mainwnd::on_grouplearnchange ( bool state ) [private],[virtual]`

This handler responds to a learn-mode change from `perf()`.

Reimplemented from `seq64::performcallback`.

### 10.29.3 Field Documentation

10.29.3.1 `int seq64::mainwnd::m_sigpipe [static],[private]`

This static member provides a couple of pipes for signalling/messaging.

10.29.3.2 `mainwid* seq64::mainwnd::m_main_wid [private]`

The first is the Patterns Panel.


10.29.3.3 `Gtk::SpinButton* seq64::mainwnd::m_spinbutton_load_offset [private]`

However, where is this button located? It is handled in the code, but I've never seen the button!

## 10.30 seq64::midi\_container Class Reference

This class is the abstract base class for a container of MIDI track information.

Inheritance diagram for seq64::midi\_container:

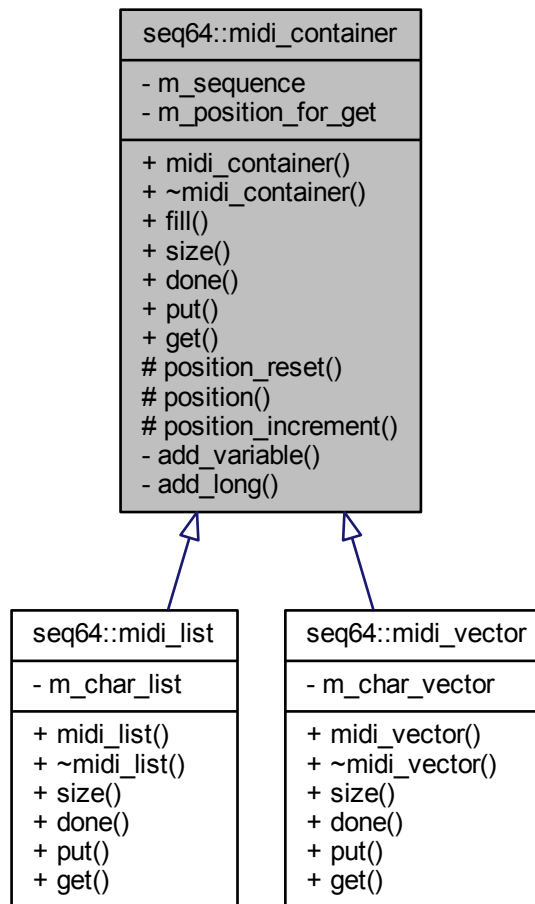

## Public Member Functions

- `midi_container (sequence &seq)`  
*Fills in the few members of this class.*
- virtual `~midi_container ()`  
*A rote constructor needed for a base class.*
- void `fill (int tracknumber)`  
*This function fills the given track (sequence) with MIDI data from the current sequence, preparatory to writing it to a file.*
- virtual `std::size_t size () const`  
*Returns the size of the container, in midibytes.*
- virtual `bool done () const`  
*Instead of checking for the size of the container when "emptying" it [see the `midifile::write()` function], use this function, which is overridden to match the type of container being used.*
- virtual void `put (midibyte b)=0`  
*Provides a way to add a MIDI byte into the container.*
- virtual `midibyte get ()=0`  
*Provide a way to get the next byte from the container.*

## Protected Member Functions

- unsigned int [position](#) () const

*Returns the current position.*

## Private Member Functions

- void [add\\_variable](#) (midipulse v)

*This function masks off the lower 8 bits of the long parameter, then shifts it right 7, and, if there are still set bits, it encodes it into the buffer in reverse order.*

- void [add\\_long](#) (midipulse x)

*What is the difference between this function and [add\\_list\\_var\(\)](#)?*

## Private Attributes

- [sequence](#) & [m\\_sequence](#)

*Provide a hook into a sequence so that we can exchange data with a sequence object.*

- unsigned int [m\\_position\\_for\\_get](#)

*Provides the position in the container when making a series of [get\(\)](#) calls on the container.*

### 10.30.1 Member Function Documentation

#### 10.30.1.1 void seq64::midi\_container::fill ( int *tracknumber* )

Note that some of the events might not come out in the same order they were stored in (we see that with program-change events).

This function replaces [sequence::fill\\_container\(\)](#).

Now, for sequence 0, an alternate format for writing the sequencer number chunk is "FF 00 00". But that format can only occur in the first track, and the rest of the tracks then don't need a sequence number, since it is assume to increment. This application doesn't use with that shortcut.

Triggers:

Triggers are added by first calling `add_variable(0)`, which is needed because why?

Then `0xFF 0x7F` is written, followed by the length value, which is the number of triggers at 3 long integers per trigger, plus the 4-byte code for triggers, `c_triggers_new = 0x24240008`.

**Not threadsafe** The sequence object bound to this container needs to provide the locking mechanism when calling this function.

Parameters

<i>tracknumber</i>	Provides the track number. This number is masked into the track information.
--------------------	--

#### 10.30.1.2 virtual void seq64::midi\_container::put ( midibyte *b* ) [pure virtual]

The original seq24 container used an `std::list` and a `push_front` operation.

Implemented in [seq64::midi\\_list](#), and [seq64::midi\\_vector](#).

10.30.1.3 `virtual midibyte seq64::midi_container::get ( )` `[pure virtual]`

It also increments `m_position_for_get`.

Implemented in [seq64::midi\\_list](#), and [seq64::midi\\_vector](#).

10.30.1.4 `unsigned int seq64::midi_container::position ( ) const` `[inline], [protected]`

Before the return, the position counter is incremented to the next position.

10.30.1.5 `void seq64::midi_container::add_variable ( midipulse v )` `[private]`

This function "replaces" `sequence::add_list_var()`.

10.30.1.6 `void seq64::midi_container::add_long ( midipulse x )` `[private]`

This function "replaces" `sequence::add_long_list()`.


This was a *global* internal function called `addLongList()`. Let's at least make it a private member now, and hew to the naming conventions of this class.

## 10.31 seq64::midi\_list Class Reference

This class is the `std::list` implementation of the [midi\\_container](#).



Inheritance diagram for seq64::midi\_list:

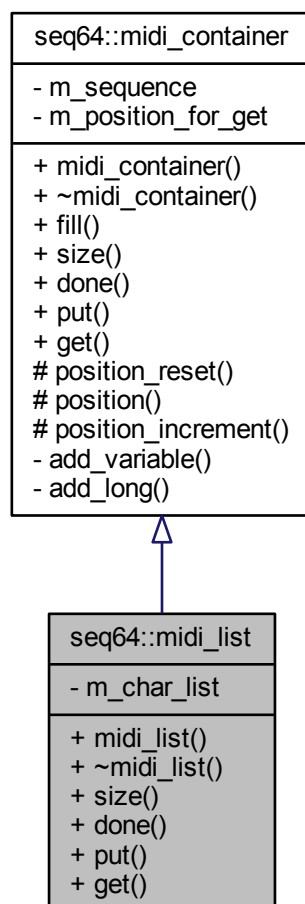

## Public Member Functions

- `midi_list (sequence &seq)`

*This constructor fills in the members.*

- `virtual ~midi_list ()`

*A rote constructor needed for a base class.*

- `virtual std::size_t size () const`

*Returns the size of the container, in midibytes.*

- `virtual bool done () const`

*For popping data from the MIDI list, we are done when the container is empty.*

- `virtual void put (midibyte b)`

*Provides a way to add a MIDI byte into the list.*

- `virtual midibyte get ()`

*Provide a way to get the next byte from the container.*

## Private Types

- `typedef std::list< midibyte > CharList`  
*Provides the type of this container.*

## Private Attributes

- `CharList m_char_list`  
*The container itself.*

## Additional Inherited Members

### 10.31.1 Member Typedef Documentation

10.31.1.1 `typedef std::list<midibyte> seq64::midi_list::CharList` `[private]`

This type is basically the same as the container used in the midifile module, and almost identical to the CharList type defined in the sequence module.

### 10.31.2 Member Function Documentation

10.31.2.1 `virtual void seq64::midi_list::put ( midibyte b )` `[inline],[virtual]`

The original seq24 list used an std::list and a push\_front operation.

Implements [seq64::midi\\_container](#).

10.31.2.2 `virtual midibyte seq64::midi_list::get ( )` `[inline],[virtual]`

In this implementation, m\_position\_for\_get is not used. The elements of the container are popped off backward!

Implements [seq64::midi\\_container](#).

## 10.32 seq64::midi\_measures Class Reference

Provides a data structure to hold the numeric equivalent of the measures string "measures:beats:divisions" ("m:b↵:d").

### Public Member Functions

- `midi_measures ()`  
*Default constructor for [midi\\_measures](#).*
- `midi_measures (int measures, int beats, int divisions)`  
*Principal constructor for [midi\\_measures](#).*
- `int measures () const`  
*'Getter' function for member m\_measures*
- `void measures (int m)`  
*'Setter' function for member m\_measures We can add validation later.*
- `int beats () const`  
*'Getter' function for member m\_beats*
- `void beats (int b)`

*'Setter' function for member m\_beats We can add validation later.*

- int `divisions` () const

*'Getter' function for member m\_divisions*

- void `divisions` (int d)

*'Setter' function for member m\_divisions We can add validation later.*

## Private Attributes

- int `m_measures`

*The integral number of measures in the measures-based time.*

- int `m_beats`

*The integral number of beats in the measures-based time.*

- int `m_divisions`

*The integral number of divisions/pulses in the measures-based time.*

## 10.32.1 Field Documentation

### 10.32.1.1 int seq64::midi\_measures::m\_divisions [private]

There are two possible translations of the two bytes of a division. If the top bit of the 16 bits is 0, then the time division is in "ticks per beat" (or "pulses per quarter note"). If the top bit is 1, then the time division is in "frames per second". This function deals only with the ticks/beat definition.

## 10.33 seq64::midi\_splitter Class Reference

This class handles the parsing and writing of MIDI files.

## Public Member Functions

- `midi_splitter` (int `ppqn`=SEQ64\_USE\_DEFAULT\_PPQN)

*Principal constructor.*

- `~midi_splitter` ()

*A rote destructor.*

- bool `log_main_sequence` (`sequence` &seq, int seqnum)

*Logs the main sequence (an SMF 0 track) for later usage in splitting the track.*

- void `initialize` ()

*Resets the SMF 0 support variables in preparation for parsing a new MIDI file.*

- void `increment` (int channel)

*Processes a channel number by raising its flag in the m\_smf0\_channels[] array.*

- bool `split` (`perform` &p, int screenset)

*This function splits an SMF 0, splitting all of the channels in the sequence out into separate sequences, and adding each to the perform object.*

- int `ppqn` () const

*'Getter' function for member m\_ppqn Provides a way to get the actual value of PPQN used in processing the sequences when parse() was called.*

- int `count` () const

*'Getter' function for member m\_smf0\_channels\_count*

## Private Member Functions

- bool `split_channel` (const `sequence` &main\_seq, `sequence` \*seq, int channel)

*This function splits the given sequence into new sequences, one for each channel found in the SMF 0 track.*

## Private Attributes

- int `m_ppqn`

*Provides the current value of the PPQN, which used to be constant and is now only the macro `DEFAULT_PPQN`.*

- bool `m_use_default_ppqn`

*Indicates that the default PPQN is in force.*

- int `m_smf0_channels_count`

*Provides support for SMF 0, indicates how many channels were found in the file in a single sequence.*

- bool `m_smf0_channels` [16]

*Provides support for SMF 0, holds a bool value that indicates the occurrence of a given channel.*

- `sequence` \* `m_smf0_main_sequence`

*Provides support for SMF 0, points to the initial SMF 0 sequence, from which the single-channel sequences will be created.*

- int `m_smf0_seq_number`

*Provides support for SMF 0, holds the prospective sequence number of the main (SMF 0) sequence.*

### 10.33.1 Detailed Description

In addition to the standard MIDI tracks, it also handles some "private" or "proprietary" tracks specific to Seq24. It does not, however, handle SYSEX events.

### 10.33.2 Constructor & Destructor Documentation

#### 10.33.2.1 `seq64::midi_splitter::midi_splitter ( int ppqn = SEQ64_USE_DEFAULT_PPQN )`

##### Parameters

<i>name</i>	Provides the name of the MIDI file to be read or written.
<i>ppqn</i>	<p>Provides the initial value of the PPQN setting. It is handled differently for parsing (reading) versus writing the MIDI file.</p> <ul style="list-style-type: none"> <li>• Reading. <ul style="list-style-type: none"> <li>– If set to <code>SEQ64_USE_DEFAULT_PPQN</code>, the legacy application behavior is used. The <code>m_ppqn</code> member is set to the default PPQN, <code>DEFAULT_PPQN</code>. The value read from the MIDI file, <code>ppqn</code>, is then use to scale the running-time of the sequence relative to <code>DEFAULT_PPQN</code>.</li> <li>– Otherwise, <code>m_ppqn</code> is set to the value read from the MIDI file. No scaling is done. Since the value gets written, specify <code>ppqn</code> as 0, an obviously bogus value, to get this behavior.</li> </ul> </li> <li>• Writing. This value is written to the MIDI file in the header chunk of the song. Note that the caller must query for the PPQN set during parsing, and pass it to the constructor when preparing to write the file. See how it is done in the <code>mainwnd</code> class.</li> </ul>

<i>oldformat</i>	If true, write out the MIDI file using the old Seq24 format, instead of the new MIDI-compliant sequencer-specific format, for the seq24-specific SeqSpec tags defined in the globals module. This option is false by default. Note that this option is only used in writing; reading can handle either format transparently.
<i>globalbgs</i>	If true, write any non-default values of the key, scale, and background sequence to the global "proprietary" section of the MIDI file, instead of to each sequence. Note that this option is only used in writing; reading can handle either format transparently.

### 10.33.3 Member Function Documentation

#### 10.33.3.1 void seq64::midi\_splitter::increment ( int *channel* )

If it is the first entry for that channel, `m_smf0_channels_count` is incremented. We won't check the channel number, to save time, until someday we segfault :-D

#### 10.33.3.2 bool seq64::midi\_splitter::split ( perform & *p*, int *screenset* )

Lastly, it adds the SMF 0 track as the last track; the user can then examine it before removing it. Is this worth the effort?

There is a little oddity, in that, if the SMF 0 track has events for only one channel, this code will still create a new sequence, as well as the main sequence. Not sure if this is worth extra code to just change the channels on the main sequence and put it into the correct track for the one channel it contains.

##### Parameters

<i>p</i>	Provides a reference to the perform object into which sequences/tracks are to be added.
<i>screenset</i>	The screen-set offset to be used when loading a sequence (track) from the file.

##### Returns

Returns true if the parsing succeeded. Returns false if no SMF 0 main sequence was logged.

#### 10.33.3.3 int seq64::midi\_splitter::ppqn ( ) const [inline]

The PPQN will be either the global ppqn (legacy behavior) or the value read from the file, depending on the ppqn parameter passed to the [midi\\_splitter](#) constructor.

#### 10.33.3.4 bool seq64::midi\_splitter::split\_channel ( const sequence & *main\_seq*, sequence \* *s*, int *channel* ) [private]

Note that the events that are read from the MIDI file have delta times. Sequencer64 converts these delta times to cumulative times. We need to preserve that here. Conversion back to delta times is needed only when saving the sequences to a file. This is done in [midi\\_container::fill\(\)](#).

We have to accumulate the delta times in order to be able to set the length of the sequence in pulses.

Luckily, we don't have to worry about copying triggers, since the imported SMF 0 track won't have any Seq24/↔ Sequencer24 triggers.

It doesn't set the sequence number of the sequence; that is set when the sequence is added to the perform object.

##### Parameters

<i>main_seq</i>	This parameter is the whole SMF 0 track that was read from the MIDI file. It contains all of the channel data that needs to be split into separate sequences.
<i>s</i>	Provides the new sequence that needs to have its settings made, and all of the selected channel events added to it.
<i>channel</i>	Provides the MIDI channel number (re 0) that marks the channel data the needs to be extracted and added to the new sequence.

#### Returns

Returns true if at least one event got added. If none were added, the caller should delete the sequence object represented by parameter *s*.

### 10.33.4 Field Documentation

10.33.4.1 `int seq64::midi_splitter::m_smf0_channels_count` [private]

SMF 1 file parsing will only warn about more than one channel found in a given sequence.

10.33.4.2 `bool seq64::midi_splitter::m_smf0_channels[16]` [private]

Obviously, we don't have to worry about multiple MIDI busses.

10.33.4.3 `int seq64::midi_splitter::m_smf0_seq_number` [private]

We want to be able to add that sequence last, for easier and cleaner removal of that sequence by the user.

## 10.34 seq64::midi\_timing Class Reference

We anticipate the need to have a small structure holding the parameters needed to calculate MIDI times within an arbitrary song.

### Public Member Functions

- [midi\\_timing](#) ()  
*Defaults constructor for [midi\\_timing](#).*
- [midi\\_timing](#) (int bpmminute, int bpmmeasure, int beatwidth, int ppqn)  
*Principal constructor for [midi\\_timing](#).*
- int [beats\\_per\\_minute](#) () const  
*'Getter' function for member m\_beats\_per\_minute*
- void [beats\\_per\\_minute](#) (int b)  
*'Setter' function for member m\_beats\_per\_minute We can add validation later.*
- int [beats\\_per\\_measure](#) () const  
*'Getter' function for member m\_beats\_per\_measure*
- void [beats\\_per\\_measure](#) (int b)  
*'Setter' function for member m\_beats\_per\_measure We can add validation later.*
- int [beat\\_width](#) () const  
*'Getter' function for member m\_beats\_per\_beat\_width*
- void [beat\\_width](#) (int bw)  
*'Setter' function for member m\_beats\_per\_beat\_width We can add validation later.*
- int [ppqn](#) () const

*'Getter' function for member m\_ppqn*

- void [ppqn](#) (int p)

*'Setter' function for member m\_ppqn We can add validation later.*

## Private Attributes

- int [m\\_beats\\_per\\_minute](#)

*This value should match the BPM value selected when editing the song.*

- int [m\\_beats\\_per\\_measure](#)

*This value should match the numerator value selected when editing the sequence.*

- int [m\\_beat\\_width](#)

*This value should match the denominator value selected when editing the sequence.*

- int [m\\_ppqn](#)

*This value provides the precision of the MIDI song.*

### 10.34.1 Detailed Description

Although Seq24/Sequencer64 currently are heavily dependent on hard-wired values, that will be rectified eventually, so let us get ready for it.

### 10.34.2 Field Documentation

#### 10.34.2.1 int seq64::midi\_timing::m\_beats\_per\_minute [private]

This value is most commonly set to 120, but is also read from the MIDI file. This value is needed if one want to calculate durations in true time units such as seconds, but is not needed to calculate the number of pulses/ticks/divisions.

#### 10.34.2.2 int seq64::midi\_timing::m\_beats\_per\_measure [private]

This value is most commonly set to 4.

#### 10.34.2.3 int seq64::midi\_timing::m\_beat\_width [private]

This value is most commonly set to 4, meaning that the fundamental beat unit is the quarter note.


#### 10.34.2.4 int seq64::midi\_timing::m\_ppqn [private]

This value is most commonly set to 192, but is also read from the MIDI file. We are still working getting "non-standard" values to work.

## 10.35 seq64::midi\_vector Class Reference

This class is the std::vector implementation of the [midi\\_container](#).

Inheritance diagram for seq64::midi\_vector:

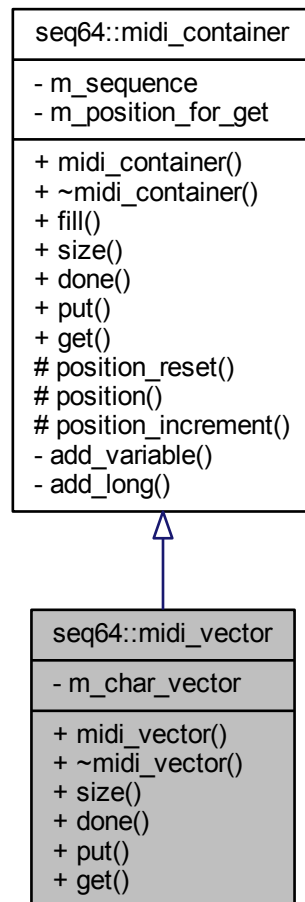

## Public Member Functions

- `midi_vector` (`sequence` &seq)

*This constructor fills in the members.*

- virtual `~midi_vector` ()

*A rote constructor needed for a base class.*

- virtual `std::size_t size` () const

*Returns the size of the container, in midibytes.*

- virtual `bool done` () const

*For iterating through the data in the MIDI vector, we are done when we've gotten the last element of the container.*

- virtual `void put` (midibyte b)

*Provides a way to add a MIDI byte into the list.*

- virtual `midibyte get` ()

*Provide a way to get the next byte from the container.*



## Private Types

- typedef std::vector< midibyte > [CharVector](#)  
*Provides the type of this container.*

## Private Attributes

- [CharVector m\\_char\\_vector](#)  
*The container itself.*

## Additional Inherited Members

### 10.35.1 Member Function Documentation

10.35.1.1 virtual void seq64::midi\_vector::put ( midibyte *b* ) [inline],[virtual]

The original seq24 list used an std::list and a push\_front operation.

Implements [seq64::midi\\_container](#).

10.35.1.2 virtual midibyte seq64::midi\_vector::get ( ) [inline],[virtual]

In this implementation, m\_position\_for\_get is used.

Implements [seq64::midi\\_container](#).

## 10.36 seq64::midibus Class Reference

Provides a class for handling the MIDI buss on Linux.

### Public Member Functions

- [~midibus \(\)](#)  
*A rote empty destructor.*
- bool [init\\_out \(\)](#)  
*Initialize the MIDI output port.*
- bool [init\\_in \(\)](#)  
*Initialize the MIDI input port.*
- bool [deinit\\_in \(\)](#)  
*Deinitialize the MIDI input?*
- bool [init\\_out\\_sub \(\)](#)  
*Initialize the output in a different way?*
- bool [init\\_in\\_sub \(\)](#)  
*Initialize the output in a different way?*
- void [print \(\)](#)  
*Prints m\_name.*
- const std::string & [get\\_name \(\)](#) const  
*'Getter' function for member n\_name*
- int [get\\_id \(\)](#) const  
*'Getter' function for member m\_id*
- void [play \(event \\*e24, midibyte channel\)](#)

- This `play()` function takes a native event, encodes it to ALSA event, and puts it in the queue.*

  - void `sysex` (`event *e24`)

*Takes a native SYSEX event, encodes it to an ALSA event, and then puts it in the queue.*
- void `start` ()

*This function gets the MIDI clock a-runnin', if the clock type is not `e_clock_off`.*
- void `stop` ()

*Stop the MIDI buss.*
- void `clock` (midipulse tick)

*Generates the MIDI clock, starting at the given tick value.*
- void `continue_from` (midipulse tick)

*Continue from the given tick.*
- void `init_clock` (midipulse tick)

*Initialize the clock, continuing from the given tick.*
- void `set_clock` (clock\_e clocktype)

*'Setter' function for member `m_clock_type`*
- clock\_e `get_clock` () const

*'Getter' function for member `m_clock_type`*
- void `set_input` (bool inputing)

*Input functions.*
- bool `get_input` () const

*'Getter' function for member `m_inputing`*
- void `flush` ()

*Flushes our local queue events out into ALSA.*
- int `get_client` () const

*'Getter' function for member `m_dest_addr_client` The address of client.*
- int `get_port` () const

*'Getter' function for member `m_dest_addr_port`*

## Static Public Member Functions

- static void `set_clock_mod` (int clockmod)

*Set the clock mod to the given value, if legal.*
- static int `get_clock_mod` ()

*Get the clock mod.*

## Private Attributes

- int `m_id`

*The ID of the midibus object.*
- clock\_e `m_clock_type`

*The type of clock to use.*
- bool `m_inputing`

*TBD.*
- int `m_ppqn`

*Provides the PPQN value in force, currently a constant.*
- const int `m_dest_addr_client`

*Destination address of client.*
- const int `m_dest_addr_port`

*Destination port of client.*
- const int `m_local_addr_client`

- Local address of client.*
- int [m\\_local\\_addr\\_port](#)  
*Local port of client.*
- int [m\\_queue](#)  
*Another ID of the MIDI queue?*
- std::string [m\\_name](#)  
*The name of the MIDI buss.*
- midipulse [m\\_lasttick](#)  
*The last (most recent? final?) tick.*
- mutex [m\\_mutex](#)  
*Locking mutex.*

### Static Private Attributes

- static int [m\\_clock\\_mod](#)  
*This is another name for "16 \* 4".*

### Friends

- class [mastermidibus](#)  
*The master MIDI bus sets up the buss.*

## 10.36.1 Member Function Documentation

### 10.36.1.1 bool seq64::midibus::init\_out ( )

#### Returns

Returns true unless setting up ALSA MIDI failed in some way.

### 10.36.1.2 bool seq64::midibus::init\_in ( )

#### Returns

Returns true unless setting up ALSA MIDI failed in some way.

### 10.36.1.3 bool seq64::midibus::deinit\_in ( )

#### Returns

Returns true, unless an error occurs.

### 10.36.1.4 bool seq64::midibus::init\_out\_sub ( )

#### Returns

Returns true unless setting up the ALSA port failed in some way.

10.36.1.5 `bool seq64::midibus::init_in_sub ( )`

#### Returns

Returns true unless setting up the ALSA port failed in some way.

10.36.1.6 `void seq64::midibus::play ( event * e24, midibyte channel )`

#### Threadsafe

#### Parameters

<i>e24</i>	The event to be played on this bus.
<i>channel</i>	The channel of the playback.

10.36.1.7 `void seq64::midibus::sysex ( event * e24 )`

#### Parameters

<i>e24</i>	The event to be handled.
------------	--------------------------

10.36.1.8 `void seq64::midibus::clock ( midipulse tick )`

#### Parameters

<i>tick</i>	Provides the starting tick.
-------------	-----------------------------

10.36.1.9 `void seq64::midibus::continue_from ( midipulse tick )`

#### Parameters

<i>tick</i>	The continuing tick.
-------------	----------------------

10.36.1.10 `void seq64::midibus::init_clock ( midipulse tick )`

#### Parameters

<i>tick</i>	The starting tick.
-------------	--------------------

10.36.1.11 `void seq64::midibus::set_input ( bool inputing )`

Set status to of "inputting" to the given value.

If the parameter is true, then [init\\_in\(\)](#) is called; otherwise, [deinit\\_in\(\)](#) is called.

#### Parameters

<i>inputing</i>	The inputing value to set.
-----------------	----------------------------

## 10.37 seq64::midifile Class Reference

This class handles the parsing and writing of MIDI files.

## Public Member Functions

- `midifile` (const std::string &name, int ppqn=SEQ64\_USE\_DEFAULT\_PPQN, bool oldformat=false, bool globalbgs=true)  
*Principal constructor.*
- `~midifile` ()  
*A rote destructor.*
- bool `parse` (`perform` &a\_perf, int a\_screen\_set=0)  
*This function opens a binary MIDI file and parses it into sequences and other application objects.*
- bool `write` (`perform` &a\_perf)  
*Write the whole MIDI data and Seq24 information out to the file.*
- const std::string & `error_message` () const  
*'Getter' function for member m\_error\_message*
- bool `error_is_fatal` () const  
*'Getter' function for member m\_error\_is\_fatal*
- int `ppqn` () const  
*'Getter' function for member m\_ppqn Provides a way to get the actual value of PPQN used in processing the sequences when `parse()` was called.*

## Private Member Functions

- bool `parse_smf_0` (`perform` &p, int screenset)  
*This function parses an SMF 0 binary MIDI file as if it were an SMF 1 file, then, if more than one MIDI channel was encountered in the sequence, splits all of the channels in the sequence out separate sequences, and deletes the original sequence.*
- bool `parse_smf_1` (`perform` &p, int screenset, bool is\_smf0=false)  
*This function parses an SMF 1 binary MIDI file; it is basically the original seq25 `midifile::parse()` function.*
- midilong `parse_prop_header` (int file\_size)  
*Parse the proprietary header, figuring out if it is the new format, or the legacy format, for sequencer-specific data.*
- bool `parse_proprietary_track` (`perform` &a\_perf, int file\_size)  
*After all of the conventional MIDI tracks are read, we're now at the "proprietary" Seq24 data section, which describes the various features that Seq24 supports.*
- int `pow2` (int logbase2)  
*Internal function for simple calculation of a power of 2 without a lot of math.*
- bool `checklen` (midilong len, midibyte type)  
*Internal function to check for and report a bad length value.*
- midilong `read_long` ()  
*Reads 4 bytes of data using `read_byte()`.*
- midishort `read_short` ()  
*Reads 2 bytes of data using `read_byte()`.*
- midibyte `read_byte` ()  
*Reads 1 byte of data directly from the m\_data vector, incrementing m\_pos after doing so.*
- midilong `read_varinum` ()  
*Read a MIDI Variable-Length Value (VLV), which has a variable number of bytes.*
- void `write_long` (midilong)  
*Writes 4 bytes, using the `write_byte()` function.*
- void `write_short` (midishort)  
*Writes 2 bytes, using the `write_byte()` function.*
- void `read_byte_array` (midibyte \*b, int len)  
*A helper function to simplify reading midi\_control data from the MIDI file.*
- void `write_byte` (midibyte c)  
*Writes 1 byte.*

- void `write_varinum` (midilong)
 

*Writes a MIDI Variable-Length Value (VLV), which has a variable number of bytes.*
- void `write_track_name` (const std::string &trackname)
 

*Writes out a track name.*
- std::string `read_track_name` ()
 

*Reads the track name.*
- void `write_seq_number` (midishort seqnum)
 

*Writes out a sequence number.*
- int `read_seq_number` ()
 

*Reads the sequence number.*
- void `write_track_end` ()
 

*Writes out the end-of-track marker.*
- void `write_prop_header` (midilong tag, long len)
 

*We want to write:*
- bool `write_proprietary_track` (perform &a\_perf)
 

*Writes out the proprietary section, using the new format if the legacy format is not in force.*
- long `varinum_size` (long len) const
 

*Calculates the length of a variable length value.*
- long `prop_item_size` (long datalen) const
 

*Calculates the size of a proprietary item, as written by the `write_prop_header()` function, plus whatever is called to write the data.*
- long `track_name_size` (const std::string &trackname) const
 

*Calculates the size of a trackname and the meta event that specifies it.*
- void `errdump` (const std::string &msg)
 

*Helper function to emit more useful error messages.*
- void `errdump` (const std::string &msg, unsigned long p)
 

*Helper function to emit more useful error messages for erroneous long values.*
- long `seq_number_size` () const
 

*Returns the size of a sequence-number event, which is always 5 bytes, plus one byte for the delta time that precedes it.*
- long `track_end_size` () const
 

*Returns the size of a track-end event, which is always 3 bytes.*
- bool `is_sysex_special_id` (midibyte ch)
 

*Check for special SysEx ID byte.*

## Private Attributes

- int `m_file_size`

*Holds the size of the MIDI file.*
- std::string `m_error_message`

*Holds the last error message, useful for trouble-shooting without having Sequencer64 running in a console window.*
- bool `m_error_is_fatal`

*Indicates if the error should be considered fatal.*
- bool `m_disable_reported`

*Indicates that file reading has already been disabled (due to serious errors), so don't complain about it anymore.*
- int `m_pos`

*Holds the position in the MIDI file.*
- const std::string `m_name`

*The unchanging name of the MIDI file.*
- std::vector< midibyte > `m_data`

*This vector of characters holds our MIDI data.*

- `std::list< midibyte > m_char_list`  
*Provides a list of characters.*
- `bool m_new_format`  
*Use the new format for the proprietary footer section of the Seq24 MIDI file.*
- `bool m_global_bgsequence`  
*Indicates to store the new key, scale, and background sequence in the global, "proprietary" section of the MIDI song.*
- `int m_ppqn`  
*Provides the current value of the PPQN, which used to be constant and is now only the macro `DEFAULT_PPQN`.*
- `bool m_use_default_ppqn`  
*Indicates that the default PPQN is in force.*
- `midi_splitter m_smf0_splitter`  
*Provides support for SMF 0.*

### 10.37.1 Detailed Description

In addition to the standard MIDI tracks, it also handles some "private" or "proprietary" tracks specific to Seq24. It does not, however, handle SYSEX events.

### 10.37.2 Constructor & Destructor Documentation

**10.37.2.1** `seq64::midifile::midifile ( const std::string & name, int ppqn = SEQ64_USE_DEFAULT_PPQN, bool oldformat = false, bool globalbgs = true )`

#### Parameters

<i>name</i>	Provides the name of the MIDI file to be read or written.
<i>ppqn</i>	<p>Provides the initial value of the PPQN setting. It is handled differently for parsing (reading) versus writing the MIDI file.</p> <ul style="list-style-type: none"> <li>• Reading. <ul style="list-style-type: none"> <li>– If set to <code>SEQ64_USE_DEFAULT_PPQN</code>, the legacy application behavior is used. The <code>m_ppqn</code> member is set to the default PPQN, <code>DEFAULT_PPQN</code>. The value read from the MIDI file, <code>ppqn</code>, is then use to scale the running-time of the sequence relative to <code>DEFAULT_PPQN</code>.</li> <li>– Otherwise, <code>m_ppqn</code> is set to the value read from the MIDI file. No scaling is done. Since the value gets written, specify <code>ppqn</code> as 0, an obviously bogus value, to get this behavior.</li> </ul> </li> <li>• Writing. This value is written to the MIDI file in the header chunk of the song. Note that the caller must query for the PPQN set during parsing, and pass it to the constructor when preparing to write the file. See how it is done in the <code>mainwnd</code> class.</li> </ul>

<i>oldformat</i>	If true, write out the MIDI file using the old Seq24 format, instead of the new MIDI-compliant sequencer-specific format, for the seq24-specific SeqSpec tags defined in the globals module. This option is false by default. Note that this option is only used in writing; reading can handle either format transparently.
<i>globalbgs</i>	If true, write any non-default values of the key, scale, and background sequence to the global "proprietary" section of the MIDI file, instead of to each sequence. Note that this option is only used in writing; reading can handle either format transparently.

### 10.37.3 Member Function Documentation

#### 10.37.3.1 `bool seq64::midifile::parse ( perform & p, int screenset = 0 )`

In addition to the standard MIDI track data in a normal track, Seq24 adds four sequencer-specific events just before the end of the track:

```

c_triggers_new:    SeqSpec FF 7F 1C 24 24 00 08 00 00 ...
c_midibus:         SeqSpec FF 7F 05 24 24 00 01 00
c_timesig:         SeqSpec FF 7F 06 24 24 00 06 04 04
c_midich:          SeqSpec FF 7F 05 24 24 00 02 06

```

Standard MIDI provides for the port and channel specifications, but they are apparently considered obsolete:

Obsolete meta-event:

Replacement:

```

MIDI port (buss):   FF 21 01 po      Device (port) name: FF 09 len text
MIDI channel:      FF 20 01 ch

```

What do other applications use for specifying port/channel?

Note on the is-modified flag. We now assume that the perform object is starting from scratch when parsing. But we let mainwnd tell the perform object when to clear everything with `perform::clear_all()`. The mainwnd does this for a new file, opening a file, but not for a file import, which might be done simply to add more MIDI tracks to the current composition. So, if parsing succeeds, all we want to do is make sure the flag is set.

Parsing a file successfully is not always a modification of the setup. For instance, the first read of a MIDI file should start clean, not dirty.

#### SysEx notes:

Some files (e.g. Dixie04.mid) do not always encode System Exclusive messages properly for a MIDI file. Instead of a varinum length value, they are followed by extended IDs (0x7D, 0x7E, or 0x7F).

We've covered some of those cases by disabling access to `m_data` if the position passes the size of the file, but we want try to bypass these odd cases properly. So we look ahead for one of these special values.

#### Parameters

<i>p</i>	Provides a reference to the perform object into which sequences/tracks are to be added.
<i>screenset</i>	The screen-set offset to be used when loading a sequence (track) from the file. This value ranges from -31 to 0 to +31 (32 is the maximum screen-set available in Seq24). This offset is added to the sequence number read in for the sequence, to place it elsewhere in the imported tune, and locate it in a specific screen-set. If this parameter is non-zero, then we will assume that the perform data is dirty.

#### Returns

Returns true if the parsing succeeded.



10.37.3.2 bool seq64::midifile::write ( perform & *p* )

## Parameters

<i>p</i>	Provides the object that will contain and manage the entire performance.
----------	--

## Returns

Returns true if the write operations succeeded.

## Note

Seq24 reverses the order of some events, due to popping from its container. Not an issue here.

### 10.37.3.3 `int seq64::midifile::ppqn ( ) const [inline]`

The PPQN will be either the global ppqn (legacy behavior) or the value read from the file, depending on the ppqn parameter passed to the midifile constructor.

### 10.37.3.4 `bool seq64::midifile::parse_smf_0 ( perform & p, int screenset ) [private]`

## Parameters

<i>p</i>	Provides a reference to the perform object into which sequences/tracks are to be added.
<i>screenset</i>	The screen-set offset to be used when loading a sequence (track) from the file.

## Returns

Returns true if the parsing succeeded.

### 10.37.3.5 `bool seq64::midifile::parse_smf_1 ( perform & p, int screenset, bool is_smf0 = false ) [private]`

It assumes the file-data has already been read into memory. It also assumes that the ID, track-length, and format have already been read.

## Parameters

<i>p</i>	Provides a reference to the perform object into which sequences/tracks are to be added.
<i>screenset</i>	The screen-set offset to be used when loading a sequence (track) from the file.

## Returns

Returns true if the parsing succeeded.

### 10.37.3.6 `midilong seq64::midifile::parse_prop_header ( int file_size ) [private]`

The new format creates a final track chunk, starting with "MTrk". Then comes the delta-time (here, 0), and the event. An event is a MIDI event, a SysEx event, or a Meta event.

A MIDI Sequencer Specific meta message includes either a delta time or absolute time, and the MIDI Sequencer Specific event encoded as follows:

```
0x00 0xFF 0x7F length data
```

For convenience, this function first checks the amount of file data left. If enough, then it reads a long value. If the value starts with 0x00 0xFF 0x7F, then that is a SeqSpec event, which signals usage of the new

Sequencer64 "proprietary" format. Otherwise, it is probably the old format, and the long value is a control tag (0x242400nn), which can be returned immediately.

If it is the new format, we back up to the FF, then get the next byte, which should be a 7F. If so, then we read the length (a variable length value) of the data, and then read the long value, which should be the control tag, which, again, is returned by this function.

#### Note

Most sequencers seem to be tolerant of both the lack of an "MTrk" marker and of the presence of an unwrapped control tag, and so can handle both the old and new formats of the final proprietary track.

#### Parameters

<i>file_size</i>	The size of the data file. This value is compared against the member <code>m_pos</code> (the position inside <code>m_data[]</code> ), to make sure there is enough data left to process.
------------------	--

#### Returns

Returns the control-tag value found. These are the values, such as `c_midich`, found in the `globals` module, that indicate the type of sequencer-specific data that comes next. If there is not enough data to process, then 0 is returned.

**10.37.3.7** `bool seq64::midifile::parse_proprietary_track ( perform & p, int file_size )` [private]

It consists of series of tags:

- `c_midictrl`
- `c_midiclocks`
- `c_notes`
- `c_bpmtag` (beats per minute)
- `c_mutegroups`
- `c_musickey` (new, added if `usr() global_seq_feature()` is true)
- `c_musicscale` (ditto)
- `c_backsequence` (ditto)

(There are more tags defined in the `globals` module, but they are not used in this function. This doesn't quite make sense, as there are also some "triggers" values, and we're pretty sure the application uses them. Oh, it turns out that they are set up by actions performed on each sequence, and are stored as sequencer-specific ("SeqSpec") data with each track's data as held in the MIDI container for the track. See the [midi\\_container](#) module for more information.)

The format is (1) tag ID; (2) length of data; (3) the data.

First, we separate out this function for a little more clarity. Then we added code to handle reading both the legacy Seq24 format and the new, MIDI-compliant format. Note that even the new format is not quite correct, since it doesn't handle a MIDI manufacturer's ID, making it a single byte that is part of the data. But it does have the "MTrk" marker and track name, so that must be processed for the new format.

Now, in our "midicvt" project, we have a test MIDI file, `b4uacuse-non-mtrk.midi` that is good, except for having a tag "MUnk" instead of "MTrk". We should consider being more permissive, if possible. Otherwise, though, the only penalty is that the "proprietary" chunk is completely skipped.

## Parameters

<i>p</i>	The performance object that is being set via the incoming MIDI file.
<i>file_size</i>	The file size as determined in the <a href="#">parse()</a> function.

There are also implicit parameters, with the `m_pos` and `m_new_format` member variables.

#### 10.37.3.8 `int seq64::midifile::pow2 ( int logbase2 ) [private]`

Use for calculating the denominator of a time signature.

## Parameters

<i>logbase2</i>	Provides the power to which 2 is to be raised. This integer is probably only rarely greater than 4 (which represents a denominator of 16).
-----------------	--

## Returns

Returns 2 raised to the `logbase2` power.

#### 10.37.3.9 `midilong seq64::midifile::read_long ( ) [private]`

## Warning

This code looks endian-dependent and integer-size dependent.

#### 10.37.3.10 `midilong seq64::midifile::read_varinum ( ) [private]`

This function reads the bytes while bit 7 is set in each byte. Bit 7 is a continuation bit. See [write\\_varinum\(\)](#) for more information.

#### 10.37.3.11 `void seq64::midifile::write_long ( midilong a_x ) [private]`

## Warning

This code looks endian-dependent.

#### 10.37.3.12 `void seq64::midifile::write_short ( midishort a_x ) [private]`

## Warning

This code looks endian-dependent.

#### 10.37.3.13 `void seq64::midifile::read_byte_array ( midibyte * b, int len ) [inline], [private]`

## Parameters

<i>b</i>	The byte array to receive the data.
<i>len</i>	The number of bytes in the array, and to be read.

#### 10.37.3.14 `void seq64::midifile::write_byte ( midibyte c ) [inline], [private]`

The byte is written to the `m_char_list` member, using a call to `push_back()`.

10.37.3.15 `void seq64::midifile::write_varinum ( midilong value ) [private]`

A MIDI file Variable Length Value is stored in bytes. Each byte has two parts: 7 bits of data and 1 continuation bit. The highest-order bit is set to 1 if there is another byte of the number to follow. The highest-order bit is set to 0 if this byte is the last byte in the VLV.

To recreate a number represented by a VLV, first you remove the continuation bit and then concatenate the leftover bits into a single number.

To generate a VLV from a given number, break the number up into 7 bit units and then apply the correct continuation bit to each byte.

In theory, you could have a very long VLV number which was quite large; however, in the standard MIDI file specification, the maximum length of a VLV value is 5 bytes, and the number it represents can not be larger than 4 bytes.

Here are some common cases:

- Numbers between 0 and 127 (0x7F) are represented by a single byte.
- 0x80 is represented as "0x81 0x00".
- 0xFFFFFFFF (the largest number) is represented as "0xFF 0xFF 0xFF 0x7F".

Also see the [varinum\\_size\(\)](#) function.

10.37.3.16 `void seq64::midifile::write_track_name ( const std::string & trackname ) [private]`

Note that we have to precede this "event" with a delta time value, set to 0.

10.37.3.17 `std::string seq64::midifile::read_track_name ( ) [private]`

Meant only for usage in the proprietary footer track, in the new file format.

#### Returns

Returns the track name, or an empty string if there was a problem.

10.37.3.18 `void seq64::midifile::write_seq_number ( midishort seqnum ) [private]`

The format is "00 FF 00 02 ss ss", where "02" is actually the constant length of the data. We have to precede these values with a 0 delta time, of course.

Now, for sequence 0, an alternate format is "FF 00 00". But that format can only occur in the first track, and the rest of the tracks then don't need a sequence number, since it is assumed to increment. Our application doesn't bother with that shortcut.

10.37.3.19 `int seq64::midifile::read_seq_number ( ) [private]`

Meant only for usage in the proprietary footer track, in the new file format.

#### Returns

Returns the sequence number found, or -1 if it was not found.

10.37.3.20 `void seq64::midifile::write_prop_header ( midilong control_tag, long data_length ) [private]`

- 0x4D54726B. The track tag "MTrk". The MIDI spec requires that software can skip over non-standard chunks. "Prop"? Would require a fix to midicvt.
- 0xaabbccdd. The length of the track. This needs to be calculated somehow.
- 0x00. A zero delta time.
- 0x7f7f. Sequence number, a special value, well out of normal range.
- The name of the track:
  - "Seq24-Spec"
  - "Sequencer64-S"

Then follows the proprietary data, written in the normal manner. Finally, tack on the track-end meta-event. Components of final track size:

```
-# Delta time. 1 byte, always 0x00.
-# Sequence number. 5 bytes. OPTIONAL. We won't write it.
-# Track name. 3 + 10 or 3 + 15
-# Series of proprietary specs:
-# Prop header:
-# If legacy format, 4 bytes.
-# Otherwise, 2 bytes + varinum_size(length) + 4 bytes.
-# Length of the prop data.
-# Track End. 3 bytes.
```

Writes a "proprietary" Seq24 footer header in either the new MIDI-compliant format, or the legacy Seq24 format. This function does not write the data. It replaces calls such as "write\_long(c\_midich)" in the proprietary section of [write\(\)](#).

The legacy format just writes the control tag (0x242400xx). The new format writes 0x00 0xFF 0x7F len 0x242400xx; the first 0x00 is the delta time.

In the new format, the 0x24 is a kind of "manufacturer ID". At <http://www.midi.org/techspecs/manid.php> we see that most manufacturer IDs start with 0x00, and are thus three bytes long, or start with codes at 0x40 and above. Similarly, this site shows that no manufacturer uses 0x24:

<http://sequence15.blogspot.com/2008/12/midi-manufacturer-ids.html>

#### Warning

Currently, the manufacturer ID is not handled; it is part of the data, which can be misleading in programs that analyze MIDI files.

#### Parameters

<i>control_tag</i>	Determines the type of sequencer-specific section to be written. It should be one of the value in the <code>globals</code> module, such as <code>c_midibus</code> or <code>c_mutegroups</code> .
<i>data_length</i>	The amount of data that will be written. This parameter does not count the length of the header itself.

10.37.3.21 `bool seq64::midifile::write_proprietary_track ( perform & p ) [private]`

The first thing to do, for the new format only, is calculate the length of this big section of data. This was quite tricky; we tweaked and adjusted until the midicvt program handled the whole new-format file without emitting any errors. Here's the basics of what Seq24 did for writing the data in this part of the file:

```
-# Write the c_midictrl value, then write a 0. To us, this looks like
no one wrote any code to write this data. And yet, the parsing
code can handles a non-zero value, which is the number of sequences
as a long value, not a byte. So shouldn't we write 4 bytes, not
one? Yes, indeed, we made a mistake. However, we should be
writing out the full data set as well. But not even Seq24 does
that! Perhaps they decided it was best kept in the "rc"
configuration file.
-# MORE TO COME.
```

### 10.37.3.22 long seq64::midifile::varinum\_size ( long *len* ) const [private]

This function is needed when calculating the length of a track. Note that it handles only the following situations:

[https://en.wikipedia.org/wiki/Variable-length\\_quantity](https://en.wikipedia.org/wiki/Variable-length_quantity)

```
1 byte: 0x00 to 0x7F
2 bytes: 0x80 to 0x3FFF
3 bytes: 0x4000 to 0x001FFFFF
4 bytes: 0x200000 to 0x0FFFFFFF
```

#### Returns

Returns values as noted above. Anything beyond that range returns 0.

### 10.37.3.23 long seq64::midifile::prop\_item\_size ( long *data\_length* ) const [private]

If using the new format, the length includes the sum of sequencer-specific tag (0xFF 0x7F) and the size of the variable-length value. Then, for legacy and new format, 4 bytes are added for the Seq24 MIDI control value, and then the data length is added.

### 10.37.3.24 void seq64::midifile::errdump ( const std::string & *msg* ) [private]

It adds the file offset to the message.

#### Parameters

<i>msg</i>	The main error message string, without an ending newline character.
------------	---

#### Returns

The constructed string is returned as a side-effect, in case we want to pass it along to the externally-accessible error-message buffer.

### 10.37.3.25 void seq64::midifile::errdump ( const std::string & *msg*, unsigned long *value* ) [private]

It adds the file offset to the message.

#### Parameters

<i>msg</i>	The main error message string, without an ending newline character.
<i>value</i>	The long value to show as part of the message.

#### Returns

The constructed string is returned as a side-effect, in case we want to pass it along to the externally-accessible error-message buffer.

10.37.3.26 `bool seq64::midifile::is_sysex_special_id ( midibyte ch ) [inline],[private]`



## Parameters

<i>ch</i>	Provides the byte to be checked against 0x7D through 0x7F.
-----------	--

## Returns

Returns true if the byte is SysEx special ID.

## 10.37.4 Field Documentation

10.37.4.1 `int seq64::midifile::m_file_size` [private]

This variable was added when loading a file that caused an attempt to load data well beyond the file-size of the midicvt test file Dixie04.mid.

10.37.4.2 `std::string seq64::midifile::m_error_message` [private]

If empty, there's no pending error. Currently most useful in the [parse\(\)](#) function.

10.37.4.3 `bool seq64::midifile::m_error_is_fatal` [private]

The caller can query for this value after getting the return value from [parse\(\)](#).

10.37.4.4 `bool seq64::midifile::m_disable_reported` [private]

Once is enough.

10.37.4.5 `int seq64::midifile::m_pos` [private]

This is at least a 31-bit value in the recent architectures running Linux and Windows, so it will handle up to 2 Gb of data. This member is used as the offset into the `m_data` vector.

10.37.4.6 `std::vector<midibyte> seq64::midifile::m_data` [private]

We could also use a string of characters, unsigned. This member is resized to the putative size of the MIDI file, in the [parse\(\)](#) function. Then the whole file is read into it, as if it were an array. This member is an input buffer.

10.37.4.7 `std::list<midibyte> seq64::midifile::m_char_list` [private]

The class pushes each MIDI byte into this list using the [write\\_byte\(\)](#) function. Also note that the [write\(\)](#) function calls `sequence::fill_list()` to fill a temporary `std::list<char>` (!) buffer, then writes that data *backwards* to this member. This member is an output buffer.

10.37.4.8 `bool seq64::midifile::m_new_format` [private]

In the new format, each sequencer-specific value (0x242400xx, as defined in the globals module) is preceded by the sequencer-specific prefix, 0xFF 0x7F len id/date). By default, the new format is used, but the user can specify the `-legacy (-l)` option, or make a soft link to the sequence24 binary called "seq24", to write the data in the old format. [We will eventually add the `-legacy` option to the "rc" configuration file.] Note that reading can handle either format transparently.


#### 10.37.4.9 midi\_splitter seq64::midifile::m\_smf0\_splitter [private]

This object holds all of the information needed to split a multi-channel sequence.

### 10.38 seq64::mutex Class Reference

The mutex class provides a simple wrapper for the pthread\_mutex\_t type used as a recursive mutex.

Inheritance diagram for seq64::mutex:

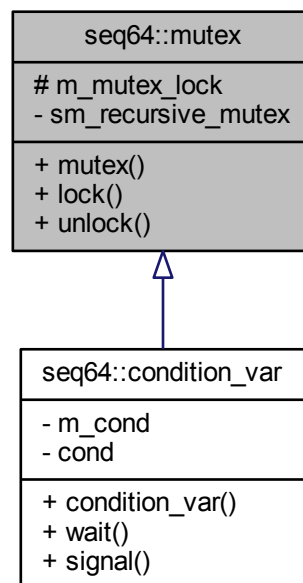

#### Public Member Functions

- `mutex ()`  
*The constructor assigns the recursive mutex to the local locking mutex.*
- `void lock () const`  
*Lock the mutex.*
- `void unlock () const`  
*Unlock the mutex.*

#### Protected Attributes

- `pthread_mutex_t m_mutex_lock`  
*Provides a mutex lock usable by a single module or class.*

#### Static Private Attributes

- `static const pthread_mutex_t sm_recursive_mutex`

*Provides a way to disable the locking.*

### 10.38.1 Field Documentation

10.38.1.1 `const pthread_mutex_t seq64::mutex::sm_recursive_mutex` `[static], [private]`

Define the static recursive mutex and its condition variable.

Mostly experimental, we want to disable locking to see if we can speed up MIDI file reading when the application is compiled for debugging. It takes about 8 seconds to read our sample MIDI files. This does not solve the problem of the long MIDI-file parsing, however.

```
static bool sm_mutex_enabled;
```

Provides a recursive mutex that can be used by the whole application, apparently.

## 10.39 seq64::options Class Reference

This class supports a full tabbed options dialog.

Inherits Dialog.

### Private Types

- enum `button`

*Defines buttons indices or IDs for some controls related to JACK.*

### Private Attributes

- `perform` & `m_mainperf`

*The performance object to which some of these options apply.*

- `Gtk::Button *` `m_button_ok`

*The famous "OK" button's pointer.*

- `Gtk::Notebook *` `m_notebook`

*Not sure yet what this notebook is for.*

### 10.39.1 Field Documentation


10.39.1.1 `Gtk::Notebook* seq64::options::m_notebook` `[private]`

Must be a GTK thang.

## 10.40 seq64::optionsfile Class Reference

Provides a file for reading and writing the application' main configuration file.

Inheritance diagram for seq64::optionsfile:

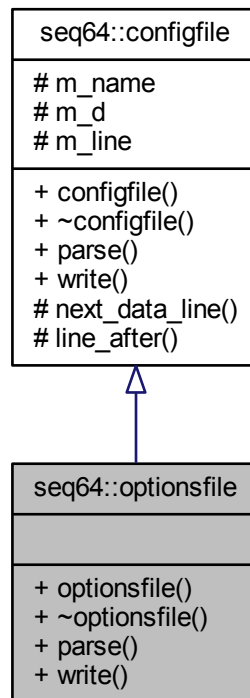

## Public Member Functions

- `optionsfile` (const std::string &name)  
*Principal constructor.*
- `~optionsfile` ()  
*A rote destructor.*
- bool `parse` (perform &perf)  
*Parse the `~/seq24rc` or `~/config/sequencer64/sequencer64.rc` file.*
- bool `write` (const perform &perf)  
*This options-writing function is just about as complex as the options-reading function.*

## Additional Inherited Members

### 10.40.1 Detailed Description

The settings that are passed around are provided or used by the perform class.

### 10.40.2 Member Function Documentation

10.40.2.1 bool seq64::optionsfile::parse ( perform & p ) [virtual]

[midi-control]

Get the number of sequence definitions provided in the [midi-control] section. Ranges from 32 on up. Then read in all of the sequence lines. The first 32 apply to the first screen set. There can also be a comment line "# mute in group" followed by 32 more lines. Then there are additional comments and single lines for BPM up, BPM down, Screen Set Up, Screen Set Down, Mod Replace, Mod Snapshot, Mod Queue, Mod Gmute, Mod Glearn, and Screen Set Play. These are all forms of MIDI automation useful to control the playback while not sitting near the computer.

#### [mute-group]

The mute-group starts with a line that indicates up to 32 mute-groups are defined. A common value is 1024, which means there are 32 groups times 32 keys. But this value is currently thrown away. This value is followed by 32 lines of data, each contained 4 sets of 8 settings. See the seq24-doc project on GitHub for a much more detailed description of this section.

#### [midi-clock]

The MIDI-clock section defines the clocking value for up to 16 output busses. The first number, 16, indicates how many busses are specified. Generally, these busses are shown to the user with names such as "[1] seq24 1".

#### [keyboard-control]

The keyboard control defines the keys that will toggle the stage of each of up to 32 patterns in a pattern/sequence box. These keys are displayed in each box as a reminder. The first number specifies the Key number, and the second number specifies the Sequence number.

#### [keyboard-group]

The keyboard group specifies more automation for the application. The first number specifies the Key number, and the second number specifies the Group number. This section should be better described in the seq24-doc project on GitHub.

#### [jack-transport]

This section covers various JACK settings, one setting per line. In order, the following numbers are specified:

- jack\_transport - Enable sync with JACK Transport.
- jack\_master - Seq24 will attempt to serve as JACK Master.
- jack\_master\_cond - Seq24 will fail to be Master if there is already a Master set.
- jack\_start\_mode:
  - 0 = Playback will be in Live mode. Use this to allow muting and unmuting of loops.
  - 1 = Playback will use the Song Editor's data.

#### [midi-input]

This section covers the MIDI input busses, and has a format similar to "[midi-clock]". Generally, these busses are shown to the user with names such as "[1] seq24 1", and currently there is only one input buss. The first field is the port number, and the second number indicates whether it is disabled (0), or enabled (1).

#### [midi-clock-mod-ticks]

This section covers.... One common value is 64.

#### [manual-alsa-ports]

This section covers.... Set to 1 if you want seq24 to create its own ALSA ports and not connect to other clients.

#### [last-used-dir]

This section simply holds the last path-name that was used to read or write a MIDI file. We still need to add a check for a valid path, and currently the path must start with a "/", so it is not suitable for Windows.

#### [interaction-method]

This section specified the kind of mouse interaction.

- 0 = 'seq24' (original Seq24 method).
- 1 = 'fruity' (similar to a certain fruity sequencer we like).

The second data line is set to "1" if Mod4 can be used to keep seq24 in note-adding mode even after the right-click is released, and "0" otherwise.

Implements [seq64::configfile](#).

10.40.2.2 `bool seq64::optionsfile::write ( const perform & p ) [virtual]`

#### Parameters

<i>p</i>	Provides a const reference to the main perform object. However, we have to cast away the constness, because too many of the perform getter functions are used in non-const contexts.
----------	--

#### Returns

Returns true if the write operations all succeeded.


New boolean to show sequence numbers; ignored in legacy mode.

Implements [seq64::configfile](#).

## 10.41 seq64::perfedit Class Reference

This class supports a Performance Editor that is used to arrange the patterns/sequences defined in the patterns panel.

Inheritance diagram for seq64::perfedit:

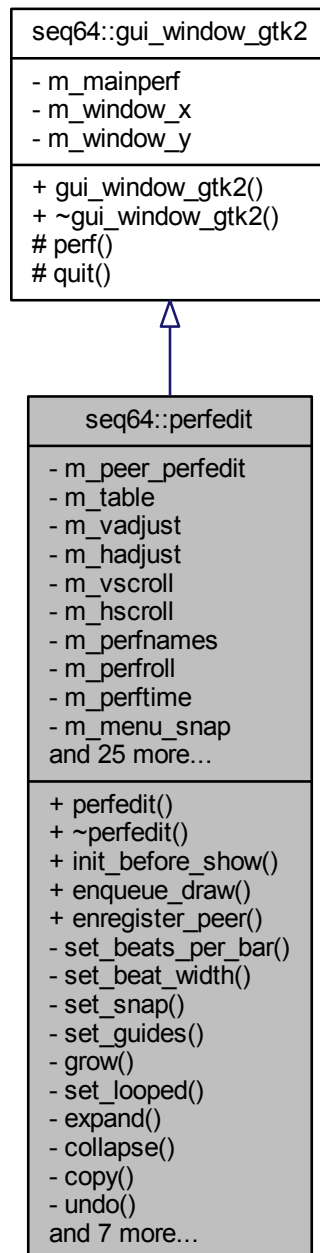

## Public Member Functions

- [perfedit](#) ([perform](#) &p, bool second\_perfedit=false, int ppqn=SEQ64\_USE\_DEFAULT\_PPQN)  
*Principal constructor, has a reference to a perform object.*
- [~perfedit](#) ()  
*This rote constructor does nothing.*
- void [init\\_before\\_show](#) ()

*This function forwards its call to the `perfroll` function of the same name.*

- void `enqueue_draw` (bool forward=true)  
*Helper wrapper for calling `perfroll::queue_draw()` for one or both perfedits.*
- void `enregister_peer` (`perfedit` \*peer)  
*Register the peer perfedit object.*

## Private Member Functions

- void `set_beats_per_bar` (int bpm)  
*Sets the beats-per-measure text and value to the given value, and then calls `set_guides()`.*
- void `set_beat_width` (int bw)  
*Sets the BW (beat width, or the denominator in the time signature) text and values to the given value, and then calls `set_guides()`.*
- void `set_snap` (int snap)  
*Sets the snap text and values to the given value, and then calls `set_guides()`.*
- void `set_guides` ()  
*Sets the guides, which are the L and R user-interface elements.*
- void `grow` ()  
*Increments the size of the `perfroll` and `perftime` objects.*
- void `set_looped` ()  
*Set the looping in the perform object.*
- void `expand` ()  
*Implement the expand action.*
- void `collapse` ()  
*Implement the collapse action.*
- void `copy` ()  
*Implement the copy (actually, expand-and-copy) action.*
- void `undo` ()  
*Implement the undo feature (Ctrl-Z).*
- void `popup_menu` (Gtk::Menu \*menu)  
*Opens the given popup menu.*
- bool `timeout` ()  
*Handles a drawing timeout.*
- void `start_playing` ()  
*Implement the playing.*
- void `stop_playing` ()  
*Stop the playing.*
- void `on_realize` ()  
*This callback function calls the base-class `on_realize()` function, and then connects the `perfedit::timeout()` function to the Glib signal-timeout, with a redraw timeout of `m_redraw_ms`.*
- bool `on_key_press_event` (GdkEventKey \*ev)  
*This function is the callback for a key-press event.*
- bool `on_delete_event` (GdkEventAny \*)  
*All this callback function does is return false.*



## Private Attributes

- [perfedit](#) \* [m\\_peer\\_perfedit](#)  
*The partner instance of perfedit.*
- [Gtk::Table](#) \* [m\\_table](#)  
*A whole horde of GUI elements.*
- [Gtk::Menu](#) \* [m\\_menu\\_bpm](#)  
*Menus for time signature, beats per measure, beat width.*
- [int](#) [m\\_snap](#)  
*Set snap-to in "pulses".*
- [int](#) [m\\_bpm](#)  
*The current "beats per measure" value.*
- [int](#) [m\\_bw](#)  
*The current "beat width" value.*
- [int](#) [m\\_ppqn](#)  
*The current "parts per quarter note" value.*
- [int](#) [m\\_standard\\_bpm](#)  
*The standard "beats per measure" of Sequencer64, which here matches the beats-per-measure displayed in the perroll (piano roll).*
- [int](#) [m\\_redraw\\_ms](#)  
*Provides the timer period for the perfedit timer, used to determine the rate of redrawing.*

## Additional Inherited Members

### 10.41.1 Detailed Description

It has a seqroll and piano roll? No, it has a perform, a perfnames, a perroll, and a perftime.

### 10.41.2 Constructor & Destructor Documentation

10.41.2.1 `seq64::perfedit::perfedit ( perform & p, bool second_perfedit = false, int ppqn = SEQ64_USE_DEFAULT_PPQN )`

We've reordered the pointer members and put them in the initializer list to make the constructor a bit cleaner.

#### Parameters

<i>p</i>	Refers to the main performance object.
----------	--

**Todo** Offload most of the work into an initialization function like options does.

10.41.2.2 `seq64::perfedit::~~perfedit ( )`

We're going to have to run the application through valgrind to make sure that nothing is left behind.

### 10.41.3 Member Function Documentation

10.41.3.1 `void seq64::perfedit::init_before_show ( )`

It does not seem to need to also forward to the perftime function of the same name.

10.41.3.2 `void seq64::perfedit::enqueue_draw ( bool forward = true )`

## Parameters

<i>forward</i>	If true (the default), pass the call to the peer. When passing this call to the peer, this parameter is set to false to prevent an infinite loop and the resultant stack overflow.
----------------	--

10.41.3.3 `void seq64::perfedit::enregister_peer ( perfedit * peer ) [inline]`

This function is meant to be called by mainwnd, which creates the perfedits and then makes sure they get along.

10.41.3.4 `void seq64::perfedit::set_beats_per_bar ( int bpm ) [private]`

The usage of is modified was faulty. Offloaded it to the perform object to make it more foolproof. See the [perform↔::modify\(\)](#) function.

10.41.3.5 `void seq64::perfedit::set_beat_width ( int bw ) [private]`

The usage of is modified was faulty. Offloaded it to the perform object to make it more foolproof. See the [perform↔::modify\(\)](#) function.

10.41.3.6 `void seq64::perfedit::set_guides ( ) [private]`

See the [set\\_snap\(\)](#) function.

It's a little confusing; I assigned the label "m\_standard\_bpm" to the value 4 in "measure\_pulse = 192 \* 4 \* m\_bpm / m\_bw", but I am not sure I understand this equation... why the extra factor of 4? That 4 appears in "c\_ppqn \* 4" a lot in the original code.

10.41.3.7 `void seq64::perfedit::grow ( ) [private]`

Make sure that setting the modified flag makes sense for this operation. It doesn't seem to modify members.

10.41.3.8 `void seq64::perfedit::expand ( ) [private]`

This action opens up a space of events between the L and R (left and right) markers. This action is preceded by pushing an Undo operation in the perform object, moving its triggers, and telling the perfroll to redraw.

10.41.3.9 `void seq64::perfedit::collapse ( ) [private]`

This action removes all events between the L and R (left and right) markers. This action is preceded by pushing an Undo operation in the perform object, not moving its triggers (they go away), and telling the perfroll to redraw.

10.41.3.10 `void seq64::perfedit::copy ( ) [private]`

This action opens up a space of events between the L and R (left and right) markers, and copies the information from the same amount of events that follow the R marker. This action is preceded by pushing an Undo operation in the perform object, copying its triggers, and telling the perfroll to redraw.

10.41.3.11 `void seq64::perfedit::undo ( ) [private]`

We pop an Undo trigger, and then ask the perfroll to queue up a (re)drawing action.

10.41.3.12 `bool seq64::perfedit::timeout ( ) [private]`

It redraws "dirty" sequences in the perfroll and the perfnames objects, and shows draw progress on the perfroll. This function is called frequently and continuously.

10.41.3.13 `void seq64::perfedit::start_playing ( ) [inline],[private]`

JACK will be used if it is present and, in the application, enabled. This call also sets `rc().is_pattern_playing(true)`, indirectly. Note that, if the JACK-start-mode value is false, the perfedit's unmute/mute feature is disabled. We no longer hardwire the boolean parameter to "true". (We might reconsider that at some point.)

10.41.3.14 `void seq64::perfedit::stop_playing ( ) [inline],[private]`

This call also sets `rc().is_pattern_playing(true)`.

## 10.41.4 Field Documentation

10.41.4.1 `int seq64::perfedit::m_bpm [private]`

Do not confuse it with BPM (beats per minute). The numerator of the time signature.

10.41.4.2 `int seq64::perfedit::m_bw [private]`

The denominator of the time signature.


10.41.4.3 `int seq64::perfedit::m_redraw_ms [private]`

This is hardwired to 40 ms in Linux, and 20 ms in Windows.

## 10.42 seq64::perfnames Class Reference

This class implements the left-side keyboard in the patterns window.

Inheritance diagram for seq64::perfname:

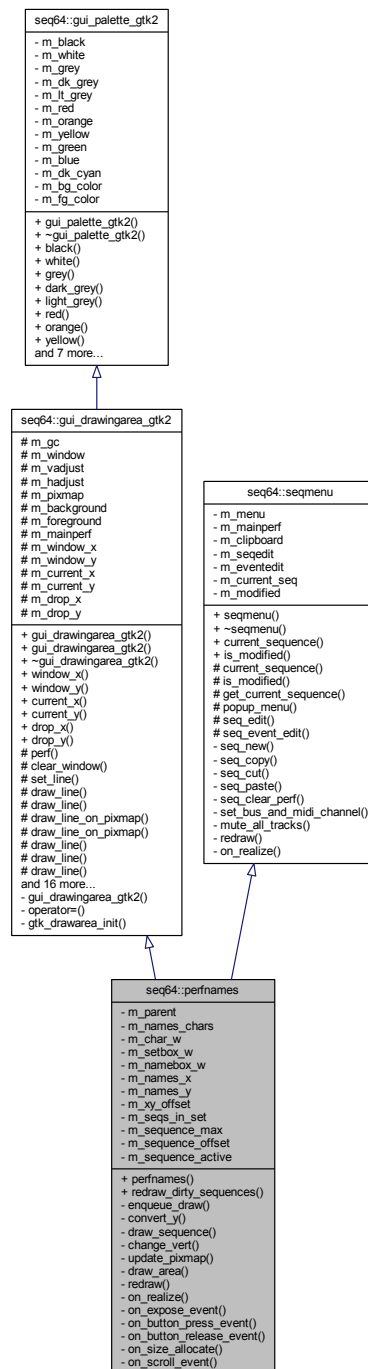

## Public Member Functions

- [perfname](#) ([perform](#) &p, [perfedit](#) &parent, Gtk::Adjustment &vadjust)

*Principal constructor for this user-interface object.*

- void [redraw\\_dirty\\_sequences](#) ()

*Redraws sequences that have been modified.*

## Private Member Functions

- void [enqueue\\_draw](#) ()  
*Wraps queue\_draw() and forwards the call to the parent perfedit, so that it can forward it to any other perfedit that exists.*
- int [convert\\_y](#) (int y)  
*Converts a y-value into a sequence number and returns it.*
- void [draw\\_sequence](#) (int [sequence](#))  
*Draw the given sequence.*
- void [change\\_vert](#) ()  
*Change the vertical offset of a sequence/pattern.*
- void [update\\_pixmap](#) ()  
*This function does nothing.*
- void [draw\\_area](#) ()  
*This function does nothing.*
- void [redraw](#) (int [sequence](#))  
*Redraw the given sequence.*
- void [on\\_realize](#) ()  
*Handles the callback when the window is realized.*
- bool [on\\_expose\\_event](#) (GdkEventExpose \*ev)  
*Handles an on-expose event.*
- bool [on\\_button\\_press\\_event](#) (GdkEventButton \*ev)  
*Provides the callback for a button press, and it handles only a left mouse button.*
- bool [on\\_button\\_release\\_event](#) (GdkEventButton \*ev)  
*Handles a button-release for the right button, bringing up a popup menu.*
- void [on\\_size\\_allocate](#) (Gtk::Allocation &)  
*Handles a size-allocation event.*
- bool [on\\_scroll\\_event](#) (GdkEventScroll \*ev)  
*Handle the scrolling of the window.*

## Private Attributes

- [perfedit](#) & [m\\_parent](#)  
*Provides a link to the perfedit that created this object.*
- int [m\\_names\\_chars](#)  
*Provides the number of the characters in the name box.*
- int [m\\_char\\_w](#)  
*Provides the "real" width of a character.*
- int [m\\_setbox\\_w](#)  
*Provides the width of the "set number" box.*
- int [m\\_namebox\\_w](#)  
*Provides the width of the "name" box.*
- int [m\\_names\\_x](#)  
*Provides the width of the names box, which is the width of a character for 24 characters.*
- int [m\\_names\\_y](#)  
*Provides the height of the names box, which is hardwired to 24 pixels.*
- int [m\\_xy\\_offset](#)  
*Provides the horizontal and vertical offsets of the text relative to the names box.*

## Additional Inherited Members

### 10.42.1 Detailed Description

*Obsolete* Note the usage of virtual base classes. Since these can add some extra overhead, we should determine if we can do without the virtuality (and indeed it doesn't seem to be needed).

### 10.42.2 Constructor & Destructor Documentation

10.42.2.1 `seq64::perfnames::perfnames ( perform & p, perfedit & parent, Gtk::Adjustment & vadjust )`

Weird is that the window (x,y) are set to (c\_names\_x, 100), when c\_names\_y is 22 (now 24) in globals.h.

### 10.42.3 Member Function Documentation

10.42.3.1 `void seq64::perfnames::enqueue_draw ( ) [private]`

The parent perfedit will call `perfnames::queue_draw()` on behalf of this object, and it will pass a [perfnames::enqueue\\_draw\(\)](#) to the peer perfedit's `perfnames`, if the peer exists.

10.42.3.2 `void seq64::perfnames::draw_sequence ( int seqnum ) [private]`

This function has to be prepared to handle an almost endless list of sequences, including unused ones, to draw them all with compatible styles. The sequences are grouped by set-number. The set-number occurs every 32 sequences in the leftmost column of the window.

10.42.3.3 `void seq64::perfnames::on_realize ( ) [private]`

It first calls the base-class version of [on\\_realize\(\)](#). Then it allocates any additional resources needed.

10.42.3.4 `bool seq64::perfnames::on_expose_event ( GdkEventExpose * ev ) [private]`

It draws all of the sequences.

10.42.3.5 `void seq64::perfnames::on_size_allocate ( Gtk::Allocation & a ) [private]`

It first calls the base-class version of this function.

### 10.42.4 Field Documentation

10.42.4.1 `perfedit& seq64::perfnames::m_parent [private]`

We want to support two perfedit windows, but the children of perfedit will have to communicate changes requiring a redraw through the parent.

10.42.4.2 `int seq64::perfnames::m_names_chars [private]`

Pretty much hardwired to 24 at present.

10.42.4.3 `int seq64::perfnames::m_char_w [private]`

This value is obtained from a font-renderer accessor function.

10.42.4.4 `int seq64::perfnames::m_setbox_w [private]`

This used to be hardwired to  $6 * 2$  (character-width times two).

10.42.4.5 `int seq64::perfnames::m_namebox_w [private]`

This used to be a weird calculation based on character width.

10.42.4.6 `int seq64::perfnames::m_names_y [private]`

This value was once 22 pixels, but we need a little extra room for our new font. This extra room is compatible enough with the old font, as well.

10.42.4.7 `int seq64::perfnames::m_xy_offset [private]`

Currently hardwired.

## 10.43 seq64::perform Class Reference

This class supports the performance mode.

### Public Member Functions

- `perform (gui_assistant &mygui, int ppqn=SEQ64_USE_DEFAULT_PPQN)`  
*This construction initializes a vast number of member variables, some of them public (but we're working on that)!*
- `~perform ()`  
*The destructor sets some running flags to false, signals this condition, then joins the input and output threads if the were launched.*
- `bool is_modified () const`  
*'Getter' function for member m\_is\_modified*
- `void modify ()`  
*'Setter' function for member m\_is\_modified This setter only sets the modified-flag to true.*
- `int sequence_count () const`  
*'Getter' function for member m\_sequence\_count It is better to call this getter before bothering to even try to use a sequence.*
- `int sequence_max () const`  
*'Getter' function for member m\_sequence\_max*
- `const gui_assistant &gui () const`  
*'Getter' function for member m\_gui\_support The const getter.*
- `gui_assistant &gui ()`  
*'Getter' function for member m\_gui\_support The un-const getter.*
- `const keys_perform &keys () const`  
*'Getter' function for member m\_gui\_support.keys() The const getter.*
- `keys_perform &keys ()`  
*'Getter' function for member m\_gui\_support.keys() The un-const getter.*
- `mastermidibus &master_bus ()`

- 'Getter' function for member m\_master\_bus*
- bool `is_running` () const
- 'Getter' function for member m\_running*
- bool `is_learn_mode` () const
- 'Getter' function for member m\_mode\_group\_learn*
- void `enregister` (performcallback \*pfcfb)
- Adds a pointer to an object to be notified by this perform object.*
- void `init` ()
- Initializes the master MIDI bus.*
- void `clear_all` ()
- Clears all of the patterns/sequences.*
- void `launch_input_thread` ()
- Creates the input thread using input\_thread\_func().*
- void `launch_output_thread` ()
- Creates the output thread using output\_thread\_func().*
- void `init_jack` ()
- Initializes JACK support, if SEQ64\_JACK\_SUPPORT is defined.*
- void `deinit_jack` ()
- Tears down the JACK infrastructure.*
- void `new_sequence` (int seq)
- Creates a new pattern/sequence for the given slot, and sets the new pattern's master MIDI bus address.*
- void `add_sequence` (sequence \*seq, int perf)
- Adds a pattern/sequence pointer to the list of patterns.*
- void `delete_sequence` (int seq)
- Deletes a pattern/sequence by number.*
- bool `is_sequence_in_edit` (int seq)
- Check if the pattern/sequence, given by number, has an edit in progress.*
- void `clear_sequence_triggers` (int seq)
- Clears the patterns/sequence for the given sequence, if it is active.*
- midipulse `get_tick` () const
- 'Getter' function for member m\_tick*
- void `set_left_tick` (midipulse tick, bool setstart=true)
- Set the left marker at the given tick.*
- midipulse `get_left_tick` () const
- 'Getter' function for member m\_left\_tick*
- void `set_start_tick` (midipulse tick)
- 'Setter' function for member m\_starting\_tick*
- midipulse `get_starting_tick` () const
- 'Getter' function for member m\_starting\_tick*
- void `set_right_tick` (midipulse tick, bool setstart=true)
- Set the right marker at the given tick.*
- midipulse `get_right_tick` () const
- 'Getter' function for member m\_right\_tick*
- void `move_triggers` (bool direction)
- If the left tick is less than the right tick, then, for each sequence that is active, its triggers are moved by the difference between the right and left in the specified direction.*
- void `copy_triggers` ()
- If the left tick is less than the right tick, then, for each sequence that is active, its triggers are copied, offset by the difference between the right and left.*
- void `push_trigger_undo` ()
- For every active sequence, call that sequence's `push_trigger_undo()` function.*



- void [pop\\_trigger\\_undo](#) ()  
*For every active sequence, call that sequence's [pop\\_trigger\\_undo\(\)](#) function.*
- void [split\\_trigger](#) (int seqnum, midipulse tick)  
*Convenience function for perfroll's split-trigger functionality.*
- midipulse [get\\_max\\_trigger](#) ()  
*Locates the largest trigger value among the active sequences.*
- void [collapse](#) ()  
*Convenience function for perfedit's collapse functionality.*
- void [copy](#) ()  
*Convenience function for perfedit's copy functionality.*
- void [expand](#) ()  
*Convenience function for perfedit's expand functionality.*
- midi\_control & [midi\\_control\\_toggle](#) (int seq)  
*Retrieves a reference to a value from `m_midi_cc_toggle[]`.*
- midi\_control & [midi\\_control\\_on](#) (int seq)  
*Retrieves a reference to a value from `m_midi_cc_on[]`.*
- midi\_control & [midi\\_control\\_off](#) (int seq)  
*Retrieves a reference to a value from `m_midi_cc_off[]`.*
- void [handle\\_midi\\_control](#) (int control, bool state)  
*Handle the MIDI Control values that provide some automation for the application.*
- const std::string & [get\\_screen\\_set\\_notepad](#) (int screen\_set) const  
*Retrieves the given string from `m_screen_set_notepad[]`.*
- const std::string & [current\\_screen\\_set\\_notepad](#) () const  
*Returns the notepad text for the current screen-set.*
- void [set\\_screen\\_set\\_notepad](#) (int screenset, const std::string &note)  
*Copies the given string into `m_screen_set_notepad[]`.*
- void [set\\_screen\\_set\\_notepad](#) (const std::string &note)  
*Sets the notepad text for the current screen-set.*
- void [set\\_screenset](#) (int ss)  
*Sets the `m_screenset` value (the index or ID of the current screen set).*
- int [get\\_screenset](#) () const  
*'Getter' function for member `m_screenset`*
- void [set\\_playing\\_screenset](#) ()  
*Sets the screen set that is active, based on the value of `m_playing_screen`.*
- int [get\\_playing\\_screenset](#) () const  
*'Getter' function for member `m_playing_screen`*
- void [mute\\_group\\_tracks](#) ()  
*Will need to study this one more closely.*
- void [select\\_and\\_mute\\_group](#) (int g\_group)  
*Select a mute group and then mutes the track in the group.*
- void [set\\_mode\\_group\\_mute](#) ()  
*'Setter' function for member `m_mode_group`*
- void [unset\\_mode\\_group\\_mute](#) ()  
*'Setter' function for member `m_mode_group` Unsets this member.*
- void [select\\_group\\_mute](#) (int g\_mute)  
*Makes some checks on all of the active sequences, and sets the group mute flag, `m_mute_group_selected`, to the clamped `g-mute` value.*
- void [set\\_mode\\_group\\_learn](#) ()  
*Sets the group-mute mode, then the group-learn mode, then notifies all of the notification subscribers.*
- void [unset\\_mode\\_group\\_learn](#) ()  
*Notifies all of the notification subscribers that group-learn is being turned off.*

- void `select_mute_group` (int group)
 

*Makes some checks and sets the group mute flag, `m_mute_group_selected`, to the clamped `g-mute` value, if all goes well (no null sequences are encountered).*
- void `start` (bool state)
 

*If JACK is not running, call `inner_start()` with the given state.*
- void `stop` ()
 

*If JACK is not running, call `inner_stop()`.*
- void `start_jack` ()
 

*If JACK is supported, starts the JACK transport.*
- void `stop_jack` ()
 

*If JACK is supported, stops the JACK transport.*
- void `position_jack` (bool state)
 

*If JACK is supported and running, sets the position of the transport.*
- void `off_sequences` ()
 

*For all active patterns/sequences, set the playing state to false.*
- void `all_notes_off` ()
 

*For all active patterns/sequences, turn off its playing notes.*
- void `set_active` (int seq, bool active)
 

*Sets or unsets the active state of the given pattern/sequence number.*
- void `set_was_active` (int seq)
 

*Sets was-active flags: main, edit, perf, and names.*
- bool `is_dirty_main` (int seq)
 

*Checks the pattern/sequence for main-dirtiness.*
- bool `is_dirty_edit` (int seq)
 

*Checks the pattern/sequence for edit-dirtiness.*
- bool `is_dirty_perf` (int seq)
 

*Checks the pattern/sequence for perf-dirtiness.*
- bool `is_dirty_names` (int seq)
 

*Checks the pattern/sequence for names-dirtiness.*
- bool `is_active` (int seq)
 

*Checks the pattern/sequence for activity.*
- `sequence * get_sequence` (int seq)
 

*Retrieves the actual sequence, based on the pattern/sequence number.*
- void `reset_sequences` ()
 

*For all active patterns/sequences, get its playing state, turn off the playing notes, set playing to false, zero the markers, and, if not in playback mode, restore the playing state.*
- void `play` (midipulse tick)
 

*Plays all notes to the current tick.*
- void `set_orig_ticks` (midipulse tick)
 

*For every pattern/sequence that is active, sets the "original ticks" value for the pattern.*
- void `set_beats_per_minute` (int bpm)
 

*Sets the value of the BPM into the master MIDI buss, after making sure it is squelched to be between 20 and 500.*
- int `get_beats_per_minute` ()
 

*Retrieves the BPM setting of the master MIDI buss.*
- void `set_looping` (bool looping)
 

*'Setter' function for member `m_looping`*
- void `set_sequence_control_status` (int status)
 

*If the given status is present in the `c_status_snapshot`, the playing state is saved.*
- void `unset_sequence_control_status` (int status)
 

*If the given status is present in the `c_status_snapshot`, the playing state is restored.*
- void `sequence_playing_on` (int seq)

- Turn off the playing of a sequence, if it is active.*

  - void [sequence\\_playing\\_off](#) (int seq)
- Turn off the playing of a sequence, if it is active.*

  - void [set\\_group\\_mute\\_state](#) (int g\_track, bool mute\_state)
- This function sets the mute state of an element in the m\_mute\_group array.*

  - bool [get\\_group\\_mute\\_state](#) (int g\_track)
- The "inverse" of [set\\_group\\_mute\\_state\(\)](#), it gets the value of the desired track.*

  - void [mute\\_all\\_tracks](#) ()
- Mutes all tracks in the current set of active patterns/sequences.*

  - void [output\\_func](#) ()
- Performance output function.*

  - void [input\\_func](#) ()
- This function is called by [input\\_thread\\_func\(\)](#).*

  - void [set\\_offset](#) (int offset)
- Calculates the offset into the screen sets.*

  - void [save\\_playing\\_state](#) ()
- For all active patterns/sequences, this function gets the playing status and saves it in m\_sequence\_state[i].*

  - void [restore\\_playing\\_state](#) ()
- For all active patterns/sequences, this function gets the playing status from m\_sequence\_state[i] and sets it for the sequence.*

  - bool [show\\_ui\\_sequence\\_key](#) () const
- Accessor** [m\\_show\\_ui\\_sequence\\_key](#) Provides access to [keys\(\).show\\_ui\\_sequence\\_key\(\)](#).

  - bool [show\\_ui\\_sequence\\_number](#) () const
- Accessor** [m\\_show\\_ui\\_sequence\\_number](#) Provides access to [keys\(\).show\\_ui\\_sequence\\_number\(\)](#).

  - bool [is\\_playing](#) () const
- 'Getter' function for member [rc\(\).is\\_pattern\\_playing\(\)](#) Provide a convenience function so that clients don't have to mess with a global variable when they're dealing with a perform object.*

  - void [start\\_playing](#) (bool jackflag=false)
- Encapsulates a series of calls used in mainwnd.*

  - void [stop\\_playing](#) ()
- Encapsulates a series of calls used in mainwnd.*

  - void [learn\\_toggle](#) ()
- Encapsulates some calls used in mainwnd.*

  - int [decrement\\_beats\\_per\\_minute](#) ()
- Encapsulates some calls used in mainwnd.*

  - int [increment\\_beats\\_per\\_minute](#) ()
- Encapsulates some calls used in mainwnd.*

  - int [decrement\\_screenset](#) ()
- Encapsulates some calls used in mainwnd.*

  - int [increment\\_screenset](#) ()
- Encapsulates some calls used in mainwnd.*

  - bool [highlight](#) (const [sequence](#) &) const
- True if a sequence is empty and should be highlighted.*

  - bool [is\\_smf\\_0](#) (const [sequence](#) &seq) const
- True if the sequence is an SMF 0 sequence.*

  - void [sequence\\_key](#) (int seq)
- Handle a sequence key to toggle the playing of an active pattern in the selected screen-set.*

  - std::string [sequence\\_label](#) (const [sequence](#) &seq)
- Provides a way to format the sequence parameters string for display in the mainwid or perfnames modules.*

  - void [set\\_input\\_bus](#) (int bus, bool input\_active)

Sets the input bus, and handles the special "key labels on sequence" and "sequence numbers on sequence" functionality.

- bool `mainwnd_key_event` (const `keystroke` &k)

Provided for `mainwnd::on_key_press_event()` and `mainwnd::on_key_release_event()` to call.

- bool `perftroll_key_event` (const `keystroke` &k, int drop\_sequence)

Provided for `perftroll::on_key_press_event()` and `perftroll::on_key_release_event()` to call.

## Private Member Functions

- bool `seq_in_playing_screen` (int seq)

A helper function for determining if the mode group is in force, the playing screenset is the same as the current screenset, and the sequence is in the range of the playing screenset.

- void `is_modified` (bool flag)

'Setter' function for member `m_is_modified` This setter is private.

- bool `is_midi_control_valid` (int seq) const

Checks the parameter against `c_midi_controls`.

- bool `is_screenset_valid` (int screenset) const

Checks the screenset against `m_max_sets`.

- void `set_running` (bool running)

'Setter' function for member `m_running`

- void `set_playback_mode` (bool playbackmode)

'Setter' function for member `m_playback_mode`

- int `mute_group_offset` (int track)

A helper function to calculate the index into the mute-group array, based on the desired track.

- bool `is_seq_valid` (int seq) const

Provides common code to check for the bounds of a sequence number.

- bool `is_mseq_valid` (int seq) const

Validates the sequence number, which is important since they're currently used as array indices.

- bool `install_sequence` (`sequence` \*seq, int seqnum)

A private helper function for `add_sequence()` and `new_sequence()`.

- void `inner_start` (bool state)

Locks on `m_condition_var`.

- void `inner_stop` ()

Unconditionally, and without locking, clears the running status, resets the sequences, and set `m_usemidiclock` false.

- int `clamp_track` (int track) const

Provides common code to keep the track value valid.

- void `set_all_key_events` ()

Pass-along function for `keys().set_all_key_events`.

- void `set_all_key_groups` ()

Pass-along function for `keys().set_all_key_events`.

- void `set_key_event` (unsigned int keycode, long sequence\_slot)

At construction time, this function sets up one keycode and one event slot.

- void `set_key_group` (unsigned int keycode, long group\_slot)

At construction time, this function sets up one keycode and one group slot.

## Private Attributes

- [gui\\_assistant](#) & [m\\_gui\\_support](#)  
*Support for a wide range of GUI-related operations.*
- bool [m\\_mute\\_group](#) [[c\\_gmute\\_tracks](#)]  
*Mute group support.*
- int [m\\_playing\\_screen](#)  
*Playing screen support.*
- int [m\\_playscreen\\_offset](#)  
*Playing screen sequence number offset.*
- [sequence](#) \* [m\\_seqs](#) [[c\\_max\\_sequence](#)]  
*Provides a "vector" of patterns/sequences.*
- mastermidibus [m\\_master\\_bus](#)  
*Provides our MIDI buss.*
- pthread\_t [m\\_out\\_thread](#)  
*Provides information for managing pthreads.*
- bool [m\\_playback\\_mode](#)  
*Specifies the playback mode.*
- int [m\\_ppqn](#)  
*Holds the current PPQN for usage in various actions.*
- midipulse [m\\_one\\_measure](#)  
*Holds the "one measure's worth" of pulses (ticks), which is normally  $m\_ppqn * 4$ .*
- midipulse [m\\_left\\_tick](#)  
*Holds the position of the left (L) marker, and it is first defined as 0.*
- midipulse [m\\_right\\_tick](#)  
*Holds the position of the right (R) marker, and it is first defined as the end of the fourth measure.*
- midipulse [m\\_starting\\_tick](#)  
*Holds the starting tick for playing.*
- midipulse [m\\_tick](#)  
*MIDI Clock support.*
- int [m\\_seqs\\_in\\_set](#)  
*We will eventually replace [c\\_seqs\\_in\\_set](#) with this member, which defaults to the value of [c\\_seqs\\_in\\_set](#).*
- int [m\\_max\\_sets](#)  
*A replacement for the [c\\_max\\_sets](#) constant.*
- int [m\\_sequence\\_count](#)  
*Keeps track of created sequences, whether or not they are active.*
- int [m\\_sequence\\_max](#)  
*A replacement for the [c\\_max\\_sequence](#) constant.*
- bool [m\\_is\\_modified](#)  
*It may be a good idea to eventually centralize all of the dirtiness of a performance here.*
- [condition\\_var](#) [m\\_condition\\_var](#)  
*A condition variable to protect...*
- [jack\\_assistant](#) [m\\_jack\\_asst](#)  
*A wrapper object for the JACK support of this application.*

## Static Private Attributes

- static midi\_control [sm\\_mc\\_dummy](#)  
*Provides a dummy, inactive midi\_control object to handle out-of-range midi\_control indicies.*

## Friends

- int [jack\\_sync\\_callback](#) (jack\_transport\_state\_t state, jack\_position\_t \*pos, void \*arg)

*Global functions for JACK support and JACK sessions.*

### 10.43.1 Detailed Description

It has way too many data members, many of the public. Might be ripe for refactoring.

### 10.43.2 Constructor & Destructor Documentation

10.43.2.1 `seq64::perform::perform ( gui\_assistant & mygui, int ppqn = SEQ64_USE_DEFAULT_PPQN )`

#### Parameters

<i>mygui</i>	Provides access to the GUI assistant that holds many things, including the containers of keys and the "events" they provide. This is a base-class reference; for a real class, see the <a href="#">gui_assistant_gtk2</a> class in the seq_gtkmm2 GUI-specific library. Note that we access the <code>m_gui_support</code> member using the <a href="#">gui()</a> accessor function.
--------------	--

10.43.2.2 `seq64::perform::~~perform ( )`

Finally, any active or inactive (but allocated) patterns/sequences are deleted, and their pointer nullified..

### 10.43.3 Member Function Documentation

10.43.3.1 `void seq64::perform::modify ( )` `[inline]`

The setter that will, [is\\_modified\(\)](#), is private. No one but perform and its friends should falsify this flag.

10.43.3.2 `int seq64::perform::sequence_count ( )` `const` `[inline]`

In many cases at startup, or when loading a file, there are no sequences yet, and still the code calls functions that try to access them.

10.43.3.3 `void seq64::perform::init ( )`

Who calls this routine? The `main()` routine of the application.

10.43.3.4 `void seq64::perform::clear_all ( )`

The `mainwnd` module calls this function. Note that perform now handles the "is modified" flag on behalf of all external objects, to centralize and simplify the dirtying of a MIDI tune.

Anything else to clear? What about all the other sequence flags? We can beef up [delete\\_sequence\(\)](#) for them, at some point.

10.43.3.5 `void seq64::perform::launch_input_thread ( )`

This might be a good candidate for a small thread class derived from a small base class.

## 10.43.3.6 void seq64::perform::launch\_output\_thread ( )

This might be a good candidate for a small thread class derived from a small base class.

## 10.43.3.7 void seq64::perform::init\_jack ( )

Who calls this routine? The main() routine of the application, and the options module.

## 10.43.3.8 void seq64::perform::new\_sequence ( int seq )

Then it activates the pattern [this is done in the [install\\_sequence\(\)](#) function]. It doesn't deal with thrown exceptions.

This function is called by the seqmenu and mainwid objects to create a new sequence. We now pass this sequence to [install\\_sequence\(\)](#) to better handle potential memory leakage, and to make sure the sequence gets counted. Also, adding a new sequence from the user-interface is a significant modification, so the "is modified" flag gets set.

## Parameters

<i>seq</i>	The prospective sequence number of the new sequence.
------------	--

## 10.43.3.9 void seq64::perform::add\_sequence ( sequence \* seq, int prefnun )

No check is made for a null pointer, but the [install\\_sequence\(\)](#) call will make sure such a pointer is officially logged.

This function checks for the preferred sequence number. This is the number that was specified by the Sequence Number meta-event for the current track. If the preferred sequence number is in the valid range (0 to m\_sequence\_max) and it is not active, add it and activate it. Otherwise, iterate through all patterns from prefnun to m\_sequence\_max and add and activate the first one that is not active, and then finish.

Finally, note that this function is used only by midifile, when reading in a MIDI song. Therefore, the "is modified" flag is *not* set by this function; loading a sequence from a file is not a modification that should lead to a prompt for saving the file later.

**Todo** Shouldn't we wrap around the sequence list if we can't find an empty sequence slot after prefnun?

## Warning

The logic of the if-statement in this function was such that *prefnun* could be out-of-bounds in the else-clause. We reworked the logic to be airtight. This bug was caught by gcc 4.8.3 on CentOS, but not on gcc 4.9.3 on Debian Sid!

## Parameters

<i>seq</i>	The pointer to the pattern/sequence to add.
<i>prefnun</i>	The preferred sequence number of the pattern, as explained above. If this value is out-of-range, then it is basically ignored.

## 10.43.3.10 void seq64::perform::delete\_sequence ( int seq )

We now also solidify the deletion by setting the pointer to null after deletion, so it will blow up if accidentally accessed. The final act is to raise the "is modified" flag, since deleting an existing sequence is always a significant modification.

Now, this function obviously sets the "active" flag for the sequence to false. But there are a few other flags that are not modified; shouldn't we also falsify them here?

## 10.43.3.11 void seq64::perform::clear\_sequence\_triggers ( int seq )

## Parameters

<i>seq</i>	Provides the desired sequence. Hopefull, the <a href="#">is_active()</a> function validates this value.
------------	---

10.43.3.12 `void seq64::perform::set_left_tick ( midipulse tick, bool setstart = true )`

We let the caller determine is this setting is a modification.

## Parameters

<i>tick</i>	The tick (MIDI pulse) at which to place the left tick. If the left tick is greater than or equal to the right tick, then the right ticked is moved forward by one "measure's length" ( $m\_ppqn * 4$ ) past the left tick.
<i>setstart</i>	If true (the default, and longstanding implicit setting), then the starting tick is also set to the left tick.

10.43.3.13 `void seq64::perform::set_right_tick ( midipulse tick, bool setstart = true )`

This setting is made only if the tick parameter is at or beyond the first measure. We let the caller determine is this setting is a modification.

## Parameters

<i>tick</i>	The tick (MIDI pulse) at which to place the right tick. If less than or equal to the left tick setting, then the left tick is backed up by one "measure's worth" ( $m\_ppqn * 4$ ) worth of ticks from the new right tick.
<i>setstart</i>	If true (the default, and longstanding implicit setting), then the starting tick is also set to the left tick, if that got changed.

10.43.3.14 `void seq64::perform::move_triggers ( bool direction )`

## Parameters

<i>a_direction</i>	Specifies the desired direction; false = left, true = right.
--------------------	--

10.43.3.15 `void seq64::perform::copy_triggers ( )`

This copies the triggers between the L marker and R marker to the R marker.

10.43.3.16 `void seq64::perform::push_trigger_undo ( )`

Too bad we cannot yet keep track of all the undoes for the sake of properly handling the "is modified" flag.

10.43.3.17 `midipulse seq64::perform::get_max_trigger ( )`

## Returns

Returns the highest trigger value, or zero. It is not clear why this function doesn't return a "no trigger found" value. Is there always at least one trigger, at 0?

10.43.3.18 `midi_control & seq64::perform::midi_control_toggle ( int seq )`



## Parameters

<i>seq</i>	Provides a control value (such as <code>c_midi_control_bpm_up</code> ) to use to retrieve the desired <code>midi_control</code> object. Note that this value is unsigned simply to make the legality check of the parameter easier.
------------	---

10.43.3.19 `midi_control & seq64::perform::midi_control_on ( int seq )`

## Parameters

<i>seq</i>	Provides a control value (such as <code>c_midi_control_bpm_up</code> ) to use to retrieve the desired <code>midi_control</code> object.
------------	---

10.43.3.20 `midi_control & seq64::perform::midi_control_off ( int seq )`

## Parameters

<i>seq</i>	Provides a control value (such as <code>c_midi_control_bpm_up</code> ) to use to retrieve the desired <code>midi_control</code> object.
------------	---

10.43.3.21 `void seq64::perform::handle_midi_control ( int ctrl, bool state )`

## Parameters

<i>ctrl</i>	The MIDI control value to use to perform an operation.
<i>state</i>	The state of the control, used with: <ul style="list-style-type: none"> <li>- <code>c_midi_control_mod_replace</code></li> <li>- <code>c_midi_control_mod_snapshot</code></li> <li>- <code>c_midi_control_mod_queue</code></li> <li>- <code>c_midi_control_mod_gmute</code></li> <li>- <code>c_midi_control_mod_glearn</code></li> </ul>

10.43.3.22 `const std::string & seq64::perform::get_screen_set_notepad ( int screenset ) const`

## Parameters

<i>screenset</i>	The ID number of the string set, an index into the <code>m_screen_set_notepad[]</code> array. This value is validated.
------------------	--

## Returns

Returns a reference to the desired string, or to an empty string if the screen-set number is invalid.

10.43.3.23 `void seq64::perform::set_screen_set_notepad ( int screenset, const std::string & notepad )`

## Parameters

<i>screenset</i>	The ID number of the string set, an index into the <code>m_screen_set_XXX[]</code> arrays.
------------------	--

<i>notepad</i>	Provides the string date to copy into the notepad. Not sure why a pointer is used, instead of nice "const std::string &" parameter. And this pointer isn't checked.
----------------	---

#### 10.43.3.24 void seq64::perform::set\_screenset ( int ss )

It's not clear that we need to set the "is modified" flag just because we changed the screen set.

##### Parameters

<i>ss</i>	The index of the desired string set. It is forced to range from 0 to m_max_sets - 1.
-----------	--

#### 10.43.3.25 void seq64::perform::set\_playing\_screenset ( )

For each value up to m\_seqs\_in\_set (32), the index of the current sequence in the currently screen set (m\_playing↔\_screen) is obtained. If it is active and the sequence actually exists. Null sequences are no longer flagged as an error, they are just ignored.

Modifies m\_playing\_screen, and mutes the group tracks.

#### 10.43.3.26 void seq64::perform::select\_group\_mute ( int a\_g\_mute )

Null sequences are no longer flagged as an error, they are just ignored.

##### Parameters

<i>a_g_mute</i>	The number of the mute group, clamped to be between 0 and m_seqs_in_set-1.
-----------------	--

#### 10.43.3.27 void seq64::perform::unset\_mode\_group\_learn ( )

Then unsets the group-learn mode flag.

#### 10.43.3.28 void seq64::perform::select\_mute\_group ( int a\_group )

Null sequences are no longer flagged as an error, they are just ignored.

Will need to study this one more closely.

##### Parameters

<i>a_group</i>	Provides the group to mute. Note that this parameter is essentially a track or sequence number.
----------------	---

#### 10.43.3.29 void seq64::perform::start ( bool state )

##### Parameters

<i>state</i>	What does this state mean?
--------------	----------------------------

#### 10.43.3.30 void seq64::perform::stop ( )

The logic seems backward here, in that we call [inner\\_stop\(\)](#) if JACK is not running. Or perhaps we misunderstand the meaning of m\_jack\_running?

10.43.3.31 void seq64::perform::all\_notes\_off ( )

Then flush the MIDI buss.

10.43.3.32 void seq64::perform::set\_active ( int seq, bool active )

If setting it active, the [sequence::number\(\)](#) setter is called. It won't modify the sequence's internal copy of the sequence number if it has already been set.

Parameters

<i>seq</i>	Provides the prospective sequence number.
<i>active</i>	True if the sequence is to be set to the active state.

10.43.3.33 void seq64::perform::set\_was\_active ( int seq )

Why do we need this routine?

Parameters

<i>seq</i>	The pattern number. It is checked for invalidity.
------------	---

10.43.3.34 bool seq64::perform::is\_dirty\_main ( int seq )

See the [sequence::is\\_dirty\\_main\(\)](#) function.

Parameters

<i>seq</i>	The pattern number. It is checked for invalidity.
------------	---

Returns

Returns the was-active-main flag value, before setting it to false. Returns false if the pattern was invalid.

10.43.3.35 bool seq64::perform::is\_dirty\_edit ( int seq )

Parameters

<i>seq</i>	The pattern number. It is checked for invalidity.
------------	---

Returns

Returns the was-active-edit flag value, before setting it to false. Returns false if the pattern was invalid.

10.43.3.36 bool seq64::perform::is\_dirty\_perf ( int seq )

Parameters

<i>seq</i>	The pattern number. It is checked for invalidity.
------------	---

Returns

Returns the was-active-perf flag value, before setting it to false. Returns false if the pattern/sequence number was invalid.

10.43.3.37 `bool seq64::perform::is_dirty_names ( int seq )`

## Parameters

<i>seq</i>	The pattern number. It is checked for invalidity.
------------	---

## Returns

Returns the was-active-names flag value, before setting it to false. Returns false if the pattern/sequence number was invalid.

10.43.3.38 `bool seq64::perform::is_active ( int seq ) [inline]`

**Todo** We should have the sequence object keep track of its own activity and access that via a reference or pointer.

## Parameters

<i>seq</i>	The pattern number. It is checked for invalidity. This can lead to "too many" (i.e. redundant) checks, but we're trying to centralize such checks in this function.
------------	---

## Returns

Returns the value of the active-flag, or false if the sequence was invalid or null.

10.43.3.39 `sequence* seq64::perform::get_sequence ( int seq ) [inline]`

## Parameters

<i>seq</i>	The prospective sequence number.
------------	----------------------------------

## Returns

Returns the value of `m_seqs[seq]` if `seq` is valid. Otherwise, a null pointer is returned.

10.43.3.40 `void seq64::perform::reset_sequences ( )`

Then flush the MIDI buss.

10.43.3.41 `void seq64::perform::play ( midipulse tick )`

Starts the playing of all the patterns/sequences.

This function just runs down the list of sequences and has them dump their events.

## Parameters

<i>tick</i>	Provides the tick at which to start playing.
-------------	--

10.43.3.42 `void seq64::perform::set_orig_ticks ( midipulse tick )`

## Parameters

<i>tick</i>	
-------------	--

10.43.3.43 void seq64::perform::set\_beats\_per\_minute ( int *bpm* )

Replaces perform::set\_bpm() from seq24.

The value is set only if neither JACK nor this performance object are running.

It's not clear that we need to set the "is modified" flag just because we changed the beats per minute. Does this setting get saved to the MIDI file?

**Todo** I think this logic is wrong, in that it needs only one of the two to be stopped before it sets the BPM, while it seems to me that both should be stopped; to be determined.

10.43.3.44 void seq64::perform::set\_sequence\_control\_status ( int *status* )

Then the given status is OR'd into the m\_control\_status.

10.43.3.45 void seq64::perform::unset\_sequence\_control\_status ( int *status* )

Then the given status is reversed in m\_control\_status.

10.43.3.46 void seq64::perform::sequence\_playing\_on ( int *seq* )

Parameters

<i>seq</i>	The number of the sequence to be turned on.
------------	---

10.43.3.47 void seq64::perform::sequence\_playing\_off ( int *seq* )

Parameters

<i>seq</i>	The number of the sequence to be turned off.
------------	--

10.43.3.48 void seq64::perform::set\_group\_mute\_state ( int *gtrack*, bool *muted* )

The index value is the track number offset by the number of the selected mute group (which seems equivalent to a set number) times the number of sequences in a set.

Parameters

<i>gtrack</i>	The number of the track to be muted/unmuted.
<i>muted</i>	This boolean indicates the state to which the track should be set.

10.43.3.49 bool seq64::perform::get\_group\_mute\_state ( int *gtrack* )

## Parameters

<i>gtrack</i>	The number of the track for which the state is to be obtained. Like <a href="#">set_group_mute_state()</a> , this value is offset by adding <code>m_mute_group_selected * m_seqs_in_set</code> .
---------------	--

## Returns

Returns the value of `m_mute_group[gtrack + set offset]`

## 10.43.3.50 void seq64::perform::output\_func ( )

1. Get delta time (current - last).
2. Get delta ticks from time.
3. Add to `current_ticks`.
4. Compute prebuffer ticks.
5. Play from current tick to prebuffer.

Figure out how much time we need to sleep, and do it.

## 10.43.3.51 void seq64::perform::set\_offset ( int offset ) [inline]

Sets `m_offset = offset * c_mainwnd_rows * c_mainwnd_cols`;

## Parameters

<i>offset</i>	The desired offset.
---------------	---------------------

## 10.43.3.52 void seq64::perform::save\_playing\_state ( )

Inactive patterns get the value set to false.

## 10.43.3.53 bool seq64::perform::show\_ui\_sequence\_key ( ) const [inline]

Used in `mainwid`, `options`, `optionsfile`, `userfile`, and `perform`.

## 10.43.3.54 bool seq64::perform::show\_ui\_sequence\_number ( ) const [inline]

Used in `mainwid`, `optionsfile`, and `perform`.

## 10.43.3.55 void seq64::perform::start\_playing ( bool jackflag = false )

We've reversed the [start\(\)](#) and [start\\_jack\(\)](#) calls so that JACK is started first, to match all of the other use-cases for playing that we've found in the code.

Note that the complementary function, [stop\\_playing\(\)](#), is an inline function defined in the header file.

**Note**

It would be nice to know why the following code snippet disables the mute/unmute functionality of the performance/song editor:

```
position_jack(false);
start_jack();
start(false);
```

The `jack_assistant::position()` function doesn't use the boolean parameter at present; that code is effectively disabled. The `perform::start()` function passes its boolean flag to `perform::inner_start()`, which sets the playback mode to that flag; if that flag is false, that turns off "song" mode. So that explains why mute/unmute is disabled.

**Parameters**

<i>flag</i>	Indicates if the caller wants to start the playback in JACK mode. In the seq42 (yes, "42", not "24") code at GitHub, this flag was identical to the "global_jack_start_mode" flag, which is true for Song Mode, and false for Live Mode. False disables Song Mode.
-------------	--

**10.43.3.56** `int seq64::perform::decrement_beats_per_minute ( ) [inline]`

Actually does a lot of work in those function calls.

**10.43.3.57** `int seq64::perform::increment_beats_per_minute ( ) [inline]`

Actually does a lot of work in those function calls.

**10.43.3.58** `bool seq64::perform::highlight ( const sequence & ) const [inline]`

This setting is currently a build-time option, but could be made a run-time option later.

**10.43.3.59** `std::string seq64::perform::sequence_label ( const sequence & seq )`

This string goes on the bottom-left of those user-interface elements.

The format of this string is something like the following example, depending on the "show sequence numbers" option. The values shown are, in this order, sequence number (if allowed), buss number, channel number, beats per bar, and beat width.

```
No sequence number:    31-16 4/4
Sequence number:      9  31-16 4/4
```

The sequence number and buss number are re 0, while the channel number is displayed re 1, unless it is an SMF 0 null channel (0xFF), in which case it is 0..

**Note**

Later, we could add the sequence hot-key to this string, though showing that is not much use in pernames. Also, this function is a stilted mix of direct access and access through sequence number.



## Parameters

<i>seq</i>	Provides the reference to the sequence, use for getting the sequence parameters to be written to the label string.
------------	--

## Returns

Returns the filled in label if the sequence is active. Otherwise, an empty string is returned.

10.43.3.60 `void seq64::perform::set_input_bus ( int bus, bool active )`

This function is called by `options::input_callback()`.

**Tricky Code** See the `bus` parameter. We should provide two separate functions for this feature, but it is already combined into one input-callback function with a lot of other functionality in the options module.

## Parameters

<i>bus</i>	If this value is greater than <code>SEQ64_DEFAULT_BUSS_MAX</code> (32), then it is treated as a user-interface flag ( <code>PERFORM_KEY_LABELS_ON_SEQUENCE</code> or <code>PERFORM_NUM_LABELS_ON_SEQUENCE</code> ) that causes all the sequences to be dirtied, and thus get redrawn with the new user-interface setting.
<i>active</i>	Indicates whether the buss or the user-interface feature is active or inactive.

10.43.3.61 `bool seq64::perform::mainwnd_key_event ( const keystroke & k )`

## Returns

Returns true if the key was handled.

10.43.3.62 `bool seq64::perform::perroll_key_event ( const keystroke & k, int drop_sequence )`

The "is modified" flag is raised if something is deleted, but we cannot yet handle the case where we undo all the changes. So, for now, we play it safe with the user, even if the user gets annoyed because he knows that he undid all the changes.

## Returns

Returns true if the key was handled.

10.43.3.63 `bool seq64::perform::seq_in_playing_screen ( int seq )` `[private]`

## Parameters

<i>seq</i>	Provides the index of the desired sequence.
------------	---

## Returns

Returns true if the sequence adheres to the conditions noted above.

10.43.3.64 `void seq64::perform::is_modified ( bool flag )` `[inline], [private]`

The `modify()` setter, which is public, can only set `m_is_modified` to true.

10.43.3.65 `bool seq64::perform::is_midi_control_valid ( int seq ) const` `[inline], [private]`

## Parameters

<i>seq</i>	The value that should be in the <code>c_midi_controls</code> range.
------------	---

## Returns

Returns true if the parameter is valid. For this function, no error print-out is generated.

10.43.3.66 `bool seq64::perform::is_screenset_valid ( int screenset ) const` `[inline], [private]`

## Parameters

<i>screenset</i>	The prospective screenset value.
------------------	----------------------------------

## Returns

Returns true if the parameter is valid. For this function, no error print-out is generated.

10.43.3.67 `bool seq64::perform::is_seq_valid ( int seq ) const` `[private]`

Also see the function [is\\_mseq\\_valid\(\)](#), which also checks the pointer stored in the `m_seq[]` array.

We considered checking the `seq` param against [sequence\\_count\(\)](#), but this function is called while creating sequences that add to that count, so we continue checking against the "container" size. Also, it is possible to have holes in the array representing inactive sequences, so that `sequencer_count()` would be too limiting.

## Parameters

<i>seq</i>	The sequencer number, in interval <code>[0, m_sequence_max)</code> .
------------	--

## Returns

Returns true if the sequence number is valid.

10.43.3.68 `bool seq64::perform::is_mseq_valid ( int seq ) const` `[private]`

It also evaluates the `m_seq[seq]` pointer value.

## Note

Since we can have holes in the sequence array, where there are inactive sequences, we check if the sequence is even active before emitting a message about a null pointer for the sequence. We only want to see messages that indicate actual problems.

## Parameters

<i>seq</i>	Provides the sequence number to be checked. It is checked for validity. We cannot compare the sequence number versus the <a href="#">sequence_count()</a> , because the current implementation can have inactive holes (with null pointers) interspersed with active pointers.
------------	--

## Returns

Returns true if the sequence number is valid as per [is\\_seq\\_valid\(\)](#), and the sequence pointer is not null.

10.43.3.69 `bool seq64::perform::install_sequence ( sequence * seq, int seqnum )` `[private]`

It is common code and using it prevents inconsistencies. It assumes values have already been checked. It does not set the "is modified" flag, since adding a sequence by loading a MIDI file should not set it. Compare [new\\_↔sequence\(\)](#), used by `mainwid` and `seqmenu`, with [add\\_sequence\(\)](#), used by `midifile`.

## Parameters

<i>seq</i>	The pointer to the pattern/sequence to add.
<i>seqnum</i>	The sequence number of the pattern to be added.

## Returns

Returns true if a sequence was removed, or the sequence was successfully added. In other words, if a real change in sequence pointers occurred. It is up to the caller to decide if the change warrants setting the "is modified" flag.

10.43.3.70 `void seq64::perform::inner_start ( bool state ) [private]`

Then, if not `is_running()`, the playback mode is set to the given state. If that state is true, call `off_sequences()`. Set the running status, and signal the condition. Then unlock.

10.43.3.71 `int seq64::perform::clamp_track ( int track ) const [inline], [private]`

Note the bug we found, where we checked for `track > m_seqs_in_set`, but set it to `m_seqs_in_set - 1` in that case!

10.43.3.72 `void seq64::perform::set_key_event ( unsigned int keycode, long sequence_slot ) [inline], [private]`

It is called 32 times, corresponding to the pattern/sequence slots in the Patterns window. It first removes the given key-code from the regular and reverse slot-maps. Then it removes the sequence-slot from the regular and reverse slot-maps. Finally, it adds the sequence-slot with a key value of key-code, and adds the key-code with a value of sequence-slot.

10.43.3.73 `void seq64::perform::set_key_group ( unsigned int keycode, long group_slot ) [inline], [private]`

It is called 32 times, corresponding the pattern/sequence slots in the Patterns window. Compare it to the `set_key↵_events()` function.

## 10.43.4 Field Documentation

10.43.4.1 `midi_control seq64::perform::sm_mc_dummy [static], [private]`

Instantiate the dummy `midi_control` object, which is used in lieu of a null pointer.

We're taking code that basically works already, in the sense that it never seems to access a null pointer. So we're not even risking data transfers between this dummy object and the ones we really want to use.

10.43.4.2 `int seq64::perform::m_playscreen_offset [private]`

Saves some multiplications, should make the code easier to grok, and centralizes the use of `c_seqs_in_set`, which we want to be able to change at run-time, as a future enhancement.

10.43.4.3 `sequence* seq64::perform::m_seqs[c_max_sequence] [private]`

**Todo** First, make the sequence array a vector, and second, put allof these flags into a structure and access those members indirectly.

#### 10.43.4.4 `bool seq64::perform::m_playback_mode` [private]

There are two, "live" and "song", indicated by the following values:

```
m_playback_mode == false:    live mode
m_playback_mode == true:     playback/song mode
```

#### 10.43.4.5 `midipulse seq64::perform::m_one_measure` [private]

We can save some multiplications, and, more importantly, later define a more flexible definition of "one measure's worth" than simply four quarter notes.

#### 10.43.4.6 `midipulse seq64::perform::m_left_tick` [private]

Note that "tick" is actually "pulses".

#### 10.43.4.7 `midipulse seq64::perform::m_right_tick` [private]

Note that "tick" is actually "pulses".

#### 10.43.4.8 `midipulse seq64::perform::m_starting_tick` [private]

By default, this value is always reset to the value of the "left tick". We want to eventually be able to leave it at the last playing tick, to support a "pause" functionality. Note that "tick" is actually "pulses".

#### 10.43.4.9 `int seq64::perform::m_seqs_in_set` [private]

This change will require some arrays to be dynamically allocated (vectors).

#### 10.43.4.10 `int seq64::perform::m_max_sets` [private]

Again, currently set to the old value, which is used in hard-wired array sizes. To make it variable will require a move from arrays to vectors.

#### 10.43.4.11 `int seq64::perform::m_sequence_count` [private]

Used by the [install\\_sequence\(\)](#) function.

#### 10.43.4.12 `int seq64::perform::m_sequence_max` [private]

However, this value is already  $32 * 32 = 1024$ , and is probably enough for any usage. Famous last words?


#### 10.43.4.13 `bool seq64::perform::m_is_modified` [private]

All the GUIs seem to use a perform object. IN PROGRESS.

## 10.44 seq64::performcallback Struct Reference

Provides for notification of events.

Inheritance diagram for seq64::performcallback:

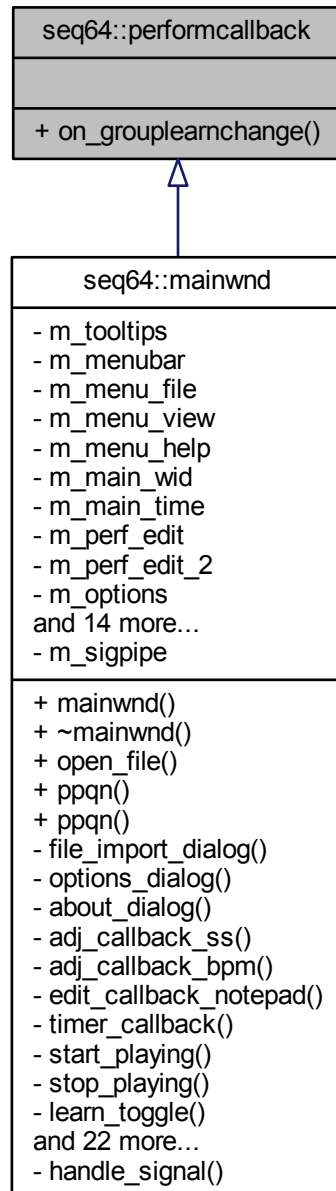


### 10.44.1 Detailed Description

Provide a response to a group-learn change event.

## 10.45 seq64::perfull Class Reference

This class implements the performance roll user interface.

Inheritance diagram for seq64::perfull:

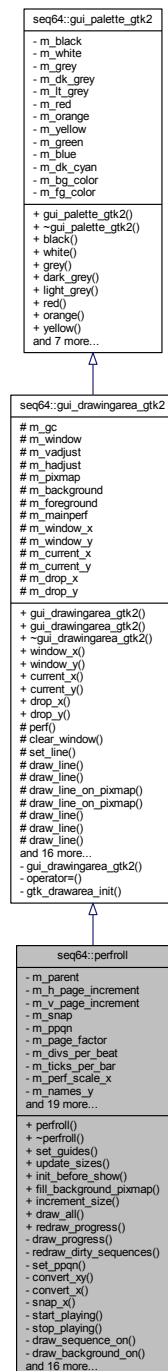

### Public Member Functions

- [perfull](#) (perform &perf, perfedit &parent, Gtk::Adjustment &hadjust, Gtk::Adjustment &vadjust, int ppqn=SEQ64\_USE\_DEFAULT\_PPQN)

- Principal constructor.*

  - `~perfull ()`

*This destructor deletes the interaction object.*
- void `set_guides` (int snap, int measure, int beat)

*This function sets the `m_snap`, `m_measure_length`, and `m_beat_length` members directly from the function parameters, which are in units of pulses (sometimes misleadingly called "ticks").*
- void `update_sizes ()`

*Updates the sizes of various items.*
- void `init_before_show ()`

*Sets the roll-lengths ticks member.*
- void `fill_background_pixmap ()`

*This function updates the background of the Performance roll.*
- void `increment_size ()`

*Increments the value of `m_roll_length_ticks` by the `PPQN * 512`, then calls `update_sizes()`.*
- void `draw_all ()`

*Provides a very common sequence of calls used in `perfull_input`.*
- void `redraw_progress ()`

*Helper function to simplify the client call.*

### Private Member Functions

- void `draw_progress ()`

*Draws the progress line that shows where we are in the performance.*
- void `redraw_dirty_sequences ()`

*Redraws patterns/sequences that have been modified.*
- void `set_ppqn` (int ppqn)

*Handles changes to the PPQN value in one place.*
- void `convert_xy` (int x, int y, midipulse &ticks, int &seq)

*Converts a tick-offset....*
- void `convert_x` (int x, midipulse &ticks)

*Converts a tick-offset on the x coordinate.*
- void `snap_x` (int &x)

*This function performs a 'snap' action on x.*
- void `start_playing ()`

*Start the performance playing.*
- void `stop_playing ()`

*Stop the performance playing.*
- void `draw_sequence_on` (int seqnum)

*Draws the given pattern/sequence on the given drawable area.*
- void `draw_background_on` (int seqnum)

*Draws the given pattern/sequence background on the given drawable area.*
- void `draw_drawable_row` (long y)

*Not quite sure what this draws yet.*
- void `change_horz ()`

*Changes the 4-bar horizontal offset member and queues up a draw operation.*
- void `change_vert ()`

*Changes the 4-bar vertical offset member and queues up a draw operation.*
- void `split_trigger` (int sequence, midipulse tick)

*Splits a trigger, whatever that means.*
- void `enqueue_draw ()`

Wraps `queue_draw()` and forwards the call to the parent `perfed`, so that it can forward it to any other `perfed` that exists.

- void `on_realize()`  
Provides the on-realization callback.
- bool `on_expose_event` (GdkEventExpose \*ev)  
Handles the on-expose event.
- bool `on_button_press_event` (GdkEventButton \*ev)  
This callback function handles a button press by forwarding it to the interaction object's button-press function.
- bool `on_button_release_event` (GdkEventButton \*ev)  
This callback function handles a button release by forwarding it to the interaction object's button-release function.
- bool `on_motion_notify_event` (GdkEventMotion \*ev)  
Handles motion notification by forwarding it to the interaction object's motion-notification callback function.
- bool `on_scroll_event` (GdkEventScroll \*ev)  
Handles horizontal and vertical scrolling.
- bool `on_focus_in_event` (GdkEventFocus \*ev)  
This callback handles an in-focus event by setting the flag to `HAS_FOCUS`.
- bool `on_focus_out_event` (GdkEventFocus \*ev)  
This callback handles an out-of-focus event by resetting the flag `HAS_FOCUS`.
- void `on_size_allocate` (Gtk::Allocation &al)  
Upon a size allocation event, this callback calls the base-class version of this function, then sets `m_window_x` and `m_window_y`, and calls `update_sizes()`.
- bool `on_key_press_event` (GdkEventKey \*ev)  
This callback function handles a key-press event.
- void `on_size_request` (GtkRequisition \*)  
This do-nothing callback effectively throws away a size request.

## Private Attributes

- `perfed` & `m_parent`  
Provides a link to the `perfed` that created this object.
- int `m_h_page_increment`  
Provides the horizontal page increment for the horizontal scrollbar.
- int `m_v_page_increment`  
Provides the vertical page increment for the vertical scrollbar.
- `FruityPerfInput` `m_fruity_interaction`  
We need both styles of interaction object present.
- `Seq24PerfInput` `m_seq24_interaction`  
Provides support for standard Seq24 mouse handling, plus the keystroke handlers.

## Friends

- class `FruityPerfInput`  
These friend implement interaction-specific behavior, although only the Seq24 interactions support keyboard processing, except for some common functionality provided by `perform::perfroll_key_event()`.

## Additional Inherited Members

### 10.45.1 Constructor & Destructor Documentation

#### 10.45.1.1 `seq64::perfroll::~~perfroll()`

Well, now there are two objects, so no explicit deletion necessary.



## 10.45.2 Member Function Documentation

### 10.45.2.1 void seq64::perftroll::set\_guides ( int *snap*, int *measure*, int *beat* )

This function then fills in the background, and queues up a draw operation.

#### Parameters

<i>snap</i>	Provides the number of snap-pulses (pulses per snap interval) as calculated in <a href="#">perftedit::set_guides()</a> . This is actually equal to the measure-pulses divided by the snap value in perftedit; the snap value defaults to 8.
<i>measure</i>	Provides the number of measure-pulses (pulses per measure) as calculated in <a href="#">perftedit::set_guides()</a> .
<i>beat</i>	Provides the number of beat-pulses (pulses per beat) as calculated in <a href="#">perftedit::set_guides()</a> .

### 10.45.2.2 void seq64::perftroll::update\_sizes ( )

#### Note

Trying to figure out what the 16 is. So take the "bars-visible" calculation, the `c_perf_scale_x` value, assume that "ticks" is another name for "pulses", and assume that "beats" is a quarter note. Ignoring the numbers, the units come out to:

$$\text{bars} = \frac{\text{pixels} * \text{ticks} / \text{pixel}}{\text{ticks} / \text{beat} * \text{beats} / \text{bar}}$$

Thus, the 16 is a "beats per bar" or "beats per measure" value. This doesn't quite make sense, but there are 16 divisions per beat on the perftroll user-interface. So for now we'll call it the latter, and make a variable called "m\_divs\_per\_beat", see its definition in the class initializer list.

### 10.45.2.3 void seq64::perftroll::init\_before\_show ( )

First, it gets the largest trigger value among the active sequences. Then it truncates this value to the nearest PPQN \* 16 ticks. Then it adds PPQN \* 4096 ticks.

### 10.45.2.4 void seq64::perftroll::fill\_background\_pixmap ( )

This first thing done is to clear the background by painting it with a filled white rectangle.

### 10.45.2.5 void seq64::perftroll::set\_ppqn ( int *ppqn* ) [private]

The `m_ticks_per_bar` member replaces the global `ppqn` times 16. This construct is parts-per-quarter-note times 4 quarter notes times 4 sixteenth notes in a bar. (We think...)

The `m_perf_scale_x` member starts out at `c_perf_scale_x`, which is 32 ticks per pixel at the default tick rate of 192 PPQN. We adjust this now. But note that this calculation still involves the `c_perf_scale_x` constant.

### 10.45.2.6 void seq64::perftroll::convert\_xy ( int *x*, int *y*, midipulse & *d\_tick*, int & *d\_seq* ) [private]

The results are returned via the `d_tick` and `d_seq` parameters.

10.45.2.7 `void seq64::perfröll::convert_x ( int x, midipulse & tick ) [private]`

The result is returned via the tick parameter.

10.45.2.8 `void seq64::perfröll::snap_x ( int & x ) [private]`

- `m_snap` = number pulses to snap to
- `m_perf_scale_x` = number of pulses per pixel

Therefore `mod = m_snap/m_perf_scale_x` equals the number pixels to snap to.

10.45.2.9 `void seq64::perfröll::start_playing ( ) [private]`

We need to keep in sync with `perfedit's start_playing()`... wish we could call it directly. Well, now we go to the source, calling `perform::start_playing()`. Note that we no longer pass "true" as the playback parameter, instead using the global JACK-start-mode flag. (We might reconsider that, later.)

10.45.2.10 `void seq64::perfröll::stop_playing ( ) [private]`

We need to keep in sync with `perfedit's stop_playing()`... wish we could call it directly. Well, now we go to the source, calling `perform::stop_playing()`.

10.45.2.11 `void seq64::perfröll::draw_sequence_on ( int seqnum ) [private]`

Statement nesting from hell!

10.45.2.12 `void seq64::perfröll::draw_drawable_row ( long y ) [private]`

It is involved in the drawing of a greyed (selected) row.

What's weird is that we divide `y` by `m_names_y`, then multiply it by `m_names_y`, before passing the result to `draw←_drawable()`. However, if we just as `y` casted to an int, then the drawing of the row is only partial, vertically.

10.45.2.13 `void seq64::perfröll::enqueue_draw ( ) [private]`

The parent `perfedit` will call `perfröll::queue_draw()` on behalf of this object, and it will pass a `perfröll::enqueue_draw()` to the peer `perfedit's perfröll`, if the peer exists.

10.45.2.14 `void seq64::perfröll::on_realize ( ) [private]`

Calls the base-class version first.

Then it allocates the additional resources need, that couldn't be initialized in the constructor, and makes some connections.

10.45.2.15 `bool seq64::perfröll::on_expose_event ( GdkEventExpose * ev ) [private]`

Returns

Always returns true.

10.45.2.16 `bool seq64::perfroll::on_button_press_event ( GdkEventButton * ev ) [private]`

This gives us Seq24 versus Fruity behavior.

One minor issue: Fruity behavior doesn't yet provide the keystroke behavior we now handle for the Seq24 mode of operation.

10.45.2.17 `bool seq64::perfroll::on_button_release_event ( GdkEventButton * ev ) [private]`

This gives us Seq24 versus Fruity behavior.

10.45.2.18 `bool seq64::perfroll::on_key_press_event ( GdkEventKey * ev ) [private]`

If we don't check the event type first, then the `ev->keyval` value is something weird like 65507. Note that we pass the functionality on to the `perform::perfroll_key_event()` function for the handling of delete, cut, copy, paste, and undo operations. If the keystroke is not handled by that function, then we handle it here.

Note that only the Seq24 input interaction object handles additional keystrokes not handled by the `perfroll_key_↔event()` function.

### 10.45.3 Friends And Related Function Documentation

10.45.3.1 `friend class FruityPerfInput [friend]`

The `perfedit` class needs access to the private `enqueue_draw()` function.

### 10.45.4 Field Documentation

10.45.4.1 `perfedit& seq64::perfroll::m_parent [private]`

We want to support two `perfedit` windows, but the children of `perfedit` will have to communicate changes requiring a redraw through the parent.

10.45.4.2 `int seq64::perfroll::m_h_page_increment [private]`

It was set to 1, the same as the step increment. That is too little. This value will be set to 4, for now. Might be a useful "user" configuration option.

10.45.4.3 `int seq64::perfroll::m_v_page_increment [private]`

It was set to 1, the same as the step increment. That is too little. This value will be set to 8, for now. Might be a useful "user" configuration option.

10.45.4.4 `FruityPerfInput seq64::perfroll::m_fruity_interaction [private]`


Even if the user specifies the fruity interaction, the Seq24 interaction is still needed to handle our new keystroke support for the `perfroll`. We need both objects to exist all the time, similar to the Fruity/Seq24 roles in the `seqroll` object.

*Obsolete* `AbstractPerfInput * m_interaction`

## 10.46 seq64::perftime Class Reference

This class implements drawing the piano time at the top of the "performance window" (the "song editor").

Inheritance diagram for seq64::perftime:

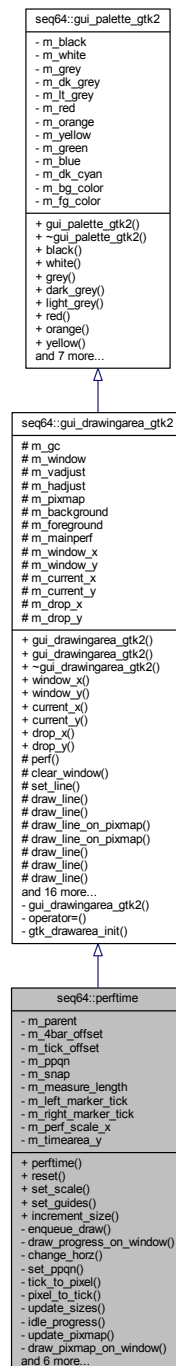

### Public Member Functions

- [perftime](#) ([perform](#) &[perf](#), [perfedit](#) &parent, Gtk::Adjustment &hadjust, int ppqn=SEQ64\_USE\_DEFAULT\_P↵PQN)

*Principal constructor.*

- void [set\\_guides](#) (int snap, int measure)

*Sets the `m_snap` value and the `m_measure_length` members directly from the function parameters, which are in units of pulses (sometimes misleadingly called "ticks".)*

- void [increment\\_size](#) ()

*This function does nothing.*

## Private Member Functions

- void [enqueue\\_draw](#) ()

*Wraps `queue_draw()` and forwards the call to the parent `perfed`, so that it can forward it to any other `perfed` that exists.*

- void [change\\_horz](#) ()

*Change the `m_4bar_offset` and queue a draw operation.*

- void [set\\_ppqn](#) (int ppqn)

*Handles changes to the PPQN value in one place.*

- long [tick\\_to\\_pixel](#) (midipulse tick)

*Common calculation to convert a pulse/tick value to a perftime x value.*

- midipulse [pixel\\_to\\_tick](#) (long pixel)

*The inverse of `tick_to_pixel()`.*

- void [update\\_sizes](#) ()

*This function does nothing.*

- int [idle\\_progress](#) ()

*This function just returns true.*

- void [update\\_pixmap](#) ()

*This function does nothing.*

- void [draw\\_pixmap\\_on\\_window](#) ()

*This function does nothing.*

- void [on\\_realize](#) ()

*Implements the on-realization event, then allocates some resources the could not be allocated in the constructor.*

- bool [on\\_expose\\_event](#) (GdkEventExpose \*ev)

*Implements the on-expose event.*

- bool [on\\_button\\_press\\_event](#) (GdkEventButton \*ev)

*Implement the button-press event.*

- void [on\\_size\\_allocate](#) (Gtk::Allocation &r)

*Implements a size-allocation event.*

- bool [on\\_button\\_release\\_event](#) (GdkEventButton \*)

*This button-release handler does nothing.*

## Private Attributes

- [perfed](#) & [m\\_parent](#)

*Provides a link to the `perfed` that created this object.*

- int [m\\_4bar\\_offset](#)

*Not yet sure exactly what this member represents.*

- int [m\\_tick\\_offset](#)

*This member is `m_4bar_offset` times 16 times the current PPQN, to save some calculations and centralize this value.*

- int [m\\_ppqn](#)

*The current value of PPQN, which we are trying to get to work everywhere, when PPQN is changed from the global `ppqn = 192`.*

- int [m\\_snap](#)

- Snap value, starts out very small, equal to m\_ppqn.*
- int [m\\_measure\\_length](#)  
*Provides the length of a measure in pulses or ticks.*
- int [m\\_left\\_marker\\_tick](#)  
*Holds the current location of the left (L) marker when arrow movement is in force.*
- int [m\\_right\\_marker\\_tick](#)  
*Holds the current location of the right (R) marker when arrow movement is in force.*
- int [m\\_perf\\_scale\\_x](#)  
*A class version of the global c\_perf\_scale\_x factor.*
- int [m\\_timearea\\_y](#)  
*A class version of the global c\_timerarea\_y factor.*

## Additional Inherited Members

### 10.46.1 Constructor & Destructor Documentation

10.46.1.1 `seq64::perftime::perftime ( perform & p, perfedit & parent, Gtk::Adjustment & hadjust, int ppqn = SEQ64_USE_DEFAULT_PPQN )`

In the constructor you can only allocate colors; get\_window() returns 0 because we have not been realized.

#### Note

Note that we still have to use a global constant in the base-class constructor; we cannot assign it to the corresponding member beforehand.

### 10.46.2 Member Function Documentation

10.46.2.1 `void seq64::perftime::set_guides ( int snap, int measure )`

This function then fills in the background, and queues up a draw operation.

#### Parameters

<i>snap</i>	Provides the number of snap-pulses (pulses per snap interval) as calculated in <a href="#">perfedit::set_guides()</a> . This is actually equal to the measure-pulses divided by the snap value in perfedit; the snap value defaults to 8.
<i>measure</i>	Provides the number of measure-pulses (pulses per measure) as calculated in <a href="#">perfedit::set_guides()</a> .

10.46.2.2 `void seq64::perftime::enqueue_draw ( ) [private]`

The parent perfedit will call perftime::queue\_draw() on behalf of this object, and it will pass a [perftime::enqueue\\_draw\(\)](#) to the peer perfedit's perftime, if the peer exists.

10.46.2.3 `void seq64::perftime::on_realize ( ) [private]`

It is important to call the base-class version of this function.

Done in base-class's [on\\_realize\(\)](#) and in its constructor now.

```
m_window = get_window();
m_gc = Gdk::GC::create(m_window);
m_window->clear();
set_size_request(10, m_timearea_y);
```

10.46.2.4 `bool seq64::perftime::on_expose_event ( GdkEventExpose * ev ) [private]`

#### Note

The perfeit object is created early on. When brought on-screen from mainwnd (the main window), first, `perftime::on_realize()` is called, then this event is called.

It crashes trying to set the foreground color.

### 10.46.3 Field Documentation

10.46.3.1 `perfeit& seq64::perftime::m_parent [private]`

We want to support two perfeit windows, but the children of perfeit will have to communicate changes requiring a redraw through the parent.

10.46.3.2 `int seq64::perftime::m_measure_length [private]`

This value is `m_ppqn * 4`, though eventually we want to employ a more flexible representation of measure length.

10.46.3.3 `int seq64::perftime::m_left_marker_tick [private]`

Otherwise it is -1.

10.46.3.4 `int seq64::perftime::m_right_marker_tick [private]`

Otherwise it is -1.

## 10.47 seq64::rc\_settings Class Reference

This class contains the options formerly named "global\_xxxxxx".

### Public Member Functions

- `rc_settings ()`  
*Default constructor.*
- `rc_settings (const rc_settings &rhs)`  
*Copy constructor.*
- `rc_settings & operator= (const rc_settings &rhs)`  
*Principal assignment operator.*
- `std::string config_filespec () const`  
*Constructs the full path and file specification for the "rc" file based on whether or not the legacy Seq24 filenames are being used.*
- `std::string user_filespec () const`  
*Constructs the full path and file specification for the "user" file based on whether or not the legacy Seq24 filenames are being used.*
- `void set_defaults ()`  
*Sets the default values.*
- `bool legacy_format () const`  
*Accessor m\_legacy\_format*
- `bool lash_support () const`

- Accessor** *m\_lash\_support*
  - bool [allow\\_mod4\\_mode](#) () const
  - Accessor** *m\_allow\_mod4\_mode*
  - bool [show\\_midi](#) () const
  - Accessor** *m\_show\_midi*
  - bool [priority](#) () const
  - Accessor** *m\_priority*
  - bool [stats](#) () const
  - Accessor** *m\_stats*
  - bool [pass\\_sysex](#) () const
  - Accessor** *m\_pass\_sysex*
  - bool [with\\_jack\\_transport](#) () const
  - Accessor** *m\_with\_jack\_transport*
  - bool [with\\_jack\\_master](#) () const
  - Accessor** *m\_with\_jack\_master*
  - bool [with\\_jack\\_master\\_cond](#) () const
  - Accessor** *m\_with\_jack\_master\_cond*
  - bool [jack\\_start\\_mode](#) () const
  - Accessor** *m\_jack\_start\_mode*
  - bool [manual\\_alsa\\_ports](#) () const
  - Accessor** *m\_manual\_alsa\_ports*
  - bool [is\\_pattern\\_playing](#) () const
  - Accessor** *m\_is\_pattern\_playing*
  - bool [print\\_keys](#) () const
  - Accessor** *m\_print\_keys*
  - bool [device\\_ignore](#) () const
  - Accessor** *m\_device\_ignore*
  - int [device\\_ignore\\_num](#) () const
  - 'Getter' function for member *m\_device\_ignore\_num*
  - interaction\_method\_t [interaction\\_method](#) () const
  - 'Getter' function for member *m\_interaction\_method*
  - const std::string & [filename](#) () const
  - 'Getter' function for member *m\_filename*
  - const std::string & [jack\\_session\\_uuid](#) () const
  - 'Getter' function for member *m\_jack\_session\_uuid*
  - const std::string & [last\\_used\\_dir](#) () const
  - 'Getter' function for member *m\_last\_used\_dir*
  - const std::string & [config\\_directory](#) () const
  - 'Getter' function for member *m\_config\_directory*
  - const std::string & [config\\_filename](#) () const
  - 'Getter' function for member *m\_config\_filename*
  - const std::string & [user\\_filename](#) () const
  - 'Getter' function for member *m\_user\_filename*
  - const std::string & [config\\_filename\\_alt](#) () const
  - 'Getter' function for member *m\_config\_filename\_alt*
  - const std::string & [user\\_filename\\_alt](#) () const
  - 'Getter' function for member *m\_user\_filename\_alt*
  - void [device\\_ignore\\_num](#) (int value)
  - 'Setter' function for member *m\_device\_ignore\_num* However, please note that this value, while set in the options processing of the main module, does not appear to be used anywhere in the code in seq24, Sequencer24, and this application.



- void [interaction\\_method](#) (interaction\_method\_t value)  
*'Setter' function for member m\_interaction\_method*
- void [filename](#) (const std::string &value)  
*'Setter' function for member m\_filename*
- void [jack\\_session\\_uuid](#) (const std::string &value)  
*'Setter' function for member m\_jack\_session\_uuid*
- void [last\\_used\\_dir](#) (const std::string &value)  
*'Setter' function for member m\_last\_used\_dir*
- void [config\\_directory](#) (const std::string &value)  
*'Setter' function for member m\_config\_directory*
- void [config\\_filename](#) (const std::string &value)  
*'Setter' function for member m\_config\_filename*
- void [user\\_filename](#) (const std::string &value)  
*'Setter' function for member m\_user\_filename*
- void [config\\_filename\\_alt](#) (const std::string &value)  
*'Setter' function for member m\_config\_filename\_alt;*
- void [user\\_filename\\_alt](#) (const std::string &value)  
*'Setter' function for member m\_user\_filename\_alt*

### Private Member Functions

- std::string [home\\_config\\_directory](#) () const  
*Provides the directory for the configuration file, and also creates the directory if necessary.*

### Private Attributes

- std::string [m\\_filename](#)  
*Provides the name of current MIDI file.*

## 10.47.1 Member Function Documentation

10.47.1.1 `std::string seq64::rc_settings::home_config_directory ( ) const` `[private]`

If the legacy format is in force, then the home directory for the configuration is (in Linux) `"/home/username"`, and the configuration file is `".seq24rc"`.

If the new format is in force, then the home directory is (in Linux) `"/home/username/.config/sequencer64"`, and the configuration file is `"sequencer64.rc"`.

### Returns

Returns the selection home configuration directory. If it does not exist or could not be created, then an empty string is returned.

## 10.48 seq64::rect Class Reference

A small helper class representing a rectangle.


## 10.49 seq64::gui\_drawingarea\_gtk2::rect Struct Reference

A small helper structure representing a rectangle.

## 10.50 seq64::Seq24PerfInput Class Reference

Implements the default (Seq24) performance input characteristics of this application.

Inheritance diagram for seq64::Seq24PerfInput:

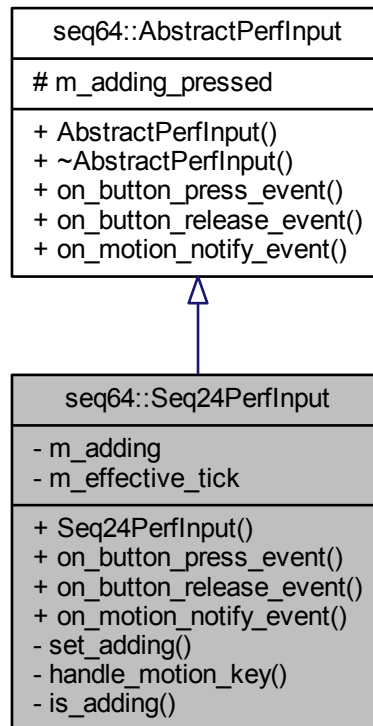

### Public Member Functions

- bool `on_button_press_event` (GdkEventButton \*a\_ev, [perftroll](#) &roll)  
*Handles the normal variety of button-press event.*
- bool `on_button_release_event` (GdkEventButton \*a\_ev, [perftroll](#) &roll)  
*Handles various button-release events.*
- bool `on_motion_notify_event` (GdkEventMotion \*a\_ev, [perftroll](#) &roll)  
*Handles the normal motion-notify event.*

### Private Member Functions

- void `set_adding` (bool a\_adding, [perftroll](#) &roll)  
*A popup menu (which one?) calls this.*
- bool `handle_motion_key` (bool is\_left, [perftroll](#) &roll)  
*Handles the keystroke motion-notify event for moving a pattern back and forth in the performance.*
- bool `is_adding` () const  
*'Getter' function for member m\_adding*

## Private Attributes

- bool [m\\_adding](#)  
*Indicates we are in the middle of adding a sequence segment to the performance.*
- midipulse [m\\_effective\\_tick](#)  
*The current tick for the current segment?*

## 10.50.1 Member Function Documentation

10.50.1.1 `bool seq64::Seq24PerfInput::on_button_press_event ( GdkEventButton * ev, perfroll & roll )` [virtual]

Is there any easy way to use ctrl-left-click as the middle button here?

### Returns

Returns true if a modification occurred.

Implements [seq64::AbstractPerfInput](#).

10.50.1.2 `bool seq64::Seq24PerfInput::on_button_release_event ( GdkEventButton * ev, perfroll & roll )` [virtual]

Any use for the middle-button or ctrl-left-click we can add?

### Returns

Returns true if any modification occurred.

Implements [seq64::AbstractPerfInput](#).

10.50.1.3 `bool seq64::Seq24PerfInput::on_motion_notify_event ( GdkEventMotion * ev, perfroll & roll )` [virtual]

### Returns

Returns true if a modification occurs. This function used to always return true.

Implements [seq64::AbstractPerfInput](#).

10.50.1.4 `void seq64::Seq24PerfInput::set_adding ( bool adding, perfroll & roll )` [private]

What does it mean?

10.50.1.5 `bool seq64::Seq24PerfInput::handle_motion_key ( bool is_left, perfroll & roll )` [private]

What happens when the mouse is used to drag the pattern is that, first, roll.m\_drop\_tick is set by left-clicking into the pattern to select it. As the pattern is dragged, the drop-tick value does not change, but the tick (converted from the moving x value) does.

Then the button-handler sets roll.m\_moving = true, and calculates roll.m\_drop\_tick\_trigger\_offset = roll.m\_drop\_tick - p.get\_sequence(dropseq)->selected\_trigger\_start();

The motion handler sees that roll.m\_moving is true, gets the new tick value from the new x value, offsets it, and calls p.get\_sequence(dropseq)->move\_selected\_triggers\_to(tick, true).

When the user releases the left button, then roll.m\_growing is turned of and the roll draw\_all()'s.

## Parameters

<i>is_left</i>	False denotes the right arrow key, and true denotes the left arrow key.
<i>roll</i>	Provides a reference to the parent roll, which keeps track of most of the information about the status of the window.

## Returns

Returns true if there was some action able to happen that would necessitate a window update. We've updated [triggers::move\\_selected\(\)](#) [called indirectly near the end of this routine] to return false if no more movement could be made. This prevents this routine from moving way ahead after movement of the selected (in the user-interface) trigger stops.

## 10.51 seq64::Seq24SeqEventInput Struct Reference

This structure implement the normal interaction methods for Seq24.

### Public Member Functions

- [Seq24SeqEventInput](#) ()  
*Default constructor.*
- void [set\\_adding](#) (bool a\_adding, [sequevent](#) &ths)  
*Changes the mouse cursor to a pencil or a left pointer in the given sequevent aobject, depending on the first parameter.*
- bool [on\\_button\\_press\\_event](#) (GdkEventButton \*a\_ev, [sequevent](#) &ths)  
*Implements the on-button-press event callback.*
- bool [on\\_button\\_release\\_event](#) (GdkEventButton \*a\_ev, [sequevent](#) &ths)  
*Implements the on-button-release callback.*
- bool [on\\_motion\\_notify\\_event](#) (GdkEventMotion \*a\_ev, [sequevent](#) &ths)  
*Implements the on-motion-notify event.*

### 10.51.1 Member Function Documentation

10.51.1.1 void seq64::Seq24SeqEventInput::set\_adding ( bool adding, sequevent & segev )

Modifies m\_adding as well.

10.51.1.2 bool seq64::Seq24SeqEventInput::on\_button\_press\_event ( GdkEventButton \* a\_ev, sequevent & segev )

Set values for dragging, then reset the box that holds dirty redraw spot. Then do the rest.

## Returns

Returns true if a likely modification was made. This function used to return true all the time.

Needs update. segev.m\_seq.unselect(); ???????

10.51.1.3 bool seq64::Seq24SeqEventInput::on\_button\_release\_event ( GdkEventButton \* a\_ev, sequevent & segev )

## Returns

Returns true if a likely modification was made. This function used to return true all the time.

10.51.1.4 `bool seq64::Seq24SeqEventInput::on_motion_notify_event ( GdkEventMotion * a_ev, seqevent & seqev )`

#### Returns

Returns true if a likely modification was made. This function used to return true all the time.

## 10.52 seq64::Seq24SeqRollInput Class Reference

Implements the Seq24 mouse interaction paradigm for the seqroll.

### Public Member Functions

- [Seq24SeqRollInput](#) ()  
*Default constructor.*
- void [set\\_adding](#) (bool a\_adding, [seqroll](#) &ths)  
*Changes the mouse cursor pixmap according to whether a note is being added or not.*
- bool [on\\_button\\_press\\_event](#) (GdkEventButton \*a\_ev, [seqroll](#) &ths)  
*Implements the on-button-press event handling for the Seq24 style of mouse interaction.*
- bool [on\\_button\\_release\\_event](#) (GdkEventButton \*a\_ev, [seqroll](#) &ths)  
*Implements the on-button-release event handling for the Seq24 style of mouse interaction.*
- bool [on\\_motion\\_notify\\_event](#) (GdkEventMotion \*a\_ev, [seqroll](#) &ths)  
*Seq24-style on-motion mouse interaction.*

### 10.52.1 Member Function Documentation

10.52.1.1 `void seq64::Seq24SeqRollInput::set_adding ( bool adding, seqroll & sroll )`

What calls this? It is actually a right click.

10.52.1.2 `bool seq64::Seq24SeqRollInput::on_button_press_event ( GdkEventButton * ev, seqroll & sroll )`

This function now uses the needs\_update flag to determine if the perform object should modify().

#### Returns

Returns the value of needs\_update. It used to return only true.

10.52.1.3 `bool seq64::Seq24SeqRollInput::on_button_release_event ( GdkEventButton * ev, seqroll & sroll )`

This function now uses the needs\_update flag to determine if the perform object should modify().


#### Returns

Returns the value of needs\_update. It used to return only true.

## 10.53 seq64::seqdata Class Reference

This class supports drawing piano-roll events on a window.

Inheritance diagram for seq64::seqdata:

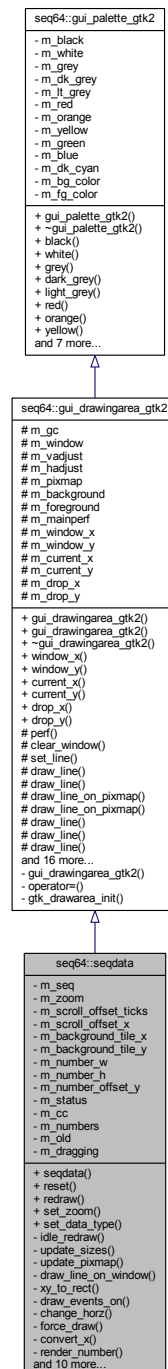

## Public Member Functions

- [seqdata](#) ([sequence](#) &seq, [perform](#) &p, int zoom, Gtk::Adjustment &hadjust)

*Principal constructor.*

- void [reset](#) ()

*This function calls [update\\_size](#)()*.

- void [redraw](#) ()

- Updates the pixmap and queues up a redraw operation.*
- void [set\\_zoom](#) (int a\_zoom)

*Sets the zoom to the given value and resets the view via the reset function.*
- void [set\\_data\\_type](#) (midibyte status, midibyte control)

*Sets the status to the given value, and the control to the optional given value, which defaults to 0, then calls [redraw\(\)](#).*

## Private Member Functions

- int [idle\\_redraw](#) ()

*Draws events on this object's built-in window and pixmap.*
- void [update\\_sizes](#) ()

*Updates the sizes in the pixmap if the view is realized, and queues up a draw operation.*
- void [update\\_pixmap](#) ()

*Simply calls [draw\\_events\\_on\\_pixmap\(\)](#).*
- void [draw\\_line\\_on\\_window](#) ()

*Draws on vertical line on the data window.*
- void [xy\\_to\\_rect](#) (int x1, int y1, int x2, int y2, int &rx, int &ry, int &rw, int &rh)

*This function takes two points, and returns an Xwin rectangle, returned via the last four parameters.*
- void [draw\\_events\\_on](#) (Glib::RefPtr< Gdk::Drawable > drawable)

*Draws events on the given drawable object.*
- void [change\\_horz](#) ()

*Change the scrolling offset on the x-axis, and redraw.*
- void [force\\_draw](#) ()

*Force a redraw.*
- void [convert\\_x](#) (int x, midipulse &tick)

*This function takes screen coordinates, and gives the horizontal tick value based on the current zoom, returned via the second parameter.*
- void [render\\_number](#) (Glib::RefPtr< Gdk::Pixmap > &pixmap, int x, int y, const char \*const num)

*Convenience function for rendering numbers.*
- void [draw\\_events\\_on\\_pixmap](#) ()

*Simply calls [draw\\_events\\_on\(\)](#) for this object's built-in pixmap.*
- void [draw\\_pixmap\\_on\\_window](#) ()

*Simply queues up a draw operation.*
- void [on\\_realize](#) ()

*Implements the on-realization event, by calling the base-class version and then allocating the resources that could not be allocated in the constructor.*
- bool [on\\_expose\\_event](#) (GdkEventExpose \*ev)

*Implements the on-expose event.*
- bool [on\\_button\\_press\\_event](#) (GdkEventButton \*ev)

*Implement a button-press event.*
- bool [on\\_button\\_release\\_event](#) (GdkEventButton \*ev)

*Implement a button-release event.*
- bool [on\\_motion\\_notify\\_event](#) (GdkEventMotion \*ev)

*Handles a motion-notify event.*
- bool [on\\_leave\\_notify\\_event](#) (GdkEventCrossing \*ev)

*Handles an on-leave notification event.*
- bool [on\\_scroll\\_event](#) (GdkEventScroll \*ev)

*Implements the on-scroll event.*
- void [on\\_size\\_allocate](#) (Gtk::Allocation &)

*Handle a size-allocation event.*

## Private Attributes

- int `m_zoom`  
*one pixel == m\_zoom ticks*
- int `m_number_w`  
*The adjusted width of a digit in a data number.*
- int `m_number_h`  
*The adjusted height of all digits in a data number.*
- int `m_number_offset_y`  
*A new value to make it easier to adapt the vertical number drawing of a data item's numeric value to a different font.*
- midibyte `m_status`  
*What is the data window currently editing?*

## Additional Inherited Members

### 10.53.1 Constructor & Destructor Documentation

10.53.1.1 `seq64::seqdata::seqdata ( sequence & seq, perform & p, int zoom, Gtk::Adjustment & hadjust )`

In the constructor you can only allocate colors, `get_window()` returns 0 because we have not been realized.

### 10.53.2 Member Function Documentation

10.53.2.1 `void seq64::seqdata::reset ( )`

Then, regardless of whether the view is realized, updates the pixmap and queues up a draw operation.

#### Note

If it weren't for the `is_realized()` condition, we could just call `update_sizes()`, which does all this anyway.

10.53.2.2 `void seq64::seqdata::set_zoom ( int zoom )`

This begs the question, do we have GUI access to the zoom setting?

10.53.2.3 `void seq64::seqdata::set_data_type ( midibyte status, midibyte control )`

Perhaps we should check that at least one of the parameters causes a change.

10.53.2.4 `int seq64::seqdata::idle_redraw ( ) [private]`

This drawing is done only if there is no dragging in progress, to guarantee no flicker.

10.53.2.5 `void seq64::seqdata::update_sizes ( ) [private]`

It creates a pixmap with window dimensions given by `m_window_x` and `m_window_y`.

10.53.2.6 `void seq64::seqdata::xy_to_rect ( int x1, int y1, int x2, int y2, int & rx, int & ry, int & rw, int & rh ) [private]`

It checks the mins/maxes, then fills in x, y, and width, height.



10.53.2.7 `void seq64::seqdata::on_realize ( ) [private]`

It also connects up the [change\\_horz\(\)](#) function.

Note that this function creates a small pixmap for every possible y-value, where y ranges from 0 to MIDI\_COUNT↔\_MAX-1 = 127. It then fills each pixmap with a numeric representation of that y value, up to three digits (left-padded with spaces).

10.53.2.8 `bool seq64::seqdata::on_button_press_event ( GdkEventButton * ev ) [private]`

#### Returns

Always returns true.

10.53.2.9 `bool seq64::seqdata::on_button_release_event ( GdkEventButton * ev ) [private]`

#### Returns

Returns true if a modification occurred, and in that case also sets the perform modification flag.

10.53.2.10 `bool seq64::seqdata::on_motion_notify_event ( GdkEventMotion * ev ) [private]`

It converts the x,y of the mouse to ticks, then sets the events in the event-data-range, updates the pixmap, draws events in the window, and draws a line on the window.

#### Returns

Returns true if a change in event data occurred. If true, then the perform modification flag is set.

10.53.2.11 `bool seq64::seqdata::on_scroll_event ( GdkEventScroll * a_ev ) [private]`

This scroll event only handles basic scrolling, without any modifier keys such as SEQ64\_CONTROL\_MASK or SEQ64K\_SHIFT\_MASK.

#### Returns

Always returns true.

### 10.53.3 Field Documentation

10.53.3.1 `int seq64::seqdata::m_number_w [private]`

By "adjusted", well this is just a minor tweak for appearances.

10.53.3.2 `int seq64::seqdata::m_number_h [private]`

Basically, the character height times 3. By "adjusted", well this is just a minor tweak for appearances.


10.53.3.3 `int seq64::seqdata::m_number_offset_y [private]`

This value was hardwired as 8, for a character height of 10.

## 10.54 seq64::seqedit Class Reference

Implements the Pattern Editor, which has references to:

Inheritance diagram for seq64::seqedit:

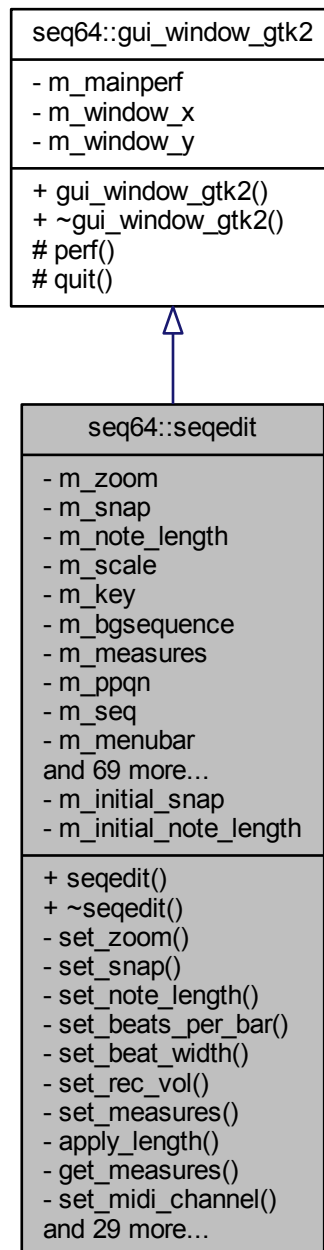

### Public Member Functions

- `seqedit` (`perform` &`perf`, `sequence` &`seq`, `int pos`, `int ppqn=SEQ64_USE_DEFAULT_PPQN`)  
*Principal constructor.*

- [~seqedit](#) ()  
*A rote destructor.*

## Private Member Functions

- void [set\\_zoom](#) (int zoom)  
*Selects the given zoom value.*
- void [set\\_snap](#) (int snap)  
*Selects the given snap value.*
- void [set\\_note\\_length](#) (int note\_length)  
*Selects the given note-length value.*
- void [set\\_beats\\_per\\_bar](#) (int bpm)  
*Set the bpm (beats per measure) value, using the given parameter, and some internal values passed to [apply\\_length\(\)](#).*
- void [set\\_beat\\_width](#) (int bw)  
*Set the bw (beat width) value, using the given parameter, and some internal values passed to [apply\\_length\(\)](#).*
- void [set\\_rec\\_vol](#) (int recvol)  
*Passes the given parameter to [sequence::set\\_rec\\_vol\(\)](#).*
- void [set\\_measures](#) (int lim)  
*Set the measures value, using the given parameter, and some internal values passed to [apply\\_length\(\)](#).*
- void [apply\\_length](#) (int bpm, int bw, int measures)  
*Sets the sequence length based on the three given parameters.*
- long [get\\_measures](#) ()  
*Calculates the measures value based on the bpm (beats per measure), ppqn (parts per quarter note), and bw (beat width) values, and returns the resultant measures value.*
- void [set\\_midi\\_channel](#) (int midichannel)  
*Selects the given MIDI channel parameter in the main sequence object, so that it will use that channel.*
- void [set\\_midi\\_bus](#) (int midibus)  
*Selects the given MIDI buss parameter in the main sequence object, so that it will use that buss.*
- void [set\\_scale](#) (int scale)  
*Selects the given scale value.*
- void [set\\_key](#) (int note)  
*Selects the given key (signature) value.*
- void [set\\_background\\_sequence](#) (int seq)  
*Draws the given background sequence on the Pattern editor so that the musician has something to see that can be played against.*
- void [name\\_change\\_callback](#) ()  
*Set the name for the main sequence to this object's entry name.*
- void [play\\_change\\_callback](#) ()  
*Passes the play status to the sequence object.*
- void [record\\_change\\_callback](#) ()  
*Passes the recording status to the sequence object.*
- void [q\\_rec\\_change\\_callback](#) ()  
*Passes the quantized-recording status to the sequence object.*
- void [thru\\_change\\_callback](#) ()  
*Passes the MIDI Thru status to the sequence object.*
- void [undo\\_callback](#) ()  
*Pops an undo operation from the sequence object, and then tell the segroll, seqtime, seqdata, and sequevent objects to redraw.*
- void [redo\\_callback](#) ()  
*Pops a redo operation from the sequence object, and then tell the segroll, seqtime, seqdata, and sequevent objects to redraw.*

- void [set\\_data\\_type](#) (midibyte status, midibyte control=0)  
*Sets the data type based on the given parameters.*
- void [fill\\_top\\_bar](#) ()  
*This function inserts the user-interface items into the top bar or panel of the pattern editor; this bar has two rows of user interface elements.*
- void [create\\_menus](#) ()  
*Creates the various menus by pushing menu elements into the menus.*
- void [popup\\_menu](#) (Gtk::Menu \*menu)  
*Pops up the given pop-up menu.*
- void [popup\\_event\\_menu](#) ()  
*Populates the event-selection menu that drops from the "Event" button in the bottom row of the Pattern editor.*
- void [popup\\_midibus\\_menu](#) ()  
*Populates the MIDI Output buss pop-up menu.*
- void [popup\\_sequence\\_menu](#) ()  
*Populates the "set background sequence" menu (drops from the button that has some note-bars on it at the right of the second row of the top bar).*
- void [popup\\_tool\\_menu](#) ()  
*Sets up the pop-up menus that are brought up by pressing the Tools button, which shows a hammer image.*
- void [popup\\_midich\\_menu](#) ()  
*Populates the MIDI Channel pop-up menu.*
- Gtk::Image \* [create\\_menu\\_image](#) (bool state=false)  
*Sets the manu pixmap depending on the given state, where true is a full menu (black background), and empty menu (gray background).*
- bool [timeout](#) ()  
*Update the window after a time out, based on dirtiness and on playback progress.*
- void [do\\_action](#) (int action, int var)  
*Implements the actions brought forth from the Tools (hammer) button.*
- void [on\\_realize](#) ()  
*On realization, calls the base-class version, and connects the redraw timeout signal, timed at c\_redraw\_ms.*
- bool [on\\_delete\\_event](#) (GdkEventAny \*event)  
*Handles an on-delete event.*
- bool [on\\_scroll\\_event](#) (GdkEventScroll \*ev)  
*Handles an on-scroll event.*
- bool [on\\_key\\_press\\_event](#) (GdkEventKey \*ev)  
*Handles a key-press event.*

## Private Attributes

- int [m\\_zoom](#)  
*Provides the zoom values: 0 1 2 3 4, and 1, 2, 4, 8, 16.*
- int [m\\_snap](#)  
*Use in setting the snap-to in pulses, off = 1.*
- int [m\\_scale](#)  
*Settings for the music scale and key.*
- Gtk::Menu \* [m\\_menu\\_length](#)  
*Provides the length in measures.*
- Gtk::Menu \* [m\\_menu\\_bpm](#)  
*These member provide the time signature, beats per measure, and beat width menus.*
- int [m\\_pos](#)  
*Basically the sequence number.*
- midibyte [m\\_editing\\_status](#)  
*Indicates what is the data window currently editing?*

## Static Private Attributes

- static int `m_initial_snap`  
*Static data members.*

## Additional Inherited Members

### 10.54.1 Detailed Description

- perform
- seqroll
- seqkeys
- seqdata
- seqtime
- seqevent
- sequence

This class has a metric ton of user-interface objects and other members.

### 10.54.2 Constructor & Destructor Documentation

10.54.2.1 `seq64::seqedit::seqedit ( perform & p, sequence & seq, int pos, int ppqn = SEQ64_USE_DEFAULT_PPQN )`

If provided, override the scale, key, and background-sequence with the values stored in the file with the sequence, if they are set to non-default values. This is a new feature.

**Todo** Offload most of the work into an initialization function like options does.

### 10.54.3 Member Function Documentation

10.54.3.1 `void seq64::seqedit::set_zoom ( int z ) [private]`

It is passed to the seqroll, seqtime, seqdata, and seqevent objects, as well.

The notation is in pixels:ticks, but I would prefer to use pulses/pixel (pulses per pixel). Oh well.

Finally, note that this value of zoom is saved to the "user" configuration file when Sequencer64 exit.

10.54.3.2 `void seq64::seqedit::set_snap ( int snap ) [private]`

It is passed to the seqroll, seqevent, and sequence objects, as well.

10.54.3.3 `void seq64::seqedit::set_note_length ( int notelength ) [private]`

It is passed to the seqroll object, as well.

**Warning**

Currently, we don't handle changes in the global PPQN after the creation of the menu. The creation of the menu hard-wires the values of note-length. To adjust for a new global PQN, we will need to store the original PPQN (`m_original_ppqn = m_ppqn`), and then adjust the notelength based on the new PPQN. For example if the new PPQN is twice as high as 192, then the notelength should double, though the text displayed in the "Note length" field should remain the same. A double value would be needed to handle the setting of a smaller `m_ppqn`. Not needed until we support a `set_ppqn()` function in this class. Another option is to rebuild the menu.

**Parameters**

<i>notelength</i>	Provides the note length in units of MIDI pulses. For example
-------------------	---

10.54.3.4 `void seq64::seqedit::set_measures ( int lim ) [private]`

**Parameters**

<i>lim</i>	Provides the sequence length, in measures.
------------	--

10.54.3.5 `void seq64::seqedit::apply_length ( int bpm, int bw, int measures ) [private]`

There's an implicit "adjust-triggers = true" parameter used in [sequence::set\\_length\(\)](#).

Then the seqroll, seqtime, seqdata, and sequevent objects are reset().

10.54.3.6 `long seq64::seqedit::get_measures ( ) [private]`

**Todo** Create a `sequence::set_units()` function or a `sequence::get_measures()` function to forward to.

10.54.3.7 `void seq64::seqedit::set_midi_channel ( int midichannel ) [private]`

Should this change raise the is-modified flag?

10.54.3.8 `void seq64::seqedit::set_midi_bus ( int bus ) [private]`

Should this change raise the is-modified flag?

10.54.3.9 `void seq64::seqedit::set_scale ( int scale ) [private]`

It is passed to the seqroll and seqkeys objects, as well. As a new feature, it is also passed to the sequence, so that it can be saved as part of the sequence data.

Note that the "initial value" for this parameter is a static variable that gets set to the new value, so that opening up another sequence causes the sequence to take on the new "initial value" as well. A feature, but should it be optional? Now it is, based on the setting of `usr().global_seq_feature()`.

10.54.3.10 `void seq64::seqedit::set_key ( int key ) [private]`

It is passed to the seqroll and seqkeys objects, as well. As a new feature, it is also passed to the sequence, so that it can be saved as part of the sequence data.

Note that the "initial value" for this parameter is a static variable that gets set to the new value, so that opening up another sequence causes the sequence to take on the new "initial value" as well. A feature, but should it be optional? Now it is, based on the setting of `usr().global_seq_feature()`.

10.54.3.11 `void seq64::seqedit::set_background_sequence ( int seqnum ) [private]`

As a new feature, it is also passed to the sequence, so that it can be saved as part of the sequence data, but only if less or equal to the maximum single-byte MIDI value, 127.

Note that the "initial value" for this parameter is a static variable that gets set to the new value, so that opening up another sequence causes the sequence to take on the new "initial value" as well. A feature, but should it be optional? Now it is, based on the setting of `usr().global_seq_feature()`.

**Todo** Make the sequence pointer a reference.

10.54.3.12 `void seq64::seqedit::name_change_callback ( ) [private]`

That name is the name the user has given to the sequence being edited.

10.54.3.13 `void seq64::seqedit::set_data_type ( midibyte status, midibyte control = 0 ) [private]`

This function uses the hardwired array `c_controller_names`.

#### Parameters

<i>status</i>	The current editing status.
<i>control</i>	The control value. However, we really need to validate it!

10.54.3.14 `void seq64::seqedit::create_menus ( ) [private]`

The first menu is the Zoom menu, represented in the pattern/sequence editor by a button with a magnifying glass. The values are "pixels to ticks", where "ticks" are actually the "pulses" of "pulses per quarter note". We would prefer the notation "n" instead of "1:n", as in "n pulses per pixel". The Snap menu is actually the Grid Snap button, which shows two arrows pointing to a central bar.

The note-length menu is on the button that shows four notes.

This menu lets one set the key of the sequence, and is brought up by the button with the "golden key" image on it.

This button shows a down around for the bottom half of the time signature. It's tooltip is "Time signature. Length of beat." But it is called `bw`, or beat width, in the code.

This menu is shown when pressing the button at the bottom of the window that has "Vol" as its label. Let's show the numbers as well to help the user. And we'll have to document this change.

This menu sets the scale to show on the panel, and the button shows a "staircase" image. See the `c_music_scales` enumeration defined in the `globals` module.

This section sets up two different menus. The first is `m_menu_length`. This menu lets on set the sequence length in bars (not the MIDI channel). The second menu is the `m_menu_bpm`, or BPM, which here means "beats per measure" (not "beats per minute").

10.54.3.15 `void seq64::seqedit::popup_event_menu ( ) [private]`

This menu has a large number of items. I think they are filled in in code, but can also be loaded from `~/seq24usr`. To be determined. Create the 8 sub-menus for the various ranges of controller changes, shown 16 per sub-menu.

10.54.3.16 `void seq64::seqedit::popup_midibus_menu ( ) [private]`

The MIDI busses are obtained by getting the `mastermidibus` object, and iterating through the busses that it contains.

**10.54.3.17** `void seq64::seqedit::popup_sequence_menu ( ) [private]`

It is populated with an "Off" menu entry, and a second "[0]" menu entry that pulls up a drop-down menu of all of the patterns/sequences that are present in the MIDI file for screen-set 0. If more screensets have active sequences, then their screen-set number appears in the screen-set section of the menu.

Now, at present, we can only save background sequence numbers that are less than 128, which means the sequences from 0 to 127, or the first four screen sets. Higher sequences can be selected, but, right now, they cannot be saved. We'll probably fix that at some point, low priority.

**10.54.3.18** `void seq64::seqedit::popup_tool_menu ( ) [private]`

This button shows three sub-menus that need to be filled in by this function. All the functions accessed here seem to be implemented by the [do\\_action\(\)](#) function.

**10.54.3.19** `void seq64::seqedit::do_action ( int action, int var ) [private]`

Note that the `push_undo()` calls push all of the current events (in [sequence::m\\_events](#)) onto the stack (as a single entry).

**10.54.3.20** `bool seq64::seqedit::on_delete_event ( GdkEventAny * event ) [private]`

It tells the sequence to stop recording, tells the perform object's mastermidibus to stop processing input, and sets the sequence object's editing flag to false.

#### Warning

This function also calls "delete this"!

#### Returns

Always returns false.

### 10.54.4 Field Documentation

**10.54.4.1** `int seq64::seqedit::m_initial_snap [static], [private]`

These items apply to all of the instances of `seqedit`, and are passed on to the following constructors:

- `seqdata`
- `seqevent`
- `seqroll`
- `seqtime`

The snap and note-length defaults would be good to write to the "user" configuration file. The scale and key would be nice to write to the proprietary section of the MIDI song. Or, even more flexibly, to each sequence, if that makes sense to do, since all tracks would generally be in the same key. Right, Charles Ives?

Note that, currently, that some of these "initial values" are modified, so that they are "contagious". That is, the next sequence to be opened in the sequence editor will adopt these values. This is a long-standing feature of Seq24, but strikes us as a bit too surprising and tricky.





- Principal constructor.*

  - void [reset](#) ()
 

*This function basically resets the whole widget as if it was realized again.*
  - void [redraw](#) ()
 

*Adjusts the scrolling offset for ticks, updates the pixmap, and draws it on the window.*
  - void [set\\_zoom](#) (int a\_zoom)
 

*Sets zoom to the given value, and resets if the value ended up being changed.*
  - void [set\\_snap](#) (int a\_snap)
 

*'Setter' function for member m\_snap*
  - void [set\\_data\\_type](#) (midibyte a\_status, midibyte a\_control)
 

*Sets the status to the given parameter, and the CC value to the given optional control parameter, which defaults to 0.*
  - void [update\\_sizes](#) ()
 

*If the window is realized, this function creates a pixmap with window dimensions, the updates the pixmap, and queues up a redraw.*
  - void [draw\\_background](#) ()
 

*This function updates the background.*
  - void [draw\\_events\\_on\\_pixmap](#) ()
 

*This function fills the main pixmap with events.*
  - void [draw\\_pixmap\\_on\\_window](#) ()
 

*This function currently just queues up a draw operation for the pixmap.*
  - void [draw\\_selection\\_on\\_window](#) ()
 

*Draw the selected events on the window.*
  - void [update\\_pixmap](#) ()
 

*Redraws the background pixmap on the main pixmap, then puts the events on.*

## Private Member Functions

- int [idle\\_redraw](#) ()
 

*Implements redraw while idling.*
- void [x\\_to\\_w](#) (int a\_x1, int a\_x2, int &a\_x, int &a\_w)
 

*This function checks the mins / maxes.*
- void [drop\\_event](#) (midipulse a\_tick)
 

*Drops (adds) an event at the given tick.*
- void [draw\\_events\\_on](#) (Glib::RefPtr< Gdk::Drawable > a\_draw)
 

*Draws events on the given drawable object.*
- void [start\\_paste](#) ()
 

*Starts a paste operation.*
- void [change\\_horz](#) ()
 

*Changes the horizontal scrolling offset for ticks, then updates the pixmap and forces a redraw.*
- void [force\\_draw](#) ()
 

*Forces a draw on the current drawable area of the window.*
- void [convert\\_x](#) (int x, midipulse &tick)
 

*Takes the screen x coordinate, multiplies it by the current zoom, and returns the tick value in the given parameter.*
- void [convert\\_t](#) (midipulse ticks, int &x)
 

*Converts the given tick value to an x corrdinate, based on the zoom, and returns it via the second parameter.*
- void [snap\\_y](#) (int &y)
 

*This function performs a 'snap' on y.*
- void [snap\\_x](#) (int &a\_x)
 

*This function performs a 'snap' on x.*
- void [on\\_realize](#) ()
 

*Implements the on-realize callback.*

- bool [on\\_expose\\_event](#) (GdkEventExpose \*a\_ev)  
*Implements the on-expose event callback.*
- bool [on\\_button\\_press\\_event](#) (GdkEventButton \*a\_ev)  
*Implements the on-button-press event callback.*
- bool [on\\_button\\_release\\_event](#) (GdkEventButton \*a\_ev)  
*Implements the on-button-release event callback.*
- bool [on\\_motion\\_notify\\_event](#) (GdkEventMotion \*a\_ev)  
*Implements the on-motion-notify event callback.*
- bool [on\\_focus\\_in\\_event](#) (GdkEventFocus \*)  
*Responds to a focus event by setting the HAS\_FOCUS flag.*
- bool [on\\_focus\\_out\\_event](#) (GdkEventFocus \*)  
*Responds to a unfocus event by resetting the HAS\_FOCUS flag.*
- bool [on\\_key\\_press\\_event](#) (GdkEventKey \*a\_p0)  
*Implements the key-press event callback function.*
- void [on\\_size\\_allocate](#) (Gtk::Allocation &)  
*Implements the on-size-allocate event callback.*

## Private Attributes

- FruitySeqEventInput [m\\_fruity\\_interaction](#)  
*Why should we need both at the same time? Just load the one that is specified in the configuration.*
- int [m\\_zoom](#)  
*Zoom setting, means that one pixel == m\_zoom ticks.*
- bool [m\\_selecting](#)  
*Used when highlighting a bunch of events.*
- midibyte [m\\_status](#)  
*Indicates what is the data window currently editing?*

## Additional Inherited Members

### 10.55.1 Member Function Documentation

#### 10.55.1.1 void seq64::sequest::set\_snap ( int a\_snap ) [inline]

Simply sets the snap member.

#### 10.55.1.2 void seq64::sequest::set\_data\_type ( midibyte status, midibyte control = 0 )

Then redraws.

#### 10.55.1.3 void seq64::sequest::update\_sizes ( )

This ends up filling the background with dotted lines, etc.

#### 10.55.1.4 void seq64::sequest::draw\_background ( )

It sets the foreground to white, draws the rectangle, in order to clear the pixmap.

10.55.1.5 `void seq64::segevent::draw_pixmap_on_window ( )`

Old comments:

It then tells event to do the same.  
We changed something on this window, and chances are we need to  
update the event widget as well and update our velocity window.

10.55.1.6 `int seq64::segevent::idle_redraw ( ) [private]`

Who calls this routine?

10.55.1.7 `void seq64::segevent::x_to_w ( int a_x1, int a_x2, int &a_x, int &a_w ) [private]`

Then it fills in x and the width.

10.55.1.8 `void seq64::segevent::drop_event ( midipulse a_tick ) [private]`

It sets the first byte properly for after-touch, program-change, channel-pressure, and pitch-wheel. The type of event is determined by `m_status`.

10.55.1.9 `void seq64::segevent::draw_events_on ( Glib::RefPtr< Gdk::Drawable > draw ) [private]`

Parameters

<i>draw</i>	The given drawable object.
-------------	----------------------------

10.55.1.10 `void seq64::segevent::start_paste ( ) [private]`

It gets the clipboard box that selected elements are in, makes a coordinate conversion, and then, sets the `m_↔` selected rectangle to hold the (x,y,w,h) of the selected events.

10.55.1.11 `void seq64::segevent::convert_x ( int x, midipulse & tick ) [inline],[private]`

Why not just return it normally?

10.55.1.12 `void seq64::segevent::convert_t ( midipulse ticks, int &x ) [inline],[private]`

Why not just return it normally?

10.55.1.13 `void seq64::segevent::snap_x ( int &x ) [private]`

- snap = number pulses to snap to
- `m_zoom` = number of pulses per pixel
- Therefore `snap / m_zoom` = number of pixels to snap to.

10.55.1.14 `void seq64::segevent::on_realize ( ) [private]`

It calls the base-class version, and then allocates additional resource not allocated in the constructor. Finally, it connects up the `change_horz` function.

10.55.1.15 `bool seq64::sequevent::on_button_press_event ( GdkEventButton * a_ev ) [private]`

It distinguishes between the Seq24 and Fruity varieties of mouse interaction.

Odd. In the legacy code, each case fell through to the next case to the "default" case! We will assume for now that this is incorrect.

Note that returning "true" from a Gtkmm event-handler stops the propagation of the event to higher-level widgets. The Fruity and Seq24 event handlers return true, always. In the legacy code, though, the fall-through code caused false to be returned, always. Not sure what effect this had. Added some fixes, but then commented them out until better testing can be done.

10.55.1.16 `bool seq64::sequevent::on_button_release_event ( GdkEventButton * a_ev ) [private]`

It distinguishes between the Seq24 and Fruity varieties of mouse interaction.

Odd. The fruity case fell through to the Seq24 case. We will assume for now that this is correct. Added some fixes, but then commented them out until better testing can be done.

10.55.1.17 `bool seq64::sequevent::on_motion_notify_event ( GdkEventMotion * a_ev ) [private]`

It distinguishes between the Seq24 and Fruity varieties of mouse interaction.

Odd. The fruity case fell through to the Seq24 case. We will assume for now that this is correct. Added some fixes, but then commented them out until better testing can be done.

10.55.1.18 `bool seq64::sequevent::on_key_press_event ( GdkEventKey * ev ) [private]`

It handles deleted a selection via the Backspace or Delete keys, cut via Ctrl-X, copy via Ctrl-C, paste via Ctrl-V, and undo via Ctrl-Z.

Would be nice to provide redo functionality via Ctrl-Y. :-)


#### Returns

Returns true if an event was handled. Only some of the handled events also cause the perform modification flag to be set as a side-effect.

## 10.56 seq64::seqkeys Class Reference

This class implements the left side piano of the pattern/sequence editor.

Inheritance diagram for seq64::seqkeys:

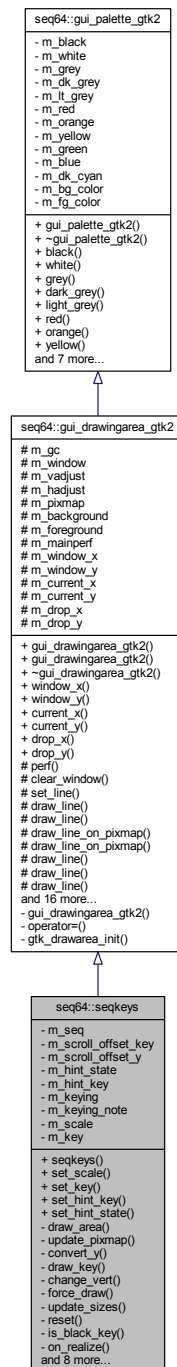

## Public Member Functions

- [seqkeys](#) ([sequence](#) &seq, [perform](#) &p, Gtk::Adjustment &vadjust)  
*Principal constructor.*
- void [set\\_scale](#) (int a\_scale)  
*Sets the musical scale, then resets.*
- void [set\\_key](#) (int a\_key)

*Sets the musical key, then resets.*

- void [set\\_hint\\_key](#) (int a\_key)

*Sets a key to grey so that it can serve as a scale hint.*

- void [set\\_hint\\_state](#) (bool a\_state)

*Sets the hint state to the given value.*

## Private Member Functions

- void [draw\\_area](#) ()

*Draws the updated pixmap on the drawable area of the window where the keys' location is hardwired.*

- void [update\\_pixmap](#) ()

*Updates the pixmaps to prepare it for the next draw operation.*

- void [convert\\_y](#) (int a\_y, int &a\_note)

*Takes the screen y coordinate, and returns the note value in the second parameter.*

- void [draw\\_key](#) (int a\_key, bool a\_state)

*Draws the given key according to the given state.*

- void [change\\_vert](#) ()

*Changes the y offset of the scrolling, and the forces a draw.*

- void [force\\_draw](#) ()

*Forces a draw operation on the whole window.*

- void [reset](#) ()

*Resetting the keys view updates the pixmap and queues up a draw operation.*

- bool [is\\_black\\_key](#) (int key) const

*Detects a black key.*

- void [on\\_realize](#) ()

*Implements the on-realize event.*

- bool [on\\_expose\\_event](#) (GdkEventExpose \*a\_ev)

*Implements the on-expose event, by drawing on the window.*

- bool [on\\_button\\_press\\_event](#) (GdkEventButton \*a\_ev)

*Implements the on-button-press event callback.*

- bool [on\\_button\\_release\\_event](#) (GdkEventButton \*a\_ev)

*Implements the on-button-release event callback.*

- bool [on\\_motion\\_notify\\_event](#) (GdkEventMotion \*a\_p0)

*Implements the on-motion-notify event handler.*

- bool [on\\_enter\\_notify\\_event](#) (GdkEventCrossing \*p0)

*Implements the on-enter notification event handler.*

- bool [on\\_leave\\_notify\\_event](#) (GdkEventCrossing \*p0)

*Implements the on-leave notification event handler.*

- bool [on\\_scroll\\_event](#) (GdkEventScroll \*a\_ev)

*Implements the on-scroll-event notification event handler.*

- void [on\\_size\\_allocate](#) (Gtk::Allocation &)

*Implements the on-size-allocation notification event handler.*

## Private Attributes

- bool [m\\_keying](#)

*What is this?*

## Additional Inherited Members

### 10.56.1 Member Function Documentation

10.56.1.1 void seq64::seqkeys::set\_hint\_state ( bool *state* )



## Parameters

<i>state</i>	Provides the value for hinting, where true == on, false == off.
--------------	---

## 10.56.1.2 void seq64::seqkeys::draw\_key ( int key, bool state ) [private]

It accounts for the black keys and the white keys, and for the highlighting of the active key.

## Parameters

<i>key</i>	The key to be drawn.
<i>state</i>	How the key is to be drawn, where false == normal, true == grayed. A key is grayed when the mouse cursor is at the same vertical location on the piano as the key.

## 10.56.1.3 void seq64::seqkeys::on\_realize ( ) [private]

Call the base-class version and then allocates resources that could not be allocated in the constructor. It connects the [change\\_vert\(\)](#) function and then calls it.

## 10.56.1.4 bool seq64::seqkeys::on\_button\_press\_event ( GdkEventButton \* ev ) [private]

It currently handles only the left button. This button, pressed on the piano keyboard, causes m\_keying to be set to true, and the given note to play.

## Returns

Always returns true.

## 10.56.1.5 bool seq64::seqkeys::on\_button\_release\_event ( GdkEventButton \* ev ) [private]

It currently handles only the left button, and only if m\_keying is true.

This function is used after pressing on one of the keys on the left-side

## Returns

Always returns true. piano keyboard, to make it play, and turns off the playing of the note.

Always returns true.

## 10.56.1.6 bool seq64::seqkeys::on\_motion\_notify\_event ( GdkEventMotion \* a\_p0 ) [private]

This allows rolling down the keyboard, playing the notes one-by-one.

## Returns

Always returns false.

## 10.56.1.7 bool seq64::seqkeys::on\_enter\_notify\_event ( GdkEventCrossing \* p0 ) [private]

I think this greys the current key.


## 10.56.1.8 bool seq64::seqkeys::on\_leave\_notify\_event ( GdkEventCrossing \* p0 ) [private]

I think this un-greys the current key.

## 10.57 seq64::seqmenu Class Reference

This class handles the right-click menu of the sequence slots in the pattern window.

Inheritance diagram for seq64::seqmenu:

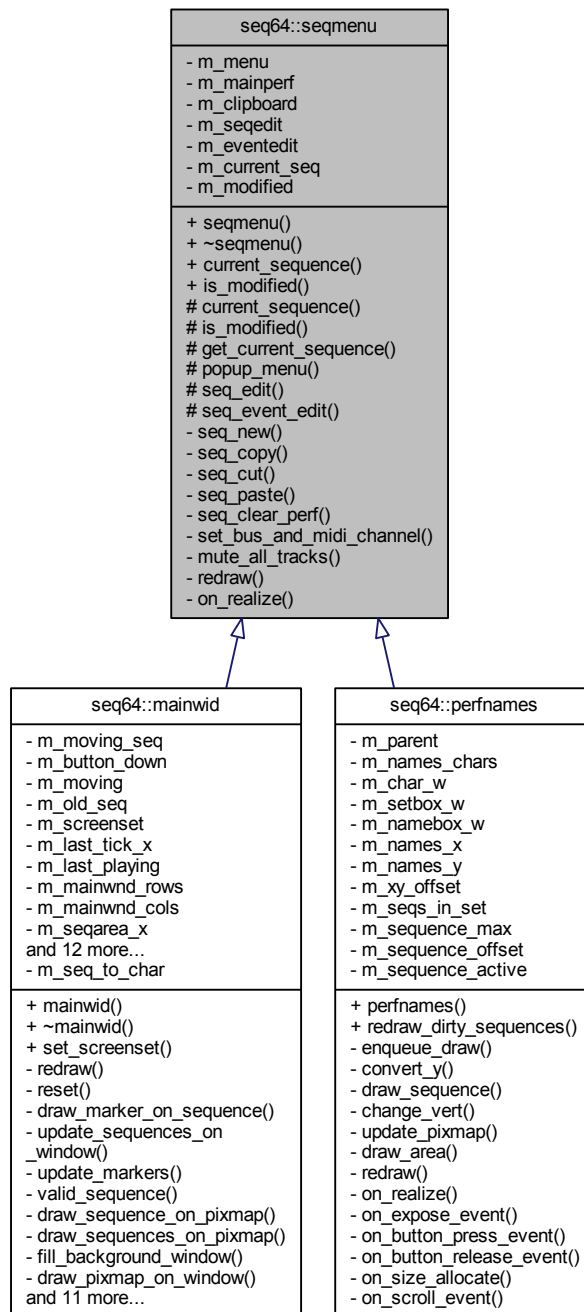

### Public Member Functions

- [seqmenu](#) ([perform](#) &a\_p)  
*Principal constructor.*

- virtual `~seqmenu ()`  
*Provides a rote base-class destructor.*
- int `current_sequence ()` const  
*'Getter' function for member `m_current_seq`*
- bool `is_modified ()` const  
*'Getter' function for member `m_modified`*

### Protected Member Functions

- void `current_sequence (int seq)`  
*'Setter' function for member `m_current_seq`*
- void `is_modified (bool flag)`  
*'Setter' function for member `m_modified`*
- `sequence * get_current_sequence ()` const  
*'Getter' function for member `m_mainperf.get_sequence(current_sequence())` This call is used many, many times.*
- void `popup_menu ()`  
*This function sets up the File menu entries.*
- void `seq_edit ()`  
*This menu callback launches the sequence-editor (pattern editor) window.*
- void `seq_event_edit ()`  
*This menu callback launches the new event editor window.*

### Private Member Functions

- void `seq_new ()`  
*This function sets the new sequence into the perform object, a bit prematurely, though.*
- void `seq_copy ()`  
*Copies the selected (current) sequence to the clipboard sequence.*
- void `seq_cut ()`  
*Deletes the selected (current) sequence and copies it to the clipboard sequence, if it is not in edit mode.*
- void `seq_paste ()`  
*Pastes the sequence clipboard into the current sequence, if the current sequence slot is not active.*
- void `seq_clear_perf ()`  
*If the current sequence is active, this function pushes a trigger undo in the main perform object, clears its sequence triggers for the current sequence, and sets the dirty flag of the sequence.*
- void `set_bus_and_midi_channel (int a_bus, int a_ch)`  
*Sets up the bus, MIDI channel, and dirtiness flag of the current sequence in the main perform object, as per the give parameters.*
- void `mute_all_tracks ()`  
*Mutes all tracks in the main perform object.*

### Private Attributes

- `perform & m_mainperf`  
*Provides a reference to the central object involved in managing a song and performance.*
- `sequence m_clipboard`  
*Holds a copy of data concerning a sequence, which can then be pasted into another pattern slot.*
- `seqedit * m_seqedit`  
*Points to the latest seqedit object, if created.*
- `eventedit * m_eventedit`

- Points to the latest eventedit object, if created.*
  - int `m_current_seq`  
*References the current sequence by sequence number.*
  - bool `m_modified`  
*Indicates if a sequence has been created.*

### 10.57.1 Detailed Description

It is an abstract base class.

### 10.57.2 Constructor & Destructor Documentation

#### 10.57.2.1 `seq64::seqmenu::seqmenu ( perform & p )`

Apart from filling in some of the members, this function initializes the clipboard, so that we don't get a crash on a paste with no previous copy.

#### 10.57.2.2 `seq64::seqmenu::~~seqmenu ( )` [virtual]

A rote destructor.

This is necessary in an abstraction base class.

If we determine that we need to delete the `m_seqedit` pointer, we can do it here. But that is not likely, because we can have many new `seqedit` objects in play, because we can edit many at once.

### 10.57.3 Member Function Documentation

#### 10.57.3.1 `void seq64::seqmenu::popup_menu ( )` [protected]

It also sets up the pattern popup menu entries that are used in `mainwid`. Note that, for the selected sequence, the "Edit" and "Event Edit" menu entries are not included if a pattern editor or event editor is already running.

#### 10.57.3.2 `void seq64::seqmenu::seq_edit ( )` [protected]

If it is already open for that sequence, this function just raises it.

Note that the `m_seqedit` member to which we save the new pointer is currently there just to avoid a compiler warning.

Also, if a new sequences is created, we set the `m_modified` flag to true, even though the sequence might later be deleted. Too much modification to keep track of!

An oddity is that calling `show_all()` here does not work unless the `seqedit()` constructor makes its `show_all()` call.

#### 10.57.3.3 `void seq64::seqmenu::seq_event_edit ( )` [protected]

If it is already open for that sequence, this function just raises it.

Note that the `m_eventedit` member to which we save the new pointer is currently there just to avoid a compiler warning.

This menu entry is available only if the selected sequence is active. That is, if the sequence has already been created.

An oddity is that we need the `show_all()` call here in order to see the dialog. A situation different from that for `seqedit`!

10.57.3.4 void seq64::seqmenu::seq\_new ( ) [private]

For one thing, if [current\\_sequence\(\)](#) is either a -1 or is greater than the maximum allowed sequence number, [perform::is\\_active\(\)](#) will return false, and we have no idea whether the sequence is not active or the sequence number is just invalid. So we need to check the pointer we got before trying to use it.

10.57.3.5 void seq64::seqmenu::seq\_copy ( ) [private]

**Todo** Can be offloaded to a perform member function that accepts a sequence clipboard non-const reference parameter.

10.57.3.6 void seq64::seqmenu::seq\_cut ( ) [private]

**Todo** A lot of [seq\\_cut\(\)](#) can be offloaded to a (new) perform member function that takes a sequence clipboard non-const reference parameter.

10.57.3.7 void seq64::seqmenu::seq\_paste ( ) [private]

Then it sets the dirty flag for the destination sequence.

**Todo** All of [seq\\_paste\(\)](#) can be offloaded to a (new) perform member function with a const clipboard reference parameter.

10.57.3.8 void seq64::seqmenu::seq\_clear\_perf ( ) [private]

**Todo** All of [seq\\_paste\(\)](#) can be offloaded to a (new) perform member function.

## 10.57.4 Field Documentation

10.57.4.1 seqedit\* seq64::seqmenu::m\_seqedit [private]

*Change Note* Added by Chris on 2015-08-02 based on compiler warnings and a comment warning in the [seq\\_edit\(\)](#) function. We'll save the result of that function here, and will let valgrind tell us later if Gtkmm takes care of it.


10.57.4.2 bool seq64::seqmenu::m\_modified [private]

**Todo** We need to make sure that the perform object is in control of the modification flag.

## 10.58 seq64::seqroll Class Reference

Implements the piano roll section of the pattern editor.

Inheritance diagram for seq64::seqroll:

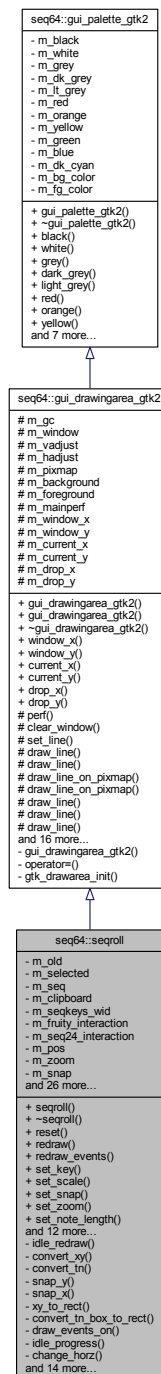

## Public Member Functions

- `seqroll` (`perform` &`perf`, `sequence` &`seq`, `int zoom`, `int snap`, `seqkeys` &`seqkeys_wid`, `int pos`, `Gtk::Adjustment` &`hadjust`, `Gtk::Adjustment` &`vadjust`, `int ppqn=SEQ64_USE_DEFAULT_PPQN`)

*Principal constructor.*

- `~seqroll` ()

*Provides a destructor to delete allocated objects.*

- void [reset](#) ()  
*This function basically resets the whole widget as if it was realized again.*
- void [redraw](#) ()  
*Redraws unless `m_ignore_redraw` is true.*
- void [redraw\\_events](#) ()  
*Redraws events unless `m_ignore_redraw` is true.*
- void [set\\_key](#) (int key)  
*Sets the music key to the given value, and then resets the view.*
- void [set\\_scale](#) (int scale)  
*Sets the music scale to the given value, and then resets the view.*
- void [set\\_snap](#) (int snap)  
*Sets the snap to the given value, and then resets the view.*
- void [set\\_zoom](#) (int zoom)  
*Sets the zoom to the given value, and then resets the view.*
- void [set\\_note\\_length](#) (int note\_length)  
*'Setter' function for member `m_note_length`*
- void [set\\_ignore\\_redraw](#) (bool ignore)  
*'Setter' function for member `m_ignore_redraw`*
- void [set\\_data\\_type](#) (midibyte status, midibyte control)  
*Sets the status to the given parameter, and the CC value to the given optional control parameter, which defaults to 0.*
- void [set\\_background\\_sequence](#) (bool state, int seq)  
*This function sets the given sequence onto the piano roll of the pattern editor, so that the musician can have another pattern to play against.*
- void [update\\_pixmap](#) ()  
*This function draws the background pixmap on the main pixmap, and then draws the events on it.*
- void [update\\_sizes](#) ()  
*Update the sizes of items based on zoom, PPQN, BPM, BW (beat width) and more.*
- void [update\\_background](#) ()  
*Updates the background of this window.*
- void [draw\\_background\\_on\\_pixmap](#) ()  
*Draws the main pixmap.*
- void [draw\\_events\\_on\\_pixmap](#) ()  
*Fills the main pixmap with events.*
- void [draw\\_selection\\_on\\_window](#) ()  
*Draws the current selecton on the main window.*
- void [draw\\_progress\\_on\\_window](#) ()  
*Draw a progress line on the window.*
- void [start\\_paste](#) ()  
*Starts a paste operation.*
- void [update\\_and\\_draw](#) (int force=false)  
*Wraps up some common code.*

## Private Member Functions

- int [idle\\_redraw](#) ()  
*Draw the events on the main window and on the pixmap.*
- void [convert\\_tn](#) (midipulse ticks, int note, int &x, int &y)  
*This function takes the given note and tick, and returns the screen coordinates via the pointer parameters.*
- void [snap\\_x](#) (int &x)  
*Performs a 'snap' operation on the x coordinate.*
- void [xy\\_to\\_rect](#) (int x1, int y1, int x2, int y2, int &x, int &y, int &w, int &h)

*This function checks the mins / maxes, and then fills in the x, y, width, and height values.*

- void [convert\\_tn\\_box\\_to\\_rect](#) (midipulse tick\_s, midipulse tick\_f, int note\_h, int note\_l, int &x, int &y, int &w, int &h)  
*Converts a tick/note box to an x/y rectangle.*
- void [draw\\_events\\_on](#) (Glib::RefPtr< Gdk::Drawable > draw)  
*Draws events on the given drawable area.*
- void [change\\_horz](#) ()  
*Change the horizontal scrolling offset and redraw.*
- void [change\\_vert](#) ()  
*Change the vertical scrolling offset and redraw.*
- void [force\\_draw](#) ()  
*Set the pixmap into the window and then draws the selection on it.*
- void [on\\_realize](#) ()  
*Implements the on-realize event handling.*
- bool [on\\_expose\\_event](#) (GdkEventExpose \*ev)  
*Implements the on-expose event handling.*
- bool [on\\_button\\_press\\_event](#) (GdkEventButton \*ev)  
*Implements the on-button-press event handling.*
- bool [on\\_button\\_release\\_event](#) (GdkEventButton \*ev)  
*Implements the on-button-release event handling.*
- bool [on\\_motion\\_notify\\_event](#) (GdkEventMotion \*ev)  
*Implements the on-motion-notify event handling.*
- bool [on\\_focus\\_in\\_event](#) (GdkEventFocus \*)  
*Implements the on-focus event handling.*
- bool [on\\_focus\\_out\\_event](#) (GdkEventFocus \*)  
*Implements the on-unfocus event handling.*
- bool [on\\_key\\_press\\_event](#) (GdkEventKey \*ev)  
*Implements the on-key-press event handling.*
- bool [on\\_scroll\\_event](#) (GdkEventScroll \*a\_ev)  
*Implements the on-scroll event handling.*
- void [on\\_size\\_allocate](#) (Gtk::Allocation &)  
*Implements the on-size-allocate event handling.*
- bool [on\\_leave\\_notify\\_event](#) (GdkEventCrossing \*p0)  
*Implements the on-leave-notify event handling.*
- bool [on\\_enter\\_notify\\_event](#) (GdkEventCrossing \*p0)  
*Implements the on-enter-notify event handling.*

## Private Attributes

- [FruitySeqRollInput m\\_fruity\\_interaction](#)  
*Provides a fruity input object, whether it is needed or not.*
- [Seq24SeqRollInput m\\_seq24\\_interaction](#)  
*Provides a normal seq24 input object, which is always needed to handle, for example, keystroke input.*
- int [m\\_zoom](#)  
*one pixel == m\_zoom ticks\**
- midibyte [m\\_status](#)  
*Indicates what is the data window currently editing.*
- bool [m\\_selecting](#)  
*When highlighting a bunch of events.*
- int [m\\_move\\_delta\\_x](#)  
*Tells where the dragging started.*



## Friends

- class [FruitySeqRollInput](#)

*These friend implement interaction-specific behavior, although only the Seq24 interactions support keyboard processing.*

## Additional Inherited Members

### 10.58.1 Member Function Documentation

#### 10.58.1.1 void seq64::seqroll::reset ( )

It's almost identical to the [change\\_horz\(\)](#) function!

#### 10.58.1.2 void seq64::seqroll::set\_data\_type ( midibyte *status*, midibyte *control* )

Unlike the same function in sequevent, this version does not redraw.

#### 10.58.1.3 void seq64::seqroll::set\_background\_sequence ( bool *state*, int *seq* )

The state parameter sets the boolean m\_drawing\_background\_seq.

##### Parameters

<i>state</i>	If true, the background sequence will be drawn.
--------------	---

*seq* Provides the sequence number, which is checked against the SEQ64\_IS\_LEGAL\_SEQUENCE() macro before being used. This macro allows the value SEQ64\_SEQUENCE\_LIMIT, which disables the background sequence.

#### 10.58.1.4 void seq64::seqroll::update\_background ( )

The first thing done is to clear the background, painting it white.

#### 10.58.1.5 void seq64::seqroll::draw\_events\_on\_pixmap ( )

Just calls [draw\\_events\\_on\(\)](#).

#### 10.58.1.6 void seq64::seqroll::convert\_tn ( midipulse *a\_ticks*, int *a\_note*, int & *a\_x*, int & *a\_y* ) [private]

This function is the "inverse" of convert\_xy().

#### 10.58.1.7 void seq64::seqroll::snap\_x ( int & *x* ) [private]

This function is similar to snap\_y(), but it calculates a modulo value from the snap and zoom settings.

- m\_snap = number pulses to snap to
- m\_zoom = number of pulses per pixel

Therefore, m\_snap / m\_zoom = number pixels to snap to.

#### 10.58.1.8 void seq64::seqroll::draw\_events\_on ( Glib::RefPtr< Gdk::Drawable > *draw* ) [private]

"Method 0" seems be the one that draws the background sequence, if active. "Method 1" draws the sequence itself.

10.58.1.9 `bool seq64::seqroll::on_key_press_event ( GdkEventKey * ev ) [private]`

The start/end key may be the same key (i.e. SPACEBAR). Allow toggling when the same key is mapped to both triggers (i.e. SPACEBAR).

Concerning the usage of the arrow keys in this function: This code is reached, but has no visible effect. Why? I think they were meant to move the point for playback. We may HAVE A BUG with our new handling of triggers, or maybe these depend upon the proper playback mode. In any case, the old functionality is preserved. However, if there are notes selected, then these keys support selection movement.


10.58.1.10 `bool seq64::seqroll::on_scroll_event ( GdkEventScroll * ev ) [private]`

This scroll event only handles basic scrolling without any modifier keys such as SEQ64\_CONTROL\_MASK or SEQ64\_SHIFT\_MASK.

## 10.59 seq64::seqtime Class Reference

This class implements the piano time, whatever that is.

Inheritance diagram for seq64::seqtime:

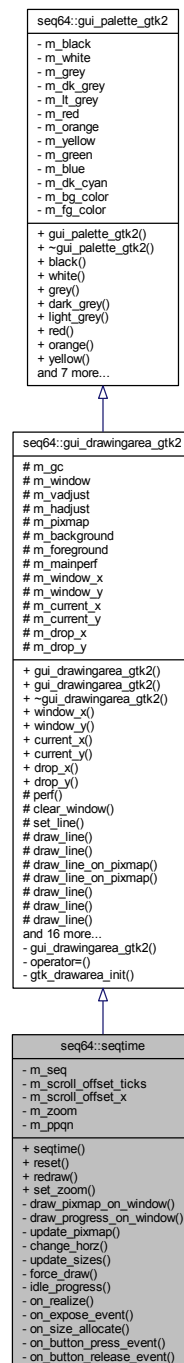

## Public Member Functions

- void [set\\_zoom](#) (int zoom)

*Sets the zoom to the given value and resets the window.*

## Private Member Functions

- bool `idle_progress` ()  
*Simply returns true.*
- bool `on_button_press_event` (GdkEventButton \*)  
*Implements the on-button-press event handler.*
- bool `on_button_release_event` (GdkEventButton \*)  
*Implements the on-button-release event handler.*

## Private Attributes

- int `m_zoom`  
*one pixel == m\_zoom ticks*

## Additional Inherited Members

### 10.59.1 Member Function Documentation

10.59.1.1 bool `seq64::seqtime::on_button_press_event` ( GdkEventButton \* ) [inline],[private]

Simply returns false.

10.59.1.2 bool `seq64::seqtime::on_button_release_event` ( GdkEventButton \* ) [inline],[private]

Simply returns false.

## 10.60 seq64::sequence Class Reference

The sequence class is firstly a receptable for a single track of MIDI data read from a MIDI file or edited into a pattern.

## Public Types

- enum `select_action_e` {  
    `e_select`,  
    `e_select_one`,  
    `e_is_selected`,  
    `e_would_select`,  
    `e_deselect`,  
    `e_toggle_selection`,  
    `e_remove_one` }

## Public Member Functions

- `sequence` (int ppqn=SEQ64\_USE\_DEFAULT\_PPQN)  
*Principal constructor.*
- `~sequence` ()  
*A rote destructor.*
- void `partial_assign` (const `sequence` &rhs)  
*A cut-down version of principal assignment operator.*
- `event_list` & `events` ()

- 'Getter' function for member `m_events`
- const `event_list` & `events` () const
- 'Getter' function for member `m_events`
- bool `any_selected_notes` () const
- 'Getter' function for member `m_events.any_selected_notes()`
- `triggers::List` & `triggerlist` ()
- 'Getter' function for member `m_triggers`
- int `number` () const
- 'Getter' function for member `m_seq_number`
- void `number` (int seqnum)
- 'Setter' function for member `m_seq_number` This setter will set the sequence number only if it has not already been set.
- int `event_count` () const
- Returns the number of events stored in `m_events`.
- void `push_undo` ()
- Pushes the event-list into the undo-list.
- void `pop_undo` ()
- If there are items on the undo list, this function pushes the event-list into the redo-list, puts the top of the undo-list into the event-list, pops from the undo-list, calls `verify_and_link()`, and then calls `unselect`.
- void `pop_redo` ()
- If there are items on the redo list, this function pushes the event-list into the undo-list, puts the top of the redo-list into the event-list, pops from the redo-list, calls `verify_and_link()`, and then calls `unselect`.
- void `push_trigger_undo` ()
- Calls `triggers::push_undo()` with locking.
- void `pop_trigger_undo` ()
- Calls `triggers::pop_undo()` with locking.
- void `set_name` (const std::string &`name`)
- Sets the sequence name member, `m_name`.
- void `set_name` (char \*`name`)
- Sets the sequence name member, `m_name`.
- int `get_ppqn` () const
- 'Getter' function for member `m_ppqn` Provided as a convenience for the `editable_events` class.
- void `set_beats_per_bar` (int beatspermeasure)
- 'Setter' function for member `m_time_beats_per_measure`
- int `get_beats_per_bar` () const
- 'Getter' function for member `m_time_beats_per_measure`
- void `set_beat_width` (int beatwidth)
- 'Setter' function for member `m_time_beat_width`
- int `get_beat_width` () const
- 'Getter' function for member `m_time_beat_width`
- void `set_rec_vol` (int rec\_vol)
- 'Setter' function for member `m_rec_vol`
- void `set_song_mute` (bool mute)
- 'Setter' function for member `m_song_mute`
- bool `get_song_mute` () const
- 'Getter' function for member `m_song_mute`
- const char \* `get_name` () const
- 'Getter' function for member `m_name` pointer
- const std::string & `name` () const
- 'Getter' function for member `m_name`
- void `set_editing` (bool edit)

- 'Setter' function for member m\_editing*
- bool `get_editing` () const
- 'Getter' function for member m\_editing*
- void `set_raise` (bool edit)
- 'Setter' function for member m\_raise*
- bool `get_raise` (void) const
- 'Getter' function for member m\_raise*
- void `set_length` (midipulse len, bool adjust\_triggers=true)
- Sets the length (m\_length) and adjusts triggers for it, if desired.*
- midipulse `get_length` () const
- 'Getter' function for member m\_length*
- midipulse `get_last_tick` ()
- Returns the last tick played, and is used by the editor's idle function.*
- midipulse `mod_last_tick` ()
- Some MIDI file errors and other things can lead to an m\_length of 0, which causes arithmetic errors when m\_last\_tick is modded against it.*
- void `set_playing` (bool)
- Sets the playing state of this sequence.*
- bool `get_playing` () const
- 'Getter' function for member m\_playing*
- void `toggle_playing` ()
- Toggles the playing status of this sequence.*
- void `toggle_queued` ()
- 'Setter' function for member m\_queued and m\_queued\_tick*
- void `off_queued` ()
- 'Setter' function for member m\_queued*
- bool `get_queued` () const
- 'Getter' function for member m\_queued*
- midipulse `get_queued_tick` () const
- 'Getter' function for member m\_queued\_tick*
- bool `check_queued_tick` (midipulse tick) const
- Helper function for perform.*
- void `set_recording` (bool)
- 'Setter' function for member m\_recording and m\_notes\_on*
- bool `get_recording` () const
- 'Getter' function for member m\_recording*
- void `set_snap_tick` (int st)
- 'Setter' function for member m\_snap\_tick*
- void `set_quantized_rec` (bool qr)
- 'Setter' function for member m\_quantized\_rec*
- bool `get_quantized_rec` () const
- 'Getter' function for member m\_quantized\_rec*
- void `set_thru` (bool)
- 'Setter' function for member m\_thru*
- bool `get_thru` () const
- 'Getter' function for member m\_thru*
- bool `is_dirty_main` ()
- Returns the value of the dirty main flag, and sets that flag to false (i.e.*
- bool `is_dirty_edit` ()
- Returns the value of the dirty edit flag, and sets that flag to false.*
- bool `is_dirty_perf` ()

- Returns the value of the dirty performance flag, and sets that flag to false.*

  - bool `is_dirty_names` ()

*Returns the value of the dirty names (heh heh) flag, and sets that flag to false.*
- void `set_dirty_mp` ()

*Sets the dirty flags for names, main, and performance.*
- void `set_dirty` ()

*Call `set_dirty_mp()` and then sets the dirty flag for editing.*
- midibyte `get_midi_channel` () const

*'Getter' function for member `m_midi_channel`*
- bool `is_smf_0` () const

*Returns true if this sequence is an SMF 0 sequence.*
- void `set_midi_channel` (midibyte ch)

*Sets the `m_midi_channel` number.*
- void `print` ()

*Prints a list of the currently-held events.*
- void `print_triggers` ()

*Prints a list of the currently-held triggers.*
- void `play` (midipulse tick, bool playback\_mode)

*The `play()` function dumps notes starting from the given tick, and it pre-buffers ahead.*
- void `set_orig_tick` (midipulse tick)

*'Setter' function for member `m_last_tick`*
- bool `add_event` (const `event` &er)

*Adds an event to the internal event list in a sorted manner.*
- void `add_trigger` (midipulse tick, midipulse len, midipulse offset=0, bool adjust\_offset=true)

*Adds a trigger.*
- void `split_trigger` (midipulse tick)

*Splits a trigger.*
- void `grow_trigger` (midipulse tick\_from, midipulse tick\_to, midipulse len)

*Grows a trigger.*
- void `del_trigger` (midipulse tick)

*Deletes a trigger, that brackets the given tick, from the trigger-list.*
- bool `get_trigger_state` (midipulse tick)

*Checks the list of triggers against the given tick.*
- bool `select_trigger` (midipulse tick)

*Checks the list of triggers against the given tick.*
- bool `unselect_triggers` ()

*Unselects all triggers.*
- bool `intersect_triggers` (midipulse position, midipulse &start, midipulse &ender)

*This function examines each trigger in the trigger list.*
- bool `intersect_notes` (midipulse position, midipulse position\_note, midipulse &start, midipulse &ender, int &note)

*This function examines each note in the event list.*
- bool `intersect_events` (midipulse posstart, midipulse posend, midibyte status, midipulse &start)

*This function examines each non-note event in the event list.*
- void `del_selected_trigger` ()

*Deletes the first selected trigger that is found.*
- void `cut_selected_trigger` ()

*Copies and deletes the first selected trigger that is found.*
- void `copy_selected_trigger` ()

*Copies the first selected trigger that is found.*
- void `paste_trigger` ()

- If there is a copied trigger, then this function grabs it from the trigger clipboard and adds it.*
- bool `move_selected_triggers_to` (midipulse tick, bool adjust\_offset, int which=2)  
*Moves selected triggers as per the given parameters.*
- midipulse `selected_trigger_start` ()  
*Gets the last-selected trigger's start tick.*
- midipulse `selected_trigger_end` ()  
*Gets the selected trigger's end tick.*
- midipulse `get_max_trigger` ()  
*Get the ending value of the last trigger in the trigger-list.*
- void `move_triggers` (midipulse start\_tick, midipulse distance, bool direction)  
*Moves triggers in the trigger-list.*
- void `copy_triggers` (midipulse start\_tick, midipulse distance)  
*Copies triggers to...*
- void `clear_triggers` ()  
*Clears the whole list of triggers.*
- midipulse `get_trigger_offset` () const  
*'Getter' function for member m\_trigger\_offset*
- void `set_midi_bus` (char mb)  
*Sets the midibus number to dump to.*
- char `get_midi_bus` () const  
*'Getter' function for member m\_bus*
- void `set_master_midi_bus` (mastermidibus \*mmb)  
*'Setter' function for member m\_masterbus*
- int `select_note_events` (midipulse tick\_s, int note\_h, midipulse tick\_f, int note\_l, `select_action_e` action)  
*This function selects events in range of tick start, note high, tick end, and note low.*
- int `select_events` (midipulse tick\_s, midipulse tick\_f, midibyte status, midibyte cc, `select_action_e` action)  
*Select all events in the given range, and returns the number selected.*
- int `select_events` (midibyte status, midibyte cc, bool inverse=false)  
*Select all events with the given status, and returns the number selected.*
- int `get_num_selected_notes` () const  
*Counts the selected notes in the event list.*
- int `get_num_selected_events` (midibyte status, midibyte cc) const  
*Counts the selected events, with the given status, in the event list.*
- void `select_all` ()  
*Selects all events, unconditionally.*
- void `copy_selected` ()  
*Copies the selected events.*
- void `cut_selected` (bool copyevents=true)  
*Cuts the selected events.*
- void `paste_selected` (midipulse tick, int note)  
*Pastes the selected notes (and only note events) at the given tick and the given note value.*
- void `get_selected_box` (midipulse &tick\_s, int &note\_h, midipulse &tick\_f, int &note\_l)  
*Returns the 'box' of the selected items.*
- void `get_clipboard_box` (midipulse &tick\_s, int &note\_h, midipulse &tick\_f, int &note\_l)  
*Returns the 'box' of the clipboard items.*
- void `move_selected_notes` (midipulse deltatick, int deltanote)  
*Removes and adds reads selected in position.*
- void `add_note` (midipulse tick, midipulse len, int note, bool paint=false)  
*Adds a note of a given length and note value, at a given tick location.*
- void `add_event` (midipulse tick, midibyte status, midibyte d0, midibyte d1, bool paint=false)  
*Adds a event of a given status value and data values, at a given tick location.*



- void [stream\\_event](#) ([event](#) &ev)  
*Streams the given event.*
- bool [change\\_event\\_data\\_range](#) (midipulse tick\_s, midipulse tick\_f, midibyte status, midibyte cc, int d\_s, int d\_f)  
*Changes the event data range.*
- void [increment\\_selected](#) (midibyte status, midibyte control)  
*Increments events the match the given status and control values.*
- void [decrement\\_selected](#) (midibyte status, midibyte control)  
*Decrements events the match the given status and control values.*
- void [grow\\_selected](#) (midipulse deltatick)  
*Moves note off event.*
- void [stretch\\_selected](#) (midipulse deltatick)  
*Performs a stretch operation on the selected events.*
- void [remove\\_marked](#) ()  
*Removes marked events.*
- void [mark\\_selected](#) ()  
*Marks the selected events.*
- void [unpaint\\_all](#) ()  
*Unpaints all events in the event-list.*
- void [unselect](#) ()  
*Deselects all events, unconditionally.*
- void [verify\\_and\\_link](#) ()  
*This function verifies state: all note-ons have an off, and it links note-offs with their note-ons.*
- void [link\\_new](#) ()  
*Links a new event.*
- void [zero\\_markers](#) ()  
*Resets everything to zero.*
- void [play\\_note\\_on](#) (int note)  
*Plays a note from the piano roll on the main bus on the master MIDI buss.*
- void [play\\_note\\_off](#) (int note)  
*Turns off a note from the piano roll on the main bus on the master MIDI buss.*
- void [off\\_playing\\_notes](#) ()  
*Sends a note-off event for all active notes.*
- void [reset\\_draw\\_marker](#) ()  
*This refreshes the play marker to the last tick.*
- void [reset\\_draw\\_trigger\\_marker](#) ()  
*Sets the draw-trigger iterator to the beginning of the trigger list.*
- draw\_type [get\\_next\\_note\\_event](#) (midipulse \*tick\_s, midipulse \*tick\_f, int \*note, bool \*selected, int \*velocity)  
*Each call to seqdata() fills the passed references with a events elements, and returns true.*
- int [get\\_lowest\\_note\\_event](#) ()  
*Goes through the list of notes, and picks the one with the lowest value.*
- int [get\\_highest\\_note\\_event](#) ()  
*Goes through the list of notes, and picks the one with the highest value.*
- bool [get\\_next\\_event](#) (midibyte status, midibyte cc, midipulse \*tick, midibyte \*d0, midibyte \*d1, bool \*selected)  
*Get the next event in the event list that matches the given status and control character.*
- bool [get\\_next\\_event](#) (midibyte \*status, midibyte \*cc)  
*Get the next event in the event list.*
- bool [get\\_next\\_trigger](#) (midipulse \*tick\_on, midipulse \*tick\_off, bool \*selected, midipulse \*tick\_offset)  
*Get the next trigger in the trigger list, and set the parameters based on that trigger.*
- void [fill\\_container](#) ([midi\\_container](#) &c, int tracknumber)  
*This function fills the given character list with MIDI data from the current sequence, preparatory to writing it to a file.*

- void [quantize\\_events](#) (midibyte status, midibyte cc, midipulse snap\_tick, int divide, bool linked=false)  
*Not deleting the ends, not selected.*
- void [transpose\\_notes](#) (int steps, int scale)  
*Transposes notes by the given steps, in accordance with the given scale.*
- midibyte [musical\\_key](#) () const  
*'Getter' function for member m\_musical\_key*
- void [musical\\_key](#) (int key)  
*'Setter' function for member m\_musical\_key*
- midibyte [musical\\_scale](#) () const  
*'Getter' function for member m\_musical\_scale*
- void [musical\\_scale](#) (int scale)  
*'Setter' function for member m\_musical\_scale*
- int [background\\_sequence](#) () const  
*'Getter' function for member m\_background\_sequence*
- void [background\\_sequence](#) (int bs)  
*'Setter' function for member m\_background\_sequence Only partial validation at present, we do not want the upper limit to be hard-wired at this time.*
- void [show\\_events](#) () const  
*A member function to dump a summary of events stored in the event-list of a sequence.*
- void [copy\\_events](#) (const [event\\_list](#) &newevents)  
*Copies an external container of events into the current container, effectively replacing all of its events.*

### Private Member Functions

- void [put\\_event\\_on\\_bus](#) (event &ev)  
*Takes an event that this sequence is holding, and places it on the midibus.*
- void [set\\_trigger\\_offset](#) (midipulse trigger\_offset)  
*Sets m\_trigger\_offset and wraps it to m\_length.*
- void [split\\_trigger](#) (trigger &trig, midipulse splittick)  
*Splits the trigger given by the parameter into two triggers.*
- void [adjust\\_trigger\\_offsets\\_to\\_length](#) (midipulse newlen)  
*Adjusts trigger offsets to the length of ???, for all triggers, and undo triggers.*
- void [remove](#) (event\_list::iterator i)  
*A helper function, which does not lock/unlock, so it is unsafe to call without supplying an iterator from the event-list.*
- void [remove](#) (event &e)  
*A helper function, which does not lock/unlock, so it is unsafe to call without supplying an iterator from the event-list.*
- void [remove\\_all](#) ()  
*Clears all events from the event container.*

### Private Attributes

- [event\\_list m\\_events](#)  
*This list holds the current pattern/sequence events.*
- midibyte [m\\_midi\\_channel](#)  
*Contains the proper MIDI channel for this sequence.*
- midibyte [m\\_bus](#)  
*Contains the proper MIDI bus number for this sequence.*
- bool [m\\_song\\_mute](#)  
*Provides a flag for the song playback mode muting.*
- int [m\\_notes\\_on](#)

- Provides a member to hold the polyphonic step-edit note counter.*

  - mastermidibus \* [m\\_masterbus](#)

*Provides the master MIDI buss which handles the output of the sequence to the proper buss and MIDI channel.*
  - int [m\\_playing\\_notes](#) [SEQ64\_MIDI\_NOTES\_MAX]

*Provides a "map" for Note On events.*
  - bool [m\\_was\\_playing](#)

*Indicates if the sequence was playing.*
  - bool [m\\_playing](#)

*True if sequence playback currently is in progress for this sequence.*
  - bool [m\\_recording](#)

*True if sequence recording currently is in progress for this sequence.*
  - bool [m\\_dirty\\_main](#)

*These flags indicate that the content of the sequence has changed due to recording, editing, performance management, or even (?) a name change.*
  - bool [m\\_editing](#)

*Indicates that the sequence is currently being edited.*
  - std::string [m\\_name](#)

*Provides the name/title for the sequence.*
  - midipulse [m\\_last\\_tick](#)

*These members manage where we are in the playing of this sequence, including triggering.*
  - const int [m\\_maxbeats](#)

*This constant provides ...?*
  - int [m\\_ppqn](#)

*Holds the PPQN value for this sequence, so that we don't have to rely on a global constant value.*
  - int [m\\_seq\\_number](#)

*A new member so that the sequence number is carried along with the sequence.*
  - midipulse [m\\_length](#)

*Holds the length of the sequence in pulses (ticks).*
  - midipulse [m\\_snap\\_tick](#)

*The size of snap in units of pulses (ticks).*
  - int [m\\_time\\_beats\\_per\\_measure](#)

*Provides the number of beats per bar used in this sequence.*
  - int [m\\_time\\_beat\\_width](#)

*Provides with width of a beat.*
  - int [m\\_rec\\_vol](#)

*The volume to be used when recording.*
  - midibyte [m\\_musical\\_key](#)

*Holds a copy of the musical key for this sequence, which we now support writing to this sequence.*
  - midibyte [m\\_musical\\_scale](#)

*Holds a copy of the musical scale for this sequence, which we now support writing to this sequence.*
  - int [m\\_background\\_sequence](#)

*Holds a copy of the background sequence number for this sequence, which we now support writing to this sequence.*
  - mutex [m\\_mutex](#)

*Provides locking for the sequence.*

## Static Private Attributes

- static event\_list [m\\_events\\_clipboard](#)

*A static clipboard for holding pattern/sequence events.*

### 10.60.1 Detailed Description

More members than you can shake a stick at.

### 10.60.2 Member Enumeration Documentation

#### 10.60.2.1 enum seq64::sequence::select\_action\_e

Enumerator

**e\_select** This enumeration is used in selecting events and note. Se the [select\\_note\\_events\(\)](#) and [select\\_↵events\(\)](#) functions.

To select ...

**e\_select\_one** To select ...

**e\_is\_selected** The events are selected ...

**e\_would\_select** The events would be selected ...

**e\_deselect** To deselect the event under the cursor.

**e\_toggle\_selection** To toggle the selection of the event under the cursor.

**e\_remove\_one** To remove one note under the cursor.

### 10.60.3 Member Function Documentation

#### 10.60.3.1 void seq64::sequence::partial\_assign ( const sequence & rhs )

We're replacing that incomplete function (many members are not assigned) with the more accurately-named [partial\\_assign\(\)](#) function.

It did not assign them all, so we created this [partial\\_assign\(\)](#) function to do this work, and replaced operator =() with this function in client code.

*Threadsafe*

#### 10.60.3.2 int seq64::sequence::event\_count ( ) const

*Threadsafe*

#### 10.60.3.3 void seq64::sequence::push\_undo ( )

*Threadsafe*

#### 10.60.3.4 void seq64::sequence::pop\_undo ( )

*Threadsafe*

#### 10.60.3.5 void seq64::sequence::pop\_redo ( )

*Threadsafe*

#### 10.60.3.6 void seq64::sequence::push\_trigger\_undo ( )

*Threadsafe*

10.60.3.7 void seq64::sequence::set\_beats\_per\_bar ( int *beatspermeasure* )

*Threadsafe*

## Parameters

<i>beatspermeasure</i>	The new setting of the beats-per-bar value.
------------------------	---

10.60.3.8 `void seq64::sequence::set_beat_width ( int beatwidth )`

*Threadsafe*

## Parameters

<i>beatwidth</i>	The new setting of the beat width value.
------------------	--

10.60.3.9 `int seq64::sequence::get_beat_width ( ) const [inline]`

*Threadsafe*

10.60.3.10 `void seq64::sequence::set_rec_vol ( int recvol )`

*Threadsafe*

## Parameters

<i>recvol</i>	The new setting of the recording volume setting.
---------------	--

10.60.3.11 `const char* seq64::sequence::get_name ( ) const [inline]`

**Deprecated**

10.60.3.12 `void seq64::sequence::set_length ( midipulse len, bool adjust_triggers = true )`

This function is called in [seqedit::apply\\_length\(\)](#), when the user selects a sequence length in measures. That function calculates the length in ticks:

```

L = M x B x 4 x P / W
L == length (ticks or pulses)
M == number of measures
B == beats per measure
P == pulses per quarter-note
W == beat width in beats per measure

```

For our "b4uacuse" MIDI file, M can be about 100 measures, B is 4, P can be 192 (but we want to support higher values), and W is 4. So L = 100 \* 4 \* 4 \* 192 / 4 = 76800 ticks. Seems small.

*Threadsafe*

10.60.3.13 `midipulse seq64::sequence::get_last_tick ( )`

If `m_length` is 0, this function returns `m_last_tick - m_trigger_offset`, to avoid an arithmetic exception. Should we return 0 instead?

10.60.3.14 `midipulse seq64::sequence::mod_last_tick ( ) [inline]`

This function replaces the "`m_last_tick % m_length`", returning `m_last_tick` if `m_length` is 0 or 1.

10.60.3.15 void seq64::sequence::set\_playing ( bool *p* )

When playing, and the sequencer is running, notes get dumped to the ALSA buffers.

Parameters

<i>p</i>	Provides the playing status to set. True means to turn on the playing, false means to turn it off, and turn off any notes still playing.
----------	--

## 10.60.3.16 void seq64::sequence::toggle\_queued ( )

Toggles the queued flag and sets the dirty-mp flag. Also calculates the queued tick based on m\_last\_tick. If m\_← length is bad (i.e. zero), then m\_queued\_tick is set to 0, to avoid an arithmetic error.

*Threadsafe*

## 10.60.3.17 void seq64::sequence::off\_queued ( )

Toggles the queued flag and sets the dirty-mp flag.

*Threadsafe*

10.60.3.18 void seq64::sequence::set\_recording ( bool *r* )

*Threadsafe*

10.60.3.19 void seq64::sequence::set\_snap\_tick ( int *st* )

*Threadsafe*

10.60.3.20 void seq64::sequence::set\_quantized\_rec ( bool *qr* )

*Threadsafe*

10.60.3.21 void seq64::sequence::set\_thru ( bool *r* )

*Threadsafe*

## 10.60.3.22 bool seq64::sequence::is\_dirty\_main ( )

resets it). This flag signals that a redraw is needed from recording.

*Threadsafe*

## 10.60.3.23 bool seq64::sequence::is\_dirty\_edit ( )

*Threadsafe*

## 10.60.3.24 bool seq64::sequence::is\_dirty\_perf ( )

*Threadsafe*

10.60.3.25 `bool seq64::sequence::is_dirty_names ( )`

*Threadsafe*

10.60.3.26 `void seq64::sequence::set_dirty_mp ( )`

*Not threadsafe*

10.60.3.27 `void seq64::sequence::set_dirty ( )`

*Threadsafe*

10.60.3.28 `void seq64::sequence::set_midi_channel ( midibyte ch )`

*Threadsafe*

10.60.3.29 `void seq64::sequence::print ( )`

*Not threadsafe*

10.60.3.30 `void seq64::sequence::print_triggers ( )`

*Not threadsafe*

10.60.3.31 `void seq64::sequence::play ( midipulse tick, bool playback_mode )`

This function is called by the sequencer thread, performance. The tick comes in as global tick.

It turns the sequence off after we play in this frame.

**Parameters**

<i>tick</i>	Provides the current end-tick value.
<i>playback_mode</i>	Provides how playback is managed. True indicates that it is performance/song-editor playback, controlled by the set of patterns and triggers set up in that editor, and saved with the song in seq24 format. False indicates that the playback is controlled by the main windows, in live mode.

*Threadsafe*

10.60.3.32 `void seq64::sequence::set_orig_tick ( midipulse tick )`

*Threadsafe*

10.60.3.33 `bool seq64::sequence::add_event ( const event & er )`

Then it reset the draw-marker and sets the dirty flag.

Currently, when reading a MIDI file [see the [midifile::parse\(\)](#) function], only the main events (notes, after-touch, pitch, program changes, etc.) are added with this function. So, we can rely on reading only playable events into a sequence. Well, actually, certain meta-events are also read, to obtain channel, buss, and more settings. Also read for a sequence, if the global-sequence flag is not set, are the new key, scale, and background sequence parameters.

This module (sequencer) adds all of those events as well, but it can surely add other events. We should assume that any events added by sequencer are playable/usable.



*Threadsafe*

#### Warning

This pushing (and, in writing the MIDI file, the popping), causes events with identical timestamps to be written in reverse order. Doesn't affect functionality, but it's puzzling until one understands what is happening. Actually, this is true only in Seq24, we've fixed that behavior for Sequencer64.

#### Parameters

<i>ep</i>	Provide a reference to the event to be added; the event is copied into the events container.
-----------	--

**10.60.3.34** void seq64::sequence::add\_trigger ( midipulse *tick*, midipulse *len*, midipulse *offset* = 0, bool *fixoffset* = true )

A pass-through function that calls [triggers::add\(\)](#).

**10.60.3.35** void seq64::sequence::split\_trigger ( midipulse *splittick* )

This is the public overload of split\_trigger.

*Threadsafe*

**10.60.3.36** void seq64::sequence::grow\_trigger ( midipulse *tickfrom*, midipulse *tickto*, midipulse *len* )

#### Parameters

<i>tickfrom</i>	The desired from-value back which to expand the trigger, if necessary.
<i>tickto</i>	The desired to-value towards which to expand the trigger, if necessary.
<i>len</i>	The additional length to append to tickto for the check.

*Threadsafe*

**10.60.3.37** void seq64::sequence::del\_trigger ( midipulse *tick* )

*Threadsafe*

**10.60.3.38** bool seq64::sequence::get\_trigger\_state ( midipulse *tick* )

If any trigger is found to bracket that tick, then true is returned.

#### Parameters

<i>tick</i>	Provides the tick of interest.
-------------	--------------------------------

#### Returns

Returns true if a trigger is found that brackets the given tick.

**10.60.3.39** bool seq64::sequence::select\_trigger ( midipulse *tick* )

If any trigger is found to bracket that tick, then true is returned, and the trigger is marked as selected.

## Parameters

<i>tick</i>	Provides the tick of interest.
-------------	--------------------------------

## Returns

Returns true if a trigger is found that brackets the given tick.

10.60.3.40 `bool seq64::sequence::unselect_triggers ( )`

## Returns

Always returns false.

10.60.3.41 `bool seq64::sequence::intersect_triggers ( midipulse position, midipulse & start, midipulse & ender )`

If the given position is between the current trigger's tick-start and tick-end values, the these values are copied to the start and end parameters, respectively, and then we exit.

*Threadsafe*

## Parameters

<i>position</i>	The position to examine.
<i>start</i>	The destination for the starting tick of the matching trigger.
<i>ender</i>	The destination for the ending tick of the matching trigger.

## Returns

Returns true if a trigger was found whose start/end ticks contained the position. Otherwise, false is returned, and the start and end return parameters should not be used.

10.60.3.42 `bool seq64::sequence::intersect_notes ( midipulse position, midipulse position_note, midipulse & start, midipulse & ender, int & note )`

If the given position is between the current notes on and off time values, values, the these values are copied to the start and end parameters, respectively, the note value is copied to the note parameter, and then we exit.

*Threadsafe*

## Parameters

<i>position</i>	The position to examine.
<i>position_note</i>	I think this is the note value we might be looking for ???
<i>start</i>	The destination for the starting timestamp of the matching note.
<i>ender</i>	The destination for the ending timestamp of the matching note.
<i>note</i>	The destination for the note of the matching event. Why is this an int value???

## Returns

Returns true if a event was found whose start/end ticks contained the position. Otherwise, false is returned, and the start and end return parameters should not be used.

10.60.3.43 `bool seq64::sequence::intersect_events ( midipulse posstart, midipulse posend, midibyte status, midipulse & start )`

If the given position is between the current notes's timestamp-start and timestamp-end values, the these values are copied to the posstart and posend parameters, respectively, and then we exit.

*Threadsafe*

**Parameters**

<i>posstart</i>	The starting position to examine.
<i>posend</i>	The ending position to examine.
<i>status</i>	The desired status value.
<i>start</i>	The destination for the starting timestamp of the matching trigger.

**Returns**

Returns true if a event was found whose start/end timestamps contained the position. Otherwise, false is returned, and the start and end return parameters should not be used.

10.60.3.44 `void seq64::sequence::paste_trigger ( )`

Why isn't this protected by a mutex? We will eventually enable this see if anything bad happens, such as a deadlock, or corruption.

10.60.3.45 `bool seq64::sequence::move_selected_triggers_to ( midipulse tick, bool adjustoffset, int which = 2 )`

```
min_tick][0          1][max_tick
                2
```

- If we are moving the 0, use first as offset.
- If we are moving the 1, use the last as the offset.
- If we are moving both (2), use first as offset.

*Threadsafe***Returns**

Returns the value of [triggers::move\\_selected\(\)](#), which indicate that the movement could be made. Used in [Seq24Perflnput::handle\\_motion\\_key\(\)](#).

10.60.3.46 `midipulse seq64::sequence::selected_trigger_start ( )`

*Threadsafe***Returns**

Returns the tick\_start() value of the last-selected trigger. If no triggers are selected, then -1 is returned.

10.60.3.47 `midipulse seq64::sequence::selected_trigger_end ( )`

*Threadsafe*

10.60.3.48 `midipulse seq64::sequence::get_max_trigger ( )`

*Threadsafe*

10.60.3.49 `void seq64::sequence::move_triggers ( midipulse starttick, midipulse distance, bool direction )`

Note the dependence on the m\_length member being kept in sync with the parent's value of m\_length.

*Threadsafe*

10.60.3.50 void seq64::sequence::copy\_triggers ( midipulse *starttick*, midipulse *distance* )

*Threadsafe*

10.60.3.51 void seq64::sequence::clear\_triggers ( )

*Threadsafe*

10.60.3.52 void seq64::sequence::set\_midi\_bus ( char *mb* )

*Threadsafe*

10.60.3.53 void seq64::sequence::set\_master\_midi\_bus ( mastermidibus \* *mmb* )

*Threadsafe*

Parameters

<i>mmb</i>	Provides a pointer to the master MIDI buss for this sequence. This should be a reference.
------------	---

10.60.3.54 int seq64::sequence::select\_note\_events ( midipulse *a\_tick\_s*, int *a\_note\_h*, midipulse *a\_tick\_f*, int *a\_note\_l*, select\_action\_e *a\_action* )

Returns the number selected.

*Threadsafe*

10.60.3.55 int seq64::sequence::select\_events ( midipulse *tick\_s*, midipulse *tick\_f*, midibyte *status*, midibyte *cc*, select\_action\_e *action* )

Note that there is also an overloaded version of this function.

*Threadsafe*

10.60.3.56 int seq64::sequence::select\_events ( midibyte *status*, midibyte *cc*, bool *inverse* = false )

Note that there is also an overloaded version of this function.

*Threadsafe*

Warning

This used to be a void function, so it just returns 0 for now.

10.60.3.57 int seq64::sequence::get\_num\_selected\_notes ( ) const

*Threadsafe*

10.60.3.58 int seq64::sequence::get\_num\_selected\_events ( midibyte *status*, midibyte *cc* ) const

If the event is a control change (CC), then it must also match the given CC value.

*Threadsafe*

10.60.3.59 `void seq64::sequence::select_all ( )`

*Threadsafe*

10.60.3.60 `void seq64::sequence::copy_selected ( )`

*Threadsafe*

10.60.3.61 `void seq64::sequence::cut_selected ( bool copyevents = true )`

*Threadsafe*

10.60.3.62 `void seq64::sequence::paste_selected ( midipulse tick, int note )`

I wonder if we can get away with just getting a reference to `m_events_clipboard`, rather than copying the whole thing, for speed.

*Threadsafe*

10.60.3.63 `void seq64::sequence::get_selected_box ( midipulse & tick_s, int & note_h, midipulse & tick_f, int & note_l )`

Note the common-code between this function and [get\\_clipboard\\_box\(\)](#).

*Threadsafe*

10.60.3.64 `void seq64::sequence::get_clipboard_box ( midipulse & tick_s, int & note_h, midipulse & tick_f, int & note_l )`

Note the common-code between this function and [get\\_selected\\_box\(\)](#).

*Threadsafe*

10.60.3.65 `void seq64::sequence::move_selected_notes ( midipulse delta_tick, int delta_note )`

Parameters

<i>delta_tick</i>	Provides the amount of time to move the selected notes.
<i>delta_note</i>	Provides the amount of pitch to move the selected notes.

10.60.3.66 `void seq64::sequence::add_note ( midipulse tick, midipulse length, int note, bool paint = false )`

It adds a single note-on / note-off pair.

The `paint` parameter indicates if we care about the painted event, so then the function runs though the events and deletes the painted ones that overlap the ones we want to add.

*Threadsafe*

10.60.3.67 `void seq64::sequence::add_event ( midipulse tick, midibyte status, midibyte d0, midibyte d1, bool paint = false )`

The `a_paint` parameter indicates if we care about the painted event, so then the function runs though the events and deletes the painted ones that overlap the ones we want to add.

*Threadsafe*

10.60.3.68 void seq64::sequence::stream\_event ( event & ev )

*Threadsafe*

10.60.3.69 bool seq64::sequence::change\_event\_data\_range ( midipulse *tick\_s*, midipulse *tick\_f*, midibyte *status*, midibyte *cc*, int *data\_s*, int *data\_f* )

Changes only selected events, if any.

*Threadsafe*

Let *t* == the current tick value; *ts* == tick start value; *tf* == tick finish value; *ds* = data start value; *df* == data finish value; *d* = the new data value.

Then

$$d = \frac{df (t - ts) + ds (tf - t)}{tf - ts}$$

If this were an interpolation formula it would be:

$$d = ds + (df - ds) \frac{t - ts}{tf - ts}$$

Something is not quite right; to be investigated.

#### Parameters

<i>tick_s</i>	Provides the starting tick value.
<i>tick_f</i>	Provides the ending tick value.
<i>status</i>	Provides the event status that is to be changed.
<i>cc</i>	Provides the event control value.
<i>data_s</i>	Provides the starting data value.
<i>data_f</i>	Provides the finishing data value.

#### Returns

Returns true if the data was changed.

10.60.3.70 void seq64::sequence::increment\_selected ( midibyte *astat*, midibyte *control* )

The supported statuses are:

- EVENT\_NOTE\_ON
- EVENT\_NOTE\_OFF
- EVENT\_AFTERTOUCH
- EVENT\_CONTROL\_CHANGE
- EVENT\_PITCH\_WHEEL
- EVENT\_PROGRAM\_CHANGE
- EVENT\_CHANNEL\_PRESSURE

*Threadsafe*

10.60.3.71 void seq64::sequence::decrement\_selected ( midibyte *astat*, midibyte *control* )

The supported statuses are:

- One-byte messages
  - EVENT\_PROGRAM\_CHANGE
  - EVENT\_CHANNEL\_PRESSURE
- Two-byte messages
  - EVENT\_NOTE\_ON
  - EVENT\_NOTE\_OFF
  - EVENT\_AFTERTOUCH
  - EVENT\_CONTROL\_CHANGE
  - EVENT\_PITCH\_WHEEL

*Threadsafe*

10.60.3.72 void seq64::sequence::grow\_selected ( midipulse *delta\_tick* )

If an event is not linked, this function now ignores the event's timestamp, rather than risk a segfault on a null pointer.

*Threadsafe*

Parameters

<i>delta_tick</i>	An offset for each linked event's timestamp.
-------------------	--

10.60.3.73 void seq64::sequence::stretch\_selected ( midipulse *delta\_tick* )

This should move a note off event, according to old comments, but it doesn't seem to do that. See the [grow\\_selected\(\)](#) function.

*Threadsafe*

10.60.3.74 void seq64::sequence::remove\_marked ( )

Note how this function handles removing a value to avoid incrementing a now-invalid iterator.

*Threadsafe*

10.60.3.75 void seq64::sequence::mark\_selected ( )

*Threadsafe*

10.60.3.76 void seq64::sequence::unpaint\_all ( )

*Threadsafe*

10.60.3.77 void seq64::sequence::unselect ( )

*Threadsafe*

10.60.3.78 void seq64::sequence::verify\_and\_link ( )

*Threadsafe*



10.60.3.79 void seq64::sequence::link\_new ( )

*Threadsafe*

10.60.3.80 void seq64::sequence::zero\_markers ( )

This function is used when the sequencer stops.

*Threadsafe*

10.60.3.81 void seq64::sequence::play\_note\_on ( int *a\_note* )

It flushes a note to the midibus to preview its sound, used by the virtual piano.

*Threadsafe*

10.60.3.82 void seq64::sequence::play\_note\_off ( int *a\_note* )

*Threadsafe*

10.60.3.83 void seq64::sequence::off\_playing\_notes ( )

*Threadsafe*

10.60.3.84 void seq64::sequence::reset\_draw\_marker ( )

It resets the draw marker so that calls to [get\\_next\\_note\\_event\(\)](#) will start from the first event.

*Threadsafe*

10.60.3.85 void seq64::sequence::reset\_draw\_trigger\_marker ( )

*Threadsafe*

10.60.3.86 draw\_type seq64::sequence::get\_next\_note\_event ( midipulse \* *a\_tick\_s*, midipulse \* *a\_tick\_f*, int \* *a\_note*, bool \* *a\_selected*, int \* *a\_velocity* )

When it has no more events, returns a false.

10.60.3.87 int seq64::sequence::get\_lowest\_note\_event ( )

*Threadsafe*

#### Returns

Returns the note with the lowest value. If there are no notes in the list, then SEQ64\_MIDI\_COUNT\_MAX-1 is returned, which of course doesn't tell the caller much.

10.60.3.88 int seq64::sequence::get\_highest\_note\_event ( )

*Threadsafe*

**Returns**

Returns the note with the highest value. If there are no notes in the list, then 0 is returned, which of course doesn't tell the caller much.

**10.60.3.89** `bool seq64::sequence::get_next_event ( midibyte status, midibyte cc, midipulse * tick, midibyte * d0, midibyte * d1, bool * selected )`

Then set the rest of the parameters parameters using that event.

Note the usage of `event::is_desired_cc_or_not_cc(status, cc, *d0)`; Either we have a control change with the right CC or it's a different type of event.

**10.60.3.90** `bool seq64::sequence::get_next_event ( midibyte * a_status, midibyte * a_cc )`

Then set the status and control character parameters using that event.

**10.60.3.91** `void seq64::sequence::fill_container ( midi_container & c, int tracknumber )`

Note that some of the events might not come out in the same order they were stored in (we see that with program-change events).

**Parameters**

<i>c</i>	Provides the <code>std::list</code> object to push events to the front, which thus inserts them in backwards order. (These events are then popped back, which restores the order, with some exceptions).
<i>tracknumber</i>	Provides the track number. This number is masked into the track information.

**10.60.3.92** `void seq64::sequence::transpose_notes ( int steps, int scale )`

If the scale value is 0, this is "no scale", which is the chromatic scale, where all 12 notes, including sharps and flats, are part of the scale.

**10.60.3.93** `void seq64::sequence::background_sequence ( int bs )` `[inline]`

Disabling the sequence number (setting it to `SEQ64_SEQUENCE_LIMIT`) is valid.

**10.60.3.94** `void seq64::sequence::copy_events ( const event_list & newevents )`

Compare this function to the [remove\\_all\(\)](#) function. Copying the container is a lot of work, but fairly fast, even with an `std::multimap` as the container.

*Threadsafe* Note that we had to consolidate the replacement of all the events in the container in order to prevent the "Save to Sequence" button in the `eventedit` object from causing the application to segfault. It would segfault when the `mainwnd` timer callback would fire, causing updates to the sequence's slot pixmap, which would then try to access deleted events. Part of the issue was that note links were dropped when copying the events, so now we call [verify\\_and\\_link\(\)](#) to hopefully reconstitute the links.

**Parameters**

<i>newevents</i>	Provides the container of MIDI events that will completely replace the current container. Normally this container is supplied by the event editor, via the <code>eventslots</code> class.
------------------	---

10.60.3.95 void seq64::sequence::put\_event\_on\_bus ( event & ev ) [private]

*Threadsafe*

10.60.3.96 void seq64::sequence::set\_trigger\_offset ( midipulse *trigger\_offset* ) [private]

If m\_length is 0, then it is simply set to the parameter.

*Threadsafe*

Parameters

<i>trigger_offset</i>	The full trigger offset to set.
-----------------------	---------------------------------

10.60.3.97 void seq64::sequence::split\_trigger ( trigger & trig, midipulse *splittick* ) [private]

This is the private overload of split\_trigger.

*Threadsafe*

Parameters

<i>trig</i>	Provides the original trigger, and also holds the changes made to that trigger as it is shortened.
<i>splittick</i>	The position just after where the original trigger will be truncated, and the new trigger begins.

10.60.3.98 void seq64::sequence::adjust\_trigger\_offsets\_to\_length ( midipulse *newlength* ) [private]

*Threadsafe*

Might can get rid of this function?

10.60.3.99 void seq64::sequence::remove ( event\_list::iterator i ) [private]

If it's a note off, and that note is currently playing, then send a note off.

*Not threadsafe*

10.60.3.100 void seq64::sequence::remove ( event & e ) [private]

Finds the given event in m\_events, and removes the first iterator matching that.

*Not threadsafe*

**Todo** Use find instead in [sequence::remove\(\)](#)!

10.60.3.101 void seq64::sequence::remove\_all ( ) [private]

Unsets the modified flag. Also see the new [copy\\_events\(\)](#) function.

## 10.60.4 Field Documentation

10.60.4.1 midibyte seq64::sequence::m\_midi\_channel [private]

However, if this value is EVENT\_NULL\_CHANNEL (0xFF), then this sequence is an SMF 0 track, and has no single channel.

10.60.4.2 `int seq64::sequence::m_playing_notes[SEQ64_MIDI_NOTES_MAX] [private]`

It is used when muting, to shut off the notes that are playing.

10.60.4.3 `int seq64::sequence::m_seq_number [private]`

This number is set in the [perform::install\\_sequence\(\)](#) function.

10.60.4.4 `midipulse seq64::sequence::m_length [private]`

This value should be a power of two when used as a bar unit.

10.60.4.5 `midipulse seq64::sequence::m_snap_tick [private]`

It starts out as the value `m_ppqn / 4`.

10.60.4.6 `int seq64::sequence::m_time_beats_per_measure [private]`

Defaults to 4. Used by the sequence editor to mark things in correct time on the user-interface.

10.60.4.7 `int seq64::sequence::m_time_beat_width [private]`

Defaults to 4, which means the beat is a quarter note. A value of 8 would mean it is an eighth note. Used by the sequence editor to mark things in correct time on the user-interface.

10.60.4.8 `midibyte seq64::sequence::m_musical_key [private]`

If the value is `SEQ64_KEY_OF_C`, then there is no musical key to be set.

10.60.4.9 `midibyte seq64::sequence::m_musical_scale [private]`

If the value is the enumeration value `c_scale_off`, then there is no musical scale to be set.

10.60.4.10 `int seq64::sequence::m_background_sequence [private]`

If the value is greater than `max_sequence()`, then there is no background sequence to be set.

10.60.4.11 `mutex seq64::sequence::m_mutex [mutable], [private]`

Made mutable for use in certain locked getter functions.

## 10.61 seq64::trigger Class Reference

This class hold a single trigger for a sequence object.

## Public Member Functions

- [trigger](#) ()  
*Initializes the trigger structure.*
- bool [operator<](#) (const [trigger](#) &rhs)  
*This operator compares only the m\_tick\_start members.*
- midipulse [tick\\_start](#) () const  
*'Getter' function for member m\_tick\_start*
- void [tick\\_start](#) (midipulse s)  
*'Setter' function for member m\_tick\_start*
- void [increment\\_tick\\_start](#) (midipulse s)  
*'Setter' function for member m\_tick\_start*
- void [decrement\\_tick\\_start](#) (midipulse s)  
*'Setter' function for member m\_tick\_start*
- midipulse [tick\\_end](#) () const  
*'Getter' function for member m\_tick\_end*
- void [tick\\_end](#) (midipulse e)  
*'Setter' function for member m\_tick\_end*
- void [increment\\_tick\\_end](#) (midipulse s)  
*'Setter' function for member m\_tick\_end*
- void [decrement\\_tick\\_end](#) (midipulse s)  
*'Setter' function for member m\_tick\_end*
- midipulse [offset](#) () const  
*'Getter' function for member m\_offset*
- void [offset](#) (midipulse o)  
*'Setter' function for member m\_offset*
- void [increment\\_offset](#) (midipulse s)  
*'Setter' function for member m\_offset*
- void [decrement\\_offset](#) (midipulse s)  
*'Setter' function for member m\_offset*
- bool [selected](#) () const  
*'Getter' function for member m\_selected*
- void [selected](#) (bool s)  
*'Setter' function for member m\_selected*

## Private Attributes

- midipulse [m\\_tick\\_start](#)  
*Provides the starting tick for this trigger.*
- midipulse [m\\_tick\\_end](#)  
*Provides the ending tick for this trigger.*
- midipulse [m\\_offset](#)  
*Provides the offset for this trigger.*
- bool [m\\_selected](#)  
*Indicates that the trigger is part of a selection.*

### 10.61.1 Detailed Description

This class is used in playback, and is contained in the triggers class.

## 10.62 seq64::triggers Class Reference

The triggers class is a receptable the triggers that can be used with a sequence object.

### Public Types

- typedef std::list< [trigger](#) > [List](#)  
*Exposes the triggers type, currently needed for [midi\\_container](#) only.*

### Public Member Functions

- [triggers](#) ([sequence](#) &parent)  
*Principal constructor.*
- [~triggers](#) ()  
*A rote destructor.*
- [triggers](#) & [operator=](#) (const [triggers](#) &rhs)  
*Principal assignment operator.*
- void [set\\_ppqn](#) (int ppqn)  
*'Setter' function for member m\_ppqn We have to set this value after construction for best safety.*
- void [set\\_length](#) (int len)  
*'Setter' function for member m\_length We have to set this value after construction for best safety.*
- [List](#) & [triggerlist](#) ()  
*'Getter' function for member m\_triggers*
- void [push\\_undo](#) ()  
*Pushes the list-trigger into the trigger undo-list, then flags each item in the undo-list as unselected.*
- void [pop\\_undo](#) ()  
*If the trigger undo-list has any items, the list-trigger is pushed into the redo list, the top of the undo-list is copied into the list-trigger, and then pops from the undo-list.*
- void [print](#) (const std::string &seqname)  
*Prints a list of the currently-held triggers.*
- bool [play](#) (midipulse &start\_tick, midipulse &end\_tick)  
*If playback-mode (live mode?) is in force, that is, if using in-triggers and on/off triggers, this function handles that kind of playback.*
- void [add](#) (midipulse tick, midipulse len, midipulse offset=0, bool adjustoffset=true)  
*Adds a trigger.*
- void [adjust\\_offsets\\_to\\_length](#) (midipulse newlen)  
*Adjusts trigger offsets to the length of ???, for all triggers, and undo triggers.*
- void [split](#) (midipulse tick)  
*Splits the first trigger that brackets the splittick parameter.*
- void [split](#) ([trigger](#) &trig, midipulse split\_tick)  
*Splits the trigger given by the parameter into two triggers.*
- void [grow](#) (midipulse tick\_from, midipulse tick\_to, midipulse length)  
*Grows a trigger.*
- void [remove](#) (midipulse tick)  
*Deletes the first trigger that brackets the given tick from the trigger-list.*
- bool [get\\_state](#) (midipulse tick)  
*Checks the list of triggers against the given tick.*
- bool [select](#) (midipulse tick)  
*Checks the list of triggers against the given tick.*
- bool [unselect](#) ()

- Unselects all triggers.*
- bool [intersect](#) (midipulse position, midipulse &start, midipulse &end)
  - This function examines each trigger in the trigger list.*
- void [remove\\_selected](#) ()
  - Deletes the first selected trigger that is found.*
- void [copy\\_selected](#) ()
  - Copies the first selected trigger that is found.*
- void [paste](#) ()
  - If there is a copied trigger, then this function grabs it from the trigger clipboard and adds it.*
- bool [move\\_selected](#) (midipulse tick, bool adjustoffset, int which=2)
  - Moves selected triggers as per the given parameters.*
- midipulse [get\\_selected\\_start](#) ()
  - Gets the selected trigger's start tick.*
- midipulse [get\\_selected\\_end](#) ()
  - Gets the selected trigger's end tick.*
- midipulse [get\\_maximum](#) ()
  - Get the ending value of the last trigger in the trigger-list.*
- void [move](#) (midipulse start\_tick, midipulse distance, bool direction)
  - Moves triggers in the trigger-list.*
- void [copy](#) (midipulse start\_tick, midipulse distance)
  - Not sure what these diagrams are for yet.*
- void [clear](#) ()
  - Clears the whole list of triggers.*
- bool [next](#) (midipulse \*tick\_on, midipulse \*tick\_off, bool \*selected, midipulse \*tick\_offset)
  - 'Getter' function for member m\_trigger\_offset*
- [trigger next\\_trigger](#) ()
  - Get the next trigger in the trigger list, and set the parameters based on that trigger.*
- void [reset\\_draw\\_trigger\\_marker](#) ()
  - Sets the draw-trigger iterator to the beginning of the trigger list.*

## Private Member Functions

- midipulse [adjust\\_offset](#) (midipulse offset)
  - Adjusts the given offset by mod'ing it with m\_length and adding m\_length if needed, and returning the result.*

## Private Attributes

- [sequence](#) & [m\\_parent](#)
  - Holds a reference to the parent sequence object that owns this trigger object.*
- [List](#) [m\\_triggers](#)
  - This list holds the current pattern/triggers events.*
- [trigger](#) [m\\_clipboard](#)
  - This item holds a single copied trigger, to be pasted later.*
- [Stack](#) [m\\_undo\\_stack](#)
  - Handles the undo list for a series of operations on triggers.*
- [Stack](#) [m\\_redo\\_stack](#)
  - Handles the redo list for a series of operations on triggers.*
- [List::iterator](#) [m\\_iterator\\_play\\_trigger](#)
  - An iterator for cycling through the triggers during playback.*
- [List::iterator](#) [m\\_iterator\\_draw\\_trigger](#)

- *An iterator for cycling through the triggers during drawing.*
- bool `m_trigger_copied`  
*Set to true if there is an active trigger in the trigger clipboard.*
- midipulse `m_trigger_offset`  
*Offset.*
- int `m_ppqn`  
*Holds the value of the PPQN from the parent sequence, for easy access.*
- int `m_length`  
*Holds the value of the length from the parent sequence, for easy access.*

## 10.62.1 Constructor & Destructor Documentation

### 10.62.1.1 `seq64::triggers::triggers ( sequence & parent )`

#### Parameters

<i>parent</i>	The triggers object often needs to tell its parent sequence object what to do (such as stop playing).
---------------	---

## 10.62.2 Member Function Documentation

### 10.62.2.1 `triggers & seq64::triggers::operator= ( const triggers & rhs )`

Follows the stock rules for such an operator, but does a little more than just assign member values. Currently, it does not assign them all, so we should create a `partial_copy()` function to do this work, and use it where it is needed.

### 10.62.2.2 `void seq64::triggers::set_length ( int len ) [inline]`

Also, there a chance that the length of the parent might change from time to time. Currently, only the sequence constructor and midifile call this function.

### 10.62.2.3 `bool seq64::triggers::play ( midipulse & start_tick, midipulse & end_tick )`

This is a new function for `sequence::play()` to call.

#### Parameters

<i>start_tick</i>	Provides the starting tick value, and returns the modified value as a side-effect.
<i>end_tick</i>	Provides the ending tick value, and returns the modified value as a side-effect.

#### Returns

Returns true if we're through playing the frame, and the caller should stop the playback.

### 10.62.2.4 `void seq64::triggers::add ( midipulse tick, midipulse len, midipulse offset = 0, bool fixoffset = true )`

What is this?

```

is      ie
<      ><      ><      >
es              ee
<              >
XX
es ee

```



```

<      >
<>
es      ee
<      >
<      >
es      ee
<      >
<      >

```

**Parameters**

<i>tick</i>	Provides the tick (pulse) time at which the trigger goes on.
<i>len</i>	Provides the length of the trigger. This value is actually calculated from the "on" value minus the "off" value read from the MIDI file.
<i>offset</i>	This value specifies the offset of the trigger. It is a feature of the <code>c_triggers_new</code> that <code>c_triggers</code> doesn't have. It is the third value in the trigger specification of the Sequencer64 MIDI file.
<i>fixoffset</i>	If true, the offset parameter is modified by <a href="#">adjust_offset()</a> first. We think that basically makes sure it is positive.

**10.62.2.5 void seq64::triggers::adjust\_offsets\_to\_length ( midipulse *newlength* )****Parameters**

<i>newlength</i>	
------------------	--

COMMON CODE?

COMMON CODE?

**10.62.2.6 void seq64::triggers::split ( midipulse *splittick* )**

This is the first trigger where *splittick* is greater than L and less than R.

**Parameters**

<i>splittick</i>	Provides the tick that must be bracketed for the split to be made.
------------------	--

**10.62.2.7 void seq64::triggers::split ( trigger & *trig*, midipulse *splittick* )**

The original trigger ends 1 tick before the *splittick* parameter, and the new trigger starts at *splittick* and ends where the original trigger ended.

**Parameters**

<i>trig</i>	Provides the original trigger, and also holds the changes made to that trigger as it is shortened.
<i>splittick</i>	The position just after where the original trigger will be truncated, and the new trigger begins.

**10.62.2.8 void seq64::triggers::grow ( midipulse *tickfrom*, midipulse *tickto*, midipulse *len* )**

This function looks for the first trigger where the *tickfrom* parameter is between the trigger's tick-start and tick-end values. If found then the trigger's start is moved back to *tickto*, if necessary, or the trigger's end is moved to *tickto* plus the length parameter, if necessary.

Then this new trigger is added, and the function breaks from the search loop.

## Parameters

<i>tickfrom</i>	The desired from-value back which to expand the trigger, if necessary.
<i>tickto</i>	The desired to-value towards which to expand the trigger, if necessary.
<i>len</i>	The additional length to append to tickto for the check.

10.62.2.9 void seq64::triggers::remove ( midipulse *tick* )

## Parameters

<i>tick</i>	Provides the tick to be examined.
-------------	-----------------------------------

10.62.2.10 bool seq64::triggers::get\_state ( midipulse *tick* )

If any trigger is found to bracket that tick, then true is returned.

## Parameters

<i>tick</i>	Provides the tick of interest.
-------------	--------------------------------

## Returns

Returns true if a trigger is found that brackets the given tick.

10.62.2.11 bool seq64::triggers::select ( midipulse *tick* )

If any trigger is found to bracket that tick, then true is returned, and the trigger is marked as selected.

## Parameters

<i>tick</i>	Provides the tick of interest.
-------------	--------------------------------

## Returns

Returns true if a trigger is found that brackets the given tick.

## 10.62.2.12 bool seq64::triggers::unselect ( )

## Returns

Always returns false.

10.62.2.13 bool seq64::triggers::intersect ( midipulse *position*, midipulse & *start*, midipulse & *ender* )

If the given position is between the current trigger's tick-start and tick-end values, then these values are copied to the start and end parameters, respectively, and then we exit.

## Parameters

<i>position</i>	The position to examine.
-----------------	--------------------------

<i>start</i>	The destination for the starting tick (m_tick_start) of the matching trigger.
<i>ender</i>	The destination for the ending tick (m_tick_end) of the matching trigger.

**Returns**

Returns true if a trigger was found whose start/end ticks contained the position. Otherwise, false is returned, and the start and end return parameters should not be used.

**10.62.2.14 void seq64::triggers::paste ( )**

It pastes at the copy end.

**10.62.2.15 bool seq64::triggers::move\_selected ( midipulse tick, bool fixoffset, int which = 2 )**

```

mintick][0
2
1][maxtick

```

**Parameters**

<i>which</i>	<p>Selects which movement will be done. This parameter has three possible values:</p> <ul style="list-style-type: none"> <li>• If we are moving the 0, use first as offset.</li> <li>• If we are moving the 1, use the last as the offset.</li> <li>• If we are moving both (2), use first as offset.</li> </ul>
--------------	--

**Returns**

Returns true if there was room to move. Otherwise, false is returned. We need this feature to support keystroke movement of a selected trigger in the perfrill window, and keep it from continually incremented when there can be no more movement. This causes moving the other direction to be delayed while the accumulating movement counter is used up. However, right now we can't rely on this result, and ignore it. There may be no way around this minor issue.

**10.62.2.16 midipulse seq64::triggers::get\_selected\_start ( )**

We guess this ends up selecting only one trigger, otherwise only the last selected one would effectively set the result.

**Returns**

Returns the tick\_start() value of the last-selected trigger. If no triggers are selected, then midipulse(-1) is returned.

**10.62.2.17 midipulse seq64::triggers::get\_selected\_end ( )****Returns**

Returns the tick\_end() value of the last-selected trigger. If no triggers are selected, then midipulse(-1) is returned.

### 10.62.2.18 void seq64::triggers::copy ( midipulse *starttick*, midipulse *distance* )

```

... a
[      ][      ]
...
... a
...

5   7   play
3   offset
8   10  play

X...X...X...X...X...X...X...X...X...
L       R
[       ][      ][ ] orig
[       ][      ]

    <<
    [       ][ ][ ] split on the R marker, shift first
    [       ][      ]
    delete middle
    [       ][ ][ ] move ticks
    [       ][      ]

    L       R
    [       ][ ][ ] split on L
    [       ][      ]

    [       ][ ][ ] increase all after L
    [       ][      ]

```

Copies triggers to...

### 10.62.2.19 bool seq64::triggers::next ( midipulse \* *tick\_on*, midipulse \* *tick\_off*, bool \* *selected*, midipulse \* *offset* )

Get the next trigger in the trigger list, and set the parameters based on that trigger.

```
midipulse get_trigger_offset () const { return m_trigger_offset; }
```

**Todo** It would be a bit simpler to simply return a trigger object, wouldn't it?

#### Parameters

<i>tick_on</i>	Return value for the retrieval of the starting tick for the trigger.
<i>tick_off</i>	Return value for the retrieval of the ending tick for the trigger.
<i>selected</i>	Return value for the retrieval of the is-selected flag for the trigger.
<i>offset</i>	Return value for the retrieval of the offset for the trigger.

#### Returns

Returns true if a trigger was found. If false, the caller cannot rely on the values returned through the return parameters.

**Side-effect(s)** The value of the `m_iterator_draw_trigger` member will be altered by this call, unless pointing to the end of the triggerlist, or if there are no triggers.

### 10.62.2.20 trigger seq64::triggers::next\_trigger ( )

#### Returns

Returns the next trigger. If there is none, a default trigger object is returned.

**Side-effect(s)** The value of the `m_iterator_draw_trigger` member will be altered by this call, unless pointing to the end of the triggerlist, or if there are no triggers.

10.62.2.21 midipulse seq64::triggers::adjust\_offset ( midipulse *offset* ) [private]

## Parameters

<i>offset</i>	Provides the offset, mod'ed against <code>m_length</code> , used to adjust the offset.
---------------	--

## Returns

Returns the new offset. However, if `m_length` is 0, no change is made, and the original offset is returned.

## 10.62.3 Field Documentation

10.62.3.1 `int seq64::triggers::m_ppqn` [private]

This should not change, but we have to set it after construction, and so we provide a setter for it, `set_ppqn()`, called by the sequence constructor.

10.62.3.2 `int seq64::triggers::m_length` [private]

This might change, we're not yet sure.

10.63 `seq64::user_instrument` Class Reference

Provides data about the MIDI instruments, readable from the "user" configuration file.

## Public Member Functions

- `user_instrument` (const std::string &name="")  
*Default constructor.*
- `user_instrument` (const `user_instrument` &rhs)  
*Copy constructor.*
- `user_instrument` & `operator=` (const `user_instrument` &rhs)  
*Principal assignment operator.*
- bool `is_valid` () const  
*'Getter' function for member `m_is_valid`*
- void `set_defaults` ()  
*Sets the default values.*
- const std::string & `name` () const  
*'Getter' function for member `m_instrument_def.instrument` (name of instrument)*
- int `controller_count` () const  
*'Getter' function for member `m_controller_count` This function returns the number of active controllers.*
- int `controller_max` () const  
*'Getter' function for member `MIDI_CONTROLLER_MAX` This function returns the maximum number of controllers, active or inactive.*
- const std::string & `controller_name` (int c) const  
*'Getter' function for member `m_instrument_def.controllers[c]`*
- bool `controller_active` (int c) const  
*'Getter' function for member `m_instrument_def.controllers_active[c]`*
- void `set_controller` (int c, const std::string &cname, bool isactive)  
*'Setter' function for member `m_instrument_def.controllers[c]` and `.controllers_active[c]` Only sets the controller values if the object is already valid.*

## Private Member Functions

- void [set\\_name](#) (const std::string &instname)  
*'Setter' function for member `m_instrument_def.instrument`*
- void [copy\\_definitions](#) (const [user\\_instrument](#) &rhs)  
*Copies the array members from one instance of [user\\_instrument](#) to this one.*

## Private Attributes

- bool [m\\_is\\_valid](#)  
*Provides a validity flag, useful in returning a reference to a bogus object for internal error-check.*
- int [m\\_controller\\_count](#)  
*Provides the actual number of non-default controllers actually set.*
- [user\\_instrument\\_t m\\_instrument\\_def](#)  
*The instance of the structure that this class wraps.*

### 10.63.1 Detailed Description

Will later make the size adjustable, if it makes sense to do so.

### 10.63.2 Member Function Documentation

#### 10.63.2.1 void seq64::user\_instrument::set\_defaults ( )

Also invalidates the object.

#### 10.63.2.2 int seq64::user\_instrument::controller\_max ( ) const [inline]

Remember that the controller numbers for each MIDI instrument range from 0 to 127 (MIDI\_CONTROLLER\_MAX-1).

#### 10.63.2.3 const std::string & seq64::user\_instrument::controller\_name ( int c ) const

##### Parameters

<code>c</code>	The index of the desired controller.
----------------	--------------------------------------

##### Returns

The name of the desired controller has is returned. If the index `c` is out of range, or the object is not valid, then a reference to an internal, empty string is returned.

#### 10.63.2.4 bool seq64::user\_instrument::controller\_active ( int c ) const

##### Parameters

<code>c</code>	The index of the desired controller.
----------------	--------------------------------------

##### Returns

The status of the desired controller has is returned. If the index `c` is out of range, or the object is not valid, then `false` is returned.

10.63.2.5 void seq64::user\_instrument::set\_controller( int *c*, const std::string & *cname*, bool *isactive* )



## Parameters

<i>c</i>	The index of the desired controller.
<i>cname</i>	The name of the controller to be set as the controller name.
<i>isactive</i>	A flag that indicates if the desired controller is active.

10.63.2.6 `void seq64::user_instrument::set_name ( const std::string & instname ) [private]`

If the name parameter is not empty, the validity flag is set to true, otherwise it is set to false. Too tricky?

10.63.2.7 `void seq64::user_instrument::copy_definitions ( const user_instrument & rhs ) [private]`

Does not include the validity flag.

### 10.63.3 Field Documentation

10.63.3.1 `bool seq64::user_instrument::m_is_valid [private]`

Callers should check this flag via the `is_valid()` accessor before using this object. This flag is set to true when any valid member assignment occurs via a public setter call. However, setting an empty name for the instrument member will render the object invalid.

10.63.3.2 `int seq64::user_instrument::m_controller_count [private]`

Often, the "user" configuration file has only a few out of the 128 assigned explicitly.

## 10.64 seq64::user\_instrument\_t Struct Reference

This structure corresponds to `[user-instrument-N]` definitions in the `~/ .seq24usr` or `~/ .config/sequencer64/seq64usr` file.

### Data Fields

- `std::string instrument`  
*Provides the name of the "instrument" being supported.*
- `std::string controllers [SEQ64_MIDI_CONTROLLER_MAX]`  
*Provides a list of up to 128 controllers (e.g.*
- `bool controllers_active [SEQ64_MIDI_CONTROLLER_MAX]`  
*Provides a flag that indicates if each of up to 128 controller is active and supported.*

### 10.64.1 Field Documentation

10.64.1.1 `std::string seq64::user_instrument_t::instrument`

Do not confuse "instrument" with "program" here. An "instrument" is most likely a hardware MIDI sound-box (though it could be a software synthesizer as well.

10.64.1.2 `std::string seq64::user_instrument_t::controllers[SEQ64_MIDI_CONTROLLER_MAX]`

"Modulation"). If a controller isn't present, or if General MIDI is in force, this name might be empty.

10.64.1.3 `bool seq64::user_instrument_t::controllers_active[SEQ64_MIDI_CONTROLLER_MAX]`

If false, it might be an unsupported controller or a General MIDI device.

## 10.65 `seq64::user_midi_bus` Class Reference

Provides data about the MIDI busses, readable from the "user" configuration file.

### Public Member Functions

- `user_midi_bus` (const std::string &name="")  
*Default constructor.*
- `user_midi_bus` (const `user_midi_bus` &rhs)  
*Copy constructor.*
- `user_midi_bus` & `operator=` (const `user_midi_bus` &rhs)  
*Principal assignment operator.*
- `bool is_valid` () const  
*'Getter' function for member m\_is\_valid*
- `void set_defaults` ()  
*Sets the default values.*
- `const std::string & name` () const  
*'Getter' function for member m\_midi\_bus\_def.alias (name of alias)*
- `int channel_count` () const  
*'Getter' function for member m\_channel\_count*
- `int channel_max` () const  
*'Getter' function for member SEQ64\_MIDI\_BUS\_CHANNEL\_MAX*
- `int instrument` (int channel) const  
*'Getter' function for member m\_midi\_bus\_def.instrument[channel]*
- `void set_instrument` (int channel, int instrum)  
*'Getter' function for member m\_midi\_bus\_def.instrument[channel]*

### Private Member Functions

- `void set_name` (const std::string &name)  
*'Setter' function for member m\_midi\_bus\_def.alias (name of alias) Also sets the validity flag according to the emptiness of the name parameter.*
- `void copy_definitions` (const `user_midi_bus` &rhs)  
*Copies the member fields from one instance of `user_midi_bus` to this one.*

### Private Attributes

- `bool m_is_valid`  
*Provides a validity flag, useful in returning a reference to a bogus object for internal error-check.*
- `int m_channel_count`  
*Provides the actual number of non-default buss channels actually set.*
- `user_midi_bus_t m_midi_bus_def`  
*The instance of the structure that this class wraps.*

### 10.65.1 Detailed Description

Will later make the size adjustable, if it makes sense to do so.

### 10.65.2 Member Function Documentation

#### 10.65.2.1 void seq64::user\_midi\_bus::set\_defaults ( )

Also invalidates the object. All 16 of the channels are set to SEQ64\_GM\_INSTRUMENT\_FLAG (-1).

#### 10.65.2.2 int seq64::user\_midi\_bus::channel\_count ( ) const [inline]

##### Returns

This function returns the number of channels. Basically this value is always the same as that returned by [channel\\_max\(\)](#), but this pair of functions is consistent with the count functions in the [user\\_instrument](#) class.

#### 10.65.2.3 int seq64::user\_midi\_bus::channel\_max ( ) const [inline]

##### Returns

Returns the maximum number of MIDI buss channels. Remember that the instrument channels for each MIDI buss range from 0 to 15 (MIDI\_BUS\_CHANNEL\_MAX-1).

#### 10.65.2.4 int seq64::user\_midi\_bus::instrument ( int *channel* ) const

##### Parameters

<i>channel</i>	Provides the desired buss channel number.
----------------	---

##### Returns

The instrument number of the desired buss channel is returned. If the channel number is out of range, or the object is not valid, then SEQ64\_GM\_INSTRUMENT\_FLAG (-1) is returned.

#### 10.65.2.5 void seq64::user\_midi\_bus::set\_instrument ( int *channel*, int *instrum* )

Does not alter the validity flag, just checks it.

##### Parameters

<i>channel</i>	Provides the desired buss channel number.
<i>instrum</i>	Provides the instrument number to set that channel to.

#### 10.65.2.6 void seq64::user\_midi\_bus::copy\_definitions ( const user\_midi\_bus & *rhs* ) [private]

Does not include the validity flag.

### 10.65.3 Field Documentation

#### 10.65.3.1 bool seq64::user\_midi\_bus::m\_is\_valid [private]

Callers should check this flag via the [is\\_valid\(\)](#) accessor before using this object. This flag is set to true when any valid member assignment occurs via a public setter call.

10.65.3.2 `int seq64::user_midi_bus::m_channel_count` `[private]`

Often, the "user" configuration file has only a few out of the 16 assigned explicitly.

## 10.66 `seq64::user_midi_bus_t` Struct Reference

This structure corresponds to `[user-midi-bus-0]` definitions in the `~/seq24usr` ("user") file (`~/config/sequencer64/sequencer64_usr` in the latest version of the application).

### Data Fields

- `std::string alias`  
*Provides the user's desired name for the MIDI bus.*
- `int instrument` `[SEQ64_MIDI_BUS_CHANNEL_MAX]`  
*Provides an implicit list of MIDI channels from 0 to 15 (1 to 16) and the "instrument" number assigned to each channel.*

### 10.66.1 Field Documentation

10.66.1.1 `std::string seq64::user_midi_bus_t::alias`

For example, "2x2 A" for some kind of MIDI card or USB MIDI cable. If `manual-alsa-ports` is enabled, this could be something like "[0] seq24 0", and that is what should be shown in that case.

10.66.1.2 `int seq64::user_midi_bus_t::instrument` `[SEQ64_MIDI_BUS_CHANNEL_MAX]`

Note that the "instrument" is not a MIDI program number. Instead, it is the number associated with a "user-instrument" section in the "user" configuration file.

## 10.67 `seq64::user_settings` Class Reference

Holds the current values of sequence settings and settings that can modify the number of sequences and the configuration of the user-interface.

### Public Member Functions

- `user_settings` ()  
*Scale factor for PPQN.*
- `user_settings` (const `user_settings` &rhs)  
*Copy constructor.*
- `user_settings` & `operator=` (const `user_settings` &rhs)  
*Principal assignment operator.*
- void `set_defaults` ()  
*Sets the default values.*
- void `normalize` ()  
*Calculate the derived values from the already-set values.*
- void `set_globals` () const  
*Copies the current values of the member variables into their corresponding global variables.*
- void `get_globals` ()  
*Copies the current values of the global variables into their corresponding member variables.*

- bool [add\\_bus](#) (const std::string &alias)  
*Adds a user bus to the container, but only does so if the name parameter is not empty.*
- bool [add\\_instrument](#) (const std::string &instname)  
*Adds a user instrument to the container, but only does so if the name parameter is not empty.*
- const [user\\_midi\\_bus](#) & [bus](#) (int index)  
*'Getter' function for member Unlike the non-const version this function is public.*
- const [user\\_instrument](#) & [instrument](#) (int index)  
*'Getter' function for member Unlike the non-const version this function is public.*
- int [bus\\_count](#) () const  
*'Getter' function for member m\_midi\_buses.size()*
- void [set\\_bus\\_instrument](#) (int index, int channel, int instrum)  
*'Getter' function for member m\_midi\_buses[index].instrument[channel] Currently this function is used, in the [userfile::parse\(\)](#) function.*
- int [bus\\_instrument](#) (int buss, int channel)  
*'Getter' function for member m\_midi\_buses[buss].instrument[channel]*
- const std::string & [bus\\_name](#) (int buss)  
*'Getter' function for member m\_midi\_buses[buss].name*
- int [instrument\\_count](#) () const  
*'Getter' function for member m\_instruments.size()*
- void [set\\_instrument\\_controllers](#) (int index, int cc, const std::string &ccname, bool isactive)  
*'Setter' function for member m\_midi\_instrument\_defs[index].controllers, controllers\_active*
- const std::string & [instrument\\_name](#) (int instrum)  
*'Getter' function for member m\_instruments[instrument].instrument (name of instrument)*
- const std::string & [instrument\\_name](#) (int buss, int channel)  
*Gets the correct instrument number from the buss and channel, and then looks up the name of the instrument.*
- bool [instrument\\_controller\\_active](#) (int instrum, int cc)  
*'Getter' function for member m\_instruments[instrument].controllers\_active[controller]*
- bool [controller\\_active](#) (int buss, int channel, int cc)  
*A convenience function so that the caller doesn't have to get the instrument number from the [bus\\_instrument\(\)](#) member function.*
- const std::string & [instrument\\_controller\\_name](#) (int instrum, int cc)  
*'Getter' function for member m\_instruments[instrument].controllers\_active[controller]*
- const std::string & [controller\\_name](#) (int buss, int channel, int cc)  
*'Getter' function for member m\_instruments[instrument].controllers\_active[controller] A convenience function so that the caller doesn't have to get the instrument number from the [bus\\_instrument\(\)](#) member function.*
- int [grid\\_style](#) () const  
*'Getter' function for member m\_grid\_style Checks for normal style.*
- bool [grid\\_is\\_normal](#) () const  
*'Getter' function for member m\_grid\_style Checks for normal style.*
- bool [grid\\_is\\_white](#) () const  
*'Getter' function for member m\_grid\_style Checks for the white style.*
- bool [grid\\_is\\_black](#) () const  
*'Getter' function for member m\_grid\_style Checks for the black style.*
- int [grid\\_brackets](#) () const  
*'Getter' function for member m\_grid\_brackets*
- int [mainwnd\\_rows](#) () const  
*'Getter' function for member m\_mainwnd\_rows*
- int [mainwnd\\_cols](#) () const  
*'Getter' function for member m\_mainwnd\_cols*
- int [seqs\\_in\\_set](#) () const  
*'Getter' function for member m\_seqs\_in\_set, dependent member*

- int [gmute\\_tracks](#) () const  
*'Getter' function for member m\_gmute\_tracks, dependent member*
- int [max\\_sets](#) () const  
*'Getter' function for member m\_max\_sets*
- int [max\\_sequence](#) () const  
*'Getter' function for member m\_max\_sequence, dependent member*
- int [text\\_x](#) () const  
*'Getter' function for member m\_text\_x, not user modifiable, not saved*
- int [text\\_y](#) () const  
*'Getter' function for member m\_text\_y, not user modifiable, not saved*
- int [seqchars\\_x](#) () const  
*'Getter' function for member m\_seqchars\_x, not user modifiable, not saved*
- int [seqchars\\_y](#) () const  
*'Getter' function for member m\_seqchars\_y, not user modifiable, not saved*
- int [seqarea\\_x](#) () const  
*'Getter' function for member m\_seqarea\_x, not user modifiable, not saved*
- int [seqarea\\_y](#) () const  
*'Getter' function for member m\_seqarea\_y, not user modifiable, not saved*
- int [seqarea\\_seq\\_x](#) () const  
*'Getter' function for member m\_seqarea\_seq\_x, not user modifiable, not saved*
- int [seqarea\\_seq\\_y](#) () const  
*'Getter' function for member m\_seqarea\_seq\_y, not user modifiable, not saved*
- int [mainwid\\_border](#) () const  
*'Getter' function for member m\_mainwid\_border*
- int [mainwid\\_spacing](#) () const  
*'Getter' function for member m\_mainwid\_spacing*
- int [mainwid\\_x](#) () const  
*'Getter' function for member m\_mainwid\_x, dependent member*
- int [mainwid\\_y](#) () const  
*'Getter' function for member m\_mainwid\_y, dependent member*
- int [control\\_height](#) () const  
*'Getter' function for member m\_control\_height*
- int [zoom](#) () const  
*'Getter' function for member m\_current\_zoom*
- void [zoom](#) (int value)  
*'Setter' function for member m\_current\_zoom This value is not modified unless the value parameter is between 1 and 32, inclusive.*
- bool [global\\_seq\\_feature](#) () const  
*'Getter' function for member m\_global\_seq\_feature\_save*
- void [global\\_seq\\_feature](#) (bool flag)  
*'Setter' function for member m\_global\_seq\_feature\_save*
- int [seqedit\\_scale](#) () const  
*'Getter' function for member m\_seqedit\_scale*
- void [seqedit\\_scale](#) (int scale)  
*'Setter' function for member m\_seqedit\_scale*
- int [seqedit\\_key](#) () const  
*'Getter' function for member m\_seqedit\_key*
- void [seqedit\\_key](#) (int key)  
*'Setter' function for member m\_seqedit\_key*
- int [seqedit\\_bgsequence](#) () const  
*'Getter' function for member m\_seqedit\_bgsequence*

- void [seqedit\\_bgsequence](#) (int seqnum)  
*'Setter' function for member m\_seqedit\_bgsequence Note that SEQ64\_IS\_LEGAL\_SEQUENCE() allows the SEQ64\_SEQUENCE\_LIMIT (0x800 = 2048) value, to turn off the use of a background sequence.*
- bool [use\\_new\\_font](#) () const  
*'Getter' function for member m\_use\_new\_font*
- bool [allow\\_two\\_perfedits](#) () const  
*'Getter' function for member m\_allow\_two\_perfedits*
- int [perf\\_h\\_page\\_increment](#) () const  
*'Getter' function for member m\_h\_perf\_page\_increment*
- int [perf\\_v\\_page\\_increment](#) () const  
*'Getter' function for member m\_v\_perf\_page\_increment*
- bool [save\\_user\\_config](#) () const  
*'Getter' function for member m\_save\_user\_config*
- void [save\\_user\\_config](#) (bool flag)  
*'Setter' function for member m\_save\_user\_config*
- int [midi\\_ppqn](#) () const  
*'Getter' function for member m\_midi\_ppqn*
- int [midi\\_beats\\_per\\_bar](#) () const  
*'Getter' function for member m\_midi\_beats\_per\_measure*
- int [midi\\_beats\\_per\\_minute](#) () const  
*'Getter' function for member m\_midi\_beats\_per\_minute*
- int [midi\\_beat\\_width](#) () const  
*'Getter' function for member m\_midi\_beat\_width*
- char [midi\\_buss\\_override](#) () const  
*'Getter' function for member m\_midi\_buss\_override*
- int [min\\_zoom](#) () const  
*'Getter' function for member mc\_min\_zoom*
- int [max\\_zoom](#) () const  
*'Getter' function for member mc\_max\_zoom*
- int [baseline\\_ppqn](#) () const  
*'Getter' function for member mc\_baseline\_ppqn*
- void [use\\_new\\_font](#) (bool flag)  
*'Setter' function for member m\_use\_new\_font*
- void [allow\\_two\\_perfedits](#) (bool flag)  
*Sets the value of allowing two perfedits to be created and shown to the user.*
- void [perf\\_h\\_page\\_increment](#) (int inc)  
*Sets the horizontal page increment size for the horizontal scrollbar of a perfedit window.*
- void [perf\\_v\\_page\\_increment](#) (int inc)  
*Sets the vertical page increment size for the vertical scrollbar of a perfedit window.*
- void [midi\\_ppqn](#) (int ppqn)  
*'Setter' function for member m\_midi\_ppqn This value can be set from 96 to 960 (this upper limit will be determined by what Sequencer64 can actually handle).*
- void [midi\\_buss\\_override](#) (char buss)  
*'Setter' function for member m\_midi\_buss\_override This value can be set from 0 to 31.*

## Protected Member Functions

- void [grid\\_brackets](#) (int thickness)  
*'Getter' function for member m\_grid\_brackets*
- void [grid\\_style](#) (int gridstyle)  
*'Setter' function for member m\_grid\_style*
- void [mainwnd\\_rows](#) (int value)  
*'Setter' function for member m\_mainwnd\_rows This value is not modified unless the value parameter is between 4 and 8, inclusive.*
- void [mainwnd\\_cols](#) (int value)  
*'Setter' function for member m\_mainwnd\_cols This value is not modified unless the value parameter is between 8 and 10, inclusive.*
- void [max\\_sets](#) (int value)  
*'Setter' function for member m\_max\_sets This value is not modified unless the value parameter is between 32 and 64, inclusive.*
- void [text\\_x](#) (int value)  
*'Setter' function for member m\_text\_x This value is not modified unless the value parameter is between 6 and 6, inclusive.*
- void [text\\_y](#) (int value)  
*'Setter' function for member m\_text\_y This value is not modified unless the value parameter is between 12 and 12, inclusive.*
- void [seqchars\\_x](#) (int value)  
*'Setter' function for member m\_seqchars\_x This affects the size or crampiness of a pattern slot, and for now we will hardwire it to 15.*
- void [seqchars\\_y](#) (int value)  
*'Setter' function for member m\_seqchars\_y This affects the size or crampiness of a pattern slot, and for now we will hardwire it to 5.*
- void [seqarea\\_x](#) (int value)  
*'Setter' function for member m\_seqarea\_x*
- void [seqarea\\_y](#) (int value)  
*'Setter' function for member m\_seqarea\_y*
- void [seqarea\\_seq\\_x](#) (int value)  
*'Setter' function for member m\_seqarea\_seq\_x*
- void [seqarea\\_seq\\_y](#) (int value)  
*'Setter' function for member m\_seqarea\_seq\_y*
- void [mainwid\\_border](#) (int value)  
*'Setter' function for member m\_mainwid\_border This value is not modified unless the value parameter is between 0 and 3, inclusive.*
- void [mainwid\\_spacing](#) (int value)  
*'Setter' function for member m\_mainwid\_spacing This value is not modified unless the value parameter is between 2 and 6, inclusive.*
- void [control\\_height](#) (int value)  
*'Setter' function for member m\_control\_height This value is not modified unless the value parameter is between 0 and 4, inclusive.*
- void [dump\\_summary](#) ()  
*Provides a debug dump of basic information to help debug a surprisingly intractable problem with all busses having the name and values of the last buss in the configuration.*
- void [midi\\_beats\\_per\\_bar](#) (int beatsperbar)  
*'Setter' function for member m\_midi\_beats\_per\_measure This value can be set from 1 to 16.*
- void [midi\\_beats\\_per\\_minute](#) (int beatsperminute)  
*'Setter' function for member m\_midi\_beats\_minute This value can be set from 20 to 500.*
- void [midi\\_beat\\_width](#) (int beatwidth)  
*'Setter' function for member m\_midi\_beatwidth This value can be set to any power of 2 in the range from 1 to 16.*



## Private Types

- enum [mainwid\\_grid\\_style\\_t](#) {  
    [grid\\_style\\_normal](#),  
    [grid\\_style\\_white](#),  
    [grid\\_style\\_black](#),  
    [grid\\_style\\_max](#) }
- typedef std::vector< [user\\_midi\\_bus](#) > [Busses](#)  
    *[user-midi-bus-definitions]*
- typedef std::vector< [user\\_instrument](#) > [Instruments](#)  
    *[user-instrument-definitions]*

## Private Member Functions

- [user\\_midi\\_bus](#) & [private\\_bus](#) (int buss)  
    *'Getter' function for member m\_midi\_buses[index] (internal function) If the index is out of range, then an invalid object is returned.*
- [user\\_instrument](#) & [private\\_instrument](#) (int instrum)  
    *'Getter' function for member m\_instruments[index] If the index is out of range, then a invalid object is returned.*

## Private Attributes

- [Busses m\\_midi\\_buses](#)  
    *Provides data about the MIDI busses, readable from the "user" configuration file.*
- [Instruments m\\_instruments](#)  
    *Provides data about the MIDI instruments, readable from the "user" configuration file.*
- [mainwid\\_grid\\_style\\_t m\\_grid\\_style](#)  
    *[user-interface-settings]*
- int [m\\_grid\\_brackets](#)  
    *Specify drawing brackets (like the old Seq24) or a solid box.*
- int [m\\_mainwnd\\_rows](#)  
    *Number of rows in the Patterns Panel.*
- int [m\\_mainwnd\\_cols](#)  
    *Number of columns in the Patterns Panel.*
- int [m\\_max\\_sets](#)  
    *Maximum number of screen sets that can be supported.*
- int [m\\_mainwid\\_border](#)  
    *These control sizes.*
- int [m\\_control\\_height](#)  
    *This constants seems to be created for a future purpose, perhaps to reserve space for a new bar on the mainwid pane.*
- int [m\\_current\\_zoom](#)  
    *Provides the initial zoom value, in units of.*
- bool [m\\_global\\_seq\\_feature\\_save](#)  
    *If true, this value provide a bit of backward-compatibility with the global key/scale/background-sequence persistence feature.*
- int [m\\_seqedit\\_scale](#)  
    *Replaces seqedit::m\_initial\_scale as the repository for the scale to apply when a sequence is loaded into the sequence editor.*
- int [m\\_seqedit\\_key](#)  
    *Replaces seqedit::m\_initial\_key as the repository for the key to apply when a sequence is loaded into the sequence editor.*

- int [m\\_seqedit\\_bgsequence](#)  
*Replaces seqedit::m\_initial\_sequence as the repository for the background sequence to apply when a sequence is loaded into the sequence editor.*
- bool [m\\_use\\_new\\_font](#)  
*Sets the usage of the font.*
- bool [m\\_allow\\_two\\_perfedits](#)  
*Enables the usage of two perfedit windows, for added convenience in editing multi-set songs.*
- int [m\\_h\\_perf\\_page\\_increment](#)  
*Allows a changed to the page size for the horizontal scroll bar.*
- int [m\\_v\\_perf\\_page\\_increment](#)  
*Allows a changed to the page size for the vertical scroll bar.*
- int [m\\_text\\_x](#)  
*Constants for the mainwid class.*
- int [m\\_seqchars\\_x](#)  
*Constants for the mainwid class.*
- int [m\\_midi\\_ppqn](#)  
*Provides the universal PPQN setting for the duration of this setting.*
- int [m\\_midi\\_beats\\_per\\_measure](#)  
*Provides the universal and unambiguous MIDI value for beats per measure, also called "beats per bar" (BPB).*
- int [m\\_midi\\_beats\\_per\\_minute](#)  
*Provides the universal and unambiguous MIDI value for beats per minute (BPM).*
- int [m\\_midi\\_beat\\_width](#)  
*Provides the universal MIDI value for beats width (BW).*
- char [m\\_midi\\_buss\\_override](#)  
*Provides a universal override of the buss number for all sequences, for the purpose of convenience of of testing.*
- int [m\\_seqs\\_in\\_set](#)  
*Number of patterns/sequences in the Patterns Panel, also known as a "set" or "screen set".*
- int [m\\_gmute\\_tracks](#)  
*Number of group-mute tracks that can be supported, which is m\_seqs\_in\_set squared, or 1024.*
- int [m\\_max\\_sequence](#)  
*The maximum number of patterns supported is given by the number of patterns supported in the panel (32) times the maximum number of sets (32), or 1024 patterns.*
- int [m\\_seqarea\\_x](#)  
*The m\_seqarea\_x and m\_seqarea\_y constants are derived from the width and heights of the default character set, and the number of characters in width, and the number of lines, in a pattern/sequence box.*
- int [m\\_seqarea\\_seq\\_x](#)  
*Area of what? Doesn't look at all like it is based on the size of characters.*
- int [m\\_mainwid\\_x](#)  
*The width of the main pattern/sequence grid, in pixels.*
- bool [m\\_save\\_user\\_config](#)  
*Provides a temporary variable that can be set from the command line to cause the "user" state to be saved into the "user" configuration file.*
- const int [mc\\_min\\_zoom](#)  
*Provides the minimum zoom value, currently a constant.*
- const int [mc\\_max\\_zoom](#)  
*Provides the maximum zoom value, currently a constant.*
- const int [mc\\_baseline\\_ppqn](#)  
*Permanent storage for the baseline, default PPQN used by Seq24.*

### 10.67.1 Detailed Description

These settings will eventually be made part of the "user" settings file.

## 10.67.2 Member Typedef Documentation

10.67.2.1 `typedef std::vector<user_midi_bus> seq64::user_settings::Busses [private]`

Internal type for the container of `user_midi_bus` objects. Sorry about the "confusion" about "bus" versus "buss". See Google for arguments about it.

10.67.2.2 `typedef std::vector<user_instrument> seq64::user_settings::Instruments [private]`

Internal type for the container of `user_instrument` objects.

## 10.67.3 Member Enumeration Documentation

10.67.3.1 `enum seq64::user_settings::mainwid_grid_style_t [private]`

### Enumerator

***grid\_style\_normal*** Provides a setting to control the overall style of grid-drawing for the pattern slots in mainwid. These values can be specified in the [user-interface-settings] section of the "user" configuration file.

The grid background color is the normal background color for the current GTK theme. The box is drawn with brackets on either side.

***grid\_style\_white*** The grid background color is white. This style better fits displaying the white-on-black sequence numbers. The box is drawn with brackets on either side.

***grid\_style\_black*** The grid background color is black.

***grid\_style\_max*** Marks the end of the list, and is an illegal value.

## 10.67.4 Constructor & Destructor Documentation

10.67.4.1 `seq64::user_settings::user_settings ( )`

Default constructor.

Should this be a float (6 significant digits) or two integers for scaling?

## 10.67.5 Member Function Documentation

10.67.5.1 `void seq64::user_settings::set_defaults ( )`

For the `m_midi_buses` and `m_instruments` members, this function can only iterate over the current size of the vectors. But the default size is zero!

10.67.5.2 `void seq64::user_settings::set_globals ( ) const`

Should be called at initialization, and after settings are read from the "user" configuration file.

DO NOT PUT ANY GLOBALS HERE UNTIL THEIR EFFECTS HAVE BEEN TESTED!!!!

10.67.5.3 `void seq64::user_settings::get_globals ( )`

Should be called before settings are written to the "user" configuration file.

10.67.5.4 `const user_midi_bus& seq64::user_settings::bus ( int index ) [inline]`

Cannot append the const specifier.

10.67.5.5 `const user_instrument& seq64::user_settings::instrument ( int index ) [inline]`

Cannot append the const specifier.

10.67.5.6 `bool seq64::user_settings::controller_active ( int buss, int channel, int cc ) [inline]`

It also has a shorter name.

10.67.5.7 `const std::string& seq64::user_settings::controller_name ( int buss, int channel, int cc ) [inline]`

It also has a shorter name.

10.67.5.8 `void seq64::user_settings::zoom ( int value )`

The default value is 2.

10.67.5.9 `void seq64::user_settings::mainwnd_rows ( int value ) [protected]`

The default value is 4. Dependent values are recalculated after the assignment.

10.67.5.10 `void seq64::user_settings::mainwnd_cols ( int value ) [protected]`

The default value is 8. Dependent values are recalculated after the assignment.

10.67.5.11 `void seq64::user_settings::max_sets ( int value ) [protected]`

The default value is 32. Dependent values are recalculated after the assignment.

10.67.5.12 `void seq64::user_settings::text_x ( int value ) [protected]`

The default value is 6. Dependent values are recalculated after the assignment. This value is currently restricted, until we can code up a bigger font.

10.67.5.13 `void seq64::user_settings::text_y ( int value ) [protected]`

The default value is 12. Dependent values are recalculated after the assignment. This value is currently restricted, until we can code up a bigger font.

10.67.5.14 `void seq64::user_settings::mainwid_border ( int value ) [protected]`

The default value is 0. Dependent values are recalculated after the assignment.

10.67.5.15 `void seq64::user_settings::mainwid_spacing ( int value ) [protected]`

The default value is 2. Dependent values are recalculated after the assignment.

10.67.5.16 void seq64::user\_settings::control\_height ( int *value* ) [protected]

The default value is 0. Dependent values are recalculated after the assignment.

10.67.5.17 void seq64::user\_settings::dump\_summary ( ) [protected]

Does its work only if PLATFORM\_DEBUG and SEQ64\_USE\_DEBUG\_OUTPUT are defined. Only enabled in emergencies :-D.

10.67.5.18 void seq64::user\_settings::perf\_h\_page\_increment ( int *inc* )

This value ranges from 1 (the original value, really too small for a "page" operation) to 6 (which is 24 measures, the same as the typical width of the perffroll)

10.67.5.19 void seq64::user\_settings::perf\_v\_page\_increment ( int *inc* )

This value ranges from 1 (the original value, really too small for a "page" operation) to 18 (which is 18 tracks, slightly more than the typical height of the perffroll)

10.67.5.20 void seq64::user\_settings::midi\_ppqn ( int *value* )

The default value is 192. Dependent values may be recalculated after the assignment.

10.67.5.21 void seq64::user\_settings::midi\_buss\_override ( char *buss* )

The default value is -1, which means that there is no buss override. It provides a way to override the buss number for smallish MIDI files. It replaces the buss-number read from the file. This option is turned on by the -bus option, and is merely a convenience feature for the quick previewing of a tune. (It's called "developer laziness".)

10.67.5.22 void seq64::user\_settings::midi\_beats\_per\_bar ( int *value* ) [protected]

The default value is 4.

10.67.5.23 void seq64::user\_settings::midi\_beats\_per\_minute ( int *value* ) [protected]

The default value is 120.

10.67.5.24 void seq64::user\_settings::midi\_beat\_width ( int *bw* ) [protected]

The default value is 4.

10.67.5.25 user\_midi\_bus & seq64::user\_settings::private\_bus ( int *index* ) [private]

This invalid object has an empty alias, and all the instrument numbers are -1.

10.67.5.26 user\_instrument & seq64::user\_settings::private\_instrument ( int *index* ) [private]

This invalid object has an empty(), instrument name, false for all controllers\_active[] values, and empty controllers[] string values.

### 10.67.6 Field Documentation

#### 10.67.6.1 Busses `seq64::user_settings::m_midi_buses` [private]

Since this object is a vector, its size is adjustable.

#### 10.67.6.2 Instruments `seq64::user_settings::m_instruments` [private]

The size is adjustable, and grows as objects are added.

#### 10.67.6.3 `mainwid_grid_style_t` `seq64::user_settings::m_grid_style` [private]

Specifies the current grid style.

#### 10.67.6.4 `int` `seq64::user_settings::m_grid_brackets` [private]

0 = no brackets, 1 and above is the thickness of the brackets. 1 is the normal thickness of the brackets, 2 is a two-pixel thickness, and so on.

#### 10.67.6.5 `int` `seq64::user_settings::m_mainwnd_rows` [private]

The current value is 4, and if changed, many other values depend on it. Together with `m_mainwnd_cols`, this value fixes the patterns grid into a 4 x 8 set of patterns known as a "screen set". We would like to be able to change this value from 4 to 8, and maybe allow the values of 5, 6, and 7 as well. But if we could just get 8 working, then well Sequencer64 deserve the 64 in its name.

#### 10.67.6.6 `int` `seq64::user_settings::m_mainwnd_cols` [private]

The current value is 4, and probably won't change, since other values depend on it. Together with `m_mainwnd_rows`, this value fixes the patterns grid into a 4 x 8 set of patterns known as a "screen set".

#### 10.67.6.7 `int` `seq64::user_settings::m_max_sets` [private]

Basically, that the number of times the Patterns Panel can be filled. 32 sets can be created. Although this value is part of the "user" configuration file, it is likely that it will never change. Rather, the number of sequences per set would change. We'll see.

#### 10.67.6.8 `int` `seq64::user_settings::m_mainwid_border` [private]

We'll try changing them and see what happens. Increasing these value spreads out the pattern grids a little bit and makes the Patterns panel slightly bigger. Seems like it would be useful to make these values user-configurable.

#### 10.67.6.9 `int` `seq64::user_settings::m_control_height` [private]

But it is used only in this header file, to define `m_mainwid_y`, but doesn't add anything to that value.

#### 10.67.6.10 `bool` `seq64::user_settings::m_global_seq_feature_save` [private]

In this feature, applying one of these three changes to a sequence causes them to also be applied to sequences that are subsequently opened for editing. However, we improve on this feature by allowing the changes to be saved in the global, proprietary part of the saved MIDI file.

If false, the user can still save the key/scale/background-sequence values with each individual sequence, so they can be different.

This value will be true by default, unless changed in the "user" configuration file.

#### 10.67.6.11 int seq64::user\_settings::m\_seqedit\_scale [private]

Its default value is `c_scale_off`. Although this value is now stored in the [user\\_settings](#) class, it always comes from the currently loaded MIDI file, if present. If `m_global_seq_feature_save` is true, this variable is stored in the "proprietary" track at the end of the file, under the control tag `c_musicscale`, and will be applied to any sequence that is edited. If `m_global_seq_feature_save` is false, this variable is stored, if used, in the meta-data for the sequence to which it applies, and, again, is tagged with the control tag `c_musicscale`.

#### 10.67.6.12 int seq64::user\_settings::m\_seqedit\_key [private]

Its default value is `SEQ64_KEY_OF_C`. Although this value is now stored in the [user\\_settings](#) class, it always comes from the currently loaded MIDI file, if present. If `m_global_seq_feature_save` is true, this variable is stored in the "proprietary" track at the end of the file, under the control tag `c_musickey`, and will be applied to any sequence that is edited. If `m_global_seq_feature_save` is false, this variable is stored, if used, in the meta-data for the sequence to which it applies, and, again, is tagged with the control tag `c_musickey`.

#### 10.67.6.13 int seq64::user\_settings::m\_seqedit\_bgsequence [private]

Its default value is `SEQ64_SEQUENCE_LIMIT`. Although this value is now stored in the [user\\_settings](#) class, it always comes from the currently loaded MIDI file, if present. If `m_global_seq_feature_save` is true, this variable is stored, if it has a valid (but not "legal") value, in the "proprietary" track at the end of the file, under the control tag `c_backsequence`, and will be applied to any sequence that is edited. If `m_global_seq_feature_save` is false, this variable is stored, if used, in the meta-data for the sequence to which it applies, and, again, is tagged with the control tag `c_backsequence`.

#### 10.67.6.14 bool seq64::user\_settings::m\_use\_new\_font [private]

By default, in normal mode, the new font is used. In legacy mode, the old font is used.

#### 10.67.6.15 bool seq64::user\_settings::m\_allow\_two\_perfedits [private]

Defaults to true.

#### 10.67.6.16 int seq64::user\_settings::m\_h\_perf\_page\_increment [private]

The value used to be hardwired to 1 (in four-measure units), now it defaults to 4 (16 measures at a time). The value of 1 is already covered by the scrollbar arrows.

#### 10.67.6.17 int seq64::user\_settings::m\_v\_perf\_page\_increment [private]

The value used to be hardwired to 1 (in single-track units), now it defaults to 8. The value of 1 is already covered by the scrollbar arrows.

#### 10.67.6.18 int seq64::user\_settings::m\_text\_x [private]

The `m_text_x` and `m_text_y` constants help define the "seqarea" size. It looks like these two values are the character width (x) and height (y) in pixels. Thus, these values would be dependent on the font chosen. But that, currently, is hard-wired. See the `m_font_6_12[]` array for the default font specification.

However, please not that font files are not used. Instead, the fonts are provided by two pixmaps in the `src/pixmap` directory: `font_b.xpm` (black lettering on a white background) and `font_w.xpm` (white lettering on a black background).

We have added black-on-yellow and yellow-on-black versions of the fonts, to support the highlighting of pattern boxes if they are empty of actual MIDI events.

We have also added a set of four new font files that are roughly the same size, and are treated as the same size, but look smooth and less like a DOS-era font.

The font module does not use these values directly, but does define some similar variables that differ slightly between the two styles of font. There are a lot of tricks and hard-wired places to fix before further work can be done with fonts in Sequencer64.

#### 10.67.6.19 `int seq64::user_settings::m_seqchars_x` [private]

The `m_seqchars_x` and `m_seqchars_y` constants help define the "seqarea" size. These look like the number of characters per line and the number of lines of characters, in a pattern/sequence box.

#### 10.67.6.20 `int seq64::user_settings::m_midi_ppqn` [private]

This variable replaces the global `ppqn`. The default value of this setting is 192 parts-per-quarter-note (PPQN). There is still a lot of work to get a different PPQN to work properly in speed of playback, scaling of the user interface, and other issues. Note that this value can be changed by the still-experimental `-ppqn` option. There is one remaining trace of the global, though: `DEFAULT_PPQN`.

#### 10.67.6.21 `int seq64::user_settings::m_midi_beats_per_measure` [private]

This variable will replace the global beats per measure. The default value of this variable is `DEFAULT_BEATS_PER_MEASURE` (4). For external access, we will call this value "beats per bar", abbreviate it "BPB", and use "bpb" in any accessor function names. Now, although it applies to the whole session, we should be able to continue seq24's tradition of allowing each sequence to have its own time signature. Also, there are a number of places where the number 4 appears and looks like it might be a hardwired BPB value, either for MIDI purposes or for drawing the piano-roll grids. So we might need a couple different versions of this variable.

#### 10.67.6.22 `int seq64::user_settings::m_midi_beats_per_minute` [private]

This variable will replace the global beats per minute. The default value of this variable is `DEFAULT_BPM` (120). This variable should apply to the whole session; there's probably no way to support a different tempo for each sequence. But we shall see. For external access, we will call this value "beats per minute", abbreviate it "BPM", and use "bpm" in any accessor function names.

#### 10.67.6.23 `int seq64::user_settings::m_midi_beat_width` [private]

This variable will replace the global `beat_width`. The default value of this variable is `DEFAULT_BEAT_WIDTH` (4). Now, although it applies to the whole session, we should be able to continue seq24's tradition of allowing each sequence to have its own time signature. Also, there are a number of places where the number 4 appears and looks like it might be a hardwired BW value, either for MIDI purposes or for drawing the user-interface. So we might need a couple different versions of this variable. For external access, we will call this value "beat width", abbreviate it "BW", and use "bw" in any accessor function names.

#### 10.67.6.24 `char seq64::user_settings::m_midi_buss_override` [private]

This variable replaces the global buss-override variable, and is set via the command-line option `-bus`.



10.67.6.25 `int seq64::user_settings::m_seqs_in_set` [private]

This value is  $4 \times 8 = 32$  by default.

#### Warning

Currently implicit/explicit in a number of the "rc" file and [rc\\_settings](#). Would probably want the left 32 or the first 32 items in the main window only to be subject to keystroke control. This value is calculated by the [normalize\(\)](#) function, and is *not* part of the "user" configuration file.

10.67.6.26 `int seq64::user_settings::m_gmute_tracks` [private]

This value is *not* part of the "user" configuration file; it is calculated by the [normalize\(\)](#) function.

10.67.6.27 `int seq64::user_settings::m_max_sequence` [private]

It is a derived value, and not stored in the "user" file.

```
m_max_sequence = m_seqs_in_set * m_max_sets;
```

10.67.6.28 `int seq64::user_settings::m_seqarea_x` [private]

Compare these two constants to `m_seqarea_seq_x(y)`, which was in `mainwid.h`, but is now in this file.

10.67.6.29 `int seq64::user_settings::m_seqarea_seq_x` [private]

These are used only in the `mainwid` module.

10.67.6.30 `int seq64::user_settings::m_mainwid_x` [private]

Affected by the `m_mainwid_border` and `m_mainwid_spacing` values.

```
c_mainwid_x =
(
    (c_seqarea_x + c_mainwid_spacing) * c_mainwnd_cols -
    c_mainwid_spacing + c_mainwid_border * 2
);
```

10.67.6.31 `bool seq64::user_settings::m_save_user_config` [private]

Normally, this state is not saved. It is not saved because there is currently no user-interface for editing it, and because it can pick up some command-line options, and it is not right to have them written to the "user" configuration file.

(The "rc" configuration file is a different case, having historically always been saved, and having a number of command-line options, such as JACK settings that should generally be permanent on a given system.)

Anyway, this flag can be set by the `-user-save` option. This setting is never saved. But note that, if no "user" configuration file is found, it is then saved anyway.

10.67.6.32 `const int seq64::user_settings::mc_min_zoom` [private]

It's value is 1.

10.67.6.33 `const int seq64::user_settings::mc_max_zoom` [private]

It's value is 32.


10.67.6.34 `const int seq64::user_settings::mc_baseline_ppqn` [private]

This value is necessary in order to keep user-interface elements stable when different PPQNs are used. It is set to DEFAULT\_PPQN.

## 10.68 seq64::userfile Class Reference

Supports the user's `~/ .config/sequencer64/sequencer64.usr` and `~/ .seq24usr` configuration file.

Inheritance diagram for seq64::userfile:

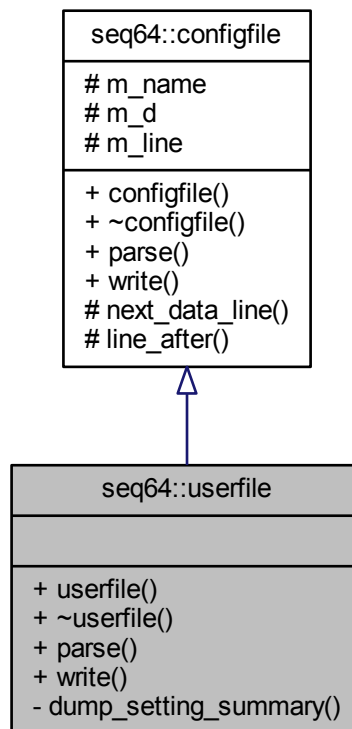

### Public Member Functions

- `userfile` (const std::string &a\_name)  
*Principal constructor.*
- `~userfile` ()  
*A rote destructor needed for a derived class.*
- bool `parse` (perform &a\_perf)

*Parses a "usr" file, filling in the given perform object.*

- bool [write](#) (const [perform](#) &a\_perf)

*This function just returns false, as there is no "perform" information in the user-file yet.*

## Private Member Functions

- void [dump\\_setting\\_summary](#) ()

*Provides a debug dump of basic information to help debug a surprisingly intractable problem with all busses having the name and values of the last buss in the configuration.*

## Additional Inherited Members

### 10.68.1 Member Function Documentation

#### 10.68.1.1 bool seq64::userfile::parse ( [perform](#) & *a\_perf* ) [virtual]

This function opens the file as a text file (line-oriented).

##### Parameters

<i>a_perf</i>	The performance object, currently unused.
---------------	---

Implements [seq64::configfile](#).

#### 10.68.1.2 bool seq64::userfile::write ( const [perform](#) & *a\_perf* ) [virtual]

##### Parameters

<i>a_perf</i>	The performance object, currently unused.
---------------	---

Implements [seq64::configfile](#).

#### 10.68.1.3 void seq64::userfile::dump\_setting\_summary ( ) [private]

Does work only if PLATFORM\_DEBUG is defined; see the [user\\_settings](#) class.



# Index

- ~event
  - seq64::event, [60](#)
- ~eventedit
  - seq64::eventedit, [75](#)
- ~jack\_assistant
  - seq64::jack\_assistant, [109](#)
- ~keys\_perform
  - seq64::keys\_perform, [115](#)
- ~keys\_perform\_gtk2
  - seq64::keys\_perform\_gtk2, [119](#)
- ~perfedit
  - seq64::perfedit, [177](#)
- ~perform
  - seq64::perform, [190](#)
- ~perfroll
  - seq64::perfroll, [208](#)
- ~seqmenu
  - seq64::seqmenu, [244](#)
- about\_dialog
  - seq64::mainwnd, [139](#)
- add
  - seq64::editable\_events, [54](#)
  - seq64::event\_list, [69](#)
  - seq64::triggers, [280](#)
- add\_event
  - seq64::sequence, [264](#), [270](#)
- add\_long
  - seq64::midi\_container, [144](#)
- add\_note
  - seq64::sequence, [270](#)
- add\_sequence
  - seq64::perform, [191](#)
- add\_trigger
  - seq64::sequence, [265](#)
- add\_variable
  - seq64::midi\_container, [144](#)
- adj\_callback\_bpm
  - seq64::mainwnd, [139](#)
- adj\_callback\_ss
  - seq64::mainwnd, [139](#)
- adjust\_offset
  - seq64::triggers, [284](#)
- adjust\_offsets\_to\_length
  - seq64::triggers, [281](#)
- adjust\_trigger\_offsets\_to\_length
  - seq64::sequence, [275](#)
- alias
  - seq64::user\_midi\_bus\_t, [290](#)
- all\_notes\_off
  - seq64::perform, [194](#)
- analyze
  - seq64::editable\_event, [50](#)
- any\_selected\_notes
  - seq64::event\_list, [71](#)
- append\_sysex
  - seq64::event, [64](#)
- apply\_length
  - seq64::seqedit, [230](#)
- BLACK
  - seq64::font, [92](#)
- BLACK\_ON\_CYAN
  - seq64::font, [92](#)
- BLACK\_ON\_YELLOW
  - seq64::font, [92](#)
- background\_sequence
  - seq64::sequence, [274](#)
- bus
  - seq64::user\_settings, [297](#)
- Busses
  - seq64::user\_settings, [297](#)
- CYAN\_ON\_BLACK
  - seq64::font, [92](#)
- calculate\_base\_sizes
  - seq64::mainwid, [132](#)
- category
  - seq64::editable\_event, [49](#)
- category\_channel\_message
  - seq64::editable\_event, [47](#)
- category\_meta\_event
  - seq64::editable\_event, [47](#)
- category\_name
  - seq64::editable\_event, [47](#)
- category\_prop\_event
  - seq64::editable\_event, [47](#)
- category\_system\_message
  - seq64::editable\_event, [47](#)
- category\_t
  - seq64::editable\_event, [47](#)
- change\_event\_data\_range
  - seq64::sequence, [271](#)
- change\_vert
  - seq64::eventslots, [88](#)
- channel\_count
  - seq64::user\_midi\_bus, [289](#)
- channel\_max
  - seq64::user\_midi\_bus, [289](#)
- CharList

- seq64::midi\_list, 146
- check\_channel
  - seq64::event, 61
- clamp\_track
  - seq64::perform, 203
- clear
  - seq64::event\_list, 70
- clear\_all
  - seq64::perform, 190
- clear\_sequence\_triggers
  - seq64::perform, 191
- clear\_triggers
  - seq64::sequence, 269
- clear\_window
  - seq64::gui\_drawingarea\_gtk2, 99
- click
  - seq64::click, 39
- client\_open
  - seq64::jack\_assistant, 111
- clock
  - seq64::midibus, 156
- collapse
  - seq64::perfedit, 178
- Color
  - seq64::font, 92
- cond
  - seq64::condition\_var, 42
- configfile
  - seq64::configfile, 43
- continue\_from
  - seq64::midibus, 156
- control\_height
  - seq64::user\_settings, 298
- controller\_active
  - seq64::user\_instrument, 286
  - seq64::user\_settings, 298
- controller\_max
  - seq64::user\_instrument, 286
- controller\_name
  - seq64::user\_instrument, 286
  - seq64::user\_settings, 298
- controllers
  - seq64::user\_instrument\_t, 287
- controllers\_active
  - seq64::user\_instrument\_t, 287
- convert\_t
  - seq64::seqevent, 236
- convert\_tn
  - seq64::seqroll, 249
- convert\_x
  - seq64::perfrill, 209
  - seq64::seqevent, 236
- convert\_xy
  - seq64::perfrill, 209
- convert\_y
  - seq64::eventslots, 87
- copy
  - seq64::perfedit, 178
- seq64::triggers, 283
- copy\_definitions
  - seq64::user\_instrument, 287
  - seq64::user\_midi\_bus, 289
- copy\_events
  - seq64::sequence, 274
- copy\_selected
  - seq64::sequence, 270
- copy\_triggers
  - seq64::perform, 192
  - seq64::sequence, 268
- count
  - seq64::editable\_events, 54
  - seq64::event\_list, 69
- count\_selected\_events
  - seq64::event\_list, 71
- create\_menus
  - seq64::seqedit, 231
- cut\_selected
  - seq64::sequence, 270
- decrement\_beats\_per\_minute
  - seq64::perform, 200
- decrement\_bottom
  - seq64::eventslots, 89
- decrement\_current
  - seq64::eventslots, 89
- decrement\_selected
  - seq64::sequence, 271
- decrement\_top
  - seq64::eventslots, 88
- deinit\_in
  - seq64::midibus, 155
- del\_trigger
  - seq64::sequence, 265
- delete\_current\_event
  - seq64::eventslots, 85
- delete\_sequence
  - seq64::perform, 191
- do\_action
  - seq64::seqedit, 232
- draw\_background
  - seq64::seqevent, 235
- draw\_drawable\_row
  - seq64::perfrill, 210
- draw\_event
  - seq64::eventslots, 87
- draw\_events
  - seq64::eventslots, 87
- draw\_events\_on
  - seq64::seqevent, 236
  - seq64::seqroll, 249
- draw\_events\_on\_pixmap
  - seq64::seqroll, 249
- draw\_key
  - seq64::seqkeys, 241
- draw\_line
  - seq64::gui\_drawingarea\_gtk2, 99–101
- draw\_line\_on\_pixmap

- seq64::gui\_drawingarea\_gtk2, 99, 100
- draw\_marker\_on\_sequence
  - seq64::mainwid, 130
- draw\_normal\_rectangle\_on\_pixmap
  - seq64::gui\_drawingarea\_gtk2, 103
- draw\_pixmap\_on\_window
  - seq64::seqevent, 235
- draw\_rectangle
  - seq64::gui\_drawingarea\_gtk2, 101–103
- draw\_rectangle\_on\_pixmap
  - seq64::gui\_drawingarea\_gtk2, 103
- draw\_sequence
  - seq64::perfnames, 182
- draw\_sequence\_on
  - seq64::perfroll, 210
- draw\_sequence\_on\_pixmap
  - seq64::mainwid, 131
- draw\_sequence\_pixmap\_on\_window
  - seq64::mainwid, 131
- draw\_sequences\_on\_pixmap
  - seq64::mainwid, 131
- drop\_event
  - seq64::seqevent, 236
- dump\_setting\_summary
  - seq64::userfile, 305
- dump\_summary
  - seq64::user\_settings, 299
- e\_deselect
  - seq64::sequence, 260
- e\_is\_selected
  - seq64::sequence, 260
- e\_remove\_one
  - seq64::sequence, 260
- e\_select
  - seq64::sequence, 260
- e\_select\_one
  - seq64::sequence, 260
- e\_toggle\_selection
  - seq64::sequence, 260
- e\_would\_select
  - seq64::sequence, 260
- edit\_callback\_notepad
  - seq64::mainwnd, 139
- editable\_event
  - seq64::editable\_event, 48
- editable\_events
  - seq64::editable\_events, 53
- enqueue\_draw
  - seq64::eventedit, 75
  - seq64::perfedit, 177
  - seq64::perfnames, 182
  - seq64::perfroll, 210
  - seq64::perftime, 214
- enregister\_peer
  - seq64::perfedit, 178
- errdump
  - seq64::midifile, 167
- error\_message
  - seq64::jack\_assistant, 110
- event
  - seq64::event, 60
- event\_count
  - seq64::sequence, 260
- event\_key
  - seq64::event\_list::event\_key, 66
- event\_list
  - seq64::event\_list, 69
- eventedit
  - seq64::eventedit, 74
- events
  - seq64::keybindentry, 113
- expand
  - seq64::perfedit, 178
- file\_import\_dialog
  - seq64::mainwnd, 139
- fill
  - seq64::midi\_container, 143
- fill\_background\_pixmap
  - seq64::perfroll, 209
- fill\_container
  - seq64::sequence, 274
- format\_timestamp
  - seq64::editable\_event, 50
- FruityPerfInput
  - seq64::perfroll, 211
- get
  - seq64::midi\_container, 143
  - seq64::midi\_list, 146
  - seq64::midi\_vector, 153
- get\_beat\_width
  - seq64::sequence, 262
- get\_clipboard\_box
  - seq64::sequence, 270
- get\_data
  - seq64::event, 64
- get\_globals
  - seq64::user\_settings, 297
- get\_group\_mute\_state
  - seq64::perform, 198
- get\_highest\_note\_event
  - seq64::sequence, 273
- get\_keys
  - seq64::keys\_perform, 116
- get\_last\_tick
  - seq64::sequence, 262
- get\_lowest\_note\_event
  - seq64::sequence, 273
- get\_max\_trigger
  - seq64::perform, 192
  - seq64::sequence, 268
- get\_measures
  - seq64::seqedit, 230
- get\_name
  - seq64::sequence, 262
- get\_next\_event

- seq64::sequence, 274
- get\_next\_note\_event
  - seq64::sequence, 273
- get\_num\_selected\_events
  - seq64::sequence, 269
- get\_num\_selected\_notes
  - seq64::sequence, 269
- get\_rank
  - seq64::event, 65
- get\_screen\_set\_notepad
  - seq64::perform, 193
- get\_selected\_box
  - seq64::sequence, 270
- get\_selected\_end
  - seq64::triggers, 283
- get\_selected\_start
  - seq64::triggers, 283
- get\_sequence
  - seq64::perform, 197
- get\_state
  - seq64::triggers, 282
- get\_trigger\_state
  - seq64::sequence, 265
- grid\_style\_black
  - seq64::user\_settings, 297
- grid\_style\_max
  - seq64::user\_settings, 297
- grid\_style\_normal
  - seq64::user\_settings, 297
- grid\_style\_white
  - seq64::user\_settings, 297
- groups
  - seq64::keybindentry, 113
- grow
  - seq64::perfedit, 178
  - seq64::triggers, 281
- grow\_selected
  - seq64::sequence, 272
- grow\_trigger
  - seq64::sequence, 265
- gui\_assistant
  - seq64::gui\_assistant, 95
- gui\_palette\_gtk2
  - seq64::gui\_palette\_gtk2, 105
- gui\_window\_gtk2
  - seq64::gui\_window\_gtk2, 107
- handle\_config
  - seq64::lash, 123
- handle\_event
  - seq64::lash, 123
- handle\_insert
  - seq64::eventedit, 78
- handle\_midi\_control
  - seq64::perform, 193
- handle\_modify
  - seq64::eventedit, 78
- handle\_motion\_key
  - seq64::Seq24PerfInput, 219
- handle\_save
  - seq64::eventedit, 78
- highlight
  - seq64::perform, 200
- home\_config\_directory
  - seq64::rc\_settings, 217
- idle\_progress
  - seq64::maintime, 126
- idle\_redraw
  - seq64::seqdata, 224
  - seq64::seqevent, 236
- increment
  - seq64::midi\_splitter, 149
- increment\_beats\_per\_minute
  - seq64::perform, 200
- increment\_bottom
  - seq64::eventslots, 89
- increment\_current
  - seq64::eventslots, 89
- increment\_selected
  - seq64::sequence, 271
- increment\_top
  - seq64::eventslots, 88
- info\_message
  - seq64::jack\_assistant, 110
- init
  - seq64::font, 92
  - seq64::jack\_assistant, 109
  - seq64::lash, 123
  - seq64::perform, 190
- init\_before\_show
  - seq64::perfedit, 177
  - seq64::perfroll, 209
- init\_clock
  - seq64::midibus, 156
- init\_in
  - seq64::midibus, 155
- init\_in\_sub
  - seq64::midibus, 155
- init\_jack
  - seq64::perform, 191
- init\_out
  - seq64::midibus, 155
- init\_out\_sub
  - seq64::midibus, 155
- inner\_start
  - seq64::perform, 203
- insert\_event
  - seq64::eventslots, 84
- install\_sequence
  - seq64::perform, 202
- instrument
  - seq64::user\_instrument\_t, 287
  - seq64::user\_midi\_bus, 289
  - seq64::user\_midi\_bus\_t, 290
  - seq64::user\_settings, 298
- Instruments
  - seq64::user\_settings, 297



- intersect
  - seq64::triggers, [282](#)
- intersect\_events
  - seq64::sequence, [266](#)
- intersect\_notes
  - seq64::sequence, [266](#)
- intersect\_triggers
  - seq64::sequence, [266](#)
- is\_active
  - seq64::perform, [197](#)
- is\_channel\_msg
  - seq64::event, [61](#)
- is\_desired\_cc\_or\_not\_cc
  - seq64::event, [63](#)
- is\_dirty\_edit
  - seq64::perform, [195](#)
  - seq64::sequence, [263](#)
- is\_dirty\_main
  - seq64::perform, [195](#)
  - seq64::sequence, [263](#)
- is\_dirty\_names
  - seq64::perform, [195](#)
  - seq64::sequence, [263](#)
- is\_dirty\_perf
  - seq64::perform, [195](#)
  - seq64::sequence, [263](#)
- is\_letter
  - seq64::keystroke, [121](#)
- is\_midi\_control\_valid
  - seq64::perform, [201](#)
- is\_modified
  - seq64::perform, [201](#)
- is\_mseq\_valid
  - seq64::perform, [202](#)
- is\_note\_msg
  - seq64::event, [61](#)
- is\_one\_byte\_msg
  - seq64::event, [61](#)
- is\_screenset\_valid
  - seq64::perform, [202](#)
- is\_seq\_valid
  - seq64::perform, [202](#)
- is\_sysex\_special\_id
  - seq64::midifile, [167](#)
- is\_two\_byte\_msg
  - seq64::event, [61](#)
- jack\_assistant
  - seq64::jack\_assistant, [109](#)
- jack\_shutdown\_callback
  - seq64::jack\_assistant, [111](#)
- jack\_timebase\_callback
  - seq64::jack\_assistant, [111](#)
- Key
  - seq64::editable\_events, [53](#)
- key\_name
  - seq64::keys\_perform, [116](#)
  - seq64::keys\_perform\_gtk2, [119](#)
- keybindentry
  - seq64::keybindentry, [113](#)
- keystroke
  - seq64::keystroke, [120](#), [121](#)
- lash
  - seq64::lash, [122](#)
- lash\_timeout\_connect
  - seq64::gui\_assistant\_gtk2, [96](#)
- launch\_input\_thread
  - seq64::perform, [190](#)
- launch\_output\_thread
  - seq64::perform, [190](#)
- line\_after
  - seq64::configfile, [43](#)
- link\_new
  - seq64::event\_list, [70](#)
  - seq64::sequence, [272](#)
- load\_events
  - seq64::editable\_events, [54](#)
  - seq64::eventslots, [84](#)
- location
  - seq64::keybindentry, [113](#)
- m\_allow\_two\_perfedit
  - seq64::user\_settings, [301](#)
- m\_b\_on\_c\_pixmap
  - seq64::font, [93](#)
- m\_b\_on\_y\_pixmap
  - seq64::font, [93](#)
- m\_background
  - seq64::gui\_drawingarea\_gtk2, [104](#)
- m\_background\_sequence
  - seq64::sequence, [276](#)
- m\_bar\_width
  - seq64::maintime, [127](#)
- m\_beat\_width
  - seq64::maintime, [127](#)
  - seq64::midi\_timing, [151](#)
- m\_beats\_per\_measure
  - seq64::midi\_timing, [151](#)
- m\_beats\_per\_minute
  - seq64::midi\_timing, [151](#)
- m\_black\_pixmap
  - seq64::font, [93](#)
- m\_box\_height
  - seq64::maintime, [127](#)
- m\_box\_width
  - seq64::maintime, [127](#)
- m\_bpm
  - seq64::perfedit, [179](#)
- m\_button
  - seq64::click, [40](#)
- m\_bw
  - seq64::perfedit, [179](#)
- m\_c\_on\_b\_pixmap
  - seq64::font, [93](#)
- m\_category
  - seq64::editable\_event, [51](#)

- m\_channel
  - seq64::event, [65](#)
- m\_channel\_count
  - seq64::user\_midi\_bus, [289](#)
- m\_char\_list
  - seq64::midifile, [169](#)
- m\_char\_w
  - seq64::eventslots, [90](#)
  - seq64::perfnames, [182](#)
- m\_clip\_mask
  - seq64::font, [93](#)
- m\_control\_height
  - seq64::user\_settings, [300](#)
- m\_controller\_count
  - seq64::user\_instrument, [287](#)
- m\_current\_event
  - seq64::editable\_events, [55](#)
- m\_current\_index
  - seq64::eventslots, [90](#)
- m\_data
  - seq64::event, [65](#)
  - seq64::midifile, [169](#)
- m\_disable\_reported
  - seq64::midifile, [169](#)
- m\_divisions
  - seq64::midi\_measures, [147](#)
- m\_drop\_x
  - seq64::gui\_drawingarea\_gtk2, [104](#)
- m\_error\_is\_fatal
  - seq64::midifile, [169](#)
- m\_error\_message
  - seq64::midifile, [169](#)
- m\_file\_size
  - seq64::midifile, [169](#)
- m\_flash\_height
  - seq64::maintime, [127](#)
- m\_flash\_width
  - seq64::maintime, [127](#)
- m\_font\_h
  - seq64::font, [93](#)
- m\_font\_w
  - seq64::font, [93](#)
- m\_foreground
  - seq64::gui\_drawingarea\_gtk2, [104](#)
- m\_format\_timestamp
  - seq64::editable\_event, [51](#)
- m\_fruity\_interaction
  - seq64::perfroll, [211](#)
- m\_global\_seq\_feature\_save
  - seq64::user\_settings, [300](#)
- m\_gmute\_tracks
  - seq64::user\_settings, [303](#)
- m\_grid\_brackets
  - seq64::user\_settings, [300](#)
- m\_grid\_style
  - seq64::user\_settings, [300](#)
- m\_h\_page\_increment
  - seq64::perfroll, [211](#)
- m\_h\_perf\_page\_increment
  - seq64::user\_settings, [301](#)
- m\_has\_link
  - seq64::event, [65](#)
- m\_initial\_snap
  - seq64::seqedit, [232](#)
- m\_instruments
  - seq64::user\_settings, [300](#)
- m\_is\_modified
  - seq64::event\_list, [71](#)
  - seq64::perform, [204](#)
- m\_is\_press
  - seq64::keystroke, [121](#)
- m\_is\_valid
  - seq64::user\_instrument, [287](#)
  - seq64::user\_midi\_bus, [289](#)
- m\_key
  - seq64::keybindentry, [113](#)
  - seq64::keystroke, [121](#)
- m\_key\_bpm\_up
  - seq64::keys\_perform, [117](#)
- m\_key\_show\_ui\_sequence\_number
  - seq64::keys\_perform, [117](#)
- m\_left\_marker\_tick
  - seq64::perftime, [215](#)
- m\_left\_tick
  - seq64::perform, [204](#)
- m\_length
  - seq64::sequence, [276](#)
  - seq64::triggers, [285](#)
- m\_line
  - seq64::configfile, [43](#)
- m\_main\_wid
  - seq64::mainwnd, [141](#)
- m\_mainperf
  - seq64::gui\_drawingarea\_gtk2, [104](#)
- m\_mainwid\_border
  - seq64::user\_settings, [300](#)
- m\_mainwid\_x
  - seq64::user\_settings, [303](#)
- m\_mainwnd\_cols
  - seq64::user\_settings, [300](#)
- m\_mainwnd\_rows
  - seq64::user\_settings, [300](#)
- m\_max\_sequence
  - seq64::user\_settings, [303](#)
- m\_max\_sets
  - seq64::perform, [204](#)
  - seq64::user\_settings, [300](#)
- m\_measure\_length
  - seq64::perftime, [215](#)
- m\_midi\_beat\_width
  - seq64::user\_settings, [302](#)
- m\_midi\_beats\_per\_measure
  - seq64::user\_settings, [302](#)
- m\_midi\_beats\_per\_minute
  - seq64::user\_settings, [302](#)
- m\_midi\_buses

- seq64::user\_settings, 300
- m\_midi\_buss\_override
  - seq64::user\_settings, 302
- m\_midi\_channel
  - seq64::sequence, 275
- m\_midi\_parameters
  - seq64::editable\_events, 55
- m\_midi\_ppqn
  - seq64::user\_settings, 302
- m\_modified
  - seq64::seqmenu, 245
- m\_modifier
  - seq64::click, 40
  - seq64::keystroke, 121
- m\_musical\_key
  - seq64::sequence, 276
- m\_musical\_scale
  - seq64::sequence, 276
- m\_mutex
  - seq64::sequence, 276
- m\_name\_meta
  - seq64::editable\_event, 51
- m\_name\_status
  - seq64::editable\_event, 51
- m\_namebox\_w
  - seq64::perfnames, 183
- m\_names\_chars
  - seq64::perfnames, 182
- m\_names\_y
  - seq64::perfnames, 183
- m\_new\_format
  - seq64::midifile, 169
- m\_notebook
  - seq64::options, 171
- m\_number\_h
  - seq64::seqdata, 225
- m\_number\_offset\_y
  - seq64::seqdata, 225
- m\_number\_w
  - seq64::seqdata, 225
- m\_one\_measure
  - seq64::perform, 204
- m\_parent
  - seq64::editable\_event, 51
  - seq64::perfnames, 182
  - seq64::perfroll, 211
  - seq64::perftime, 215
- m\_pixmap
  - seq64::font, 93
  - seq64::gui\_drawingarea\_gtk2, 104
- m\_playback\_mode
  - seq64::perform, 203
- m\_playing\_notes
  - seq64::sequence, 275
- m\_playscreen\_offset
  - seq64::perform, 203
- m\_pos
  - seq64::midifile, 169
- m\_ppqn
  - seq64::maintime, 127
  - seq64::midi\_timing, 151
  - seq64::triggers, 285
- m\_rank
  - seq64::event\_list::event\_key, 66
- m\_redraw\_ms
  - seq64::eventedit, 79
  - seq64::perfeddit, 179
- m\_right\_marker\_tick
  - seq64::perftime, 215
- m\_right\_tick
  - seq64::perform, 204
- m\_save\_user\_config
  - seq64::user\_settings, 303
- m\_screenset\_offset
  - seq64::mainwid, 134
- m\_screenset\_slots
  - seq64::mainwid, 134
- m\_seq\_number
  - seq64::sequence, 276
- m\_seqarea\_seq\_x
  - seq64::user\_settings, 303
- m\_seqarea\_x
  - seq64::user\_settings, 303
- m\_seqchars\_x
  - seq64::user\_settings, 302
- m\_seqedit
  - seq64::seqmenu, 245
- m\_seqedit\_bgsequence
  - seq64::user\_settings, 301
- m\_seqedit\_key
  - seq64::user\_settings, 301
- m\_seqedit\_scale
  - seq64::user\_settings, 301
- m\_seqs
  - seq64::perform, 203
- m\_seqs\_in\_set
  - seq64::perform, 204
  - seq64::user\_settings, 302
- m\_sequence
  - seq64::editable\_events, 55
- m\_sequence\_count
  - seq64::perform, 204
- m\_sequence\_max
  - seq64::perform, 204
- m\_setbox\_w
  - seq64::eventslots, 90
  - seq64::perfnames, 183
- m\_sigpipe
  - seq64::mainwnd, 141
- m\_slots\_chars
  - seq64::eventslots, 90
- m\_slots\_y
  - seq64::eventslots, 90
- m\_smf0\_channels
  - seq64::midi\_splitter, 150
- m\_smf0\_channels\_count

- seq64::midi\_splitter, 150
- m\_smf0\_seq\_number
  - seq64::midi\_splitter, 150
- m\_smf0\_splitter
  - seq64::midifile, 169
- m\_snap\_tick
  - seq64::sequence, 276
- m\_spinbutton\_load\_offset
  - seq64::mainwnd, 141
- m\_starting\_tick
  - seq64::perform, 204
- m\_status
  - seq64::event, 65
- m\_sysex
  - seq64::event, 65
- m\_text\_x
  - seq64::user\_settings, 301
- m\_time\_beat\_width
  - seq64::sequence, 276
- m\_time\_beats\_per\_measure
  - seq64::sequence, 276
- m\_timestamp
  - seq64::event\_list::event\_key, 66
- m\_top\_index
  - seq64::eventslots, 90
- m\_use\_new\_font
  - seq64::user\_settings, 301
- m\_v\_page\_increment
  - seq64::perfroll, 211
- m\_v\_perf\_page\_increment
  - seq64::user\_settings, 301
- m\_white\_pixmap
  - seq64::font, 93
- m\_window
  - seq64::gui\_drawingarea\_gtk2, 104
- m\_window\_x
  - seq64::gui\_drawingarea\_gtk2, 104
  - seq64::gui\_window\_gtk2, 108
- m\_x
  - seq64::click, 40
- m\_xy\_offset
  - seq64::eventslots, 90
  - seq64::perfnames, 183
- m\_y
  - seq64::click, 40
- m\_y\_on\_b\_pixmap
  - seq64::font, 93
- maintime
  - seq64::maintime, 125
- mainwid
  - seq64::mainwid, 130
- mainwid\_border
  - seq64::user\_settings, 298
- mainwid\_grid\_style\_t
  - seq64::user\_settings, 297
- mainwid\_spacing
  - seq64::user\_settings, 298
- mainwnd
  - seq64::mainwnd, 138
- mainwnd\_cols
  - seq64::user\_settings, 298
- mainwnd\_key\_event
  - seq64::perform, 201
- mainwnd\_rows
  - seq64::user\_settings, 298
- mark\_all
  - seq64::event\_list, 71
- mark\_out\_of\_range
  - seq64::event\_list, 70
- mark\_selected
  - seq64::sequence, 272
- max\_sets
  - seq64::user\_settings, 298
- mc\_baseline\_ppqn
  - seq64::user\_settings, 304
- mc\_max\_zoom
  - seq64::user\_settings, 303
- mc\_min\_zoom
  - seq64::user\_settings, 303
- merge
  - seq64::event\_list, 70
- midi\_beat\_width
  - seq64::user\_settings, 299
- midi\_beats\_per\_bar
  - seq64::user\_settings, 299
- midi\_beats\_per\_minute
  - seq64::user\_settings, 299
- midi\_buss\_override
  - seq64::user\_settings, 299
- midi\_control\_off
  - seq64::perform, 193
- midi\_control\_on
  - seq64::perform, 193
- midi\_control\_toggle
  - seq64::perform, 192
- midi\_ppqn
  - seq64::user\_settings, 299
- midi\_splitter
  - seq64::midi\_splitter, 148
- midifile
  - seq64::midifile, 159
- mod\_last\_tick
  - seq64::sequence, 262
- mod\_timestamp
  - seq64::event, 63
- modify
  - seq64::perform, 190
- modify\_current\_event
  - seq64::eventslots, 86
- move\_selected
  - seq64::triggers, 283
- move\_selected\_notes
  - seq64::sequence, 270
- move\_selected\_triggers\_to
  - seq64::sequence, 268
- move\_triggers

- seq64::perform, [192](#)
- seq64::sequence, [268](#)
- name\_change\_callback
  - seq64::seqedit, [231](#)
- name\_to\_value
  - seq64::editable\_event, [48](#)
- new\_file
  - seq64::mainwnd, [140](#)
- new\_sequence
  - seq64::perform, [191](#)
- next
  - seq64::triggers, [284](#)
- next\_data\_line
  - seq64::configfile, [43](#)
- next\_trigger
  - seq64::triggers, [284](#)
- off\_playing\_notes
  - seq64::sequence, [273](#)
- off\_queued
  - seq64::sequence, [263](#)
- on\_button\_press\_event
  - seq64::Seq24PerfInput, [219](#)
  - seq64::Seq24SeqEventInput, [220](#)
  - seq64::Seq24SeqRollInput, [221](#)
  - seq64::mainwid, [132](#)
  - seq64::perfroll, [210](#)
  - seq64::seqdata, [225](#)
  - seq64::seqevent, [236](#)
  - seq64::seqkeys, [241](#)
  - seq64::seqtime, [252](#)
- on\_button\_release\_event
  - seq64::Seq24PerfInput, [219](#)
  - seq64::Seq24SeqEventInput, [220](#)
  - seq64::Seq24SeqRollInput, [221](#)
  - seq64::mainwid, [133](#)
  - seq64::perfroll, [211](#)
  - seq64::seqdata, [225](#)
  - seq64::seqevent, [237](#)
  - seq64::seqkeys, [241](#)
  - seq64::seqtime, [252](#)
- on\_delete\_event
  - seq64::eventedit, [78](#)
  - seq64::mainwnd, [140](#)
  - seq64::seqedit, [232](#)
- on\_enter\_notify\_event
  - seq64::seqkeys, [241](#)
- on\_expose\_event
  - seq64::eventslots, [89](#)
  - seq64::maintime, [127](#)
  - seq64::mainwid, [132](#)
  - seq64::perfnames, [182](#)
  - seq64::perfroll, [210](#)
  - seq64::perftime, [214](#)
- on\_focus\_in\_event
  - seq64::eventslots, [89](#)
  - seq64::mainwid, [133](#)
- on\_focus\_out\_event
  - seq64::mainwid, [133](#)
- on\_grouplearnchange
  - seq64::mainwnd, [141](#)
- on\_key\_press\_event
  - seq64::eventedit, [78](#)
  - seq64::keybindentry, [113](#)
  - seq64::mainwnd, [140](#)
  - seq64::perfroll, [211](#)
  - seq64::seqevent, [237](#)
  - seq64::seqroll, [249](#)
- on\_key\_release\_event
  - seq64::mainwnd, [141](#)
- on\_leave\_notify\_event
  - seq64::seqkeys, [241](#)
- on\_motion\_notify\_event
  - seq64::Seq24PerfInput, [219](#)
  - seq64::Seq24SeqEventInput, [220](#)
  - seq64::mainwid, [133](#)
  - seq64::seqdata, [225](#)
  - seq64::seqevent, [237](#)
  - seq64::seqkeys, [241](#)
- on\_move\_down
  - seq64::eventslots, [90](#)
- on\_move\_up
  - seq64::eventslots, [89](#)
- on\_realize
  - seq64::eventslots, [89](#)
  - seq64::gui\_drawingarea\_gtk2, [104](#)
  - seq64::maintime, [127](#)
  - seq64::mainwid, [132](#)
  - seq64::perfnames, [182](#)
  - seq64::perfroll, [210](#)
  - seq64::perftime, [214](#)
  - seq64::seqdata, [224](#)
  - seq64::seqevent, [236](#)
  - seq64::seqkeys, [241](#)
- on\_scroll\_event
  - seq64::seqdata, [225](#)
  - seq64::seqroll, [250](#)
- on\_size\_allocate
  - seq64::eventslots, [89](#)
  - seq64::perfnames, [182](#)
- open\_file
  - seq64::mainwnd, [138](#)
- open\_performance\_edit
  - seq64::mainwnd, [140](#)
- open\_performance\_edit\_2
  - seq64::mainwnd, [140](#)
- operator<
  - seq64::event, [60](#)
  - seq64::event\_list::event\_key, [66](#)
- operator=
  - seq64::click, [40](#)
  - seq64::editable\_events, [53](#)
  - seq64::event, [60](#)
  - seq64::event\_list, [69](#)
  - seq64::keystroke, [121](#)
  - seq64::triggers, [280](#)

- output
  - seq64::jack\_assistant, 110
- output\_func
  - seq64::perform, 199
- page\_movement
  - seq64::eventslots, 88
- page\_topper
  - seq64::eventslots, 88
- parse
  - seq64::midifile, 160
  - seq64::optionsfile, 172
  - seq64::userfile, 305
- parse\_prop\_header
  - seq64::midifile, 162
- parse\_proprietary\_track
  - seq64::midifile, 163
- parse\_smf\_0
  - seq64::midifile, 162
- parse\_smf\_1
  - seq64::midifile, 162
- partial\_assign
  - seq64::sequence, 260
- paste
  - seq64::triggers, 282
- paste\_selected
  - seq64::sequence, 270
- paste\_trigger
  - seq64::sequence, 268
- perf\_h\_page\_increment
  - seq64::user\_settings, 299
- perf\_v\_page\_increment
  - seq64::user\_settings, 299
- perfedit
  - seq64::perfedit, 177
- perfnames
  - seq64::perfnames, 182
- perform
  - seq64::perform, 190
- perfroll\_key\_event
  - seq64::perform, 201
- perftime
  - seq64::perftime, 214
- play
  - seq64::midibus, 156
  - seq64::perform, 197
  - seq64::sequence, 264
  - seq64::triggers, 280
- play\_note\_off
  - seq64::sequence, 273
- play\_note\_on
  - seq64::sequence, 273
- pop\_redo
  - seq64::sequence, 260
- pop\_undo
  - seq64::sequence, 260
- popup\_event\_menu
  - seq64::seqedit, 231
- popup\_menu
  - seq64::seqmenu, 244
- popup\_midibus\_menu
  - seq64::seqedit, 231
- popup\_sequence\_menu
  - seq64::seqedit, 231
- popup\_tool\_menu
  - seq64::seqedit, 232
- position
  - seq64::jack\_assistant, 110
  - seq64::midi\_container, 144
- pow2
  - seq64::midifile, 164
- ppqn
  - seq64::mainwnd, 139
  - seq64::midi\_splitter, 149
  - seq64::midifile, 162
- print
  - seq64::sequence, 264
- print\_triggers
  - seq64::sequence, 264
- private\_bus
  - seq64::user\_settings, 299
- private\_instrument
  - seq64::user\_settings, 299
- process\_events
  - seq64::lash, 123
- prop\_item\_size
  - seq64::midifile, 167
- push\_trigger\_undo
  - seq64::perform, 192
  - seq64::sequence, 260
- push\_undo
  - seq64::sequence, 260
- put
  - seq64::midi\_container, 143
  - seq64::midi\_list, 146
  - seq64::midi\_vector, 153
- put\_event\_on\_bus
  - seq64::sequence, 274
- read\_byte\_array
  - seq64::midifile, 164
- read\_long
  - seq64::midifile, 164
- read\_seq\_number
  - seq64::midifile, 165
- read\_track\_name
  - seq64::midifile, 165
- read\_varinum
  - seq64::midifile, 164
- redraw
  - seq64::mainwid, 130
- remove
  - seq64::event\_list, 69
  - seq64::sequence, 275
  - seq64::triggers, 282
- remove\_all
  - seq64::sequence, 275
- remove\_marked

- seq64::sequence, 272
- render\_string
  - seq64::gui\_drawingarea\_gtk2, 101
- render\_string\_on\_drawable
  - seq64::font, 92
- render\_string\_on\_pixmap
  - seq64::gui\_drawingarea\_gtk2, 101
- reset
  - seq64::seqdata, 224
  - seq64::seqroll, 249
- reset\_draw\_marker
  - seq64::sequence, 273
- reset\_draw\_trigger\_marker
  - seq64::sequence, 273
- reset\_sequences
  - seq64::perform, 197
- save\_events
  - seq64::editable\_events, 54
  - seq64::eventslots, 86
- save\_file
  - seq64::mainwnd, 140
- save\_playing\_state
  - seq64::perform, 199
- select
  - seq64::triggers, 282
- select\_action\_e
  - seq64::sequence, 260
- select\_all
  - seq64::sequence, 269
- select\_event
  - seq64::eventslots, 86
- select\_events
  - seq64::sequence, 269
- select\_group\_mute
  - seq64::perform, 194
- select\_mute\_group
  - seq64::perform, 194
- select\_note\_events
  - seq64::sequence, 269
- select\_trigger
  - seq64::sequence, 265
- selected\_trigger\_end
  - seq64::sequence, 268
- selected\_trigger\_start
  - seq64::sequence, 268
- seq64::AbstractPerfInput, 37
- seq64::Seq24PerfInput, 218
  - handle\_motion\_key, 219
  - on\_button\_press\_event, 219
  - on\_button\_release\_event, 219
  - on\_motion\_notify\_event, 219
  - set\_adding, 219
- seq64::Seq24SeqEventInput, 220
  - on\_button\_press\_event, 220
  - on\_button\_release\_event, 220
  - on\_motion\_notify\_event, 220
  - set\_adding, 220
- seq64::Seq24SeqRollInput, 221
  - on\_button\_press\_event, 221
  - on\_button\_release\_event, 221
  - set\_adding, 221
- seq64::automutex, 37
- seq64::click, 38
  - click, 39
  - m\_button, 40
  - m\_modifier, 40
  - m\_x, 40
  - m\_y, 40
  - operator=, 40
- seq64::condition\_var, 40
  - cond, 42
- seq64::configfile, 42
  - configfile, 43
  - line\_after, 43
  - m\_line, 43
  - next\_data\_line, 43
- seq64::editable\_event, 43
  - analyze, 50
  - category, 49
  - category\_channel\_message, 47
  - category\_meta\_event, 47
  - category\_name, 47
  - category\_prop\_event, 47
  - category\_system\_message, 47
  - category\_t, 47
  - editable\_event, 48
  - format\_timestamp, 50
  - m\_category, 51
  - m\_format\_timestamp, 51
  - m\_name\_meta, 51
  - m\_name\_status, 51
  - m\_parent, 51
  - name\_to\_value, 48
  - set\_status\_from\_string, 50
  - sm\_category\_arrays, 51
  - sm\_category\_names, 50
  - sm\_channel\_event\_names, 50
  - sm\_meta\_event\_names, 51
  - sm\_prop\_event\_names, 51
  - sm\_system\_event\_names, 51
  - stock\_event\_string, 50
  - time\_as\_measures, 49
  - time\_as\_minutes, 49
  - timestamp, 49
  - timestamp\_format\_t, 47
  - timestamp\_measures, 47
  - timestamp\_pulses, 48
  - timestamp\_time, 48
  - value\_to\_name, 48
- seq64::editable\_events, 52
  - add, 54
  - count, 54
  - editable\_events, 53
  - Key, 53
  - load\_events, 54
  - m\_current\_event, 55

- m\_midi\_parameters, 55
  - m\_sequence, 55
  - operator=, 53
  - save\_events, 54
- seq64::event, 55
  - ~event, 60
  - append\_sysex, 64
  - check\_channel, 61
  - event, 60
  - get\_data, 64
  - get\_rank, 65
  - is\_channel\_msg, 61
  - is\_desired\_cc\_or\_not\_cc, 63
  - is\_note\_msg, 61
  - is\_one\_byte\_msg, 61
  - is\_two\_byte\_msg, 61
  - m\_channel, 65
  - m\_data, 65
  - m\_has\_link, 65
  - m\_status, 65
  - m\_sysex, 65
  - mod\_timestamp, 63
  - operator<, 60
  - operator=, 60
  - set\_channel, 64
  - set\_data, 64
  - set\_status, 63, 64
- seq64::event\_list, 67
  - add, 69
  - any\_selected\_notes, 71
  - clear, 70
  - count, 69
  - count\_selected\_events, 71
  - event\_list, 69
  - link\_new, 70
  - m\_is\_modified, 71
  - mark\_all, 71
  - mark\_out\_of\_range, 70
  - merge, 70
  - operator=, 69
  - remove, 69
  - unmodify, 69
  - verify\_and\_link, 70
- seq64::event\_list::event\_key, 65
  - event\_key, 66
  - m\_rank, 66
  - m\_timestamp, 66
  - operator<, 66
- seq64::eventedit, 71
  - ~eventedit, 75
  - enqueue\_draw, 75
  - eventedit, 74
  - handle\_insert, 78
  - handle\_modify, 78
  - handle\_save, 78
  - m\_redraw\_ms, 79
  - on\_delete\_event, 78
  - on\_key\_press\_event, 78
  - set\_dirty, 76
  - set\_event\_category, 76
  - set\_event\_data\_0, 76
  - set\_event\_data\_1, 76
  - set\_event\_name, 76
  - set\_event\_timestamp, 76
  - set\_seq\_count, 76
  - set\_seq\_ppqn, 75
  - set\_seq\_time\_sig, 75
  - set\_seq\_title, 75
  - timeout, 78
  - v\_adjustment, 76, 78
- seq64::eventslots, 79
  - change\_vert, 88
  - convert\_y, 87
  - decrement\_bottom, 89
  - decrement\_current, 89
  - decrement\_top, 88
  - delete\_current\_event, 85
  - draw\_event, 87
  - draw\_events, 87
  - increment\_bottom, 89
  - increment\_current, 89
  - increment\_top, 88
  - insert\_event, 84
  - load\_events, 84
  - m\_char\_w, 90
  - m\_current\_index, 90
  - m\_setbox\_w, 90
  - m\_slots\_chars, 90
  - m\_slots\_y, 90
  - m\_top\_index, 90
  - m\_xy\_offset, 90
  - modify\_current\_event, 86
  - on\_expose\_event, 89
  - on\_focus\_in\_event, 89
  - on\_move\_down, 90
  - on\_move\_up, 89
  - on\_realize, 89
  - on\_size\_allocate, 89
  - page\_movement, 88
  - page\_topper, 88
  - save\_events, 86
  - select\_event, 86
  - set\_current\_event, 84
  - set\_text, 87
- seq64::font, 90
  - BLACK, 92
  - BLACK\_ON\_CYAN, 92
  - BLACK\_ON\_YELLOW, 92
  - CYAN\_ON\_BLACK, 92
  - Color, 92
  - init, 92
  - m\_b\_on\_c\_pixmap, 93
  - m\_b\_on\_y\_pixmap, 93
  - m\_black\_pixmap, 93
  - m\_c\_on\_b\_pixmap, 93
  - m\_clip\_mask, 93



- m\_font\_h, 93
- m\_font\_w, 93
- m\_pixmap, 93
- m\_white\_pixmap, 93
- m\_y\_on\_b\_pixmap, 93
- render\_string\_on\_drawable, 92
- WHITE, 92
- YELLOW\_ON\_BLACK, 92
- seq64::gui\_assistant, 94
  - gui\_assistant, 95
- seq64::gui\_assistant\_gtk2, 95
  - lash\_timeout\_connect, 96
  - sm\_internal\_keys, 96
- seq64::gui\_drawingarea\_gtk2, 96
  - clear\_window, 99
  - draw\_line, 99–101
  - draw\_line\_on\_pixmap, 99, 100
  - draw\_normal\_rectangle\_on\_pixmap, 103
  - draw\_rectangle, 101–103
  - draw\_rectangle\_on\_pixmap, 103
  - m\_background, 104
  - m\_drop\_x, 104
  - m\_foreground, 104
  - m\_mainperf, 104
  - m\_pixmap, 104
  - m\_window, 104
  - m\_window\_x, 104
  - on\_realize, 104
  - render\_string, 101
  - render\_string\_on\_pixmap, 101
  - set\_line, 99
- seq64::gui\_drawingarea\_gtk2::rect, 217
- seq64::gui\_palette\_gtk2, 104
  - gui\_palette\_gtk2, 105
- seq64::gui\_window\_gtk2, 105
  - gui\_window\_gtk2, 107
  - m\_window\_x, 108
- seq64::jack\_assistant, 108
  - ~jack\_assistant, 109
  - client\_open, 111
  - error\_message, 110
  - info\_message, 110
  - init, 109
  - jack\_assistant, 109
  - jack\_shutdown\_callback, 111
  - jack\_timebase\_callback, 111
  - output, 110
  - position, 110
  - sm\_status\_pairs, 111
  - start, 109
  - stop, 110
- seq64::jack\_scratchpad, 112
- seq64::keybindentry, 112
  - events, 113
  - groups, 113
  - keybindentry, 113
  - location, 113
  - m\_key, 113
  - on\_key\_press\_event, 113
  - set, 113
  - type, 112
- seq64::keys\_perform, 113
  - ~keys\_perform, 115
  - get\_keys, 116
  - key\_name, 116
  - m\_key\_bpm\_up, 117
  - m\_key\_show\_ui\_sequence\_number, 117
  - set\_all\_key\_events, 116
  - set\_all\_key\_groups, 116
  - set\_key\_event, 116
  - set\_key\_group, 117
  - set\_keys, 115
  - show\_ui\_sequence\_key, 116
  - show\_ui\_sequence\_number, 116
- seq64::keys\_perform\_gtk2, 117
  - ~keys\_perform\_gtk2, 119
  - key\_name, 119
  - set\_all\_key\_events, 119
  - set\_all\_key\_groups, 119
- seq64::keys\_perform\_transfer, 119
- seq64::keystroke, 119
  - is\_letter, 121
  - keystroke, 120, 121
  - m\_is\_press, 121
  - m\_key, 121
  - m\_modifier, 121
  - operator=, 121
- seq64::lash, 122
  - handle\_config, 123
  - handle\_event, 123
  - init, 123
  - lash, 122
  - process\_events, 123
  - set\_alsa\_client\_id, 123
- seq64::maintime, 123
  - idle\_progress, 126
  - m\_bar\_width, 127
  - m\_beat\_width, 127
  - m\_box\_height, 127
  - m\_box\_width, 127
  - m\_flash\_height, 127
  - m\_flash\_width, 127
  - m\_ppqn, 127
  - maintime, 125
  - on\_expose\_event, 127
  - on\_realize, 127
- seq64::mainwid, 128
  - calculate\_base\_sizes, 132
  - draw\_marker\_on\_sequence, 130
  - draw\_sequence\_on\_pixmap, 131
  - draw\_sequence\_pixmap\_on\_window, 131
  - draw\_sequences\_on\_pixmap, 131
  - m\_screenset\_offset, 134
  - m\_screenset\_slots, 134
  - mainwid, 130
  - on\_button\_press\_event, 132

- on\_button\_release\_event, 133
- on\_expose\_event, 132
- on\_focus\_in\_event, 133
- on\_focus\_out\_event, 133
- on\_motion\_notify\_event, 133
- on\_realize, 132
- redraw, 130
- seq\_from\_xy, 131
- set\_screenset, 130
- timeout, 132
- update\_markers, 130
- valid\_sequence, 131
- seq64::mainwnd, 134
  - about\_dialog, 139
  - adj\_callback\_bpm, 139
  - adj\_callback\_ss, 139
  - edit\_callback\_notepad, 139
  - file\_import\_dialog, 139
  - m\_main\_wid, 141
  - m\_sigpipe, 141
  - m\_spinbutton\_load\_offset, 141
  - mainwnd, 138
  - new\_file, 140
  - on\_delete\_event, 140
  - on\_grouplearnchange, 141
  - on\_key\_press\_event, 140
  - on\_key\_release\_event, 141
  - open\_file, 138
  - open\_performance\_edit, 140
  - open\_performance\_edit\_2, 140
  - ppqn, 139
  - save\_file, 140
  - signal\_action, 140
  - start\_playing, 140
  - stop\_playing, 140
  - timer\_callback, 139
  - update\_window\_title, 140
- seq64::midi\_container, 141
  - add\_long, 144
  - add\_variable, 144
  - fill, 143
  - get, 143
  - position, 144
  - put, 143
- seq64::midi\_list, 144
  - CharList, 146
  - get, 146
  - put, 146
- seq64::midi\_measures, 146
  - m\_divisions, 147
- seq64::midi\_splitter, 147
  - increment, 149
  - m\_smf0\_channels, 150
  - m\_smf0\_channels\_count, 150
  - m\_smf0\_seq\_number, 150
  - midi\_splitter, 148
  - ppqn, 149
  - split, 149
  - split\_channel, 149
- seq64::midi\_timing, 150
  - m\_beat\_width, 151
  - m\_beats\_per\_measure, 151
  - m\_beats\_per\_minute, 151
  - m\_ppqn, 151
- seq64::midi\_vector, 151
  - get, 153
  - put, 153
- seq64::midibus, 153
  - clock, 156
  - continue\_from, 156
  - deinit\_in, 155
  - init\_clock, 156
  - init\_in, 155
  - init\_in\_sub, 155
  - init\_out, 155
  - init\_out\_sub, 155
  - play, 156
  - set\_input, 156
  - sysex, 156
- seq64::midifile, 156
  - errdump, 167
  - is\_sysex\_special\_id, 167
  - m\_char\_list, 169
  - m\_data, 169
  - m\_disable\_reported, 169
  - m\_error\_is\_fatal, 169
  - m\_error\_message, 169
  - m\_file\_size, 169
  - m\_new\_format, 169
  - m\_pos, 169
  - m\_smf0\_splitter, 169
  - midifile, 159
  - parse, 160
  - parse\_prop\_header, 162
  - parse\_proprietary\_track, 163
  - parse\_smf\_0, 162
  - parse\_smf\_1, 162
  - pow2, 164
  - ppqn, 162
  - prop\_item\_size, 167
  - read\_byte\_array, 164
  - read\_long, 164
  - read\_seq\_number, 165
  - read\_track\_name, 165
  - read\_varinum, 164
  - varinum\_size, 167
  - write, 160
  - write\_byte, 164
  - write\_long, 164
  - write\_prop\_header, 165
  - write\_proprietary\_track, 166
  - write\_seq\_number, 165
  - write\_short, 164
  - write\_track\_name, 165
  - write\_varinum, 164
- seq64::mutex, 170

- sm\_recursive\_mutex, 171
- seq64::options, 171
  - m\_notebook, 171
- seq64::optionsfile, 171
  - parse, 172
  - write, 174
- seq64::perfedit, 174
  - ~perfedit, 177
  - collapse, 178
  - copy, 178
  - enqueue\_draw, 177
  - enregister\_peer, 178
  - expand, 178
  - grow, 178
  - init\_before\_show, 177
  - m\_bpm, 179
  - m\_bw, 179
  - m\_redraw\_ms, 179
  - perfedit, 177
  - set\_beat\_width, 178
  - set\_beats\_per\_bar, 178
  - set\_guides, 178
  - start\_playing, 179
  - stop\_playing, 179
  - timeout, 178
  - undo, 178
- seq64::perfnames, 179
  - draw\_sequence, 182
  - enqueue\_draw, 182
  - m\_char\_w, 182
  - m\_namebox\_w, 183
  - m\_names\_chars, 182
  - m\_names\_y, 183
  - m\_parent, 182
  - m\_setbox\_w, 183
  - m\_xy\_offset, 183
  - on\_expose\_event, 182
  - on\_realize, 182
  - on\_size\_allocate, 182
  - perfnames, 182
- seq64::perform, 183
  - ~perform, 190
  - add\_sequence, 191
  - all\_notes\_off, 194
  - clamp\_track, 203
  - clear\_all, 190
  - clear\_sequence\_triggers, 191
  - copy\_triggers, 192
  - decrement\_beats\_per\_minute, 200
  - delete\_sequence, 191
  - get\_group\_mute\_state, 198
  - get\_max\_trigger, 192
  - get\_screen\_set\_notepad, 193
  - get\_sequence, 197
  - handle\_midi\_control, 193
  - highlight, 200
  - increment\_beats\_per\_minute, 200
  - init, 190
  - init\_jack, 191
  - inner\_start, 203
  - install\_sequence, 202
  - is\_active, 197
  - is\_dirty\_edit, 195
  - is\_dirty\_main, 195
  - is\_dirty\_names, 195
  - is\_dirty\_perf, 195
  - is\_midi\_control\_valid, 201
  - is\_modified, 201
  - is\_mseq\_valid, 202
  - is\_screenset\_valid, 202
  - is\_seq\_valid, 202
  - launch\_input\_thread, 190
  - launch\_output\_thread, 190
  - m\_is\_modified, 204
  - m\_left\_tick, 204
  - m\_max\_sets, 204
  - m\_one\_measure, 204
  - m\_playback\_mode, 203
  - m\_playscreen\_offset, 203
  - m\_right\_tick, 204
  - m\_seqs, 203
  - m\_seqs\_in\_set, 204
  - m\_sequence\_count, 204
  - m\_sequence\_max, 204
  - m\_starting\_tick, 204
  - mainwnd\_key\_event, 201
  - midi\_control\_off, 193
  - midi\_control\_on, 193
  - midi\_control\_toggle, 192
  - modify, 190
  - move\_triggers, 192
  - new\_sequence, 191
  - output\_func, 199
  - perform, 190
  - perfroll\_key\_event, 201
  - play, 197
  - push\_trigger\_undo, 192
  - reset\_sequences, 197
  - save\_playing\_state, 199
  - select\_group\_mute, 194
  - select\_mute\_group, 194
  - seq\_in\_playing\_screen, 201
  - sequence\_count, 190
  - sequence\_label, 200
  - sequence\_playing\_off, 198
  - sequence\_playing\_on, 198
  - set\_active, 195
  - set\_beats\_per\_minute, 198
  - set\_group\_mute\_state, 198
  - set\_input\_bus, 201
  - set\_key\_event, 203
  - set\_key\_group, 203
  - set\_left\_tick, 192
  - set\_offset, 199
  - set\_orig\_ticks, 197
  - set\_playing\_screenset, 194

- set\_right\_tick, 192
- set\_screen\_set\_notepad, 193
- set\_screensset, 194
- set\_sequence\_control\_status, 198
- set\_was\_active, 195
- show\_ui\_sequence\_key, 199
- show\_ui\_sequence\_number, 199
- sm\_mc\_dummy, 203
- start, 194
- start\_playing, 199
- stop, 194
- unset\_mode\_group\_learn, 194
- unset\_sequence\_control\_status, 198
- seq64::performcallback, 205
- seq64::perfull, 206
  - ~perfull, 208
  - convert\_x, 209
  - convert\_xy, 209
  - draw\_drawable\_row, 210
  - draw\_sequence\_on, 210
  - enqueue\_draw, 210
  - fill\_background\_pixmap, 209
  - FruityPerfInput, 211
  - init\_before\_show, 209
  - m\_fruity\_interaction, 211
  - m\_h\_page\_increment, 211
  - m\_parent, 211
  - m\_v\_page\_increment, 211
  - on\_button\_press\_event, 210
  - on\_button\_release\_event, 211
  - on\_expose\_event, 210
  - on\_key\_press\_event, 211
  - on\_realize, 210
  - set\_guides, 209
  - set\_ppqn, 209
  - snap\_x, 210
  - start\_playing, 210
  - stop\_playing, 210
  - update\_sizes, 209
- seq64::perftime, 212
  - enqueue\_draw, 214
  - m\_left\_marker\_tick, 215
  - m\_measure\_length, 215
  - m\_parent, 215
  - m\_right\_marker\_tick, 215
  - on\_expose\_event, 214
  - on\_realize, 214
  - perftime, 214
  - set\_guides, 214
- seq64::rc\_settings, 215
  - home\_config\_directory, 217
- seq64::rect, 217
- seq64::seqdata, 221
  - idle\_redraw, 224
  - m\_number\_h, 225
  - m\_number\_offset\_y, 225
  - m\_number\_w, 225
  - on\_button\_press\_event, 225
  - on\_button\_release\_event, 225
  - on\_motion\_notify\_event, 225
  - on\_realize, 224
  - on\_scroll\_event, 225
  - reset, 224
  - seqdata, 224
  - set\_data\_type, 224
  - set\_zoom, 224
  - update\_sizes, 224
  - xy\_to\_rect, 224
- seq64::seqedit, 226
  - apply\_length, 230
  - create\_menus, 231
  - do\_action, 232
  - get\_measures, 230
  - m\_initial\_snap, 232
  - name\_change\_callback, 231
  - on\_delete\_event, 232
  - popup\_event\_menu, 231
  - popup\_midibus\_menu, 231
  - popup\_sequence\_menu, 231
  - popup\_tool\_menu, 232
  - seqedit, 229
  - set\_background\_sequence, 230
  - set\_data\_type, 231
  - set\_key, 230
  - set\_measures, 230
  - set\_midi\_bus, 230
  - set\_midi\_channel, 230
  - set\_note\_length, 229
  - set\_scale, 230
  - set\_snap, 229
  - set\_zoom, 229
- seq64::seqevent, 233
  - convert\_t, 236
  - convert\_x, 236
  - draw\_background, 235
  - draw\_events\_on, 236
  - draw\_pixmap\_on\_window, 235
  - drop\_event, 236
  - idle\_redraw, 236
  - on\_button\_press\_event, 236
  - on\_button\_release\_event, 237
  - on\_key\_press\_event, 237
  - on\_motion\_notify\_event, 237
  - on\_realize, 236
  - set\_data\_type, 235
  - set\_snap, 235
  - snap\_x, 236
  - start\_paste, 236
  - update\_sizes, 235
  - x\_to\_w, 236
- seq64::seqkeys, 237
  - draw\_key, 241
  - on\_button\_press\_event, 241
  - on\_button\_release\_event, 241
  - on\_enter\_notify\_event, 241
  - on\_leave\_notify\_event, 241

- on\_motion\_notify\_event, 241
- on\_realize, 241
- set\_hint\_state, 240
- seq64::seqmenu, 242
  - ~seqmenu, 244
  - m\_modified, 245
  - m\_seqedit, 245
  - popup\_menu, 244
  - seq\_clear\_perf, 245
  - seq\_copy, 245
  - seq\_cut, 245
  - seq\_edit, 244
  - seq\_event\_edit, 244
  - seq\_new, 244
  - seq\_paste, 245
  - seqmenu, 244
- seq64::seqroll, 245
  - convert\_tn, 249
  - draw\_events\_on, 249
  - draw\_events\_on\_pixmap, 249
  - on\_key\_press\_event, 249
  - on\_scroll\_event, 250
  - reset, 249
  - set\_background\_sequence, 249
  - set\_data\_type, 249
  - snap\_x, 249
  - update\_background, 249
- seq64::seqtime, 250
  - on\_button\_press\_event, 252
  - on\_button\_release\_event, 252
- seq64::sequence, 252
  - add\_event, 264, 270
  - add\_note, 270
  - add\_trigger, 265
  - adjust\_trigger\_offsets\_to\_length, 275
  - background\_sequence, 274
  - change\_event\_data\_range, 271
  - clear\_triggers, 269
  - copy\_events, 274
  - copy\_selected, 270
  - copy\_triggers, 268
  - cut\_selected, 270
  - decrement\_selected, 271
  - del\_trigger, 265
  - e\_deselect, 260
  - e\_is\_selected, 260
  - e\_remove\_one, 260
  - e\_select, 260
  - e\_select\_one, 260
  - e\_toggle\_selection, 260
  - e\_would\_select, 260
  - event\_count, 260
  - fill\_container, 274
  - get\_beat\_width, 262
  - get\_clipboard\_box, 270
  - get\_highest\_note\_event, 273
  - get\_last\_tick, 262
  - get\_lowest\_note\_event, 273
  - get\_max\_trigger, 268
  - get\_name, 262
  - get\_next\_event, 274
  - get\_next\_note\_event, 273
  - get\_num\_selected\_events, 269
  - get\_num\_selected\_notes, 269
  - get\_selected\_box, 270
  - get\_trigger\_state, 265
  - grow\_selected, 272
  - grow\_trigger, 265
  - increment\_selected, 271
  - intersect\_events, 266
  - intersect\_notes, 266
  - intersect\_triggers, 266
  - is\_dirty\_edit, 263
  - is\_dirty\_main, 263
  - is\_dirty\_names, 263
  - is\_dirty\_perf, 263
  - link\_new, 272
  - m\_background\_sequence, 276
  - m\_length, 276
  - m\_midi\_channel, 275
  - m\_musical\_key, 276
  - m\_musical\_scale, 276
  - m\_mutex, 276
  - m\_playing\_notes, 275
  - m\_seq\_number, 276
  - m\_snap\_tick, 276
  - m\_time\_beat\_width, 276
  - m\_time\_beats\_per\_measure, 276
  - mark\_selected, 272
  - mod\_last\_tick, 262
  - move\_selected\_notes, 270
  - move\_selected\_triggers\_to, 268
  - move\_triggers, 268
  - off\_playing\_notes, 273
  - off\_queued, 263
  - partial\_assign, 260
  - paste\_selected, 270
  - paste\_trigger, 268
  - play, 264
  - play\_note\_off, 273
  - play\_note\_on, 273
  - pop\_redo, 260
  - pop\_undo, 260
  - print, 264
  - print\_triggers, 264
  - push\_trigger\_undo, 260
  - push\_undo, 260
  - put\_event\_on\_bus, 274
  - remove, 275
  - remove\_all, 275
  - remove\_marked, 272
  - reset\_draw\_marker, 273
  - reset\_draw\_trigger\_marker, 273
  - select\_action\_e, 260
  - select\_all, 269
  - select\_events, 269

- select\_note\_events, 269
- select\_trigger, 265
- selected\_trigger\_end, 268
- selected\_trigger\_start, 268
- set\_beat\_width, 262
- set\_beats\_per\_bar, 260
- set\_dirty, 264
- set\_dirty\_mp, 264
- set\_length, 262
- set\_master\_midi\_bus, 269
- set\_midi\_bus, 269
- set\_midi\_channel, 264
- set\_orig\_tick, 264
- set\_playing, 262
- set\_quantized\_rec, 263
- set\_rec\_vol, 262
- set\_recording, 263
- set\_snap\_tick, 263
- set\_thru, 263
- set\_trigger\_offset, 275
- split\_trigger, 265, 275
- stream\_event, 270
- stretch\_selected, 272
- toggle\_queued, 263
- transpose\_notes, 274
- unpaint\_all, 272
- unselect, 272
- unselect\_triggers, 266
- verify\_and\_link, 272
- zero\_markers, 273
- seq64::trigger, 276
- seq64::triggers, 278
  - add, 280
  - adjust\_offset, 284
  - adjust\_offsets\_to\_length, 281
  - copy, 283
  - get\_selected\_end, 283
  - get\_selected\_start, 283
  - get\_state, 282
  - grow, 281
  - intersect, 282
  - m\_length, 285
  - m\_ppqn, 285
  - move\_selected, 283
  - next, 284
  - next\_trigger, 284
  - operator=, 280
  - paste, 282
  - play, 280
  - remove, 282
  - select, 282
  - set\_length, 280
  - split, 281
  - triggers, 280
  - unselect, 282
- seq64::user\_instrument, 285
  - controller\_active, 286
  - controller\_max, 286
  - controller\_name, 286
  - copy\_definitions, 287
  - m\_controller\_count, 287
  - m\_is\_valid, 287
  - set\_controller, 286
  - set\_defaults, 286
  - set\_name, 287
- seq64::user\_instrument\_t, 287
  - controllers, 287
  - controllers\_active, 287
  - instrument, 287
- seq64::user\_midi\_bus, 288
  - channel\_count, 289
  - channel\_max, 289
  - copy\_definitions, 289
  - instrument, 289
  - m\_channel\_count, 289
  - m\_is\_valid, 289
  - set\_defaults, 289
  - set\_instrument, 289
- seq64::user\_midi\_bus\_t, 290
  - alias, 290
  - instrument, 290
- seq64::user\_settings, 290
  - bus, 297
  - Busses, 297
  - control\_height, 298
  - controller\_active, 298
  - controller\_name, 298
  - dump\_summary, 299
  - get\_globals, 297
  - grid\_style\_black, 297
  - grid\_style\_max, 297
  - grid\_style\_normal, 297
  - grid\_style\_white, 297
  - instrument, 298
  - Instruments, 297
  - m\_allow\_two\_perfedits, 301
  - m\_control\_height, 300
  - m\_global\_seq\_feature\_save, 300
  - m\_gmute\_tracks, 303
  - m\_grid\_brackets, 300
  - m\_grid\_style, 300
  - m\_h\_perf\_page\_increment, 301
  - m\_instruments, 300
  - m\_mainwid\_border, 300
  - m\_mainwid\_x, 303
  - m\_mainwnd\_cols, 300
  - m\_mainwnd\_rows, 300
  - m\_max\_sequence, 303
  - m\_max\_sets, 300
  - m\_midi\_beat\_width, 302
  - m\_midi\_beats\_per\_measure, 302
  - m\_midi\_beats\_per\_minute, 302
  - m\_midi\_buses, 300
  - m\_midi\_buss\_override, 302
  - m\_midi\_ppqn, 302
  - m\_save\_user\_config, 303

- m\_seqarea\_seq\_x, [303](#)
- m\_seqarea\_x, [303](#)
- m\_seqchars\_x, [302](#)
- m\_seqedit\_bgsequence, [301](#)
- m\_seqedit\_key, [301](#)
- m\_seqedit\_scale, [301](#)
- m\_seqs\_in\_set, [302](#)
- m\_text\_x, [301](#)
- m\_use\_new\_font, [301](#)
- m\_v\_perf\_page\_increment, [301](#)
- mainwid\_border, [298](#)
- mainwid\_grid\_style\_t, [297](#)
- mainwid\_spacing, [298](#)
- mainwnd\_cols, [298](#)
- mainwnd\_rows, [298](#)
- max\_sets, [298](#)
- mc\_baseline\_ppqn, [304](#)
- mc\_max\_zoom, [303](#)
- mc\_min\_zoom, [303](#)
- midi\_beat\_width, [299](#)
- midi\_beats\_per\_bar, [299](#)
- midi\_beats\_per\_minute, [299](#)
- midi\_buss\_override, [299](#)
- midi\_ppqn, [299](#)
- perf\_h\_page\_increment, [299](#)
- perf\_v\_page\_increment, [299](#)
- private\_bus, [299](#)
- private\_instrument, [299](#)
- set\_defaults, [297](#)
- set\_globals, [297](#)
- text\_x, [298](#)
- text\_y, [298](#)
- user\_settings, [297](#)
- zoom, [298](#)
- seq64::userfile, [304](#)
  - dump\_setting\_summary, [305](#)
  - parse, [305](#)
  - write, [305](#)
- seq\_clear\_perf
  - seq64::seqmenu, [245](#)
- seq\_copy
  - seq64::seqmenu, [245](#)
- seq\_cut
  - seq64::seqmenu, [245](#)
- seq\_edit
  - seq64::seqmenu, [244](#)
- seq\_event\_edit
  - seq64::seqmenu, [244](#)
- seq\_from\_xy
  - seq64::mainwid, [131](#)
- seq\_in\_playing\_screen
  - seq64::perform, [201](#)
- seq\_new
  - seq64::seqmenu, [244](#)
- seq\_paste
  - seq64::seqmenu, [245](#)
- seqdata
  - seq64::seqdata, [224](#)
- seqedit
  - seq64::seqedit, [229](#)
- seqmenu
  - seq64::seqmenu, [244](#)
- sequence\_count
  - seq64::perform, [190](#)
- sequence\_label
  - seq64::perform, [200](#)
- sequence\_playing\_off
  - seq64::perform, [198](#)
- sequence\_playing\_on
  - seq64::perform, [198](#)
- set
  - seq64::keybindentry, [113](#)
- set\_active
  - seq64::perform, [195](#)
- set\_adding
  - seq64::Seq24PerfInput, [219](#)
  - seq64::Seq24SeqEventInput, [220](#)
  - seq64::Seq24SeqRollInput, [221](#)
- set\_all\_key\_events
  - seq64::keys\_perform, [116](#)
  - seq64::keys\_perform\_gtk2, [119](#)
- set\_all\_key\_groups
  - seq64::keys\_perform, [116](#)
  - seq64::keys\_perform\_gtk2, [119](#)
- set\_alsa\_client\_id
  - seq64::lash, [123](#)
- set\_background\_sequence
  - seq64::seqedit, [230](#)
  - seq64::seqroll, [249](#)
- set\_beat\_width
  - seq64::perfedit, [178](#)
  - seq64::sequence, [262](#)
- set\_beats\_per\_bar
  - seq64::perfedit, [178](#)
  - seq64::sequence, [260](#)
- set\_beats\_per\_minute
  - seq64::perform, [198](#)
- set\_channel
  - seq64::event, [64](#)
- set\_controller
  - seq64::user\_instrument, [286](#)
- set\_current\_event
  - seq64::eventslots, [84](#)
- set\_data
  - seq64::event, [64](#)
- set\_data\_type
  - seq64::seqdata, [224](#)
  - seq64::seqedit, [231](#)
  - seq64::seqevent, [235](#)
  - seq64::seqroll, [249](#)
- set\_defaults
  - seq64::user\_instrument, [286](#)
  - seq64::user\_midi\_bus, [289](#)
  - seq64::user\_settings, [297](#)
- set\_dirty
  - seq64::eventedit, [76](#)

- seq64::sequence, 264
- set\_dirty\_mp
  - seq64::sequence, 264
- set\_event\_category
  - seq64::eventedit, 76
- set\_event\_data\_0
  - seq64::eventedit, 76
- set\_event\_data\_1
  - seq64::eventedit, 76
- set\_event\_name
  - seq64::eventedit, 76
- set\_event\_timestamp
  - seq64::eventedit, 76
- set\_globals
  - seq64::user\_settings, 297
- set\_group\_mute\_state
  - seq64::perform, 198
- set\_guides
  - seq64::perfedit, 178
  - seq64::perfroll, 209
  - seq64::perftime, 214
- set\_hint\_state
  - seq64::seqkeys, 240
- set\_input
  - seq64::midibus, 156
- set\_input\_bus
  - seq64::perform, 201
- set\_instrument
  - seq64::user\_midi\_bus, 289
- set\_key
  - seq64::seqedit, 230
- set\_key\_event
  - seq64::keys\_perform, 116
  - seq64::perform, 203
- set\_key\_group
  - seq64::keys\_perform, 117
  - seq64::perform, 203
- set\_keys
  - seq64::keys\_perform, 115
- set\_left\_tick
  - seq64::perform, 192
- set\_length
  - seq64::sequence, 262
  - seq64::triggers, 280
- set\_line
  - seq64::gui\_drawingarea\_gtk2, 99
- set\_master\_midi\_bus
  - seq64::sequence, 269
- set\_measures
  - seq64::seqedit, 230
- set\_midi\_bus
  - seq64::seqedit, 230
  - seq64::sequence, 269
- set\_midi\_channel
  - seq64::seqedit, 230
  - seq64::sequence, 264
- set\_name
  - seq64::user\_instrument, 287
- set\_note\_length
  - seq64::seqedit, 229
- set\_offset
  - seq64::perform, 199
- set\_orig\_tick
  - seq64::sequence, 264
- set\_orig\_ticks
  - seq64::perform, 197
- set\_playing
  - seq64::sequence, 262
- set\_playing\_screenset
  - seq64::perform, 194
- set\_ppqn
  - seq64::perfroll, 209
- set\_quantized\_rec
  - seq64::sequence, 263
- set\_rec\_vol
  - seq64::sequence, 262
- set\_recording
  - seq64::sequence, 263
- set\_right\_tick
  - seq64::perform, 192
- set\_scale
  - seq64::seqedit, 230
- set\_screen\_set\_notepad
  - seq64::perform, 193
- set\_screenset
  - seq64::mainwid, 130
  - seq64::perform, 194
- set\_seq\_count
  - seq64::eventedit, 76
- set\_seq\_ppqn
  - seq64::eventedit, 75
- set\_seq\_time\_sig
  - seq64::eventedit, 75
- set\_seq\_title
  - seq64::eventedit, 75
- set\_sequence\_control\_status
  - seq64::perform, 198
- set\_snap
  - seq64::seqedit, 229
  - seq64::seqevent, 235
- set\_snap\_tick
  - seq64::sequence, 263
- set\_status
  - seq64::event, 63, 64
- set\_status\_from\_string
  - seq64::editable\_event, 50
- set\_text
  - seq64::eventslots, 87
- set\_thru
  - seq64::sequence, 263
- set\_trigger\_offset
  - seq64::sequence, 275
- set\_was\_active
  - seq64::perform, 195
- set\_zoom
  - seq64::seqdata, 224



- seq64::seqedit, 229
- show\_ui\_sequence\_key
  - seq64::keys\_perform, 116
  - seq64::perform, 199
- show\_ui\_sequence\_number
  - seq64::keys\_perform, 116
  - seq64::perform, 199
- signal\_action
  - seq64::mainwnd, 140
- sm\_category\_arrays
  - seq64::editable\_event, 51
- sm\_category\_names
  - seq64::editable\_event, 50
- sm\_channel\_event\_names
  - seq64::editable\_event, 50
- sm\_internal\_keys
  - seq64::gui\_assistant\_gtk2, 96
- sm\_mc\_dummy
  - seq64::perform, 203
- sm\_meta\_event\_names
  - seq64::editable\_event, 51
- sm\_prop\_event\_names
  - seq64::editable\_event, 51
- sm\_recursive\_mutex
  - seq64::mutex, 171
- sm\_status\_pairs
  - seq64::jack\_assistant, 111
- sm\_system\_event\_names
  - seq64::editable\_event, 51
- snap\_x
  - seq64::perfroll, 210
  - seq64::seqevent, 236
  - seq64::seqroll, 249
- split
  - seq64::midi\_splitter, 149
  - seq64::triggers, 281
- split\_channel
  - seq64::midi\_splitter, 149
- split\_trigger
  - seq64::sequence, 265, 275
- start
  - seq64::jack\_assistant, 109
  - seq64::perform, 194
- start\_paste
  - seq64::seqevent, 236
- start\_playing
  - seq64::mainwnd, 140
  - seq64::perfedit, 179
  - seq64::perform, 199
  - seq64::perfroll, 210
- stock\_event\_string
  - seq64::editable\_event, 50
- stop
  - seq64::jack\_assistant, 110
  - seq64::perform, 194
- stop\_playing
  - seq64::mainwnd, 140
  - seq64::perfedit, 179
- seq64::perfroll, 210
- stream\_event
  - seq64::sequence, 270
- stretch\_selected
  - seq64::sequence, 272
- sysex
  - seq64::midibus, 156
- text\_x
  - seq64::user\_settings, 298
- text\_y
  - seq64::user\_settings, 298
- time\_as\_measures
  - seq64::editable\_event, 49
- time\_as\_minutes
  - seq64::editable\_event, 49
- timeout
  - seq64::eventedit, 78
  - seq64::mainwid, 132
  - seq64::perfedit, 178
- timer\_callback
  - seq64::mainwnd, 139
- timestamp
  - seq64::editable\_event, 49
- timestamp\_format\_t
  - seq64::editable\_event, 47
- timestamp\_measures
  - seq64::editable\_event, 47
- timestamp\_pulses
  - seq64::editable\_event, 48
- timestamp\_time
  - seq64::editable\_event, 48
- toggle\_queued
  - seq64::sequence, 263
- transpose\_notes
  - seq64::sequence, 274
- triggers
  - seq64::triggers, 280
- type
  - seq64::keybindentry, 112
- undo
  - seq64::perfedit, 178
- unmodify
  - seq64::event\_list, 69
- unpaint\_all
  - seq64::sequence, 272
- unselect
  - seq64::sequence, 272
  - seq64::triggers, 282
- unselect\_triggers
  - seq64::sequence, 266
- unset\_mode\_group\_learn
  - seq64::perform, 194
- unset\_sequence\_control\_status
  - seq64::perform, 198
- update\_background
  - seq64::seqroll, 249
- update\_markers

- seq64::mainwid, [130](#)
- update\_sizes
  - seq64::perfroll, [209](#)
  - seq64::seqdata, [224](#)
  - seq64::seqevent, [235](#)
- update\_window\_title
  - seq64::mainwnd, [140](#)
- user\_settings
  - seq64::user\_settings, [297](#)
- v\_adjustment
  - seq64::eventedit, [76](#), [78](#)
- valid\_sequence
  - seq64::mainwid, [131](#)
- value\_to\_name
  - seq64::editable\_event, [48](#)
- varinum\_size
  - seq64::midifile, [167](#)
- verify\_and\_link
  - seq64::event\_list, [70](#)
  - seq64::sequence, [272](#)
- WHITE
  - seq64::font, [92](#)
- write
  - seq64::midifile, [160](#)
  - seq64::optionsfile, [174](#)
  - seq64::userfile, [305](#)
- write\_byte
  - seq64::midifile, [164](#)
- write\_long
  - seq64::midifile, [164](#)
- write\_prop\_header
  - seq64::midifile, [165](#)
- write\_proprietary\_track
  - seq64::midifile, [166](#)
- write\_seq\_number
  - seq64::midifile, [165](#)
- write\_short
  - seq64::midifile, [164](#)
- write\_track\_name
  - seq64::midifile, [165](#)
- write\_varinum
  - seq64::midifile, [164](#)
- x\_to\_w
  - seq64::seqevent, [236](#)
- xy\_to\_rect
  - seq64::seqdata, [224](#)
- YELLOW\_ON\_BLACK
  - seq64::font, [92](#)
- zero\_markers
  - seq64::sequence, [273](#)
- zoom
  - seq64::user\_settings, [298](#)