get set up for today's workshop

1. Answer a quick poll before we get started:
   bit.ly/dsspoll

2. Install Python 3.6 (Anaconda) from
   https://www.anaconda.com/download
   or use a lab computer

3. Exercises and files
   https://github.com/nmbrodnax/iqss-python-scrape

Introduction to Web Scraping with Python

NaLette Brodnax

The Institute for Quantitative Social Science

Harvard University

iq.harvard.edu

1

intro

2

get the tools

3

review Python

4

scrape the web

my goals

- Review Python programming
- Introduce web scraping method
- Provide opportunities to practice

your goals

Please complete the one-minute poll at
bit.ly/dsspoll

part 1: introduction

what is web scraping?

Web scraping is a set of techniques for extracting information from the web and transforming it into structured data that we can store and analyze.

when should you scrape the web?

Web scraping should help you be more **efficient**

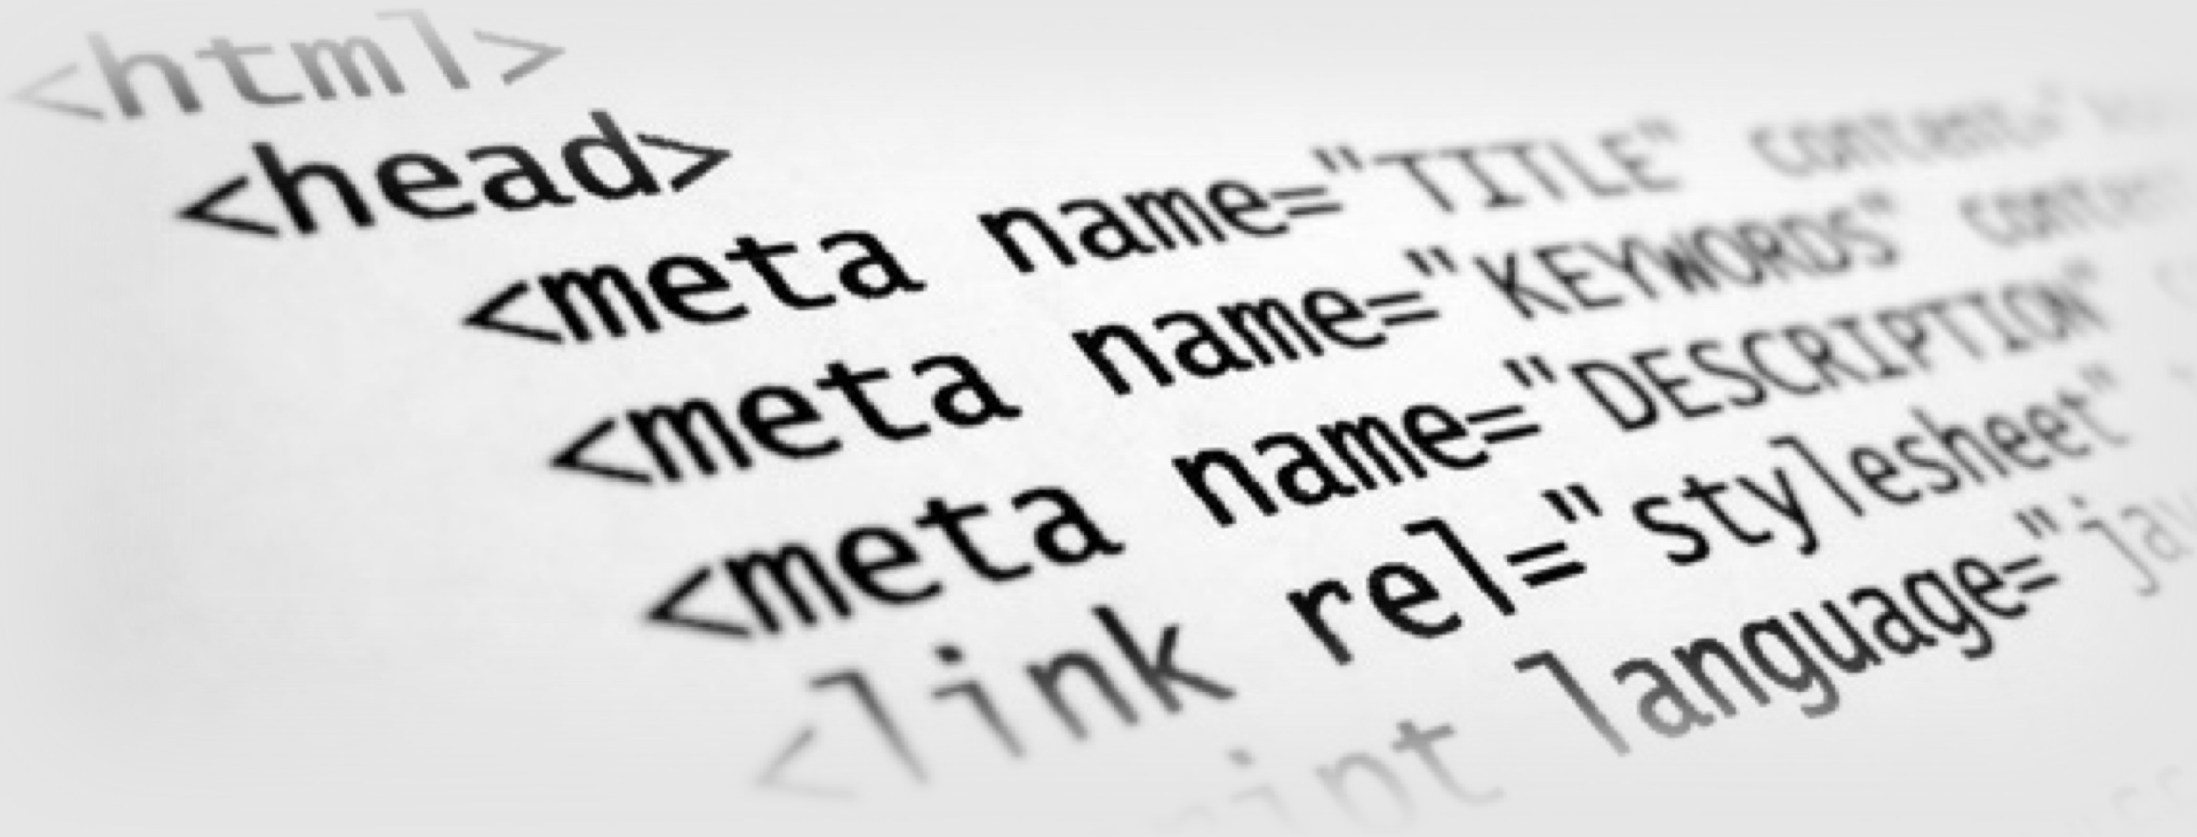

a simple model: locate and process data

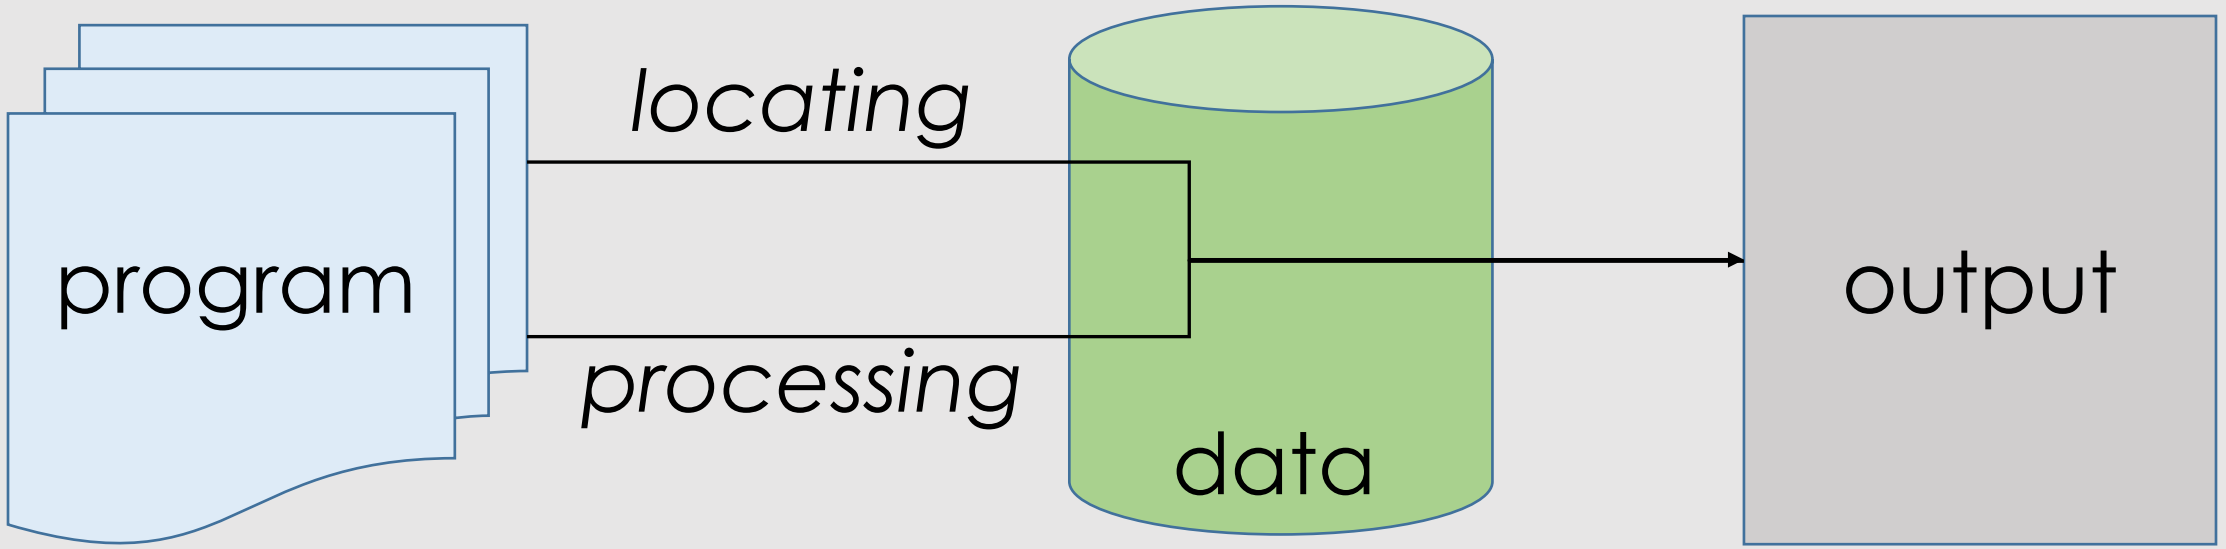

example 1: browse and open csv file

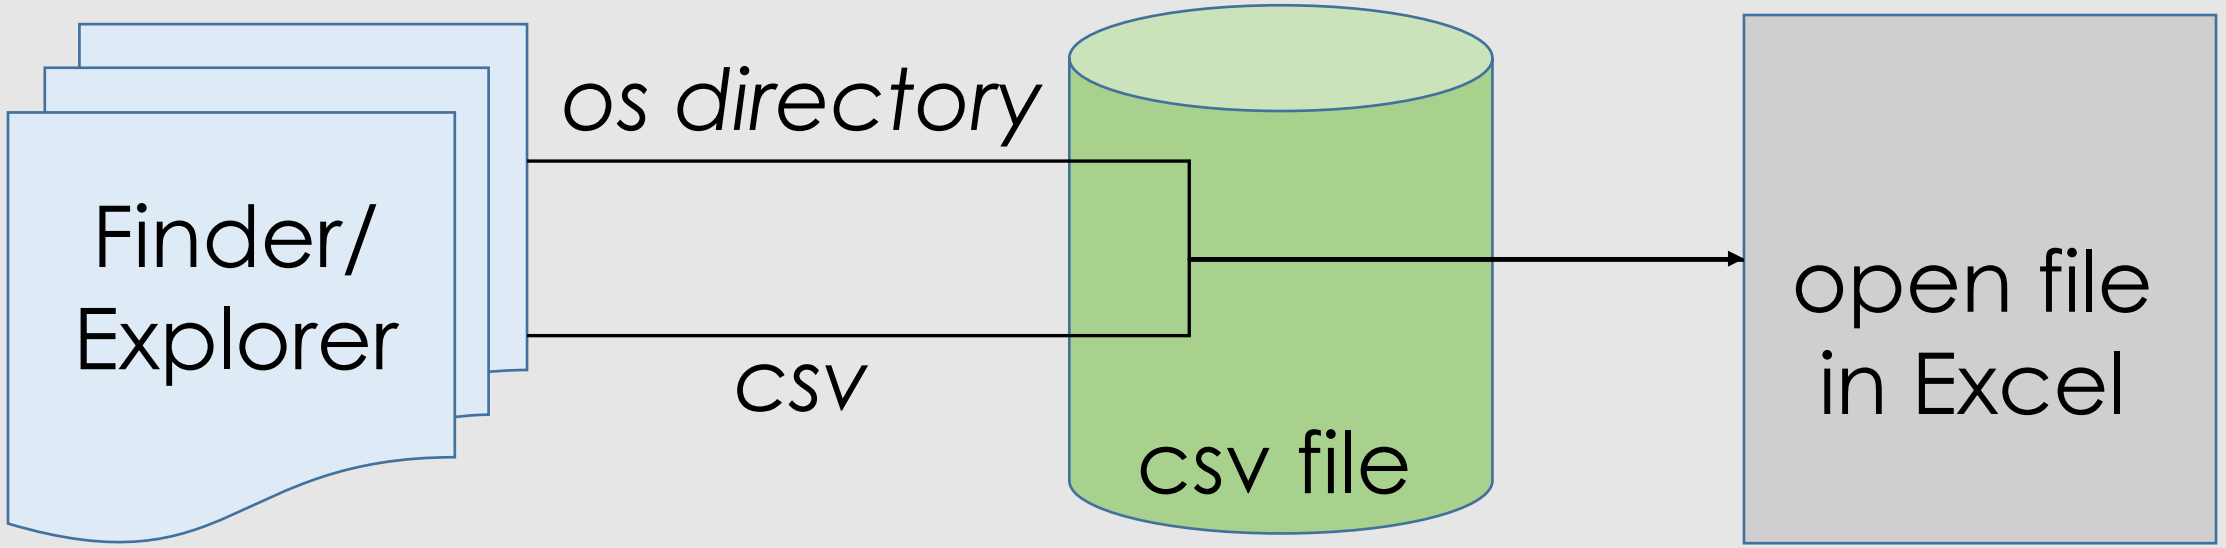

The program and data are all located on one computer

example 2: view a static web page

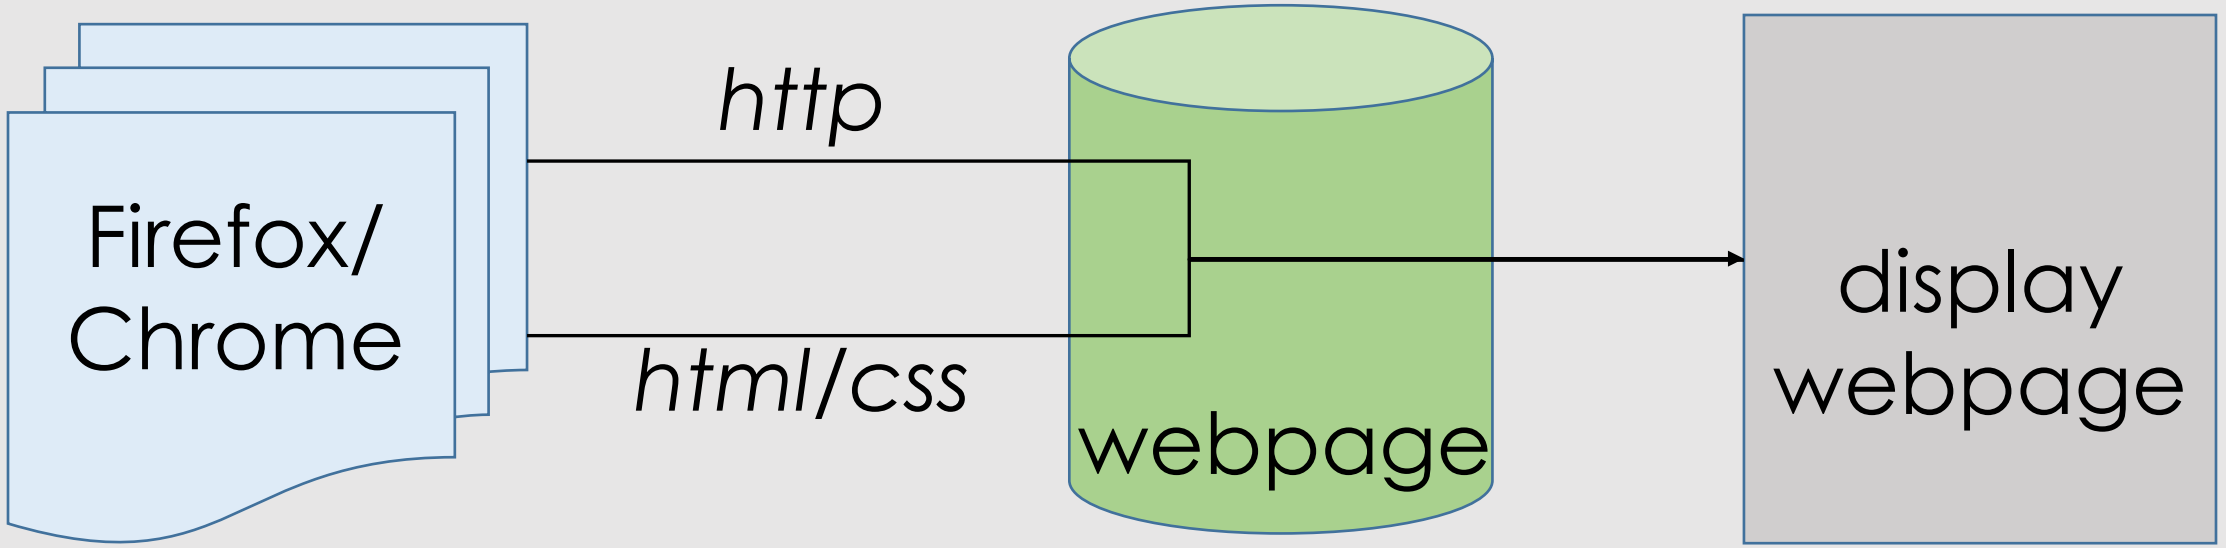

The program and data are located on different computers

example 3: view a dynamic web page

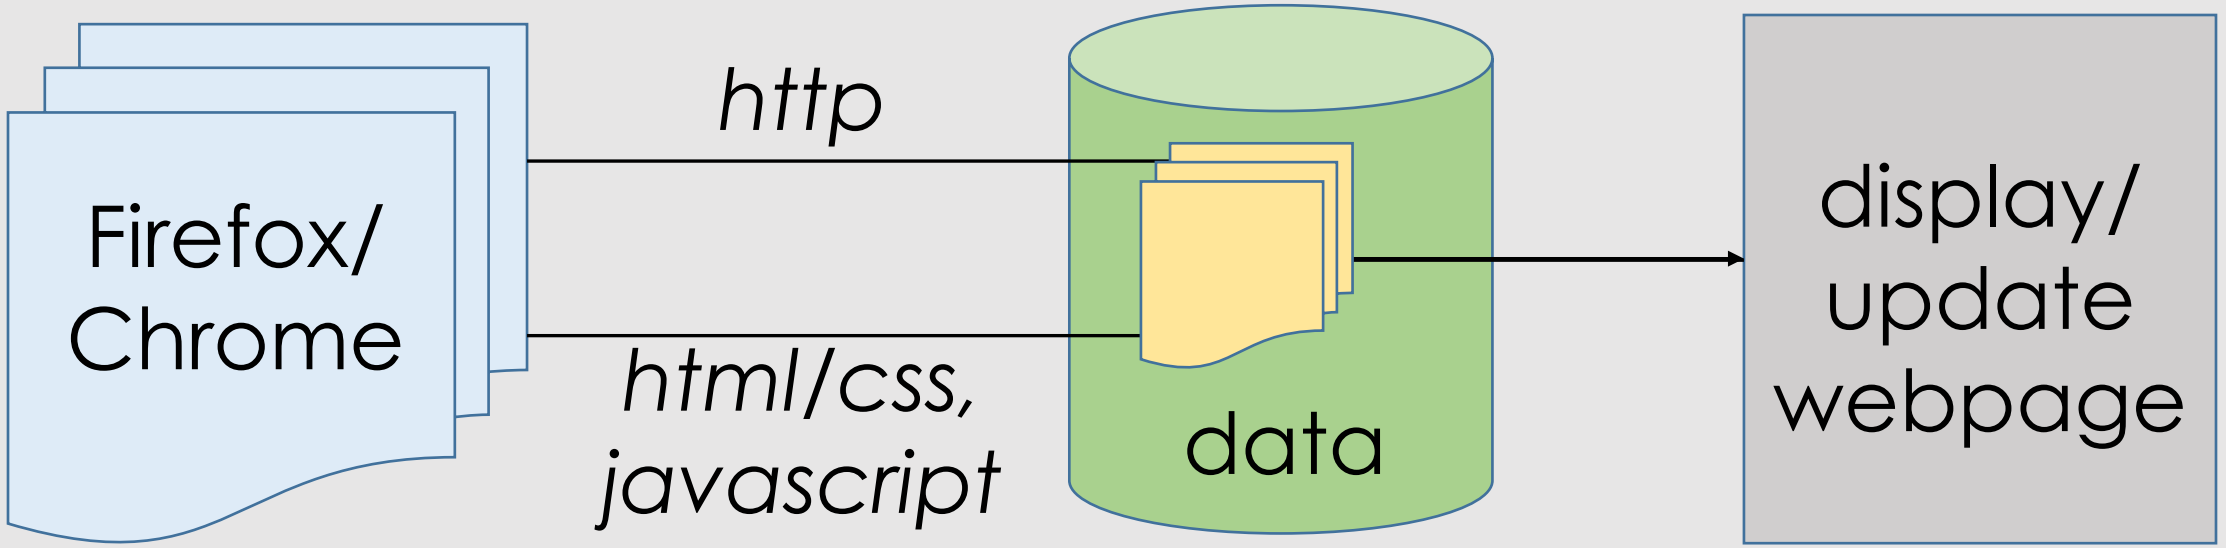

The browser encounters instructions for how to display the webpage based on the user

goal: scrape a static page

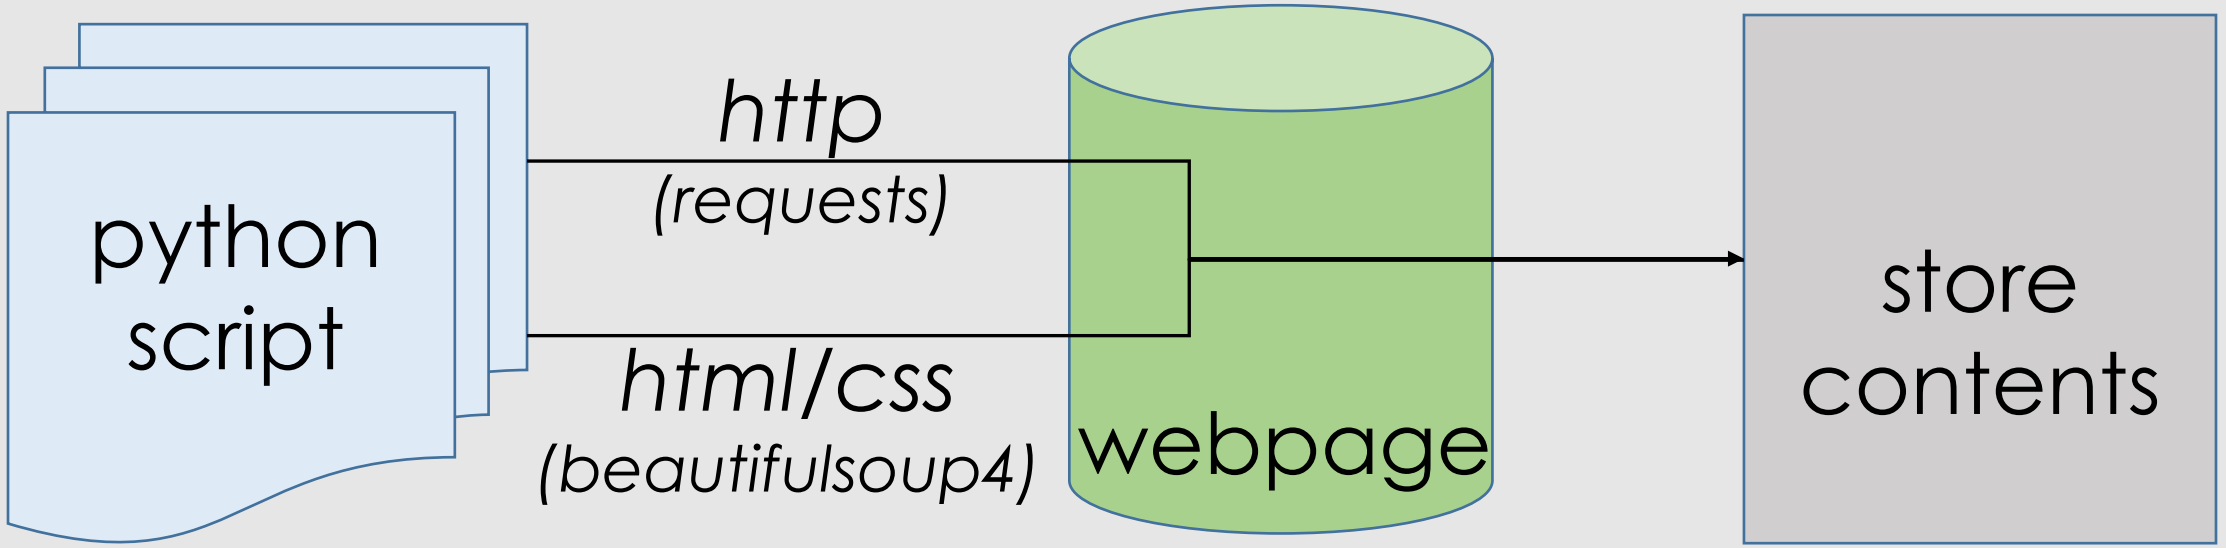

Use the **requests** library for http protocols and the **beautifulsoup4** library for html processing

part 2: getting set up

getting the tools

Interpreter → Output

Text Editor + Interpreter → Output

Command Line + Text Editor + Interpreter → Output

Integrated Development Environment (IDE) → Output

installing the tools on your machine

- Install Anaconda Python 3.6 from Continuum https://www.anaconda.com/download
  - **Spyder** IDE
  - Navigator graphical interface
  - Conda command line utility
  - Includes popular data science packages

- Workshop exercises and files https://github.com/nmbrodnax/iqss-python-scrape

not using anaconda?

Download Python 3.6
https://www.python.org/downloads/
→Includes IDLE, an IDE with a text editor and interpreter
→Includes pip, Python's standard package manager

Install the necessary libraries **from the command line**:

```
$ pip3 install --upgrade pip
$ pip3 install requests
$ pip3 install beautifulsoup4
```

participating today

On your machine:

- Anaconda3 → Spyder
- IDLE

Exercise 2.1

create a new script: *review.py*

```
print(“Hello, world.”)
```

Save the program/script.
Run the program in the IDE: **F5** or **Run** or 

part 3: Python review

programming in Python

1. **sequences**
2. **control structures**
3. **writing functions**
4. **using modules and packages**

data types: sequences

String—ordered sequence of characters

```
‘happy’
```

List—ordered sequence of items

```
[‘Leia’, ‘Rey’, ‘Maz’]
```

Dictionary—unordered sequence of key-value pairs

```
{‘name’:‘Kylo’, ‘side’:‘dark’}
```

Exercise 3.1

working with sequences

- Sequences bound by different characters
  - string ‘’
  - list **[]**
  - dictionary **{}**
- Reference items in an **ordered** sequence by number, *starting from 0 or ending at -1*
- Reference dictionary items by key

Exercise 3.2

control structures: loops

for loop

```
name = ‘Grace Hopper’

i = 0
for letter in name:
    if letter in [‘a’,‘e’,‘i’,‘o’,‘u’]:
        i = i + 1
print(name + ‘ has ’ + str(i) + ‘ vowels.’)
```

while loop

```
i = 0
vowel_count = 0
while i < len(name):
    if name[i] in [‘a’,‘e’,‘i’,‘o’,‘u’]:
        vowel_count = vowel_count + 1
    i = i + 1
print(name + ‘ has’ + str(vowel_count) + ‘ vowels.’)
```

Exercise 3.3

functions

def function_name(argument1, argument2, ...):
    first command
    second command
    return output

```
def say_hello(name_string):
    print('Hello, ' + str(name_string) + '!')
    return None

say_hello('NaLette')
```

Exercise 3.4

modules

import statements allow you to add functions

```
import csv

with open("workshop.csv", 'w') as csvfile, \
     open(filename, 'r') as txtfile:
    writer = csv.writer(csvfile)
```

use module name to call functions

part 4: scraping the web

datasets for statistics class

Please open the following in Firefox or Chrome:
http://ww2.amstat.org/publications/jse/jse_data_archive.htm

Notice:

- No option to download all datasets
- No index to see webpage contents

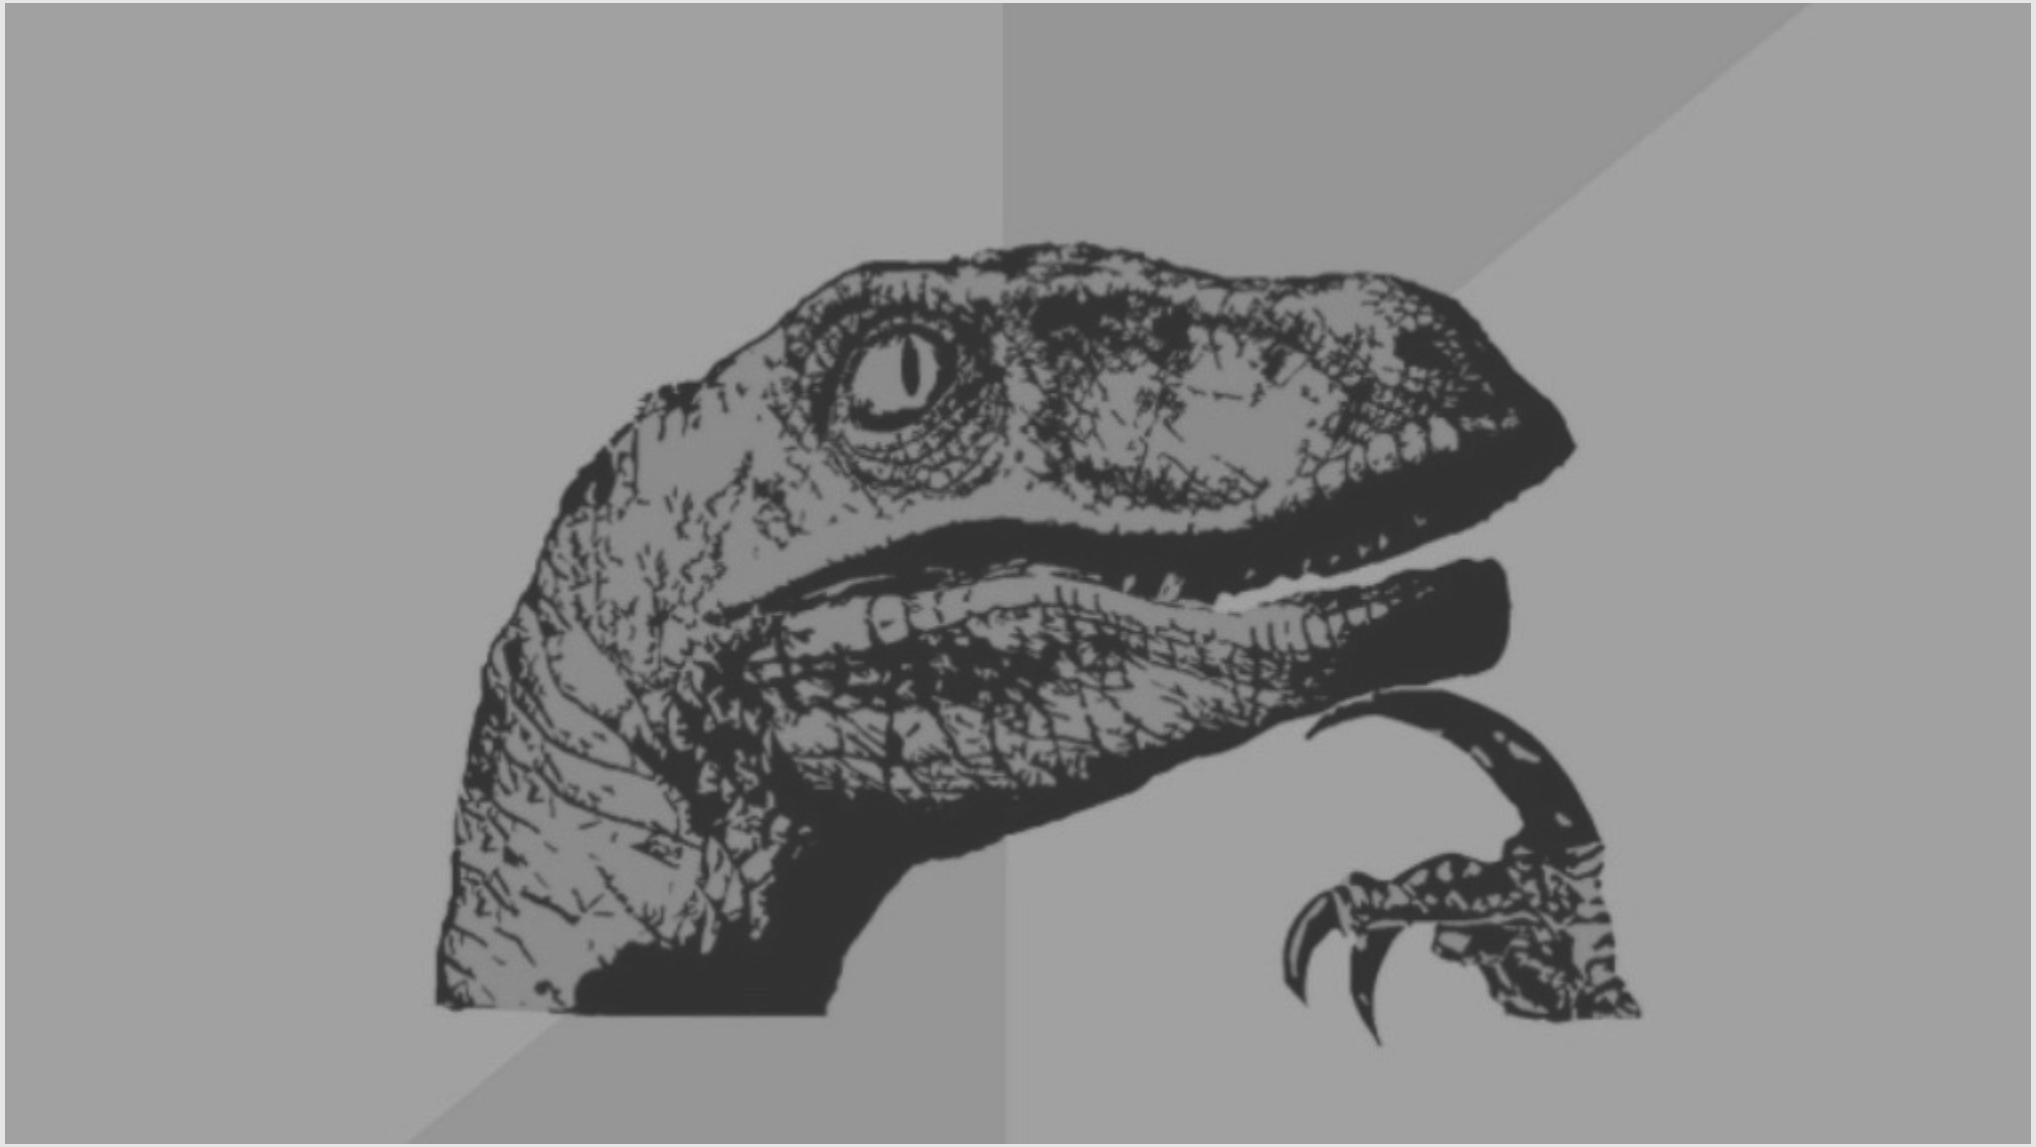

Review • **A**ccess • **P**arse • **T**ransform • st**OR**e

RAPTOR

Review	Structure of webpage
Access	HTML files on web server
Parse	HTML tags, attributes, etc.
Transform	Convert page content to desired format
St**OR**e	Write to text, CSV, or other file format

review: web browser behavior

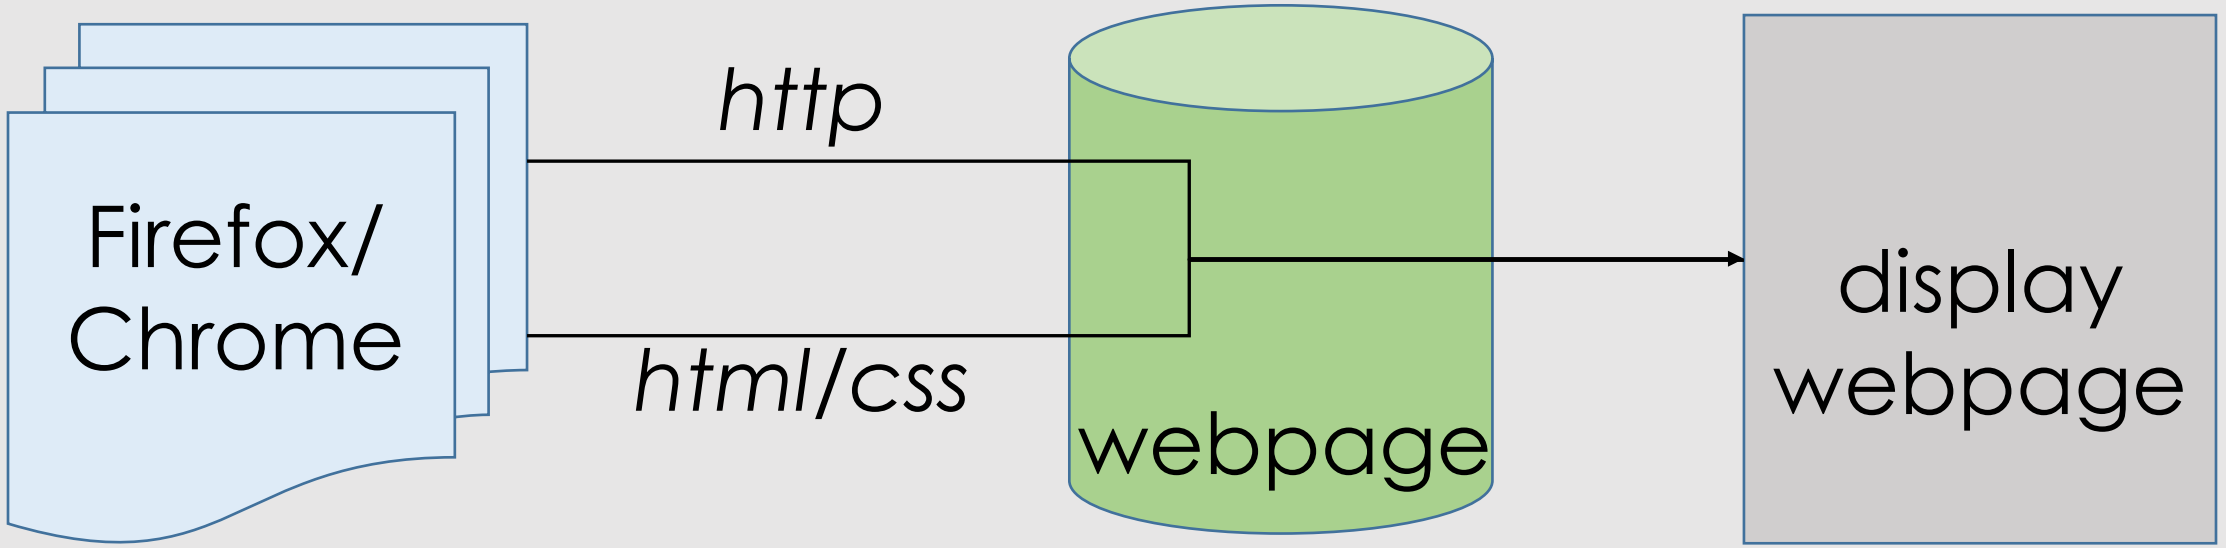

An International Journal on the Teaching and Learning of Statistics

JSE Data Archive

Copy
Select All
Search Google for "JSE Data Archiv..."
View Selection Source
Inspect Element

4cdata.txt (the basic data file)
4c1data.txt (includes indicator or "dummy" variables)
4c.txt (the documentation file)

NAME: Pricing the C's of Diamond Stones
TYPE: Observational Regression Analysis Data
SIZE: 308 observations, 5 variables

The article associated with this dataset appears in the *Journal of Statistics Education*, Volume 9, Number 2 (July 2001).

SUBMITTED BY:
Singfat Chu
Faculty of Business Administration
National University of Singapore
10 Kent Ridge Crescent
Singapore 119260
fbachucl@nus.sg

review

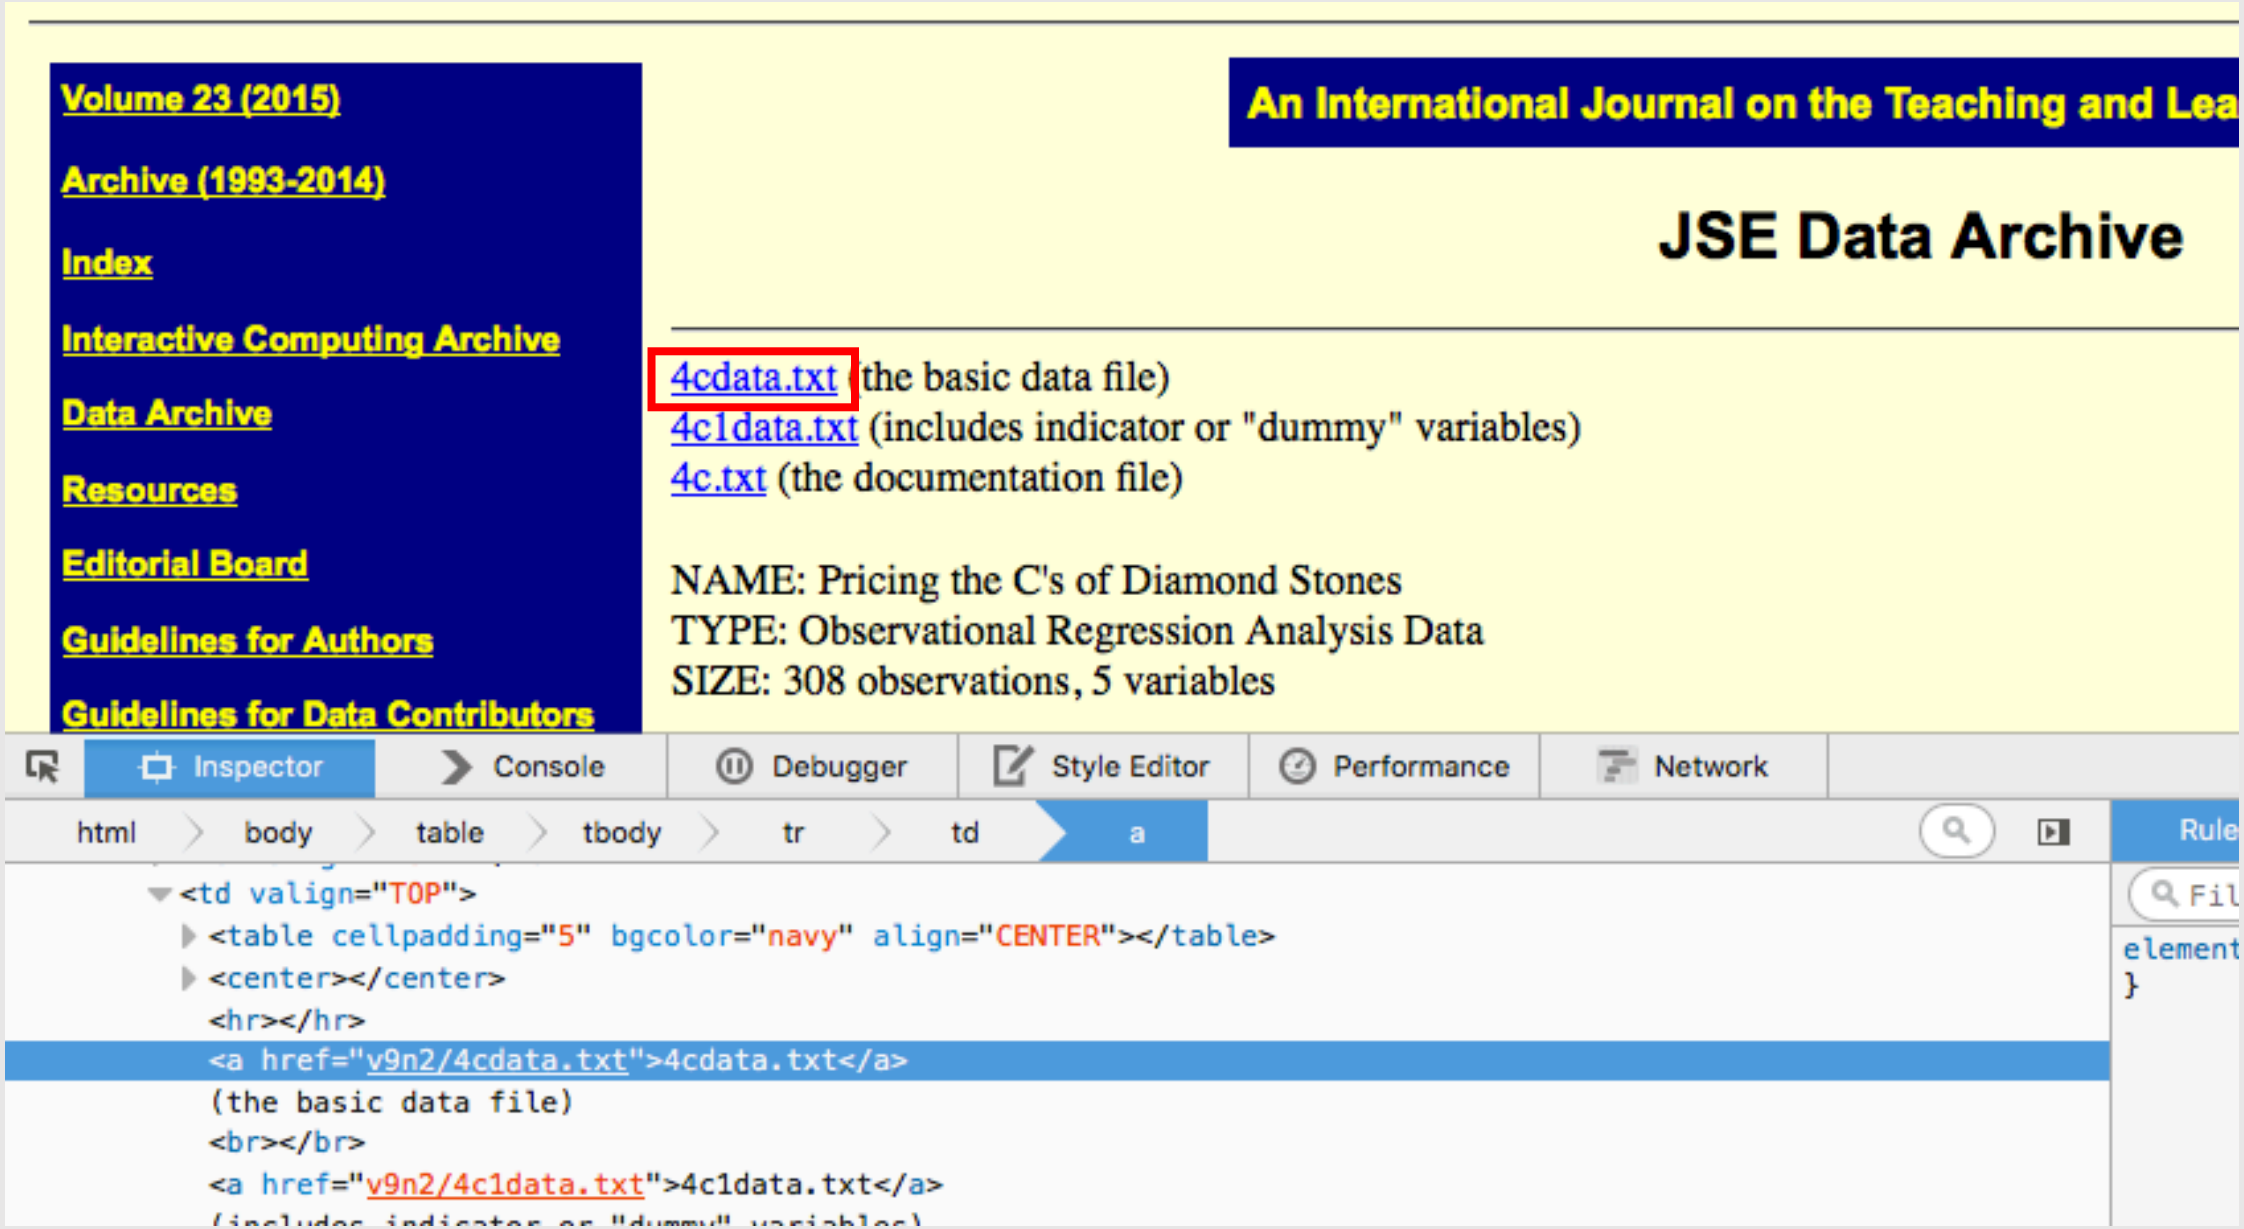
Volume 23 (2015)
Archive (1993-2014)
Index
Interactive Computing Archive
Data Archive
Resources
Editorial Board
Guidelines for Authors
Guidelines for Data Contributors
An International Journal on the Teaching and Lea
JSE Data Archive
4cdata.txt (the basic data file)
4c1data.txt (includes indicator or "dummy" variables)
4c.txt (the documentation file)
NAME: Pricing the C's of Diamond Stones
TYPE: Observational Regression Analysis Data
SIZE: 308 observations, 5 variables
Inspector
Console
Debugger
Style Editor
Performance
Network
html
body
table
tbody
tr
td
a
<td valign="TOP">
<table cellpadding="5" bgcolor="navy" align="CENTER"></table>

<hr></hr>
4cdata.txt
(the basic data file)

</br>
4c1data.txt

review

```
<html>
  <!--Last updated 1/4/13 by JGG-->
▶ <head></head>
▼ <body vlink="blue" link="blue" bgcolor="#FFFFDF" alink="blue">
  ▼ <table>
    ▼ <tbody>
      ▶ <tr></tr>
      ▶ <tr></tr>
      ▼ <tr>
        ▶ <td valign="TOP"></td>
        ▼ <td valign="TOP">
          ▶ <table cellpadding="5" bgcolor="navy" align="CENTER"></table>
          ▶ <center></center>
            <hr></hr>
            <a href="v9n2/4cdata.txt">4cdata.txt</a>
            (the basic data file)
            <br></br>
            <a href="v9n2/4c1data.txt">4c1data.txt</a>
            (includes indicator or "dummy" variables)
```

review

html elements

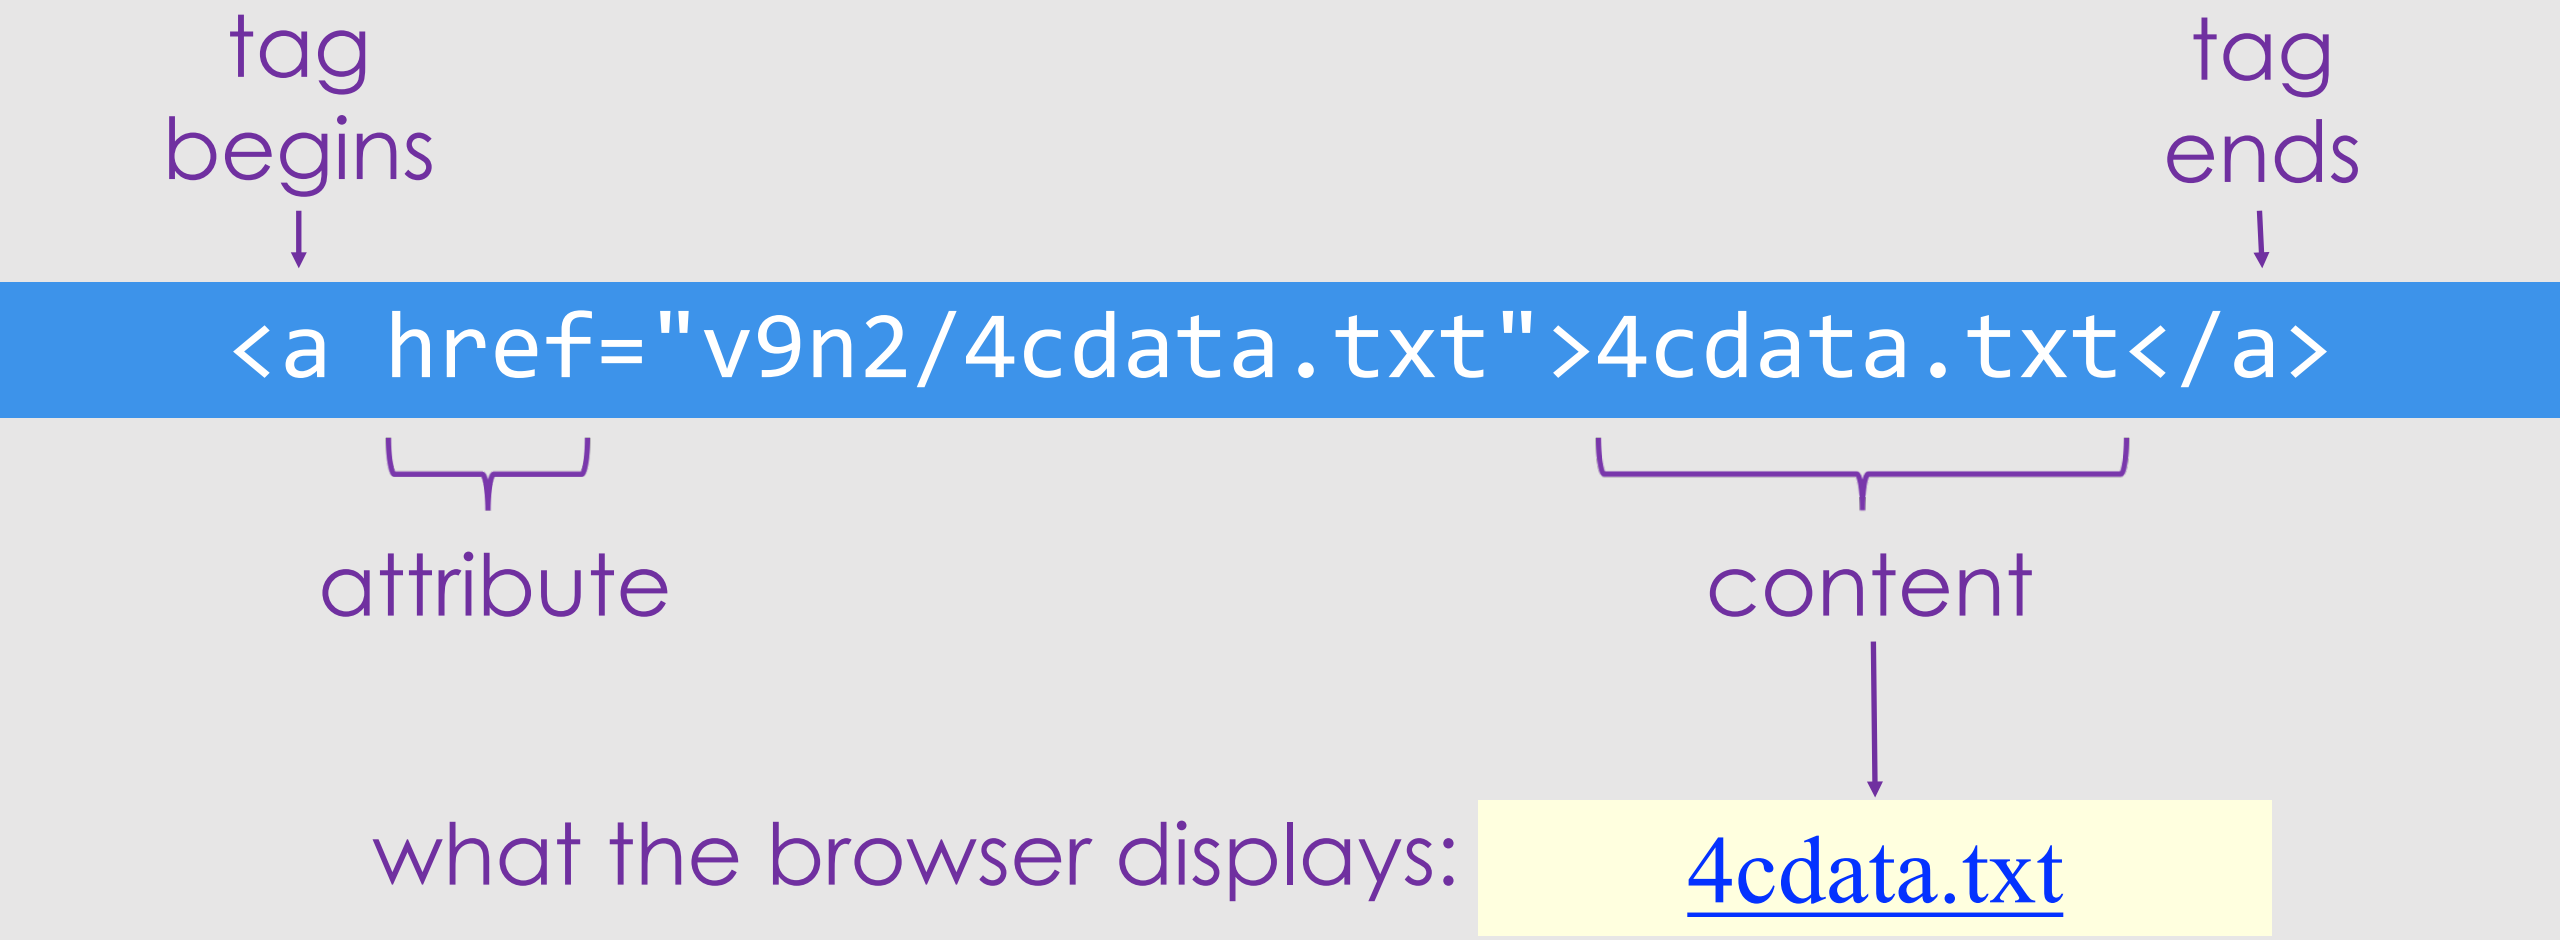

html elements

attributes

tags

table

table row

table cell

text

```
<html>
  <!--Last updated 1/4/13 by JGG-->
▸ <head></head>
▾ <body vlink="blue" link="blue" bgcolor="#FFFFDF" alink="blue">
  ▾ <table>
    ▾ <tbody>
      ▸ <tr></tr>
      ▸ <tr></tr>
      ▾ <tr>
        ▸ <td valign="TOP"></td>
        ▾ <td valign="TOP">
          ▸ <table cellpadding="5" bgcolor="navy" align="CENTER"></table>
          ▸ <center></center>
            <hr></hr>
            <a href="v9n2/4cdata.txt">4cdata.txt</a>
            (the basic data file)
            <br></br>
            <a href="v9n2/4c1data.txt">4c1data.txt</a>
```

take a 10-minute break

script workflow

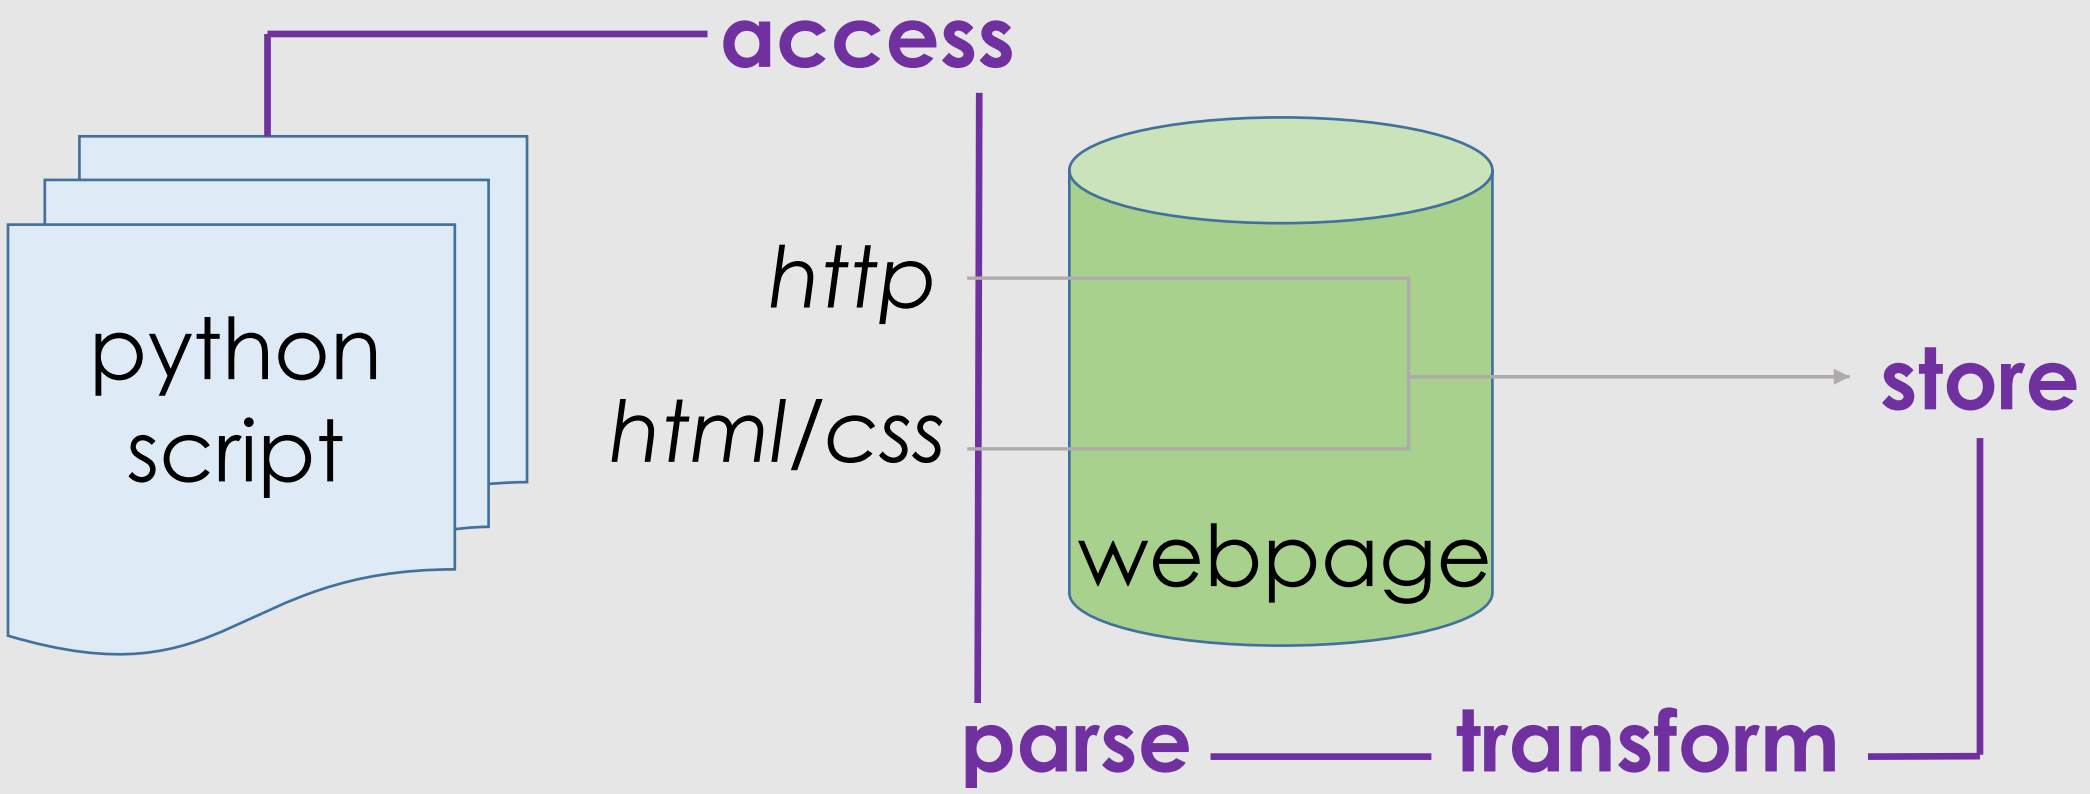

access: request data from web server

Import statements allow you to add functions

```
import requests
import bs4
import csv

webpage = 'http://www.amstat.org/...'
server_response = requests.get(webpage)
```

use the **get()** function from the **requests** package

parse

```
soup = bs4.BeautifulSoup(server_response.text)

link_info_list = []
for tag in soup.find_all('a'):
    link = tag['href']
    name = tag.text
    if name[-3:] == 'txt':
        link_info_list.append({'link': link,
                               'name': name})
```

Check every instance of the 'a' html tag to get the url and filename

Save the info for each link in its own dictionary inside the list

what is python doing?

1. Create an empty list: `link_info_list = []`
2. Find all the html chunks with 'a' tags: `soup.find_all('a')`
3. Go to the first tag in the list:

```
<a href="v9n2/4cdata.txt">4cdata.txt</a>
```

4. Assign the url to a variable called link and the text to a variable called name
5. If the last three letters in the value assigned to the name variable are `'txt'`, proceed. (If not, go to the next tag.)

what is python doing?

6. Save the two variables as values in a dictionary
7. Add the dictionary to the list:

```
link_info_list = [{'link': 'v9n2/4cdata.txt'
                   'name': '4cdata.txt'}]
```

link

name

8. Repeat steps 3 through 7 until all tags have been checked

transform

```
host = ‘http://www.amstat.org/publications/jse/’
for dataset in link_info_list[:3]:
    url = host + dataset[‘link’]
    data_response = requests.get(url)
    if data_response.text[:5] == ‘NAME:’:
        dataset[‘type’] = ‘doc’
    else:
        dataset[‘type’] = ‘dat’
```

what is python doing?

1. Build the address for the link and assign it to the url variable:

```
url ='http://www.amstat.org/publications/jse/v9n2/4cdata.txt'
```

2. Using the requests library, retrieve the web page information
3. If the text on the webpage starts with `'NAME:'`, add a new key `'type'` to the link's dictionary with the value `'doc'`
4. If not, add a new key `'type'` to the link's dictionary with the value `'dat'`

store: helper function 1

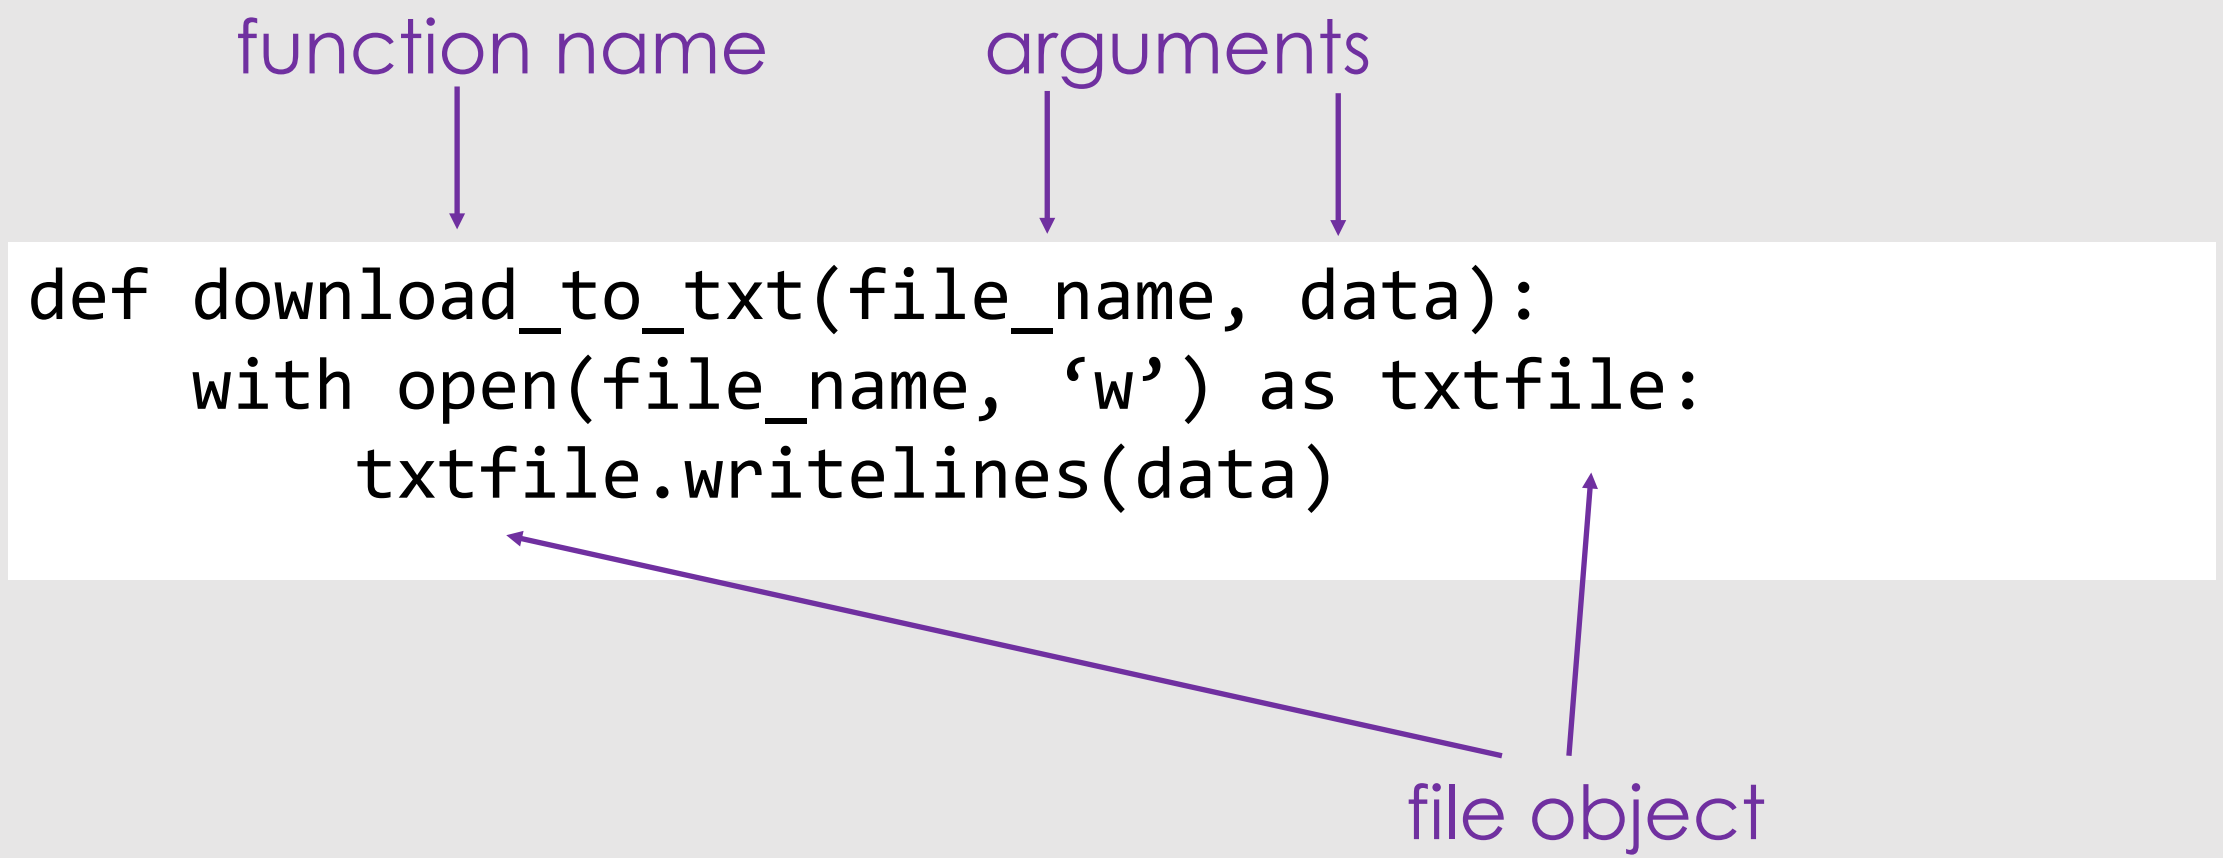

store: helper function 2

```
def strip_extension(file_name):
    i = -1
    while i < -1:
        if file_name[i] == '.':
            break
        else:
            i -= -1  # this is the same as i = i - 1
    return file_name[:i]
```

Note: We need to do something with the return value, e.g.,

```
stripped1 = strip_extension('my_file.txt')
```

store

function call

```
for dataset in link_info_list[:3]:
    url = host + dataset['link']
    data_response = requests.get(url)

    description = strip_extension(dataset['name'])
    filename = description + '_' + dataset['type'] + '.txt'

    download_to_text(filename, data_response.text)
```

function call

store

```
with open(‘data_links.csv’, ‘w’) as csvfile:
    fieldnames = [‘link’, ‘name’, ‘type’]
    writer = csv.DictWriter(csvfile, fieldnames)

    writer.writeheader()
    for link in link_info_list:
        writer.writerow(link)
    print(‘Links added: ’ + str(len(link_info_list)))
```

run your web scraper

From IDE:
Run the program in the interpreter: **F5** or **Run** or 

OR

From the Command Line:

```
$ python3 scraper.py
```

Questions?

Please complete the brief evaluation survey:

bit.ly/dssevaluation

linkedin: nalettebrodnax

github: nmbrodnax

twitter: @nbrodnax

email: nbrodnax@iq.harvard.edu

web: www.nalettebrodnax.com