

SOP for RDK-X3

*Rviz can only be opened/made visible using VNC


*SSH=robot screen

*VMware workstation=virtual machine, set up instructions in

<https://www.yahboom.net/study/RDK-X3-Robot>

SSH Connection to the Robot (refer to 6. Development environment setup>3. Remote Control)

1. Turn on the robot
2. Connect to the hotspot signal of the robot in wifi of the computer

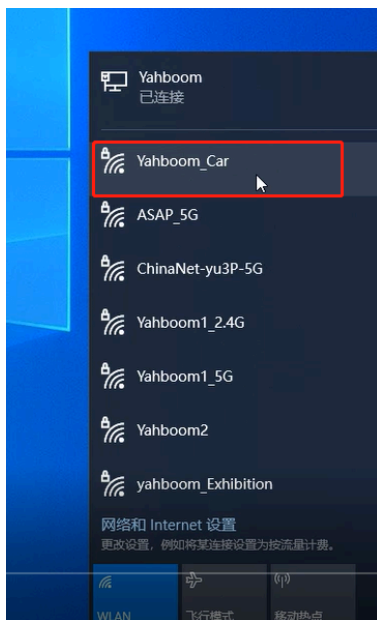

3. Open terminal in computer
4. In your IDE(example: VS code) control p to add an ssh terminal

Account: root@ip address

Password: yahboom

Whenever making edits to the robot, the robot AND the computer must be connected to the SAME ethernet cable.

Test to see if the robot is connected to the computer:

Command: `ros2 run demo_nodes_py talker` (on the robot)

Command: `ros2 run demo_nodes_py listener` (on the computer)

If the robot's terminal response matches with the computer(virtual machine) terminal, then they're connected.


To boot up Rviz(radar sensing)

Command: `ros2 launch oradar_lidar ms200_scan` [launch.py](#) (on the robot)

Command: `ros2 launch yahboomcar_rviz yahboomcar_laser_launch.py` (on the computer)

To edit code:


Robot source code is in downloads labed as “code”

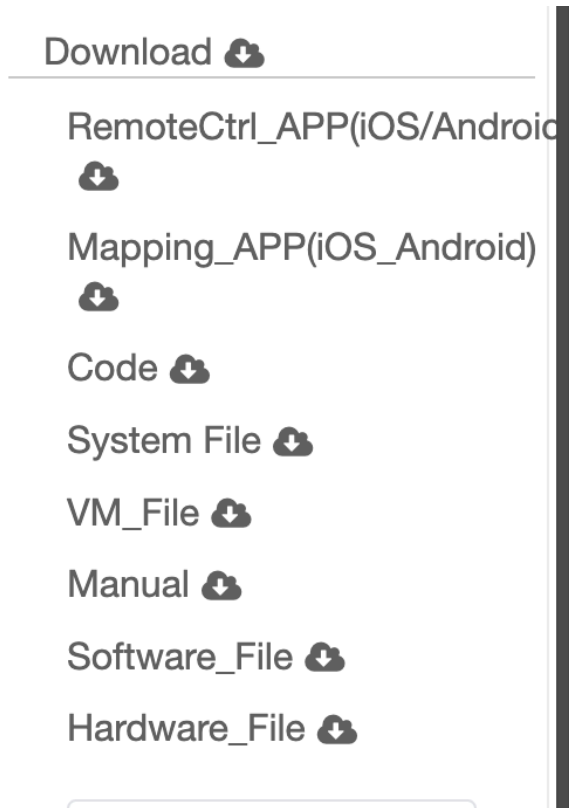

Laser Avoidance Parameters

Command: `ros2 launch yahboomcar_laser laser_avoidance_launch.py` (robot)

Command: `ros2 run rqt_reconfigure rqt_reconfigure`(virtural machine)

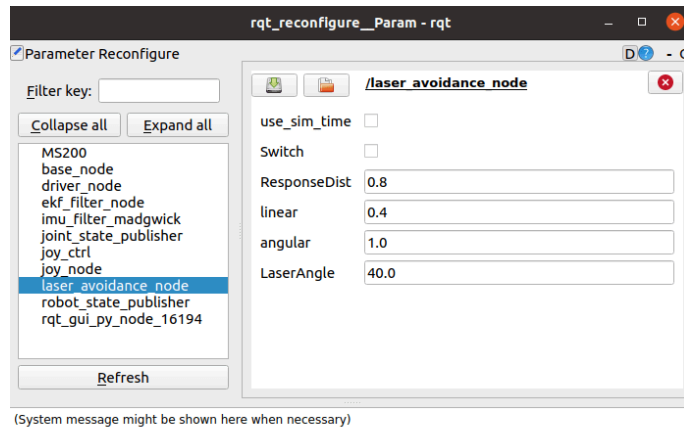

Playing with these parameters allows for different measures of avoidance.