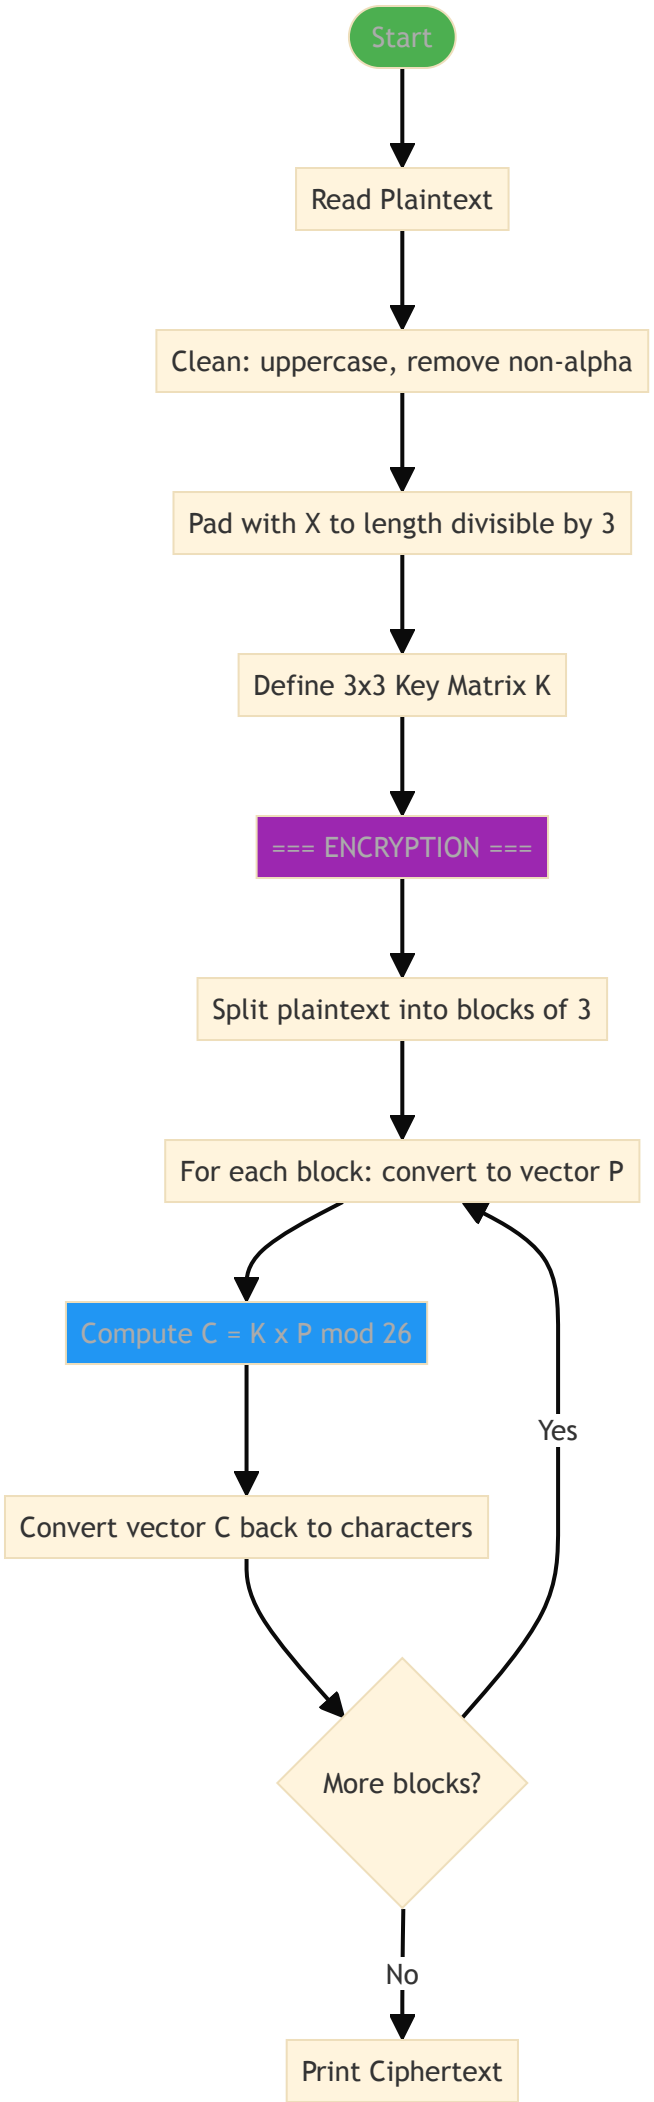
Start
Read Plaintext
Clean: uppercase, remove non-alpha
Pad with X to length divisible by 3
Define 3x3 Key Matrix K
=== ENCRYPTION ===
Split plaintext into blocks of 3
For each block: convert to vector P
Compute C = K x P mod 26
Convert vector C back to characters
More blocks?
Yes
No
Print Ciphertext

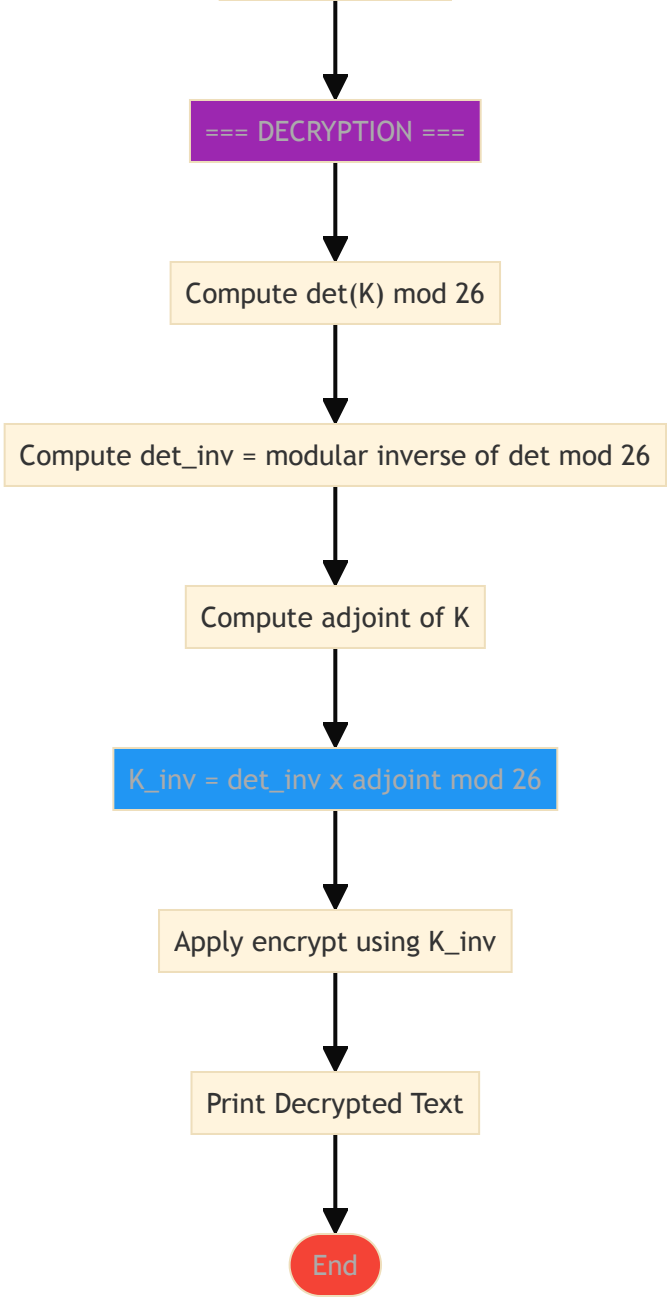
=== DECRYPTION ===
Compute det(K) mod 26
Compute det_inv = modular inverse of det mod 26
Compute adjoint of K
K_inv = det_inv x adjoint mod 26
Apply encrypt using K_inv
Print Decrypted Text
End