

DEEP SENTIMENT ANALYSIS ON TUMBLR

Anonymous authors

Paper under double-blind review

ABSTRACT

We introduce a new large-scale multimodal dataset for sentiment analysis named TumblrData, that contains over 1 million labeled data with text, image and the associated emotion. TumblrData aims to provide a mean to evaluate machine learning models using visual and textual contents for sentiment analysis research.

We propose a novel approach to sentiment analysis using deep neural networks combining visual recognition and natural language processing. Our approach leverages Tumblr posts containing images and text to predict the emotional state of users. Deep convolutional layers extract relevant features from images and high-dimensional word embedding followed by a recurrent layer process the textual information in order to infer the emotion conveyed by a given Tumblr post. We demonstrate that our network architecture, named Deep Sentiment, learns meaningful relations between visual data and language as it outperforms models using a single modality.

1 INTRODUCTION

Sentiment analysis has been an active area of research in the past few years, especially on the readily available Twitter data, e.g. Bollen et al. (2011) who investigated the impact of collective mood states on stock market or Flaxman & Kassam (2016) who analysed day-of-week population well-being.

Contrary to Twitter, Tumblr posts are not limited to 140 characters, allowing more expressiveness, and are not focused on the textual content but on the visual content. A Tumblr post will almost always be an image with some text accompanying the latter. Pictures have become prevalent on social media and characterising them could enable the understanding of billions of users. Unfortunately, there is no large publicly available dataset for multimodal sentiment analysis. This paper provides a new dataset, TumblrData¹, that will allow the research community to learn multimodal feature representations of emotions.

Also, we propose a novel method to uncover the emotional state of an individual posting on social media. The ground truth emotion will be extracted from the Tumblr tags, considered as the ‘self-reported’ emotion of the user. Our model incorporates both text and image and we aim to ‘read’ them to be able to understand the emotional content they imply about the user. Concretely, the Deep Sentiment model associates the features learned by the two modalities as follows:

- We fine-tune a pre-trained Deep Convolutional Neural Network, named Inception (Szegedy et al., 2015), to our specific task of emotion inferring.
- We project the text in a rich high-dimensional space with a word representation learned by GloVe (Pennington et al., 2014) The word vectors then go through a Recurrent Neural Network which preserves the word order and captures the semantics of human language.
- A fully-connected layer combines the information in the two modalities and a final softmax output layer gives the probability distribution of the emotional state of the user.

¹<https://github.com/anthonyhu/tumblr-sentiment>

2 TUMBLRDATA

Tumblr is a microblogging service where users post multimedia content with the following attributes: an image, text and tags. The tags are really valuable as they indicate the user’s state of mind when writing his post.

To build our dataset, queries were made through the Tumblr API searching for an emotion appearing in the tags. The 16 emotions retained are those with a high relative frequencies among the PANAS-X scale (Watson & Clark, 1999). In some posts, the tag containing the emotion of the post also appeared in the text itself, undermining the possibility of learning meaningful relationships between the features and the emotion expressed. We thus removed from the text the tags containing the emotion to be predicted.

Tumblr is used worldwide but we only kept posts written in English. Basically, if a post contained less than a given number of English word, it was deemed as non-English and removed from the dataset. The threshold was set to 5 English words as it appeared to filter out reasonably well non-English posts. [To change: filter posts with less than 90% of English words] The vocabulary of English words was obtained from GloVe. Figure 1 shows two posts with their associated emotions and table 1 summarises the statistics of the data.



(a) **Optimistic**: “The most beautiful thing we can experience is the mysterious. It is the source of all true art and science – Albert Einstein.”



(b) **Sad**: “It’s okay to be upset. It’s okay to not always be happy. It’s okay to cry. Never hide your emotions in fear of upsetting others or of being a bother.”

Figure 1: Examples of Tumblr posts

Table 1: Summary statistics for the TumblrData dataset, that spans from January 2011 to September 2017

TumblrData			
	Posts	In English	With Image
	1,015,140	582,231	258,803
Emotion	Posts	In English	With Image
Happy	189,841	62%	29%
Calm	139,911	37%	29%
Sad	124,900	53%	15%
Scared	104,161	65%	20%
Bored	101,856	54%	29%
Angry	100,033	60%	21%
Annoyed	72,993	78%	10%
Love	66,146	61%	39%
Excited	37,240	58%	41%
Surprised	18,322	47%	32%
Optimistic	16,111	64%	36%
Amazed	10,367	61%	35%
Ashamed	10,066	63%	22%
Disgusted	9,178	69%	17%
Pensive	8,409	57%	34%
Interested	5,606	63%	32%

3 VISUAL RECOGNITION

Pictures are valuable to accurately infer the emotion expressed by a user. For instance, optimistic photos might contain vivid colors while sad pictures might contain darker colors. To extract visual insights from images, we will use convolutional neural networks, which achieve state-of-the-art performances in many visual recognition tasks.

3.1 TRANSFER LEARNING

Training a convolutional network from scratch can be difficult as a large amount of data is needed and many different architectures need to be tested before achieving satisfying performances. To circumvent this issue, we can take advantage of the pre-trained network named Inception that learned to recognise images through the ImageNet dataset with a deep architecture of 22 layers.

Inception learned representations capturing the colors and arrangement of shapes of an image, which turn out to be relevant when dealing with images even for a different task. We could also say that the pre-trained network grasped the underlying structure of images. This statement rests on the hypothesis that all images lie in a low-dimensional manifold, and recent advances in realistic photos generation through generative adversarial networks bolsters this idea (Radford et al., 2016).

More specifically, the Inception network learned to recognise features in a picture in order to classify the latter among the 1000 classes in the ImageNet dataset. Suppose that instead of classifying an image into 1000 classes we want to label it according to 16 different emotions, the same features can be combined in a different way to let the network take a decision about what the emotion conveyed by the image is.

The process described above is called *Transfer Learning*: we chop off the last layer of the network and add our own layer given how many classes we have. We then freeze the weights of the other layers and only backpropagate through the newly created layer when training the network on our examples. If we have enough data, we can unfreeze more higher-level layers and backpropagate through them.

3.2 RESULTS

The Inception model was fed raw images, that were resized to a fixed size (224, 224, 3), and fine-tuned with the following parameters:

- 9,000 training steps
- Mini-batch of size 64
- Adam optimizer with an initial learning rate of 0.001
- Learning rate decay of 0.3 every epoch

After the preprocessing described in Section 2, the dataset contains 258,803 posts that we split as 80% train set and 20% validation set. The metric used to evaluate the model is accuracy, which is the fraction of correctly classified images.

The fine-tuned Inception is compared to a baseline: random guessing that includes the prior probabilities of the classes. Table 2 summarises the results of the image model.

Table 2: Image model against random guessing

	Train accuracy	Validation accuracy
Random guessing	11%	11%
Inception fine-tuned	43%	36%

4 NATURAL LANGUAGE PROCESSING

Even as a human being, it can be difficult to guess the expressed emotion only by looking at a Tumblr image without reading its caption as shown by Figure 2.



Figure 2: Which emotion is it?

It’s unclear whether the user wants to convey happiness or surprise. Only after reading the text “To who ever left this on my windshield outside of last nights art opening, I love you. You made my night.”, we can finally conclude that the person was *surprised*. The text is extremely informative and is usually crucial to accurately infer the emotional state.

4.1 WORD EMBEDDING

Most learning algorithms rely on the local smoothness hypothesis, that is, similar training instances are spatially close. This hypothesis clearly doesn’t hold with words one-hot encoded as for instance ‘dog’ is as close to ‘tree’ as it is to ‘cat’. Ideally, we would like to transform the word ‘dog’ in a space so that it’s closer to ‘cat’ than it is to ‘tree’. That is exactly how word embedding works: every word is projected into a high-dimensional space that preserves semantic relationships. Therefore, what the model has learned about dogs can be used when faced with a cat.

We will use the GloVe word embedding that resulted from training on Twitter data as the writing style between Tumblr and Twitter are rather similar.

Each post in the dataset does not necessarily contain the same number of words. Even after embedding each word, the input will be of variable size and most learning algorithm expect a fixed-sized input. To solve that problem, we can simply average across the number of words. The information loss is still minimal as the features come from a high-dimensional space (Flaxman et al., 2015).

However note that the word order is completely lost. Human language relies on the word order to communicate as for example the word *change* can be both a noun and a verb, and negation such as ‘not entertained’ can only be understood if ‘not’ directly precedes the verb. The order information can be preserved using Recurrent Neural Networks.

4.2 SEQUENCE INPUT

The text is broken down into a sequence of words that are embed in a high-dimensional space (unknown words are transformed to a zero vector) and then fed to an LSTM (Hochreiter & Schmidhuber, 1997). To account for shorter posts, we zero-pad the vector with a special word token. For longer posts, we only keep the 50 first words which is a reasonable choice as 76% posts in the dataset contain less than 50 words.

We now evaluate the performance of the text model described below:

- Word embedding into a vector of dimension 200.
- An LSTM layer of size 1024.
- An output layer of size 16.

4.3 RESULTS

The network was trained with the same configuration as the image model and table 3 shows the text model results.

Table 3: Text model against random guessing

	Train accuracy	Validation accuracy
Random guessing	11%	11%
LSTM model	72%	69%

5 DEEP SENTIMENT

Real-world information oftentimes comes in several modalities. For instance, in speech recognition, humans integrate audio and visual information to understand speech, as was demonstrated by the McGurk effect (McGurk & MacDonald, 1976). Separating what we see from what we hear seems like an easy task, but in an experiment conducted by McGurk, the subjects who were listening to a */ba/* sound with a visual */ga/* actually reported they were hearing a */da/*. This is uncanny as even if we know the actual sound is a */ba/*, we cannot stop our brain from interpreting it as a */da/*.

Likewise, an image almost always comes with a caption as different interpretations can arise when textual context is not provided, as shown in Figure 3:



(a) “Planes might just be the most frightening thing ever.” **scared** (b) “I hate it when people are taking too much space on planes.” **angry**

Figure 3: Different meanings with different captions.

Exploiting both visual and textual information is therefore key to understand the user’s emotional state. Deep Sentiment is the name of the deep neural network incorporating visual recognition and text analysis.

5.1 ARCHITECTURE

Deep Sentiment builds on the models we have seen before as shown in Figure 4:

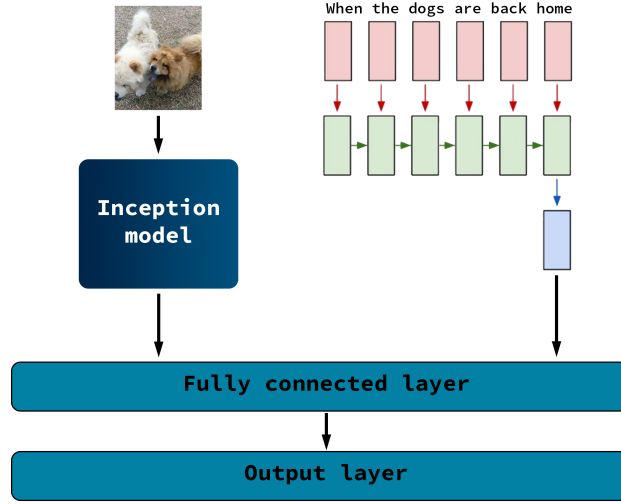


Figure 4: Deep Sentiment architecture

1. The image goes through the pre-trained Inception model that extracts features from the images: more precisely with 256 neurons in the last Inception layer.
2. The text is embedded in a high-dimensional space with Word2Vec and is fed to an LSTM with 1024 neurons.
3. The two outputs are concatenated and fed to a fully connected layer with 512 neurons.
4. The final layer contains 16 neurons, one for each basic emotion.
5. Softmax is applied to the final layer to give the probability distribution of the emotional state of the user.

6 RESULTS

Deep Sentiment was trained with the same configuration as before and figure 5 shows a comparison of the accuracy curves of the different models:

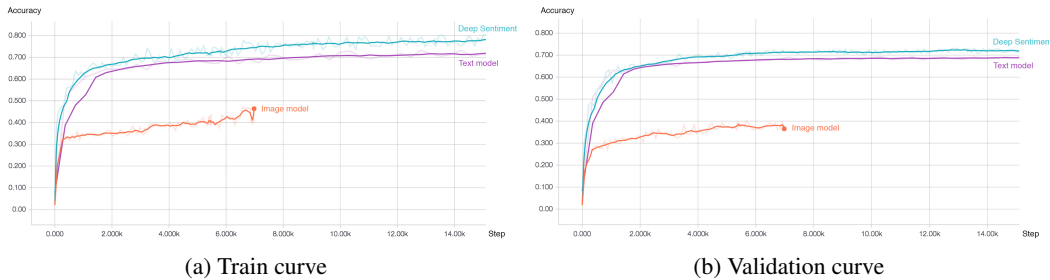


Figure 5: Accuracy curves

This model combining text and image outperforms the algorithms only using those elements separately with 80% train accuracy and 72% validation accuracy. This shows that just like a human being, a neural network needs both visual and textual information to determine the emotion conveyed by a post. The synergy between visual recognition and natural language processing is impressive as shown in the comparison table 4.

Table 4: Comparison of models

	Loss	Train accuracy	Validation accuracy
Random guessing	-	11%	11%
Inception fine-tuned	1.80	43%	36%
LSTM model	0.81	72%	69%
Deep Sentiment	0.75	80%	72%

ACKNOWLEDGMENTS

REFERENCES

- Johan Bollen, Huina Mao, and Xiao-Jun Zeng. Twitter mood predicts the stock market. *Journal of Computational Science*, 2:1–8, 2011.
- Seth Flaxman and Karim Kassam. On #agony and #ecstasy: Potential and pitfalls of linguistic sentiment analysis. In preparation, 2016.
- Seth Flaxman, Yu-Xiang Wang, and Alexander Smola. Who supported obama in 2012? ecological inference through distribution regression. In *KDD*, 2015.
- Sepp Hochreiter and Jurgen Schmidhuber. Long short-term memory. In *Neural Computation*, 1997.
- Harry McGurk and John MacDonald. Hearing lips and seeing voices. In *Nature*, 1976.
- Jeffrey Pennington, Richard Socher, and Christopher D. Manning. Glove: Global vectors for word representation. In *Empirical Methods in Natural Language Processing (EMNLP)*, 2014.
- Alec Radford, Luke Metz, and Soumith Chintala. Unsupervised representation learning with deep convolutional generative adversarial networks. In *ICLR*, 2016.
- Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions. In *CVPR*, 2015.
- David Watson and Lee Anna Clark. The panas-x: Manual for the positive and negative affect schedule - expanded form. 1999.