

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Role Overview:

- Position: Desktop Support Technician
- Company: ABC Logistics
- Responsibility: Resolve end-user tickets related to desktop / laptop issues

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 1 Details

Date Submitted: 10/03/202x

Department: Finance

Priority: High

Issue Description:

Desktop won't power on; emits multiple beeping sounds when attempting to start. User has tried multiple times without success.

Troubleshooting & Resolution

Possible Reasons	Recommended Actions
Faulty power supply unit	Use a multimeter or power supply tester to test the PSU
Incoming electricity supply	Ensure other devices in the area are working to rule out electrical power circuit fault.
Faulty power cable	Try out other good working power cable
Socket issue	Plug a good working device into the wall socket to test the incoming electricity supply. If faulty, contact a technician
Power supply unit under power	Remove any plug-in component, if this solve the issue, the PSU may be underpowered, or one of the components is faulty

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Dell Desktop Beep Codes

Beep Count	Error Description
1 Beep	BIOS ROM failure, BIOS corruption, or ROM error
2 Beep	No memory detected (RAM missing)
3 Beep	Motherboard chipset failure
4 Beep	Memory failure (RAM issue)
5 Beep	CMOS battery failure or real-time clock power failure
6 Beep	Video BIOS or video card/chip failure
7 Beep	CPU failure (Central Processing Unit)

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 2 Details

Date Submitted: 10/03/202x

Department: Sales

Priority: Low

Issue Description:

User notice that the laptop is only able to use portion of its memory. The laptop is come with 8GB memory but when user open Windows Task Manager, user notice only 6GB are shown in task manager

Troubleshooting & Resolution


Possible Causes	Reason
Hardware Reserved Memory	Some RAM is allocated to integrated graphics or system devices
Maximum Memory Limit	Windows boot settings may restrict usable RAM

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 2: Check Hardware Reserved Memory

1. Open **Task Manager**
2. Go to **Performance** tab
3. Clicked on Memory
4. Look for “**Hardware Reserved**” at the bottom of the graph

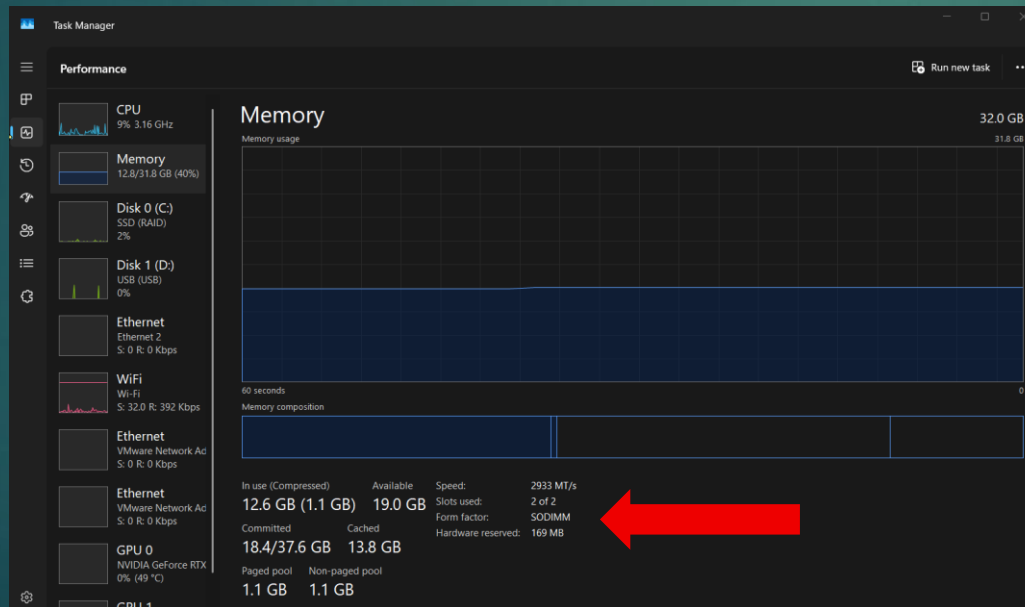


Speed: 2933 MT/s
Slots used: 2 of 2
Form factor: SODIMM
Hardware reserved: 169 MB

Project 2: Implementation Workstation Solution


Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 2: Maximum Memory Limit

Check Windows Boot Configuration

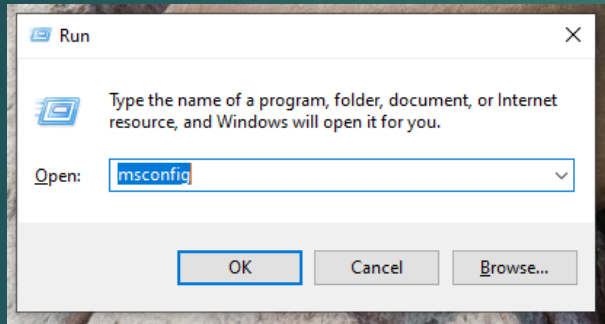

1. Press **Window + R** key, type “msconfig” and click **OK**.

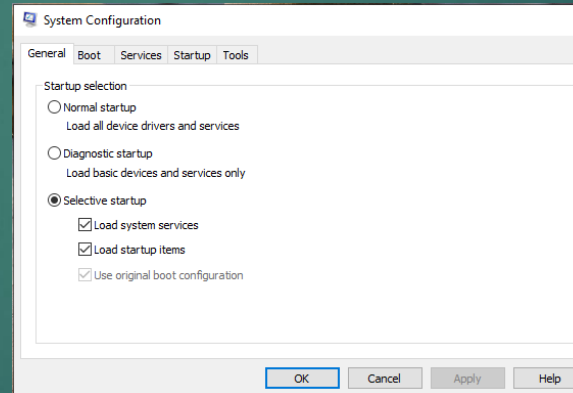


2. Click **Boot** tab

Project 2: Implementation Workstation Solution


Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 2: Maximum Memory Limit - continue

Check Windows Boot Configuration

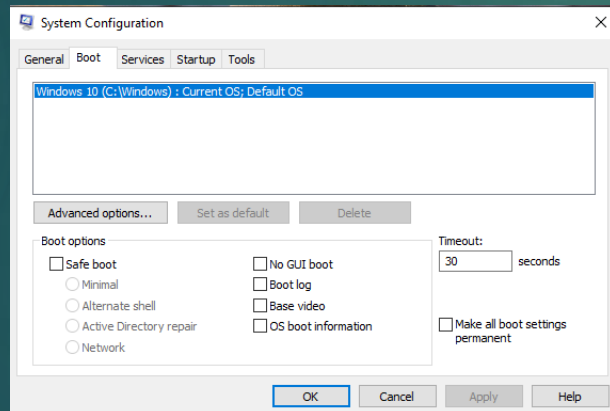

3. Click **Advanced Options**

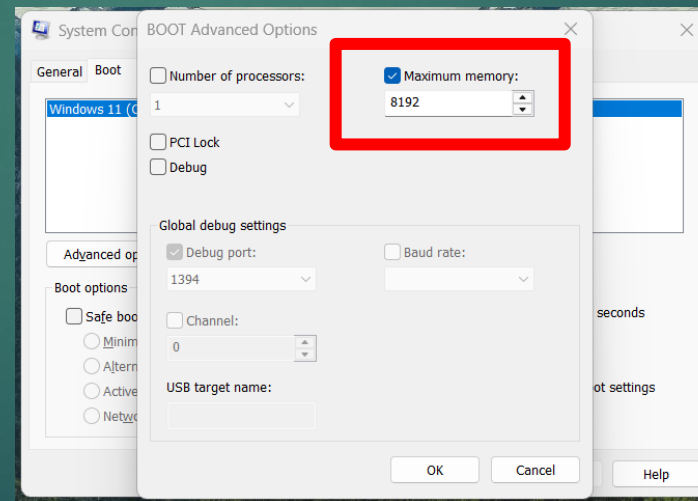

4. Ensure the “Maximum memory” is **unchecked**, Click “OK”, then “Apply”, and restart the laptop

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 3 Details

Date Submitted: 10/03/202x

Department: Operation

Priority: Low

Issue Description:

User complaint that the system time is keep out of sync whenever the user power on the pc after shutting down. When user change the display time, it only changes the time on screen, not on the computer's display clock. And when user switch off, the screen clock is wrong again; it matches the computer's display clock again.

Troubleshooting & Resolution

Possible Causes	Reason
Most likely is the CMOS battery failure	It's a small coin like battery, replace it with battery model "CR2032" on the motherboard.

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 3 Details

Date Submitted: 10/03/202x

Department: Operation

Priority: Low

Issue 2 Description:

Users also complaint that whenever he travels outstation oversea and use the laptop, the laptop is not synchronizing with the time server properly. User also requested to add additional time server to synchronize in case primary time server fail.


Troubleshooting & Resolution

Possible Causes	Reason
It could be due to the Windows Time Service, overload time server, or issue with the internet	Restart the Windows Time


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 3: Restart the Windows Time

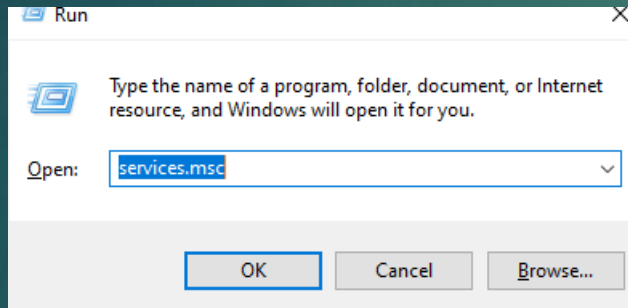

1. Press key Windows + R to open up Run, type “**services.msc**” into the Open box and click OK

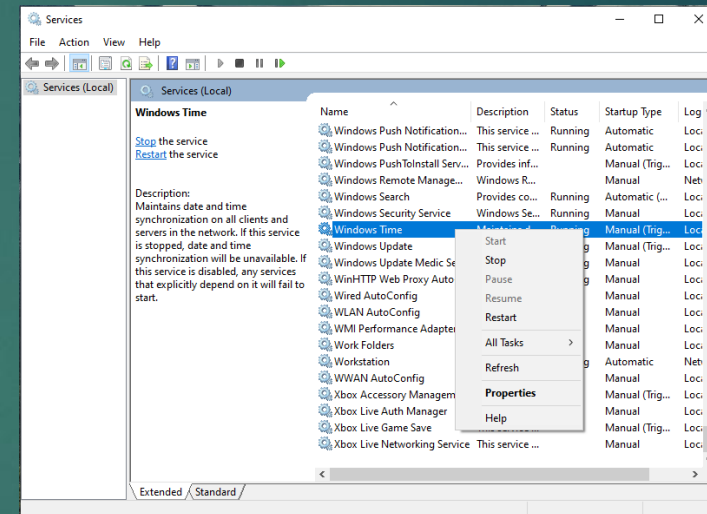


2. A **Services** window will appear, Scroll down and search for **windows Time**. **Right-click on Window Time** and select **Restart**, if the Restart is grey out, click the **Start**.


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 3: Restart the Windows Time - continue

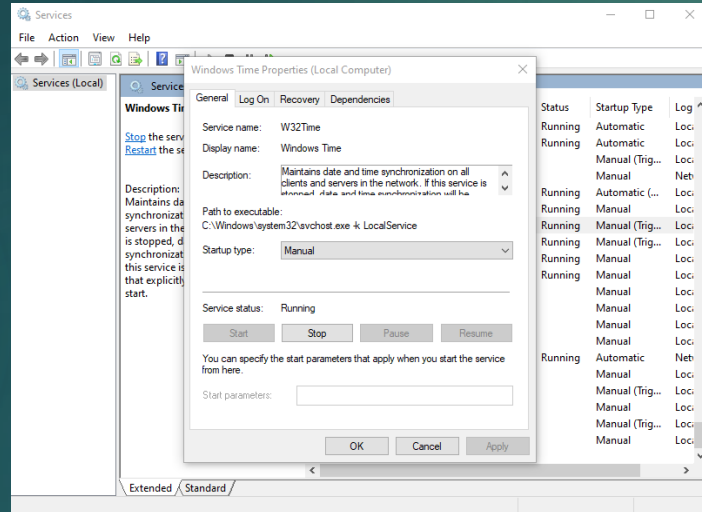

3. If the **Time Synchronization** error still persists, adjust the Windows Time properties. Re-open the **Service window**. Scroll down to Window Time. Double-click the **Window Time**, and a properties window would pop up

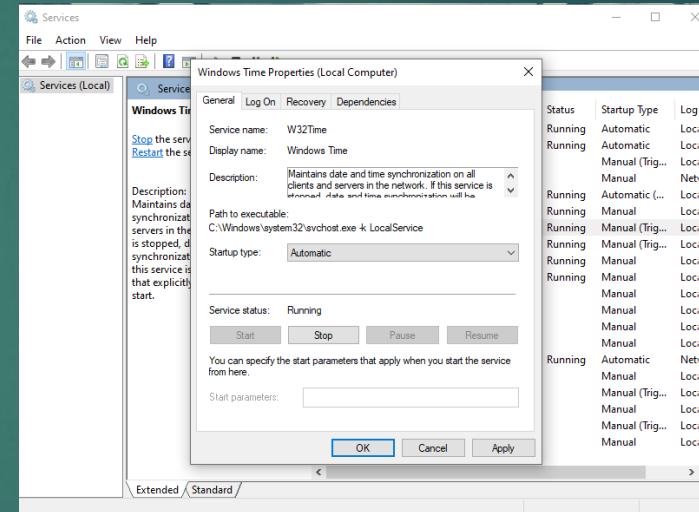


4. Set setup type to **Automatic**, and ensure Service status is **Running**, Select **Apply** and **Click OK** and exit the Services.


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 3: Add Additional Time Server - continue

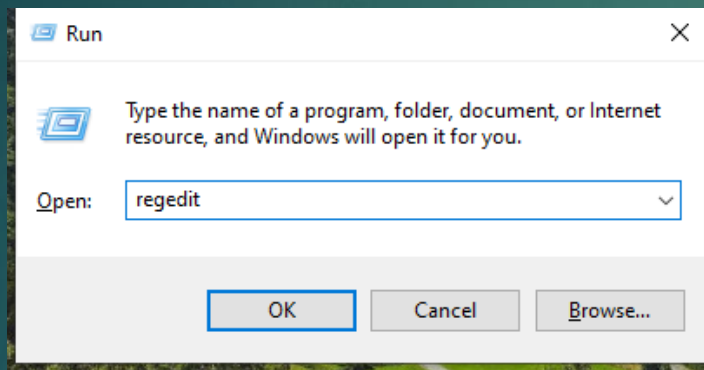

1. Press key Windows + R to open up Run, type “**regedit**” into the Open box and click OK

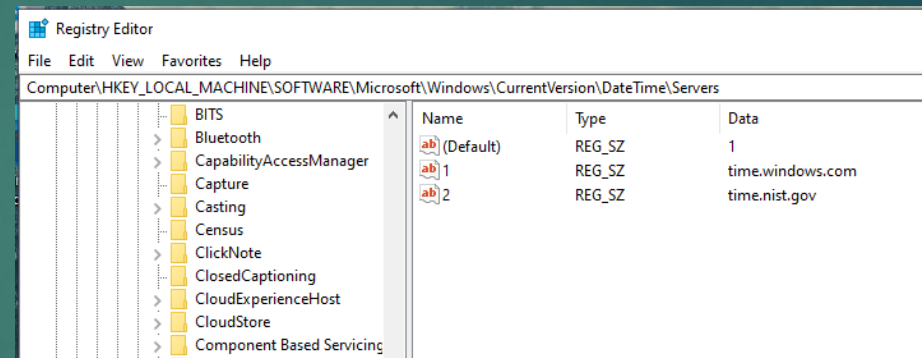


2. Go to “HKEY_LOCAL_MACHINE/SOFTWARE/Microsoft/Windows/CurrentVersion/DateTime/Servers”


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue


Ticket 3: Add Additional Time Server - continue

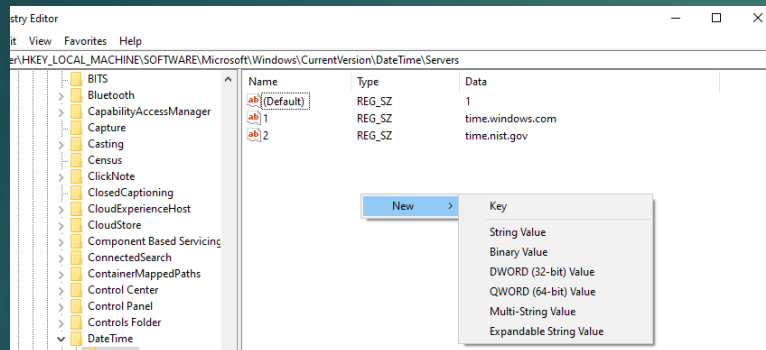

3. Right click on the right side panel and select **New, String value**

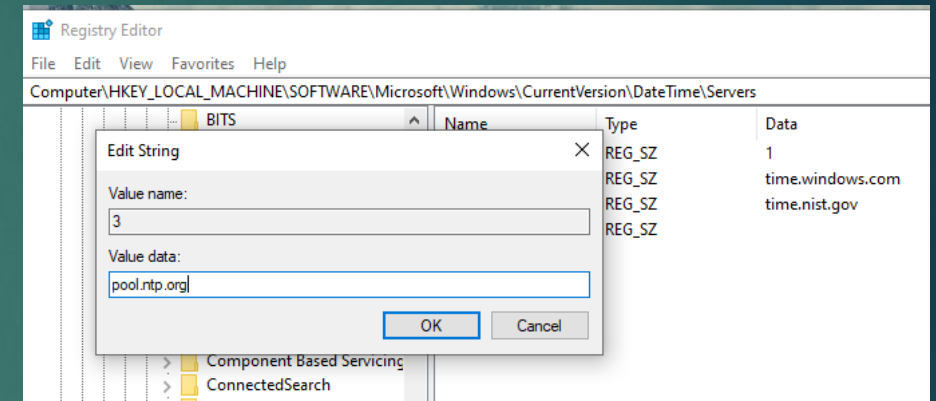

4. Enter **Value name** as 3, and **Value data** as **pool.ntp.org** and click OK, the new Time server will be added

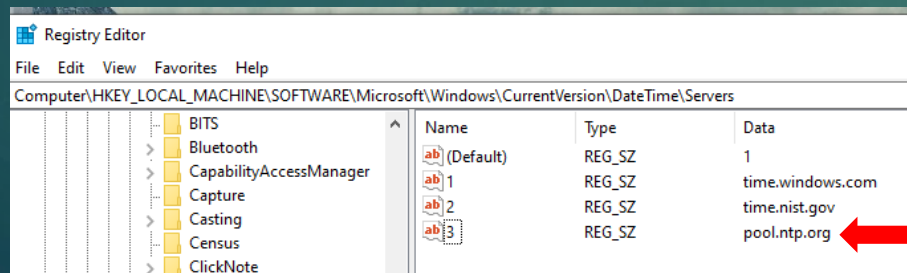


5. New Time Server added


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 3: Updating the Time Server - continue

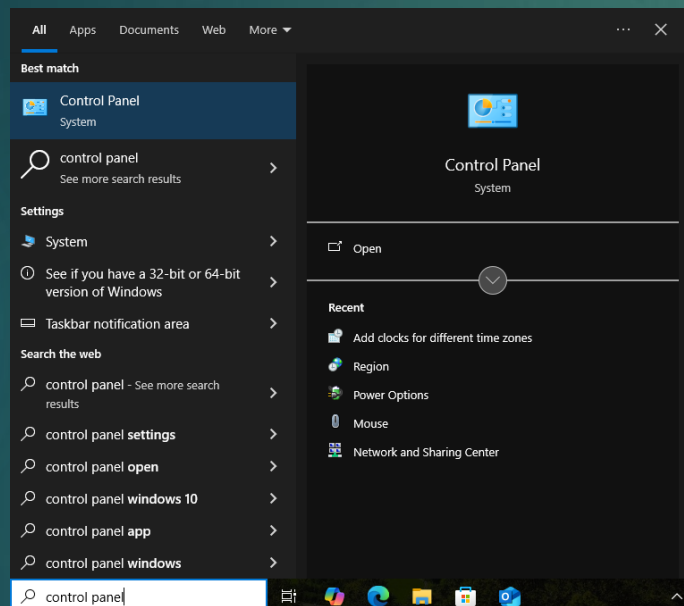

1. Type **Control Panel** in the searchbox and select **Control Panel** from the menu.

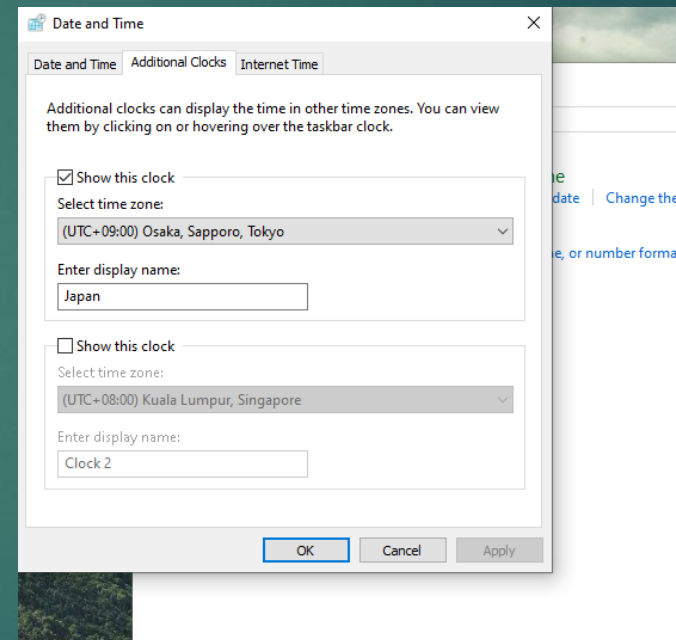


2. Select **Clock and Region**, under **Date and Time**, select **Add clocks for different time zone**.


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 3: Updating the Time Server - continue

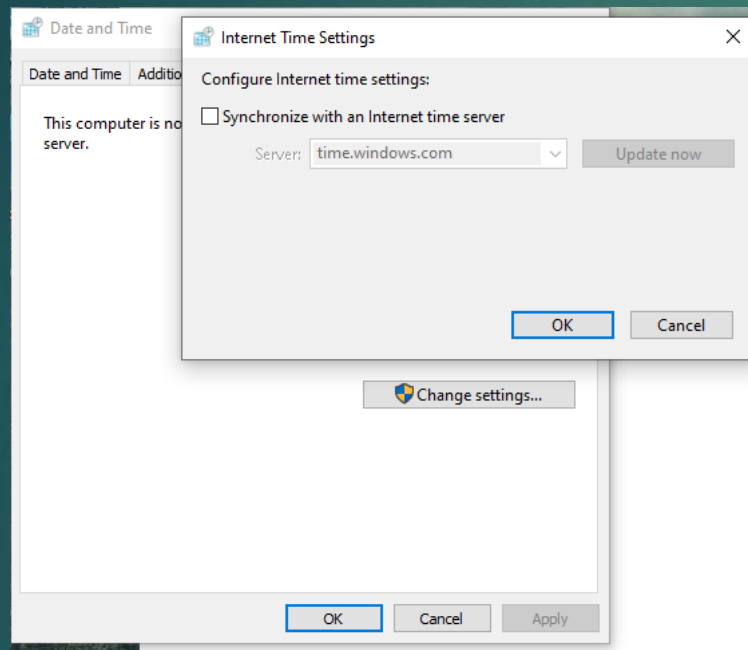

3. Click on **Internet Time**, then **Change Setting**

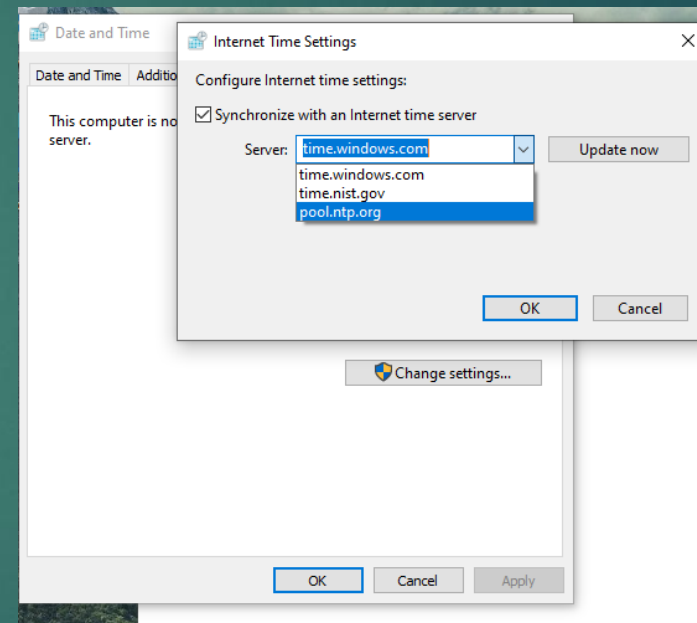

4. Check the box beside **Synchronize with an internet time server**, select the dropdown next to **Server**, select **Pool.ntp.org**, and click **update**

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 4 Details

Date Submitted: 10/03/202x


Department: Sales

Priority: High

Issue Description:

When user is working, suddenly an error occur on the screen as shown below. User has tried restart the laptop but after a while this error screen occur again.

Error screen

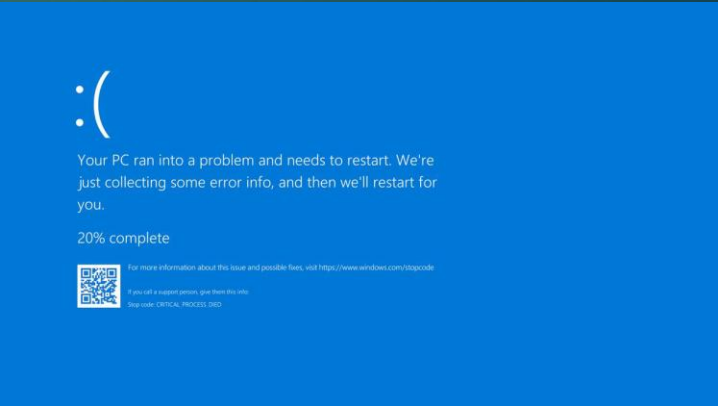

Troubleshooting & Resolution

Possible Reason
Faulty or incompatible hardware
Corrupt or outdated drivers
Software conflicts or system file error
Insufficient disk space
Memory issues or failing components

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 4: Resolving Blue Screen of Death (BOSD) - continue

1. **Remove any new hardware.** If recently added any new hardware before the error, shut down the PC, remove the hardware, and try restarting again.
2. **Start PC in safe mode.** If having difficulties in restarting, start the PC in safe mode.
 - a. **Check the Device Manager.** Right -click the start button and select Device manager. Check if any devices are marked with the exclamation mark.
 - b. Right Click the device and select update driver. If updating the driver doesn't help, try disabling and uninstalling the device.
 - c. Check for sufficient free space on the hard drive. The operating system and some applications require sufficient free space to create swap files and perform other functions. Based on the system configuration, the exact requirement varies, but it's a good idea to have 10% to 15% of free space available.
 - d. Install the latest Windows updates.
 - e. Restore Windows if none of the above steps help.

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 5 Details

Date Submitted: 10/03/202x

Department: Warehouse

Priority: Low

Issue Description:

User request to add additional or change function to the laptop, table show the list of features to be enable or change on the laptop


List of Features to be Change

Features
Add simplified Chinese language
Add additional clock using Japan time zone and display on clock
Format date and time
Change mouse scheme to Windows default (large)
Disable display turn off when laptop is idle
Enable PrtScn button to open snipping features


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue


Ticket 5: Add Simplified Chinese Language to the Keyboard Language

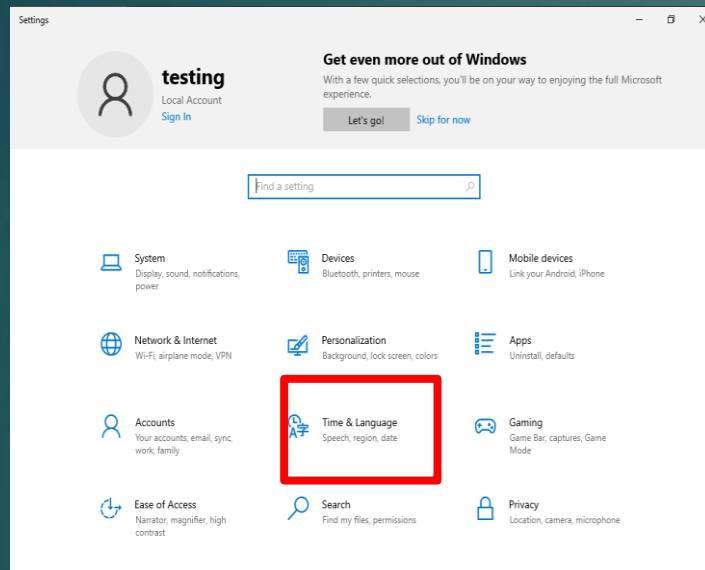

1. Go to Setting. Select Time and Language.

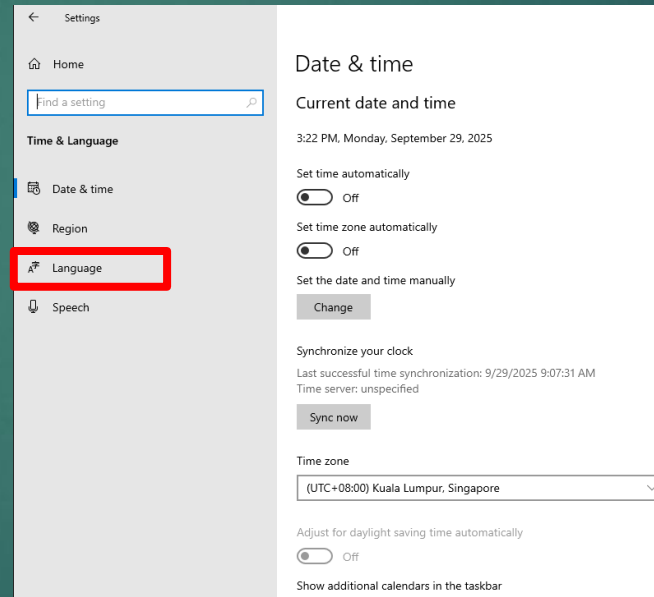

2. Select language on the left menu

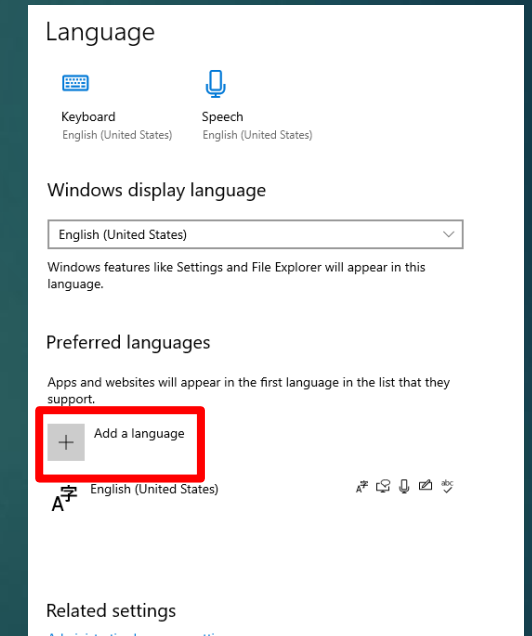


3. Select **Add a Language**


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue


Ticket 5: Add Simplified Chinese Language to the Keyboard Language - continue

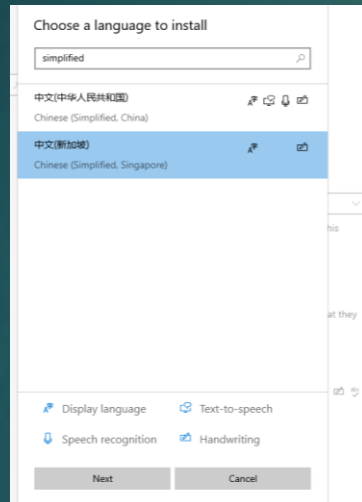


4. A pop up will appear for you to select desire language. Type **Simplified** in the searchbox, select **Chinese (Simplified, Singapore)** and click **Next**.

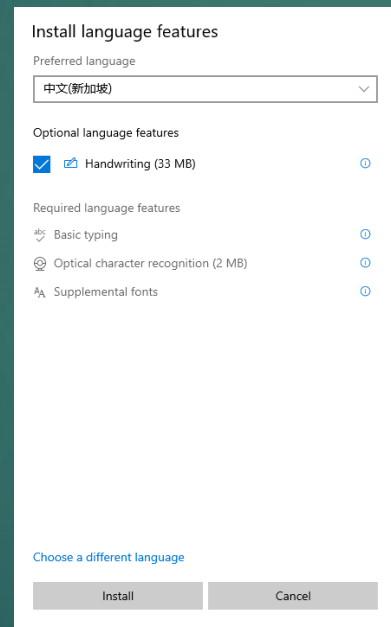

5. Click **Install**

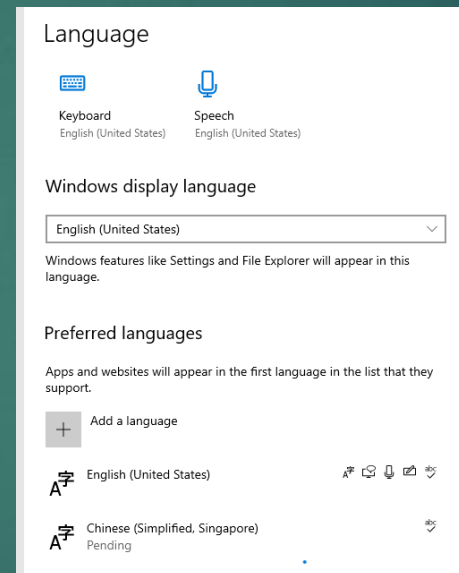

6. Wait for the installation to complete. Once the installation is complete, click the **Keyboard** icon

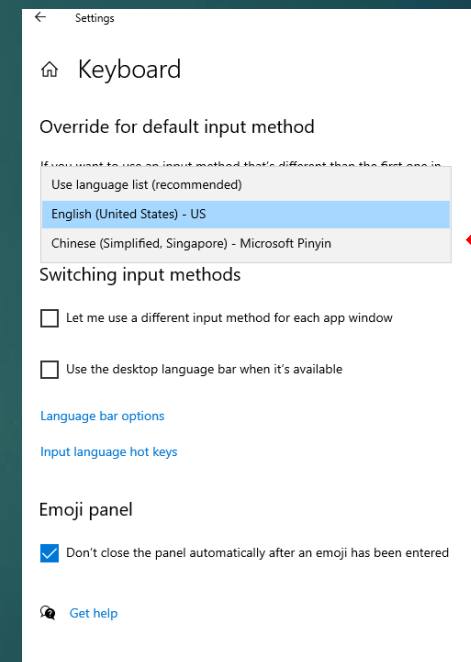


7. Successfully install Simplified Chinese language


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue


Ticket 5: Add Additional Clock Using Japan Time zone and display the Clock

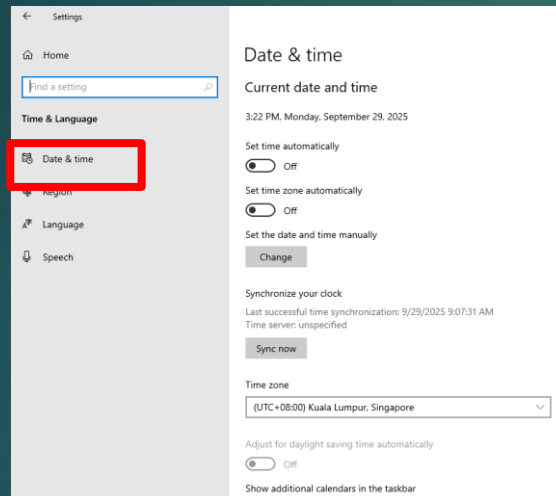

1. Go to **Setting** and select **Time and Language**, Select **Date and Time** on the left menu.

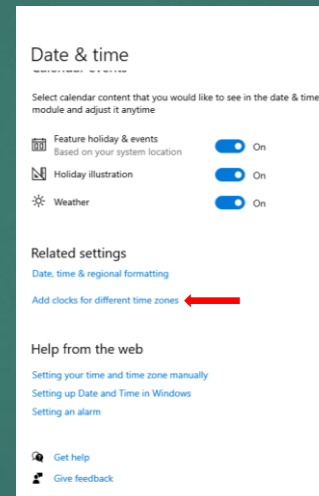

2. Scroll down and click on **Add Clocks for Different Time Zones**.

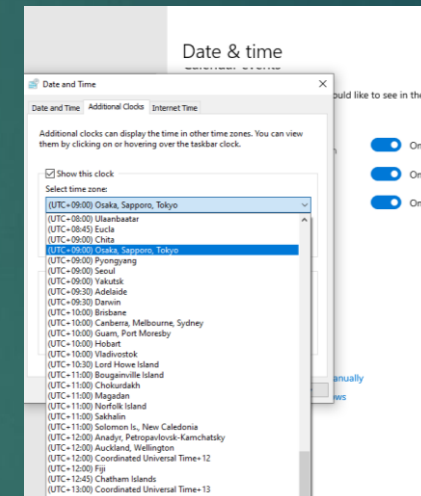


3. A Date and Time window will pop up, check the **Show this Clock**, click on the dropdown under **Select time zone**, and select (UTC+09:00) Osaka, Sapporo, Tokyo


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 5: Add Additional Clock Using Japan Time zone and display the Clock - continue

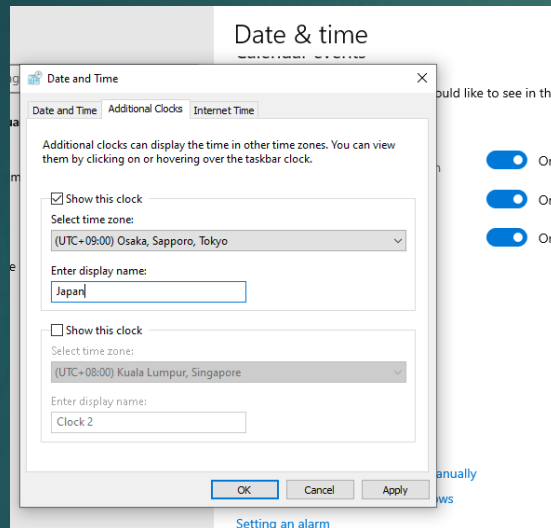

4. Enter the Display name to Japan, click **Apply** and **OK**

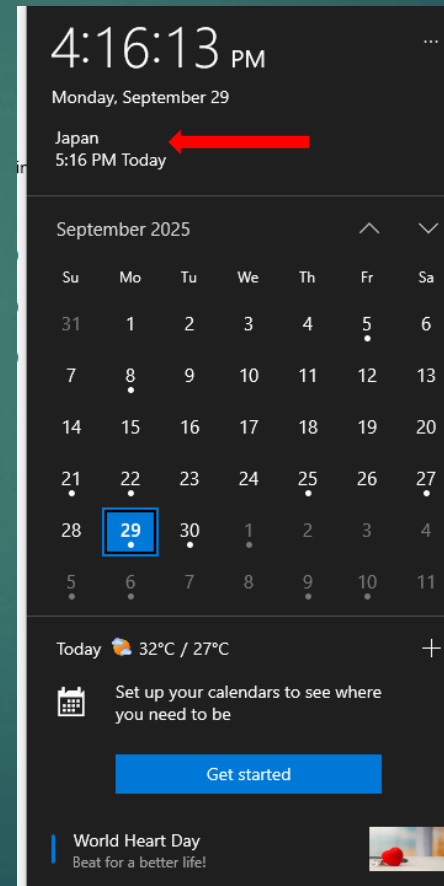


5. Click the date time on the bottom right, ensure the additional clock is display


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue


Ticket 5: Change the Date and Time format

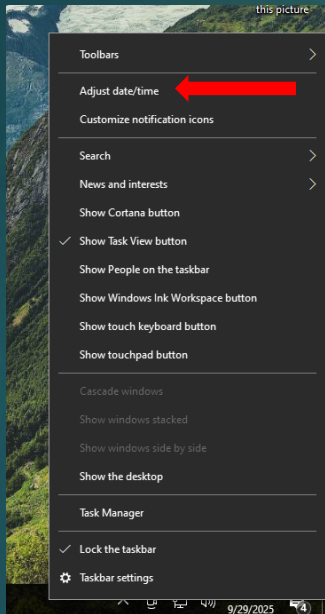


1. Right-click on the **Date and Time** (Bottom right corner). A pop up will appear, click **Adjust date/time**

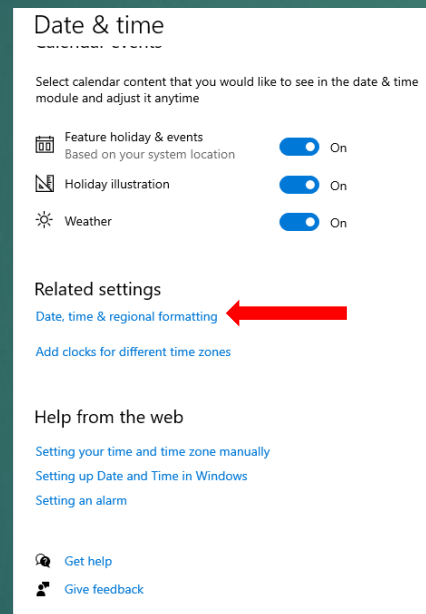

2. Scroll down and click on Date, time & regional formatting

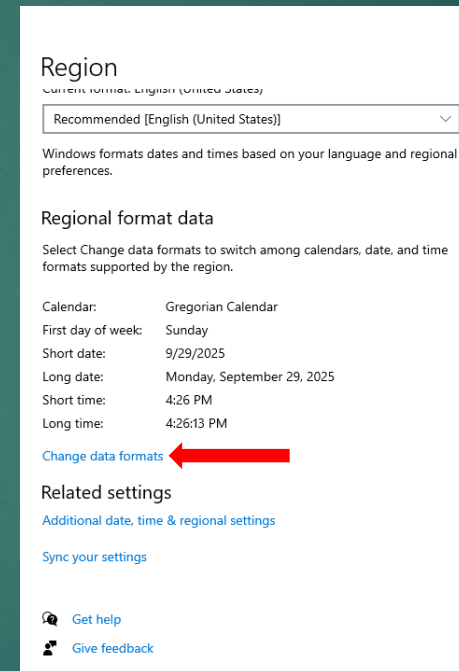

3. Scroll down and click on Change data formats

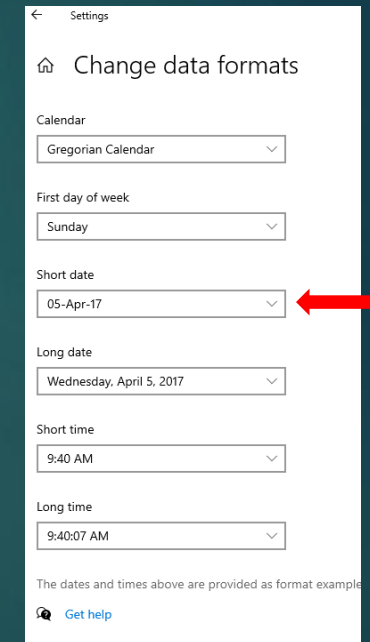


4. To change the Short date: dd-MMM-yy, click on the Short date dropdown and select **05-Apr-17**

Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 5: Change the Date and Time format - continue

Long date: d MMMM, yyyy

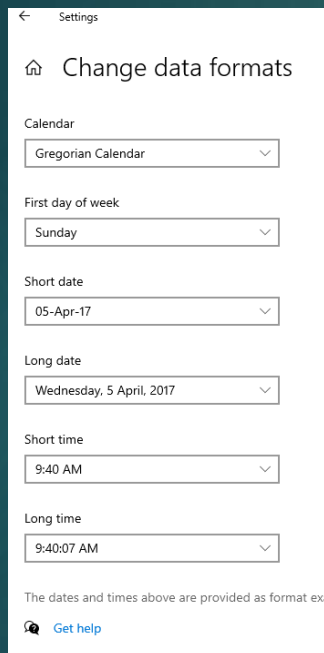

Settings

Change data formats

Calendar

Gregorian Calendar

First day of week

Sunday

Short date

05-Apr-17

Long date

Wednesday, 5 April, 2017

Short time

9:40 AM

Long time


9:40:07 AM

The dates and times above are provided as format examples.

Get help

5. To change long date: dddd,d MMMM, yyyy, select dropdown from Long date, and select **Wednesday, 5 April, 2017**

Short time: hh:mm tt

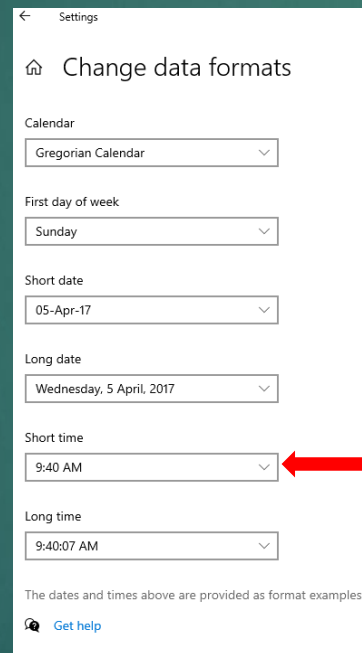

Settings

Change data formats

Calendar

Gregorian Calendar

First day of week

Sunday

Short date

05-Apr-17

Long date

Wednesday, 5 April, 2017

Short time

9:40 AM

Long time


9:40:07 AM

The dates and times above are provided as format examples.

Get help

6. To change short time: hh:mm tt, select dropdown from **Short time**, and select **9:40 AM**

Long time: hh:mm:ss tt

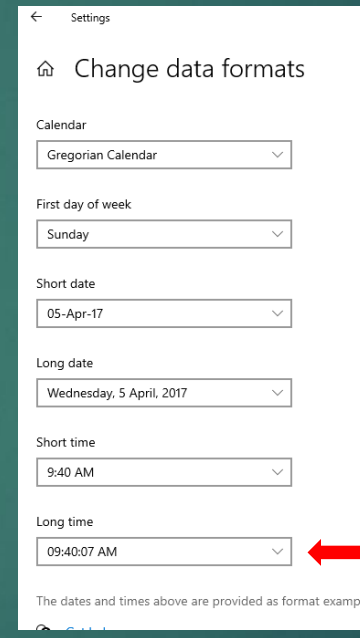

Settings

Change data formats

Calendar

Gregorian Calendar

First day of week

Sunday

Short date

05-Apr-17

Long date

Wednesday, 5 April, 2017

Short time

9:40 AM

Long time


09:40:07 AM

The dates and times above are provided as format examples.

Get help

7. To change long time: hh:mm:ss:tt, select dropdown from **Long time** and click **09:40:07 AM**

First day of week: Sunday

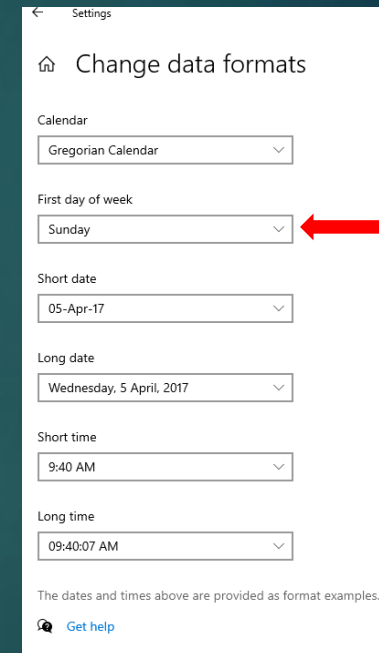

Settings

Change data formats

Calendar

Gregorian Calendar

First day of week

Sunday

Short date

05-Apr-17

Long date

Wednesday, 5 April, 2017

Short time

9:40 AM

Long time

09:40:07 AM

The dates and times above are provided as format examples.


Get help

8. To change the first day of week to Sunday, select dropdown from **First day of week**, and click **Sunday**


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue


Ticket 5: Change the Mouse Scheme to Windows Default

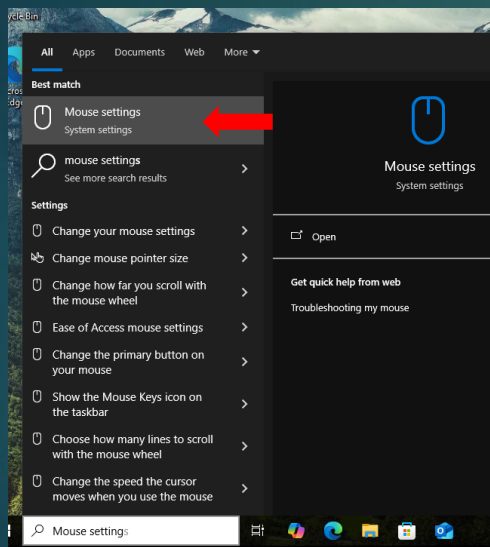


1. Type **Mouse Setting** into the Windows searchbox on the taskbar, and click **Mouse setting** from the menu

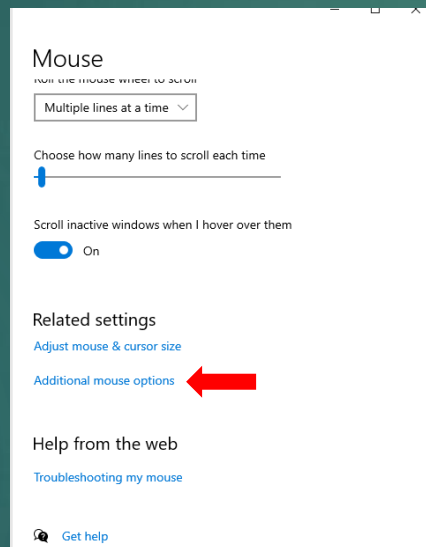

2. Scroll down and click on **Additional mouse options**

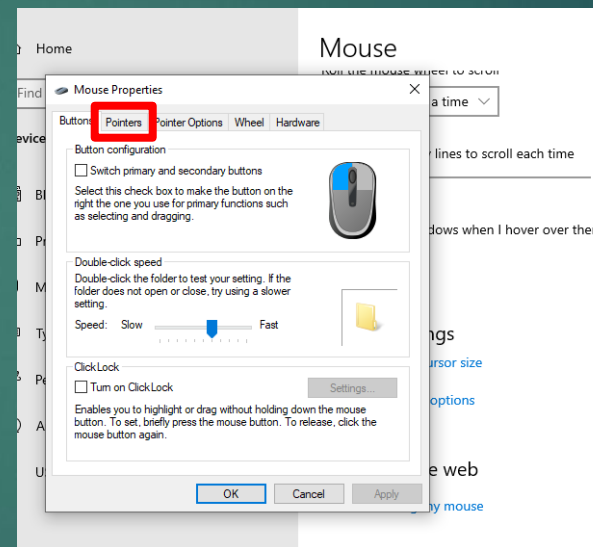

3. Click on the **Pointer** tab

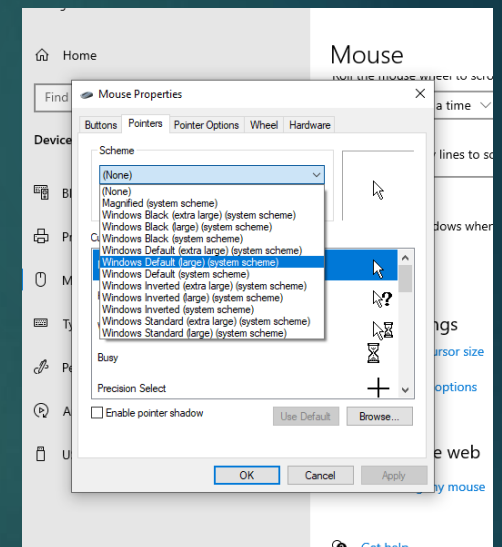


4. Click dropdown from **Scheme**, and select **Windows Default (large) (system scheme)**. Click **Ok** and **Apply**


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue


Ticket 5: Disable the Display Turn-Off Option When Laptop is Idle

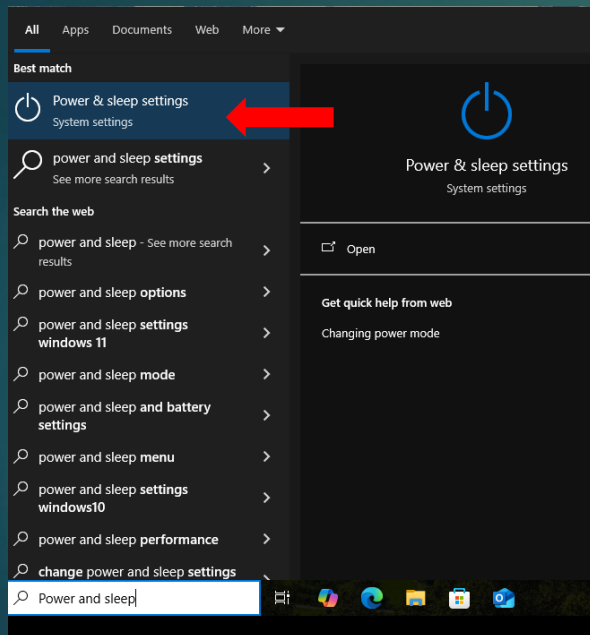


1. Type **Power and Sleep** into the Windows searchbox on the taskbar, and click **Power & Sleep settings** from the menu

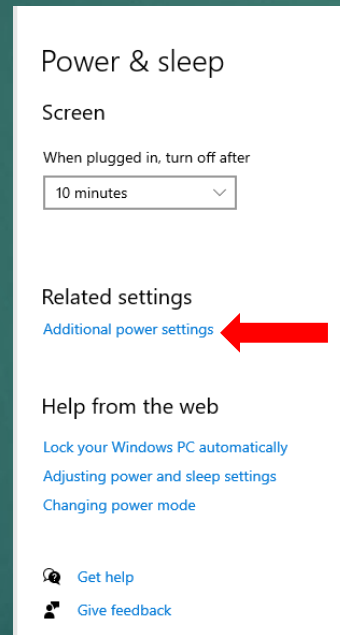

2. Click **Additional power settings**

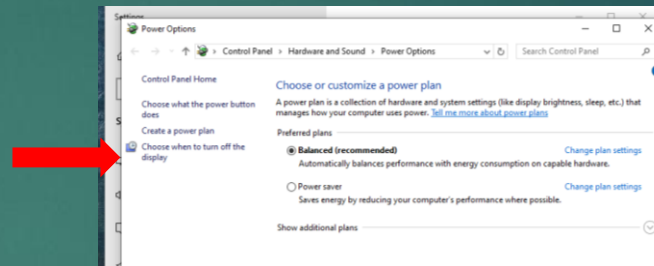

3. Click the **Choose when to turn off the display** on the left menu

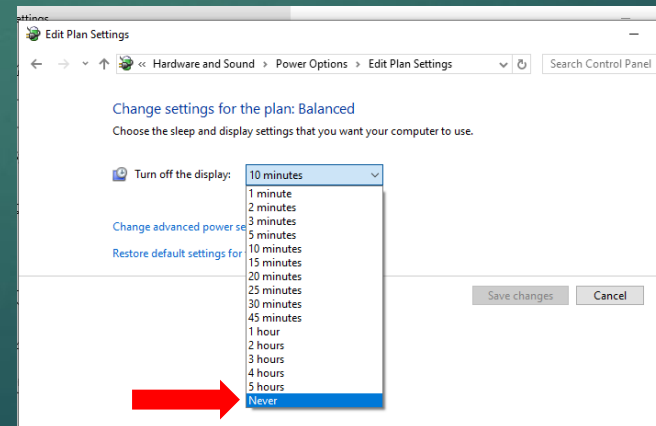


4. Next to the **Turn off the display**, click on the dropdown and select **Never** and click **Save changes**


Project 2: Implementation Workstation Solution

Part 1: Troubleshooting Desktop / Laptop Issue

Ticket 5: Enable the PrtSc Button to Open Screen Snipping Features

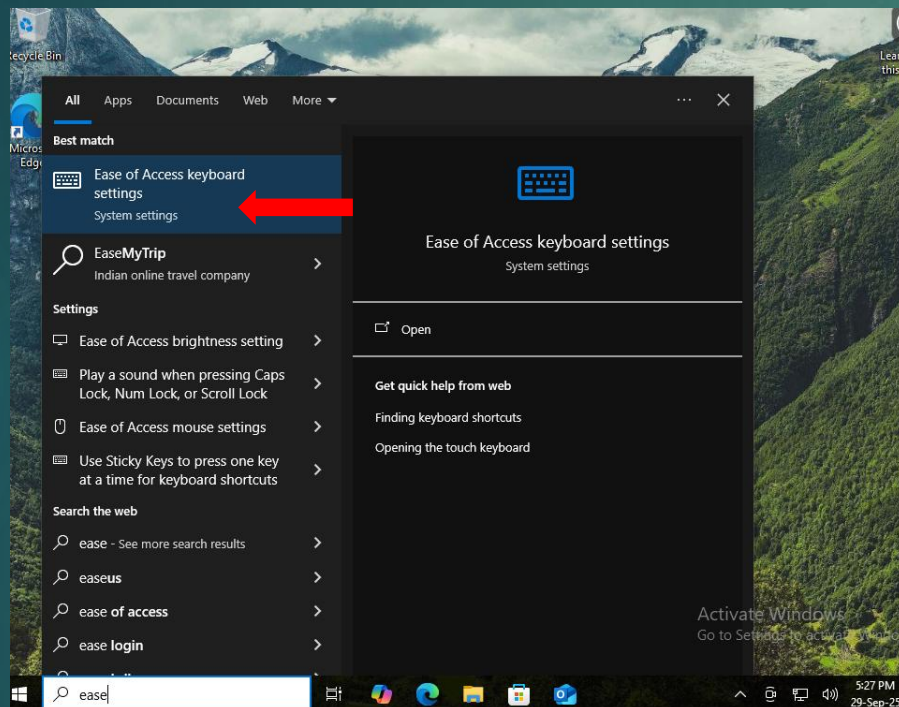

1. Type **Ease** into the Windows searchbox on the taskbar, and click **Ease of Access keyboard settings** from the menu

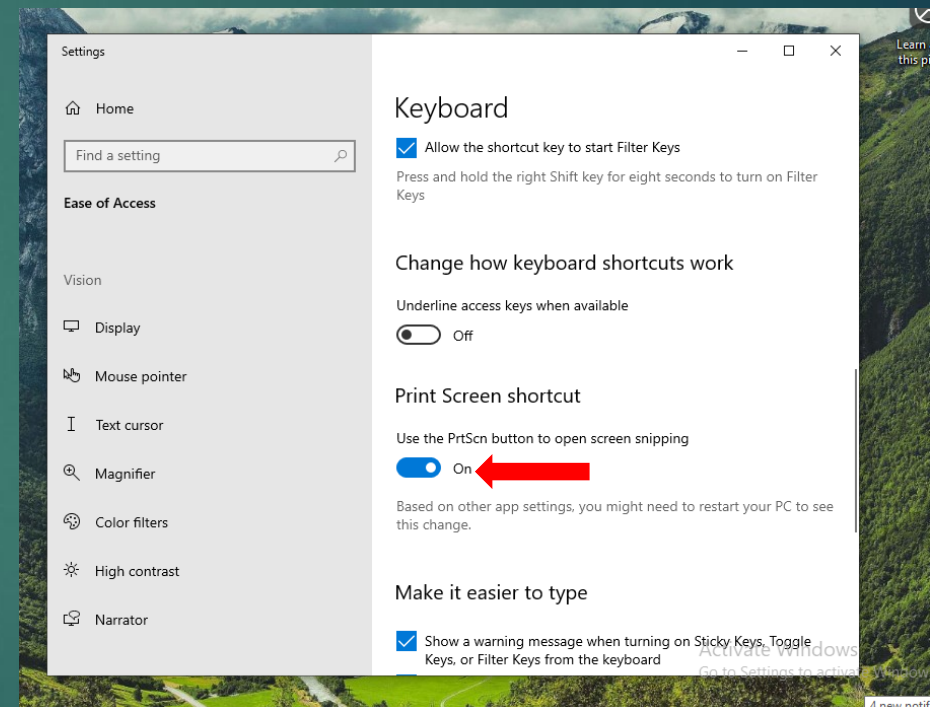

2. At the **Keyboard** window, scroll down until you find **Print Screen shortcut**. Toggle the **Off** button to **On**

Thank You