

1. Write a program where a method accepts an integer parameter and tries to change its value. Print the value before and after the method call.

Code:

```
package day_06;

class Pass_Value {

    public static void modify(int x) {

        x = x + 10;

        System.out.println("Inside method tha value changed to: " + x);

    }

    public static void main(String[] args) {

        int num = 5;

        System.out.println("Before: " + num);


        modify(num);

        System.out.println("After: " + num);

    }

}
```

Output:

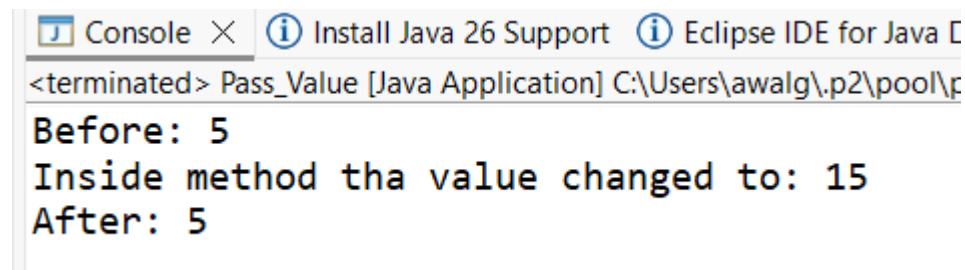A screenshot of the Eclipse IDE console window. The title bar shows 'Console', 'Install Java 26 Support', and 'Eclipse IDE for Java C'. The console text shows the output of the Java application: '<terminated> Pass_Value [Java Application] C:\Users\awalg\p2\pool\p', 'Before: 5', 'Inside method tha value changed to: 15', and 'After: 5'.

```
<terminated> Pass_Value [Java Application] C:\Users\awalg\p2\pool\p
Before: 5
Inside method tha value changed to: 15
After: 5
```

2. Create a class Box with a variable length. Write a method that modifies the value of length by passing the Box object. Show that the original object is modified.

Code:

```
package day_06;

class Box {

    int length;

}

public class TestBox {

    public static void modify(Box b) {
```

```

        b.length = 50;
    }

    public static void main(String[] args) {

        Box box = new Box();

        box.length = 10;

        System.out.println("Before the method call: " + box.length);


        modify(box);

        System.out.println("After the method call: " + box.length); // changed

    }
}

```

Output:

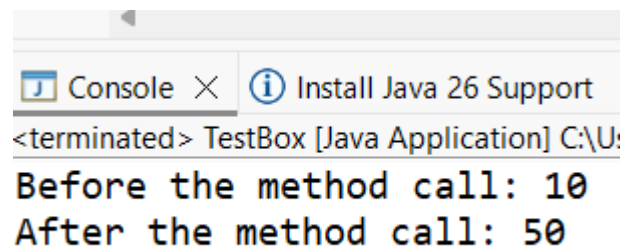

```

<terminated> TextBox [Java Application] C:\U:
Before the method call: 10
After the method call: 50

```

3. Check if character is a Digit

Code:

```

package day_06;

import java.util.Scanner;

class CheckDigit {

    public static void main(String[] args) {

        Scanner sc = new Scanner(System.in);

        System.out.print("Enter character: ");

        char s = sc.next().charAt(0);

        if (Character.isDigit(s))

            System.out.println("Digit");

        else

            System.out.println("Not Digit");


        sc.close();

    }
}

```

```
}
```

Output:

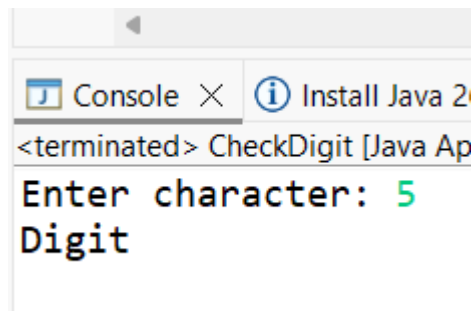

4. Compare two Strings.

Code:

```
package day_06;

import java.util.Scanner;

class CompareStrings {

    public static void main(String[] args) {

        Scanner sc = new Scanner(System.in);

        System.out.print("Enter first string: ");

        String s1 = sc.next();

        System.out.print("Enter second string: ");

        String s2 = sc.next();

        if (s1.equals(s2))

            System.out.println("Strings are equal");

        else


            System.out.println("Not equal");

        sc.close();

    }

}
```

Output:

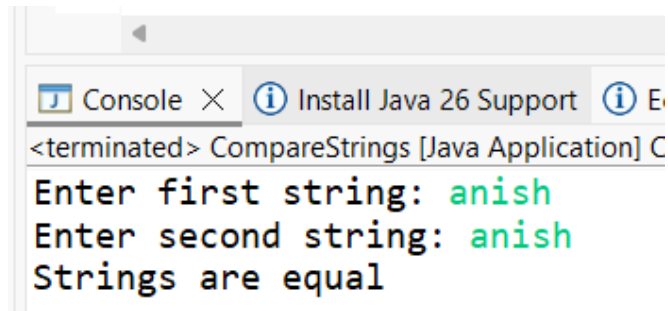

```
<terminated> CompareStrings [Java Application] C
Enter first string: anish
Enter second string: anish
Strings are equal
```

5. Convert using valueOf method.

Code:

```
package day_06;

import java.util.Scanner;

public class ValueOfExample {

    public static void main(String[] args) {

        Scanner sc = new Scanner(System.in);

        System.out.print("Enter number: ");

        int num = sc.nextInt();

        String str = String.valueOf(num);


        System.out.println("String: " + str);

        sc.close();

    }

}
```

Output:

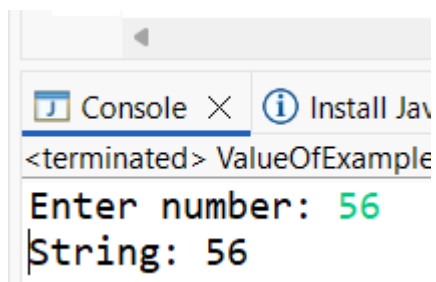

```
<terminated> ValueOfExample
Enter number: 56
String: 56
```

6. Create Boolean Wrapper usage.

Code:

```
package day_06;

class BooleanWrapper {
```

```

public static void main(String[] args) {

    Boolean b1 = true;

    Boolean b2 = Boolean.valueOf("true");


    System.out.println(b1);

    System.out.println(b2);

}

```

Output:

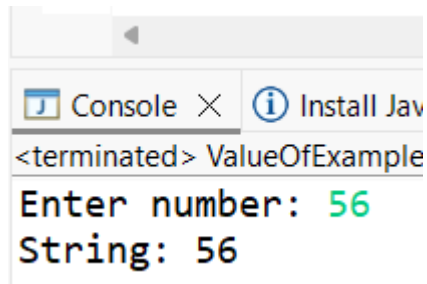

7. Convert null to wrapper classes.

Code:

```

package day_06;

class NullWrapper {

    public static void main(String[] args) {

        Integer num = null;

        System.out.println("Wrapper value: " + num);

    }

}

```

Output:

