

```
In [1]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [2]: df=pd.read_csv(r"C:\Users\user\Downloads\used_cars.csv")
df
```

Out[2]:

	Unnamed: 0	model	year	price	transmission	mileage	fuelType	tax	mpg	engineSize	Make
0	0	T-Roc	2019	25000	Automatic	13904	Diesel	145	49.6	2.0	VW
1	1	T-Roc	2019	26883	Automatic	4562	Diesel	145	49.6	2.0	VW
2	2	T-Roc	2019	20000	Manual	7414	Diesel	145	50.4	2.0	VW
3	3	T-Roc	2019	33492	Automatic	4825	Petrol	145	32.5	2.0	VW
4	4	T-Roc	2019	22900	Semi-Auto	6500	Petrol	150	39.8	1.5	VW
...	...	...	...	...	...	...	...	...	...	...	...
99182	10663	A3	2020	16999	Manual	4018	Petrol	145	49.6	1.0	Audi
99183	10664	A3	2020	16999	Manual	1978	Petrol	150	49.6	1.0	Audi
99184	10665	A3	2020	17199	Manual	609	Petrol	150	49.6	1.0	Audi
99185	10666	Q3	2017	19499	Automatic	8646	Petrol	150	47.9	1.4	Audi
99186	10667	Q3	2016	15999	Manual	11855	Petrol	150	47.9	1.4	Audi

99187 rows × 11 columns

```
In [3]: df.columns
```

```
Out[3]: Index(['Unnamed: 0', 'model', 'year', 'price', 'transmission', 'mileage',
   'fuelType', 'tax', 'mpg', 'engineSize', 'Make'],
   dtype='object')
```

```
In [4]: df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 99187 entries, 0 to 99186
Data columns (total 11 columns):
 #   Column      Non-Null Count  Dtype  
 --- 
 0   Unnamed: 0   99187 non-null   int64  
 1   model        99187 non-null   object  
 2   year         99187 non-null   int64  
 3   price        99187 non-null   int64  
 4   transmission 99187 non-null   object  
 5   mileage       99187 non-null   int64  
 6   fuelType      99187 non-null   object  
 7   tax           99187 non-null   int64  
 8   mpg           99187 non-null   float64 
 9   engineSize    99187 non-null   float64
```

```
10 Make          99187 non-null object
dtypes: float64(2), int64(5), object(4)
memory usage: 8.3+ MB
```

In [5]: `df['fuelType'].value_counts()`

```
Out[5]: Petrol      54928
Diesel       40928
Hybrid        3078
Other         247
Electric        6
Name: fuelType, dtype: int64
```

In [6]: `x=df[['Unnamed: 0', 'year', 'price','mileage','tax']]
y=df['fuelType']`

In [7]: `g1={"fuelType":{'Diesel':1,'Petrol':2,'Hybrid':3,'Electric':4,'Other':5}}
df=df.replace(g1)
print(df)`

	Unnamed: 0	model	year	price	transmission	mileage	fuelType	tax	\
0	0	T-Roc	2019	25000	Automatic	13904	1	145	
1	1	T-Roc	2019	26883	Automatic	4562	1	145	
2	2	T-Roc	2019	20000	Manual	7414	1	145	
3	3	T-Roc	2019	33492	Automatic	4825	2	145	
4	4	T-Roc	2019	22900	Semi-Auto	6500	2	150	
...	...	...	...	...	...	...	...	...	...
99182	10663	A3	2020	16999	Manual	4018	2	145	
99183	10664	A3	2020	16999	Manual	1978	2	150	
99184	10665	A3	2020	17199	Manual	609	2	150	
99185	10666	Q3	2017	19499	Automatic	8646	2	150	
99186	10667	Q3	2016	15999	Manual	11855	2	150	
	mpg	engineSize	Make						
0	49.6	2.0	VW						
1	49.6	2.0	VW						
2	50.4	2.0	VW						
3	32.5	2.0	VW						
4	39.8	1.5	VW						
...	...	...	...						
99182	49.6	1.0	Audi						
99183	49.6	1.0	Audi						
99184	49.6	1.0	Audi						
99185	47.9	1.4	Audi						
99186	47.9	1.4	Audi						

[99187 rows x 11 columns]

In [8]: `from sklearn.model_selection import train_test_split
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.70)`

In [9]: `from sklearn.ensemble import RandomForestClassifier
rfc=RandomForestClassifier()
rfc.fit(x_train,y_train)`

Out[9]: `RandomForestClassifier()`

In [10]:

```
parameters = {
    "max_depth": [1, 2, 3, 4, 5],
    "min_samples_leaf": [5, 10, 15, 20, 25],
    'n_estimators': [10, 20, 30, 40, 50]
}
```

In [11]:

```
from sklearn.model_selection import GridSearchCV
grid_search=GridSearchCV(estimator=rfc,param_grid=parameters, cv=2, scoring="accuracy")
grid_search.fit(x_train,y_train)
```

Out[11]:

```
GridSearchCV(cv=2, estimator=RandomForestClassifier(),
param_grid={'max_depth': [1, 2, 3, 4, 5],
            'min_samples_leaf': [5, 10, 15, 20, 25],
            'n_estimators': [10, 20, 30, 40, 50]},
scoring='accuracy')
```

In [12]:

```
grid_search.best_score_
```

Out[12]:

```
0.7426065331361742
```

In [13]:

```
rfc_best=grid_search.best_estimator_
```

In [14]:

```
from sklearn.tree import plot_tree
plt.figure(figsize=(80,40))
plot_tree(rfc_best.estimators_[5], feature_names=x.columns, class_names=[ 'a', 'b', 'c', 'd',
```

Out[14]:


```
[Text(2152.285714285714, 1993.2, 'tax <= 142.5\ngini = 0.521\nsamples = 18811\nvalue =
[12236, 890, 90, 16540]\nclass = d'),
 Text(1116.0, 1630.8000000000002, 'year <= 2017.5\ngini = 0.583\nsamples = 5838\nvalue =
[4315, 851, 44, 4005]\nclass = a'),
 Text(637.7142857142857, 1268.4, 'mileage <= 30201.0\ngini = 0.558\nsamples = 5621\nvalue =
[4310, 536, 39, 3997]\nclass = a'),
 Text(318.85714285714283, 906.0, 'Unnamed: 0 <= 6317.0\ngini = 0.529\nsamples = 2618\nvalue =
[1361, 289, 14, 2486]\nclass = d'),
 Text(159.42857142857142, 543.5999999999999, 'mileage <= 25578.0\ngini = 0.555\nsamples =
1607\nvalue = [768, 276, 12, 1489]\nclass = d'),
 Text(79.71428571428571, 181.1999999999982, 'gini = 0.531\nsamples = 1204\nvalue = [50
5, 214, 7, 1196]\nclass = d'),
 Text(239.1428571428571, 181.1999999999982, 'gini = 0.591\nsamples = 403\nvalue = [263,
62, 5, 293]\nclass = d'),
 Text(478.2857142857142, 543.5999999999999, 'price <= 13794.5\ngini = 0.478\nsamples = 1
011\nvalue = [593, 13, 2, 997]\nclass = d'),
 Text(398.57142857142856, 181.1999999999982, 'gini = 0.341\nsamples = 743\nvalue = [25
9, 0, 0, 931]\nclass = d'),
 Text(558.0, 181.1999999999982, 'gini = 0.326\nsamples = 268\nvalue = [334, 13, 2, 66]
\nclass = a'),
 Text(956.5714285714284, 906.0, 'price <= 9416.5\ngini = 0.507\nsamples = 3003\nvalue =
[2949, 247, 25, 1511]\nclass = a'),
 Text(797.1428571428571, 543.5999999999999, 'mileage <= 49158.5\ngini = 0.505\nsamples =
1322\nvalue = [915, 21, 3, 1156]\nclass = d'),
 Text(717.4285714285713, 181.1999999999982, 'gini = 0.39\nsamples = 676\nvalue = [269,
8, 1, 788]\nclass = d'),
 Text(876.8571428571428, 181.1999999999982, 'gini = 0.478\nsamples = 646\nvalue = [646,
13, 2, 368]\nclass = a'),
 Text(1116.0, 543.5999999999999, 'tax <= 15.0\ngini = 0.38\nsamples = 1681\nvalue = [203
4, 226, 22, 355]\nclass = a'),
```

```

Text(1036.2857142857142, 181.19999999999982, 'gini = 0.589\nsamples = 240\nvalue = [18
5, 168, 19, 20]\nclass = a'),
Text(1195.7142857142856, 181.19999999999982, 'gini = 0.299\nsamples = 1441\nvalue = [18
49, 58, 3, 335]\nclass = a'),
Text(1594.2857142857142, 1268.4, 'tax <= 137.5\ngini = 0.104\nsamples = 217\nvalue =
[5, 315, 5, 8]\nclass = b'),
Text(1355.142857142857, 906.0, 'mileage <= 4976.5\ngini = 0.038\nsamples = 166\nvalue =
[0, 251, 4, 1]\nclass = b'),
Text(1275.4285714285713, 543.5999999999999, 'gini = 0.0\nsamples = 50\nvalue = [0, 74,
0, 0]\nclass = b'),
Text(1434.8571428571427, 543.5999999999999, 'year <= 2018.5\ngini = 0.054\nsamples = 11
6\nvalue = [0, 177, 4, 1]\nclass = b'),
Text(1355.142857142857, 181.19999999999982, 'gini = 0.048\nsamples = 50\nvalue = [0, 7
9, 1, 1]\nclass = b'),
Text(1514.5714285714284, 181.19999999999982, 'gini = 0.058\nsamples = 66\nvalue = [0, 9
8, 3, 0]\nclass = b'),
Text(1833.4285714285713, 906.0, 'Unnamed: 0 <= 5929.5\ngini = 0.297\nsamples = 51\nvalu
e = [5, 64, 1, 7]\nclass = b'),
Text(1753.7142857142856, 543.5999999999999, 'mileage <= 9106.5\ngini = 0.072\nsamples =
34\nvalue = [0, 52, 1, 1]\nclass = b'),
Text(1673.9999999999998, 181.19999999999982, 'gini = 0.056\nsamples = 19\nvalue = [0, 3
4, 0, 1]\nclass = b'),
Text(1833.4285714285713, 181.19999999999982, 'gini = 0.1\nsamples = 15\nvalue = [0, 18,
1, 0]\nclass = b'),
Text(1913.1428571428569, 543.5999999999999, 'gini = 0.612\nsamples = 17\nvalue = [5, 1
2, 0, 6]\nclass = b'),
Text(3188.5714285714284, 1630.8000000000002, 'mileage <= 32064.5\ngini = 0.479\nsamples =
12973\nvalue = [7921, 39, 46, 12535]\nclass = d'),
Text(2550.8571428571427, 1268.4, 'Unnamed: 0 <= 13360.0\ngini = 0.462\nsamples = 10995
\nvalue = [6140, 39, 45, 11232]\nclass = d'),
Text(2232.0, 906.0, 'price <= 15899.5\ngini = 0.458\nsamples = 10320\nvalue = [5655, 3
9, 41, 10642]\nclass = d'),
Text(2072.5714285714284, 543.5999999999999, 'mileage <= 24604.0\ngini = 0.199\nsamples =
4220\nvalue = [725, 0, 22, 5948]\nclass = d'),
Text(1992.8571428571427, 181.19999999999982, 'gini = 0.172\nsamples = 3691\nvalue = [53
3, 0, 22, 5307]\nclass = d'),
Text(2152.285714285714, 181.19999999999982, 'gini = 0.355\nsamples = 529\nvalue = [192,
0, 0, 641]\nclass = d'),
Text(2391.428571428571, 543.5999999999999, 'year <= 2019.5\ngini = 0.506\nsamples = 610
0\nvalue = [4930, 39, 19, 4694]\nclass = a'),
Text(2311.7142857142853, 181.19999999999982, 'gini = 0.503\nsamples = 5468\nvalue = [45
53, 17, 19, 4126]\nclass = a'),
Text(2471.142857142857, 181.19999999999982, 'gini = 0.502\nsamples = 632\nvalue = [377,
22, 0, 568]\nclass = d'),
Text(2869.7142857142853, 906.0, 'Unnamed: 0 <= 15146.0\ngini = 0.499\nsamples = 675\nva
lue = [485, 0, 4, 590]\nclass = d'),
Text(2710.285714285714, 543.5999999999999, 'price <= 14996.5\ngini = 0.498\nsamples = 4
38\nvalue = [390, 0, 4, 306]\nclass = a'),
Text(2630.5714285714284, 181.19999999999982, 'gini = 0.342\nsamples = 126\nvalue = [44,
0, 0, 157]\nclass = d'),
Text(2790.0, 181.19999999999982, 'gini = 0.43\nsamples = 312\nvalue = [346, 0, 4, 149]
\nclass = a'),
Text(3029.142857142857, 543.5999999999999, 'price <= 13997.0\ngini = 0.376\nsamples = 2
37\nvalue = [95, 0, 0, 284]\nclass = d'),
Text(2949.428571428571, 181.19999999999982, 'gini = 0.203\nsamples = 135\nvalue = [23,
0, 0, 178]\nclass = d'),
Text(3108.8571428571427, 181.19999999999982, 'gini = 0.482\nsamples = 102\nvalue = [72,
0, 0, 106]\nclass = d'),
Text(3826.2857142857138, 1268.4, 'year <= 2010.5\ngini = 0.488\nsamples = 1978\nvalue =
[1781, 0, 1, 1303]\nclass = a'),
Text(3507.428571428571, 906.0, 'mileage <= 65400.0\ngini = 0.387\nsamples = 189\nvalue =
[80, 0, 0, 225]\nclass = d'),
Text(3347.9999999999995, 543.5999999999999, 'mileage <= 51139.5\ngini = 0.111\nsamples =
53\nvalue = [5, 0, 0, 80]\nclass = d'),
Text(3268.285714285714, 181.19999999999982, 'gini = 0.219\nsamples = 18\nvalue = [3, 0,
0]\nclass = d')

```

```
0, 21]\nclass = d'),
Text(3427.7142857142853, 181.19999999999982, 'gini = 0.063\nsamples = 35\nvalue = [2,
0, 0, 59]\nclass = d'),
Text(3666.8571428571427, 543.5999999999999, 'Unnamed: 0 <= 16583.5\ngini = 0.449\nsamples = 136\nvalue = [75, 0, 0, 145]\nclass = d'),
Text(3587.142857142857, 181.19999999999982, 'gini = 0.483\nsamples = 116\nvalue = [75,
0, 0, 109]\nclass = d'),
Text(3746.5714285714284, 181.19999999999982, 'gini = 0.0\nsamples = 20\nvalue = [0, 0,
0, 36]\nclass = d'),
Text(4145.142857142857, 906.0, 'Unnamed: 0 <= 16017.0\ngini = 0.475\nsamples = 1789\nvalue = [1701, 0, 1, 1078]\nclass = a'),
Text(3985.7142857142853, 543.5999999999999, 'Unnamed: 0 <= 918.5\ngini = 0.472\nsamples = 1752\nvalue = [1682, 0, 1, 1039]\nclass = a'),
Text(3905.999999999995, 181.19999999999982, 'gini = 0.381\nsamples = 145\nvalue = [15
7, 0, 0, 54]\nclass = a'),
Text(4065.428571428571, 181.19999999999982, 'gini = 0.477\nsamples = 1607\nvalue = [152
5, 0, 1, 985]\nclass = a'),
Text(4304.571428571428, 543.5999999999999, 'tax <= 147.5\ngini = 0.441\nsamples = 37\nvalue = [19, 0, 0, 39]\nclass = d'),
Text(4224.857142857142, 181.19999999999982, 'gini = 0.499\nsamples = 16\nvalue = [12,
0, 0, 13]\nclass = d'),
Text(4384.285714285714, 181.19999999999982, 'gini = 0.334\nsamples = 21\nvalue = [7, 0,
0, 26]\nclass = d')
```

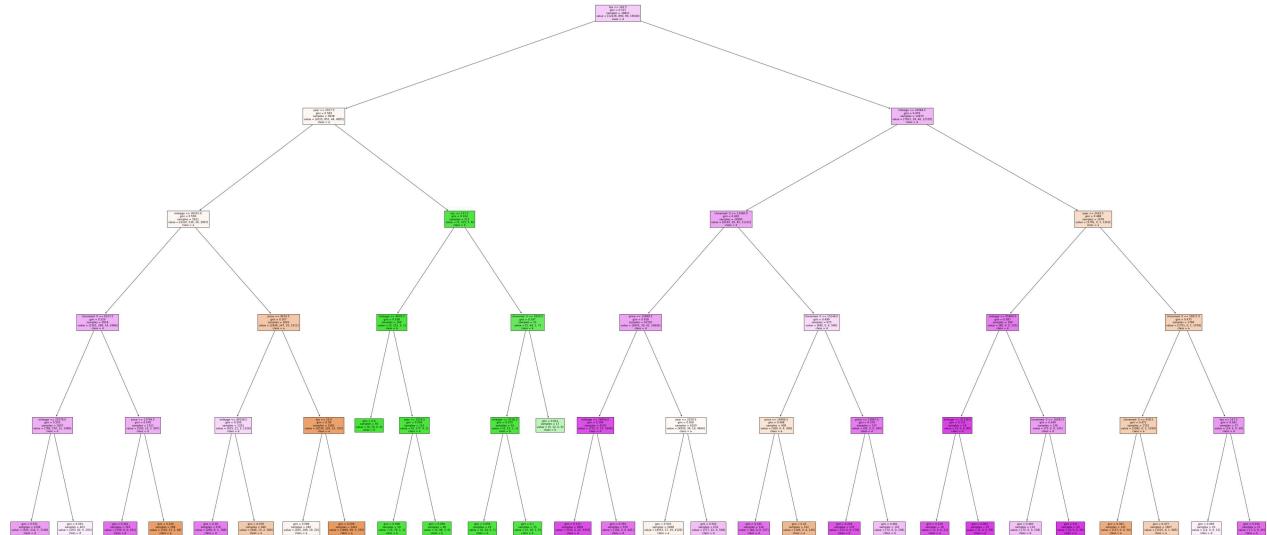

In [ ]: