



## INSTALLATION GUIDE


## Skyzer Nitro Setup Wizard

### Step 1: Installing Skyzer Nitro – Setup Wizard


1. Run the Skyzer Nitro Installer program on the PC based system where Nitro terminal will be installed
2. The following screen will be displayed. Click on “Next”.



**Step 2:** Accept the agreement and click “Next”

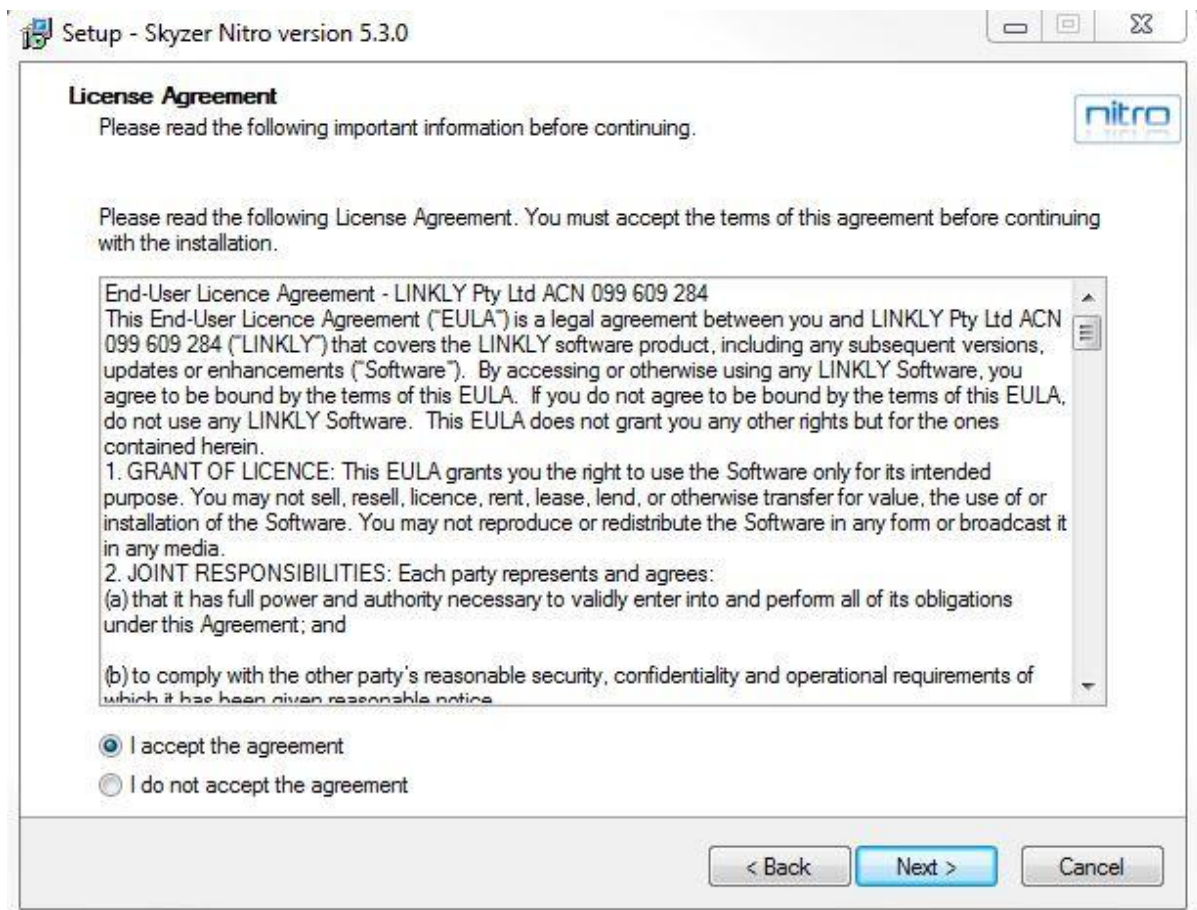


**Step 3:** By default, the destination location path is selected “C:\Program files (x86)\Nitro\_EFT” to install the Skyzer Nitro and then click on “NEXT”

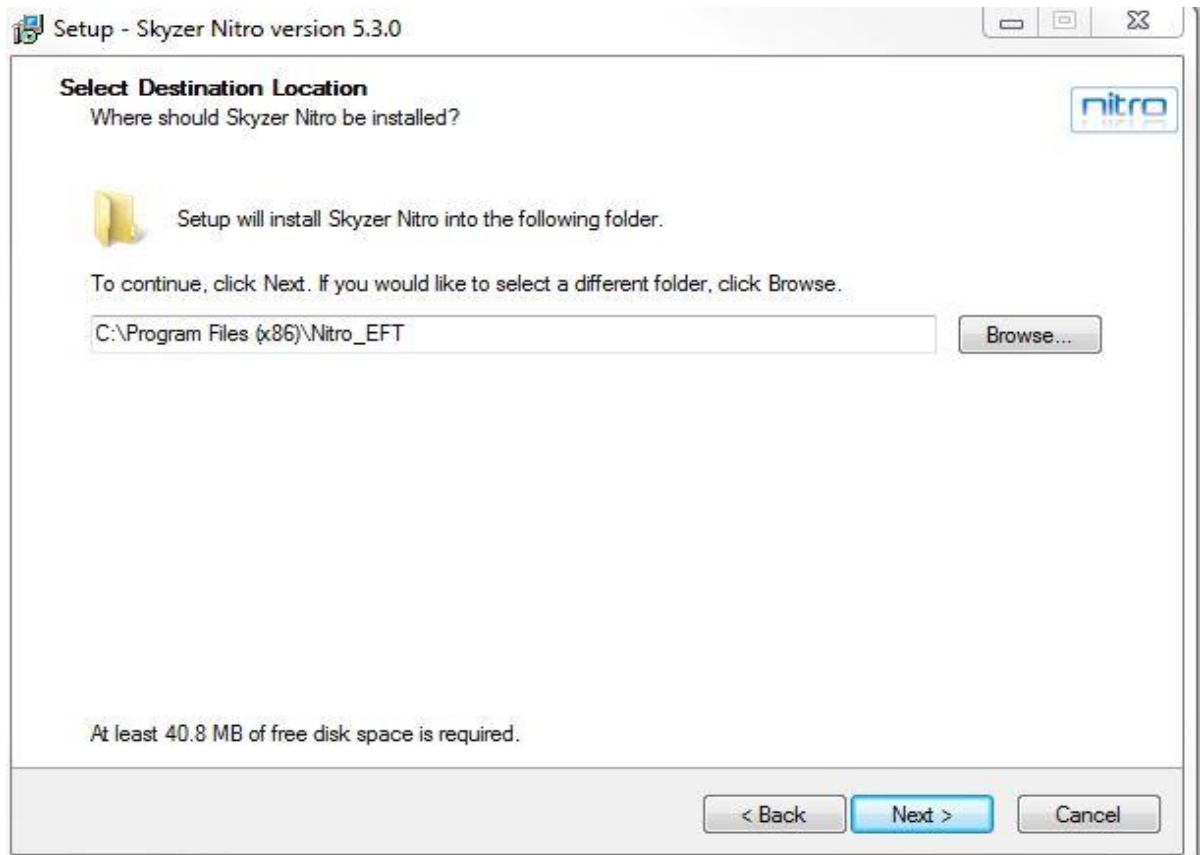





**Step 4:** For POS lanes, always select “Client and Server (A Pinpad will be attached to this PC)” and then click on “NEXT “

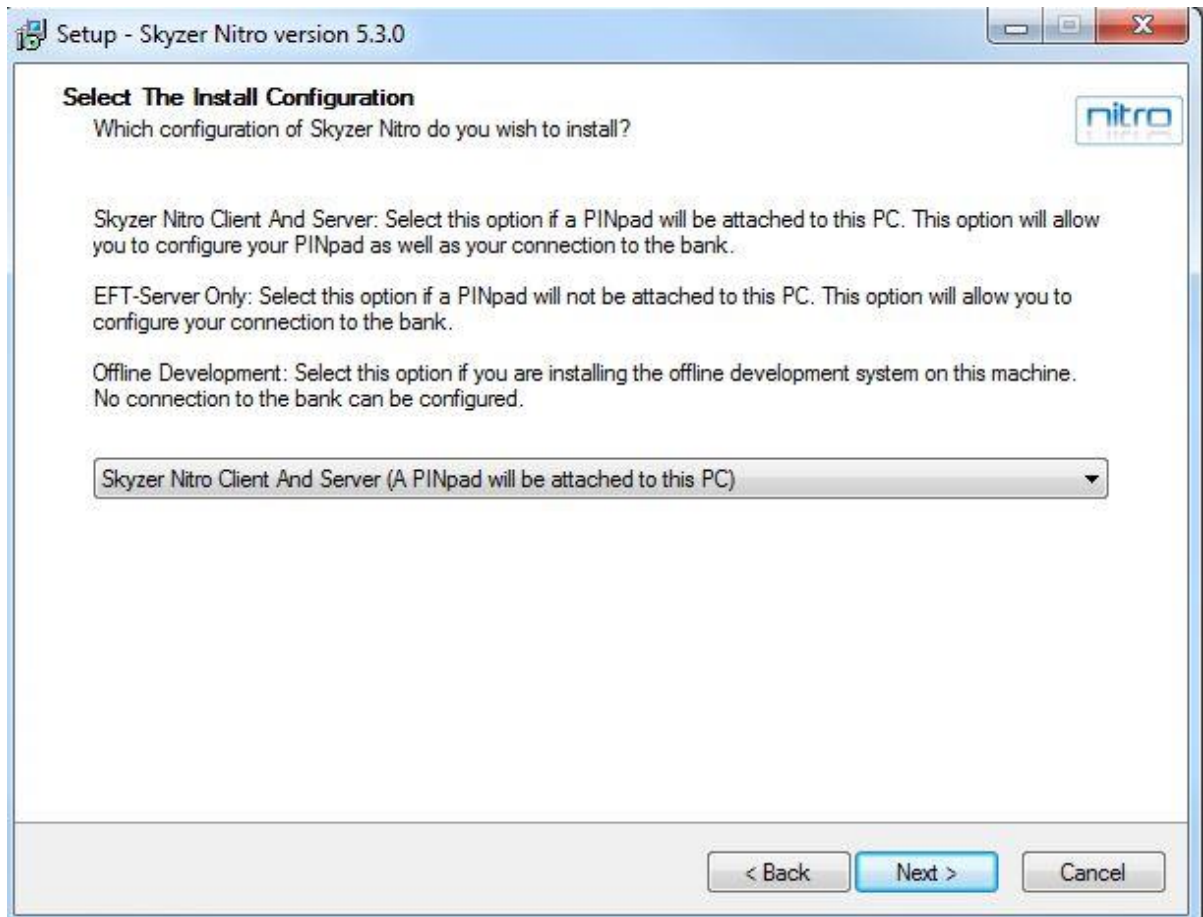


**Step 5:** Additional tasks will be display for installing EMS-client service, leave the box ticked and then click on **“NEXT”**.

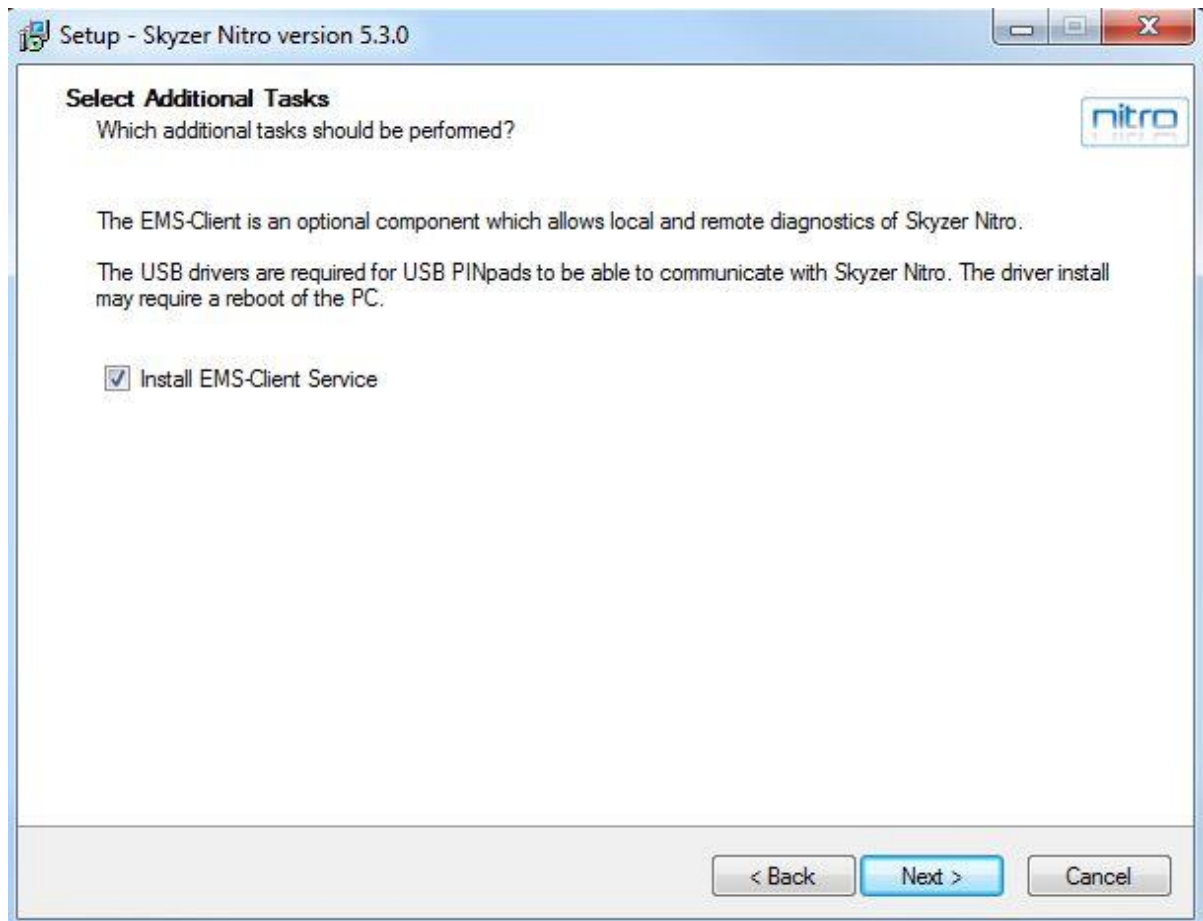

**Step 6:** Click on **“INSTALL”** to begin the software installation.

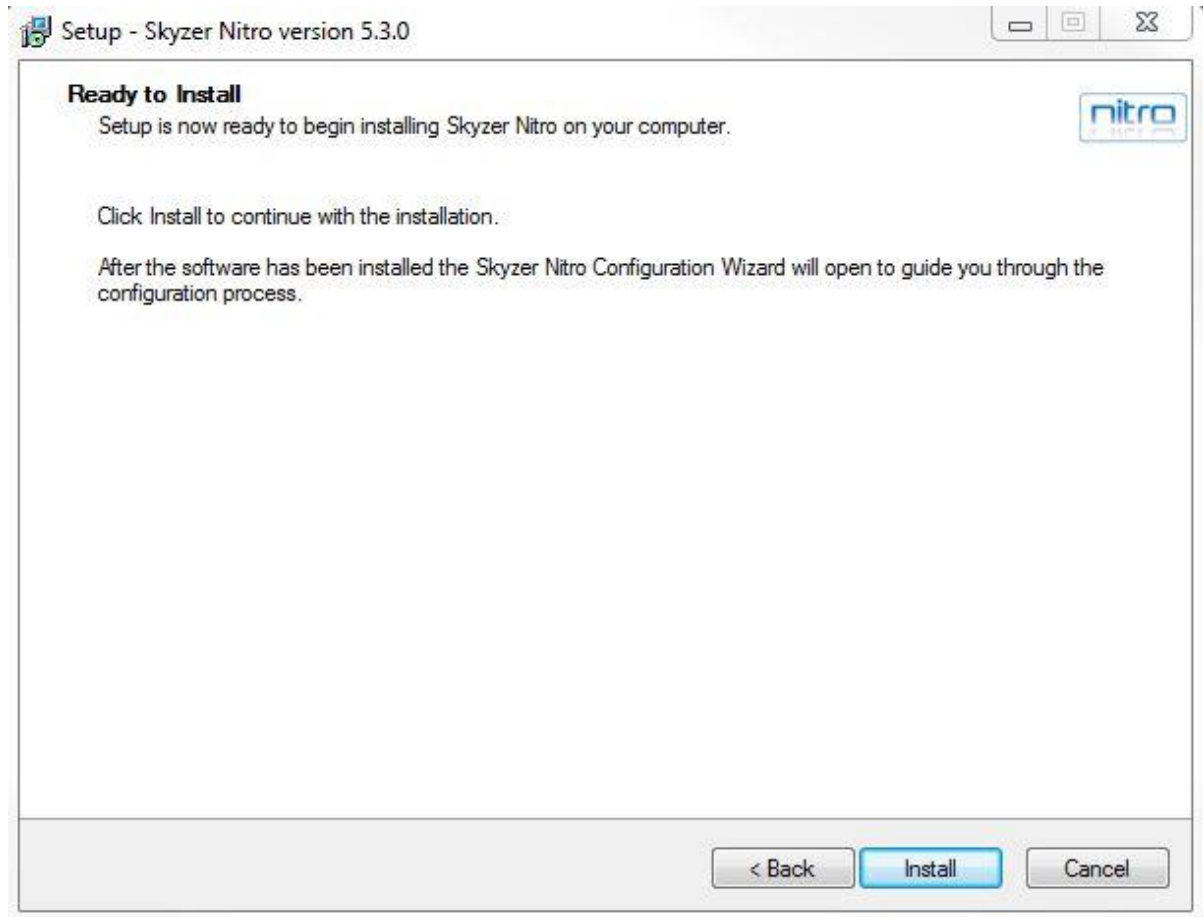


**Step 7:** The installation will begin and may take several minutes to install.

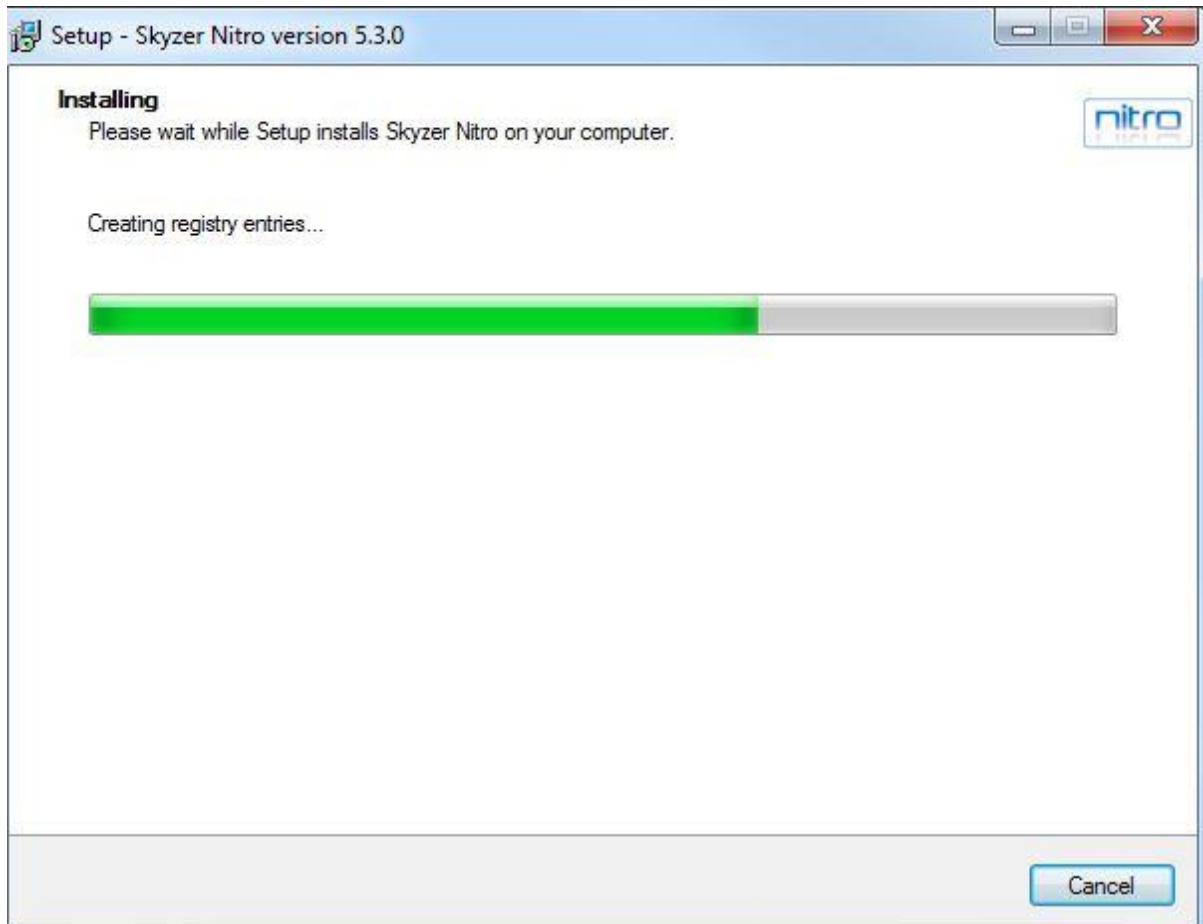




**Step 8:** To proceed with “Nitro Configuration Wizard”, click on “NEXT”.

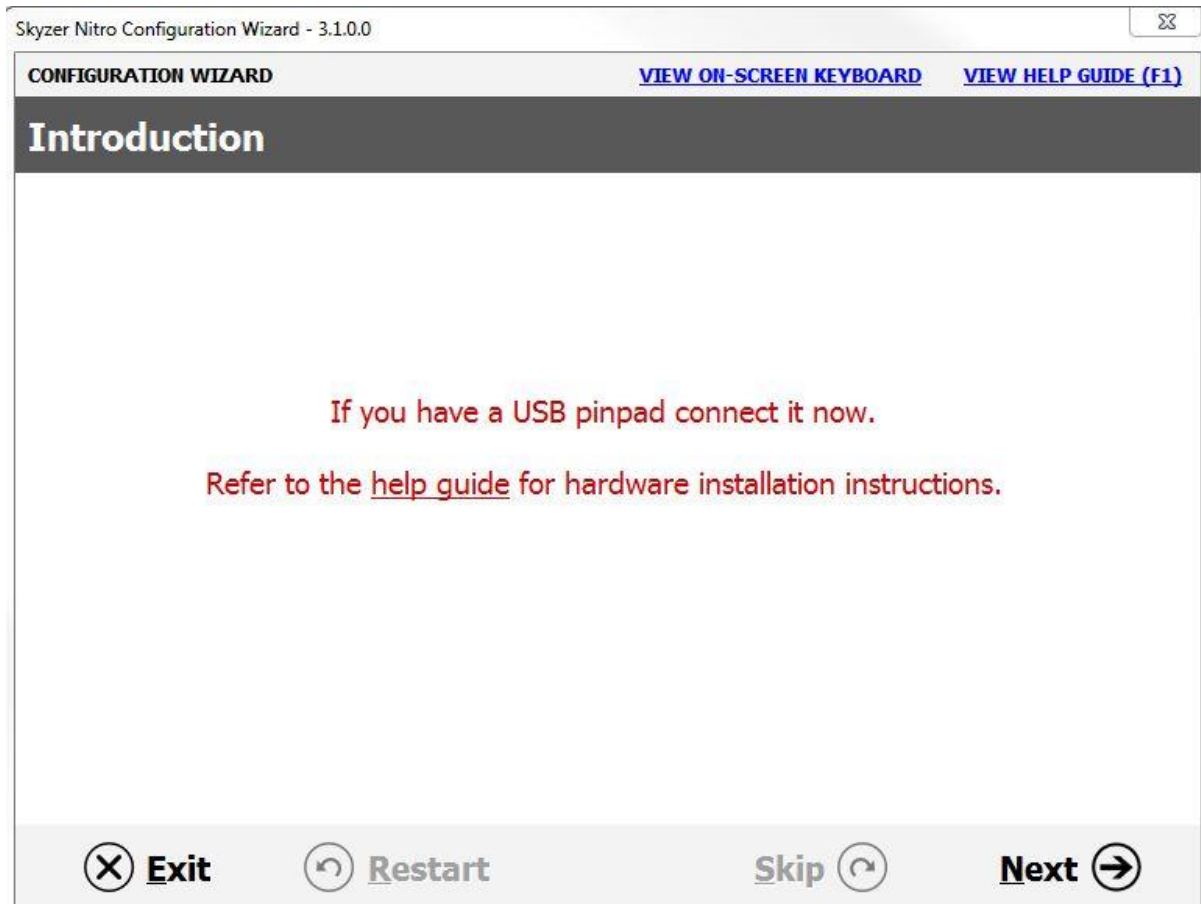





**Step 9:** To perform auto detect, click on **“DETECT”** or **“SKIP”** to manually proceed with the configuration. Click on **“Next”**

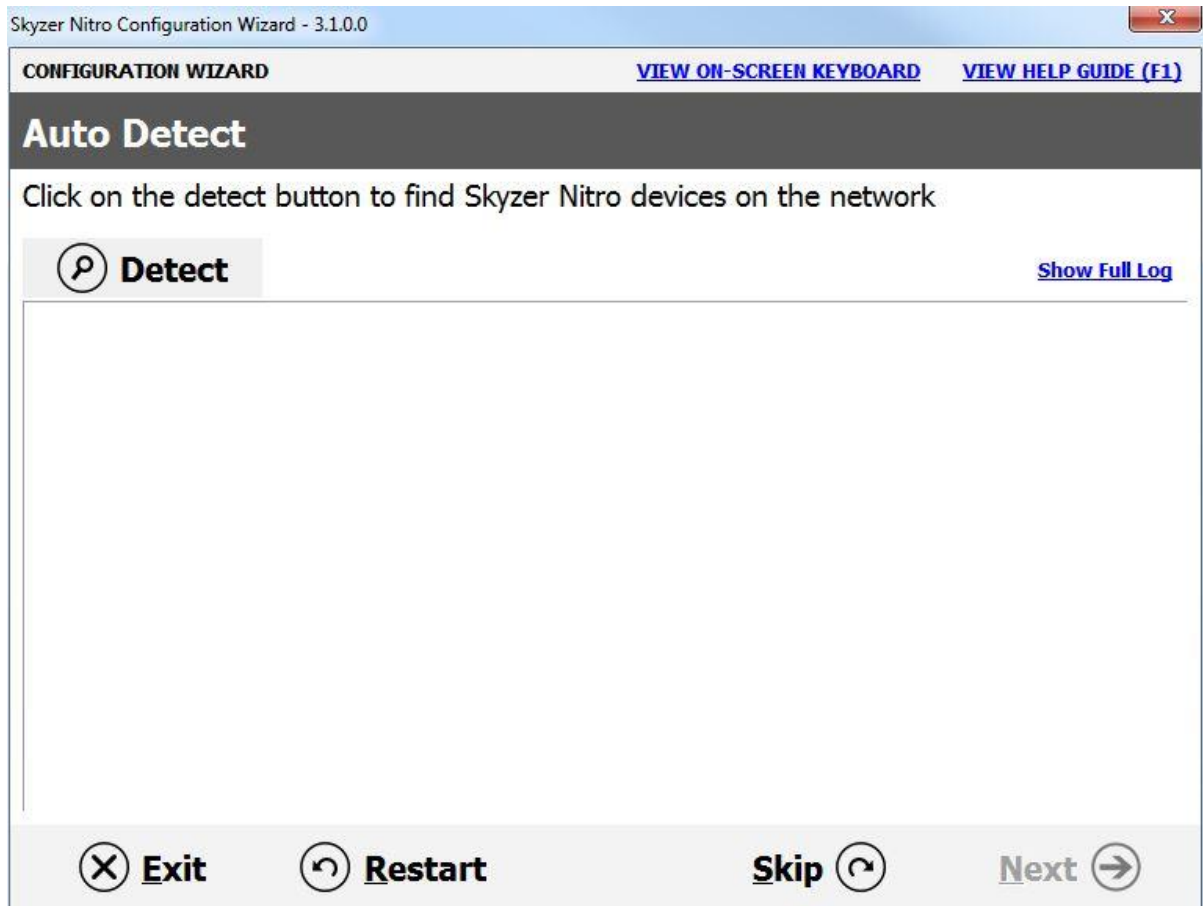

**Step 10:** Click on Paymark to select the bank and click on “Next”.

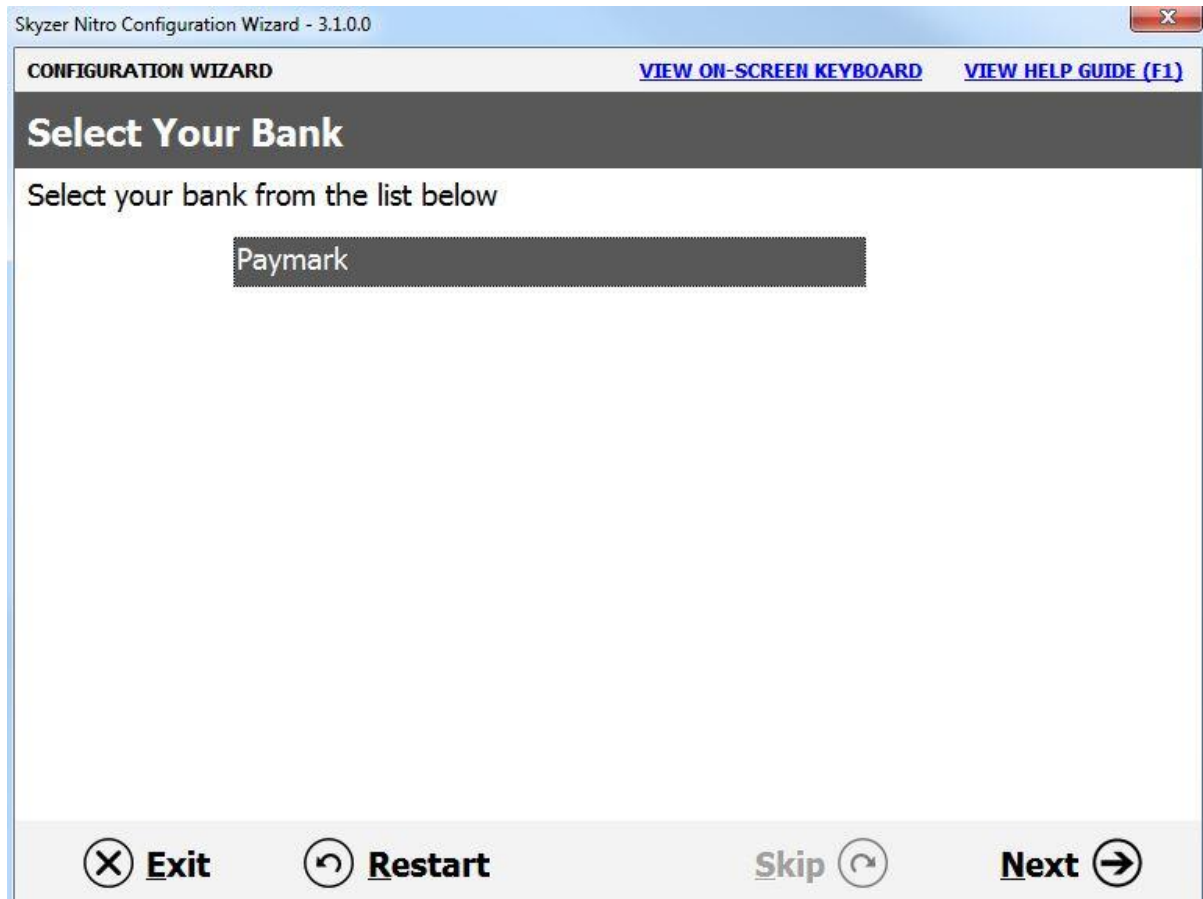

**Step 11:** To setting up EFT-Client, Pinpad modem/ printer configuration is by default set to (option 1) **fallback link to the bank**. Un-Ticked from fallback and tick the (Third option) **Primary link to the bank** as shown below. Click “Next”.

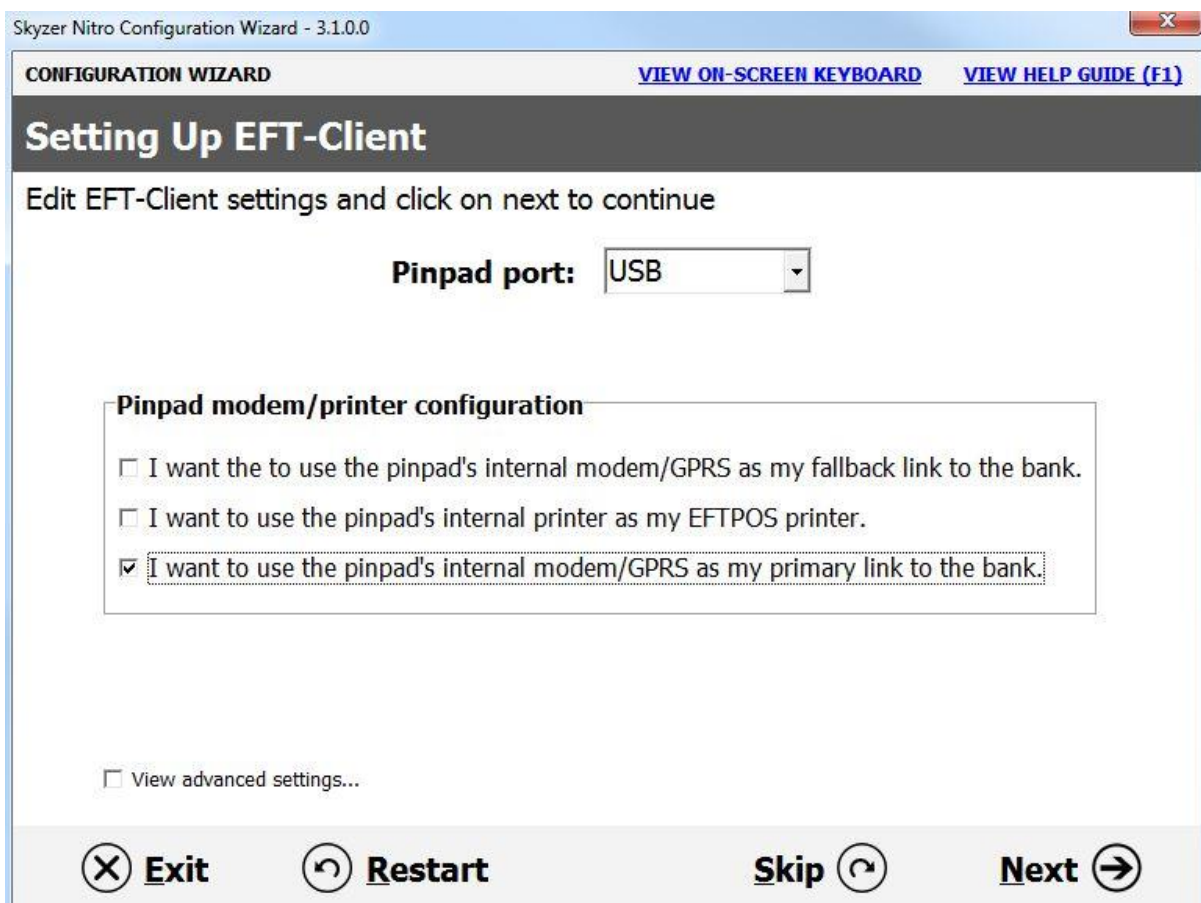

Skyzer Nitro Configuration Wizard - 3.1.0.0

CONFIGURATION WIZARD [VIEW ON-SCREEN KEYBOARD](#) [VIEW HELP GUIDE \(F1\)](#)

## Setting Up EFT-Client

Edit EFT-Client settings and click on next to continue

Pinpad port:

**Pinpad modem/printer configuration**


- ☐ I want the to use the pinpad's internal modem/GPRS as my fallback link to the bank.
- ☐ I want to use the pinpad's internal printer as my EFTPOS printer.
- ☒ I want to use the pinpad's internal modem/GPRS as my primary link to the bank.

☐ View advanced settings...

**Exit** **Restart** **Skip** **Next**



**Step 12:** The Nitro Configuration Wizard is now complete. Click on “COMPLETE “and “FINISH”

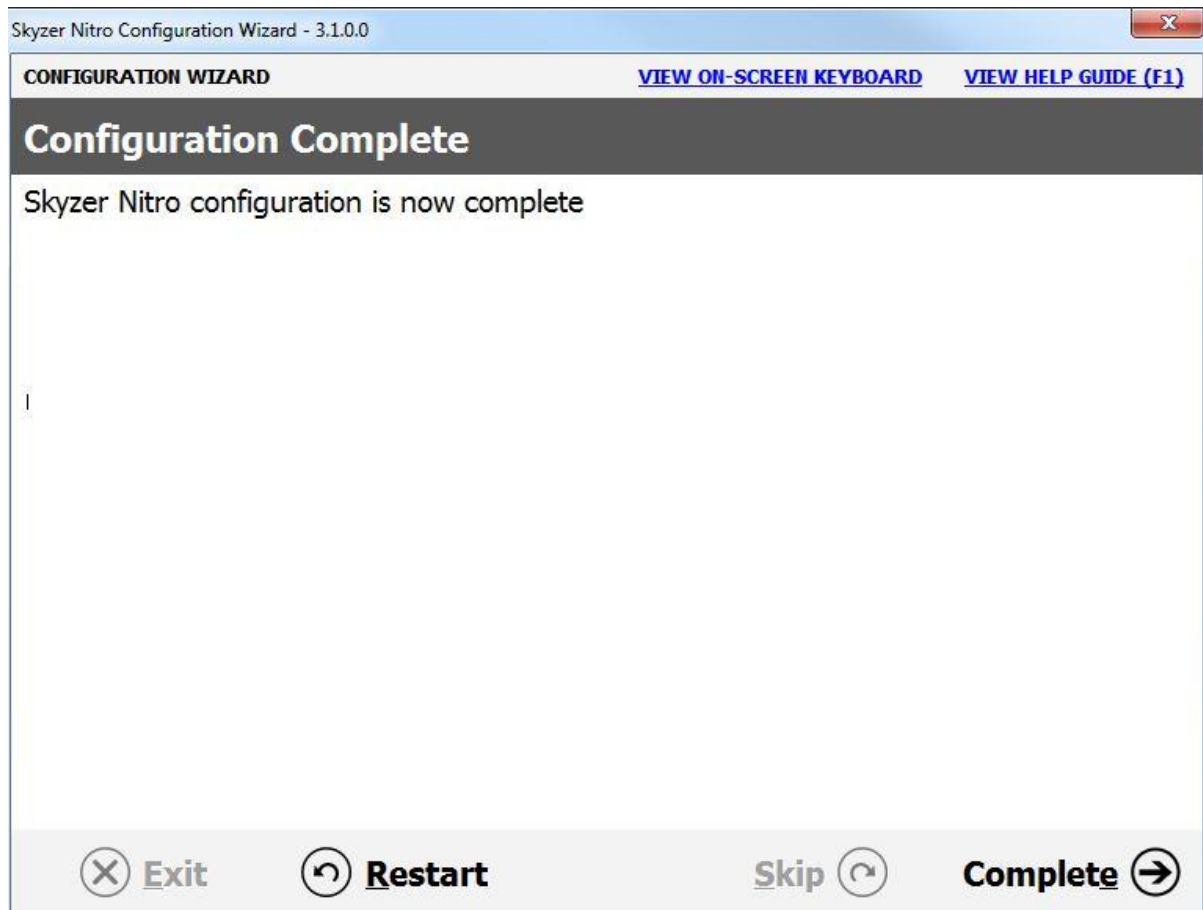

**NOTE:** Please install USB driver that come externally with the Nitro package.