

Raspberry Pi 4






Installation du Raspberry Pi



Préparation de la carte MicroSD

1. Sortir la carte MicroSD du Pi
2. L'insérer dans l'adaptateur USB
3. Insérer l'adaptateur dans votre ordinateur

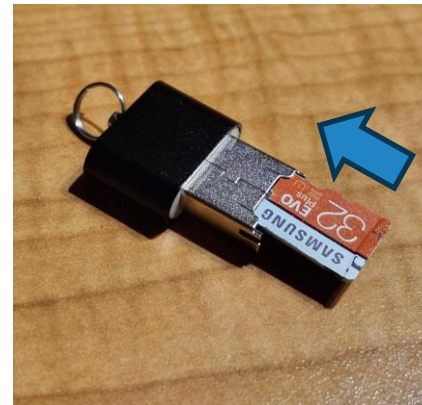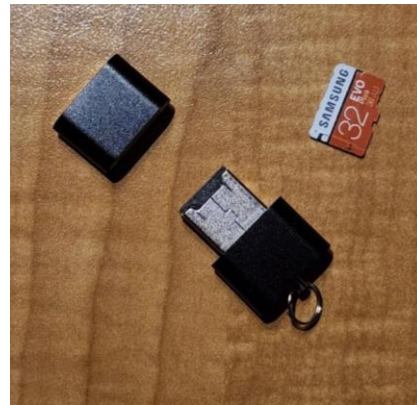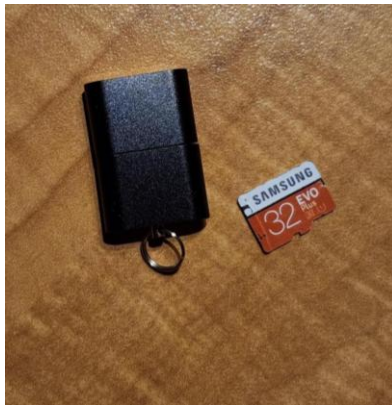


Comme une clé USB!

Installation de Linux sur la microSD

<https://www.raspberrypi.com/software/>

Télécharger, installer et lancer le logiciel *Raspberry Pi Imager*.

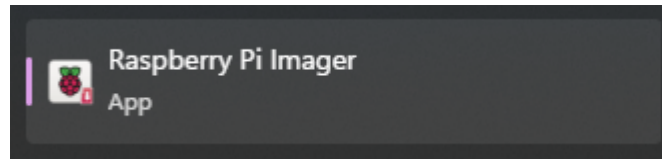

Setup steps

Device

OS

Storage

Customisation

Writing

Done

APP OPTIONS

Select your Raspberry Pi device



Raspberry Pi 5

Raspberry Pi 5, 500 / 500+, and Compute Module 5



Raspberry Pi 4

Raspberry Pi 4 Model B, 400, and Compute Module 4 / 4S



Raspberry Pi 3

Raspberry Pi 3 Model A+ / B / B+ and Compute Module 3 / 3+



Raspberry Pi 2

Raspberry Pi 2 Model B



Raspberry Pi 1

Raspberry Pi 1 Model A / A+ / B / B+ and Compute Module 1

NEXT

Setup steps

Device

OS

Storage

Customisation

Writing

Done

APP OPTIONS

Choose operating system

Select an operating system to install on your Raspberry Pi



Raspberry Pi OS (64-bit)

A port of Debian Trixie with the Raspberry Pi Desktop
(Recommended)

Online - 1.3 GB download

Released: 2026-06-18



Raspberry Pi OS (32-bit)

A port of Debian Trixie with the Raspberry Pi Desktop

Online - 1.2 GB download

Released: 2026-06-18



Raspberry Pi OS (Legacy, 32-bit)

A port of Debian Bookworm with security updates and
desktop environment


Online - 1.2 GB download

Released: 2026-06-18


BACK

NEXT

L'adaptateur contenant la microSD doit être connecté à l'ordinateur!

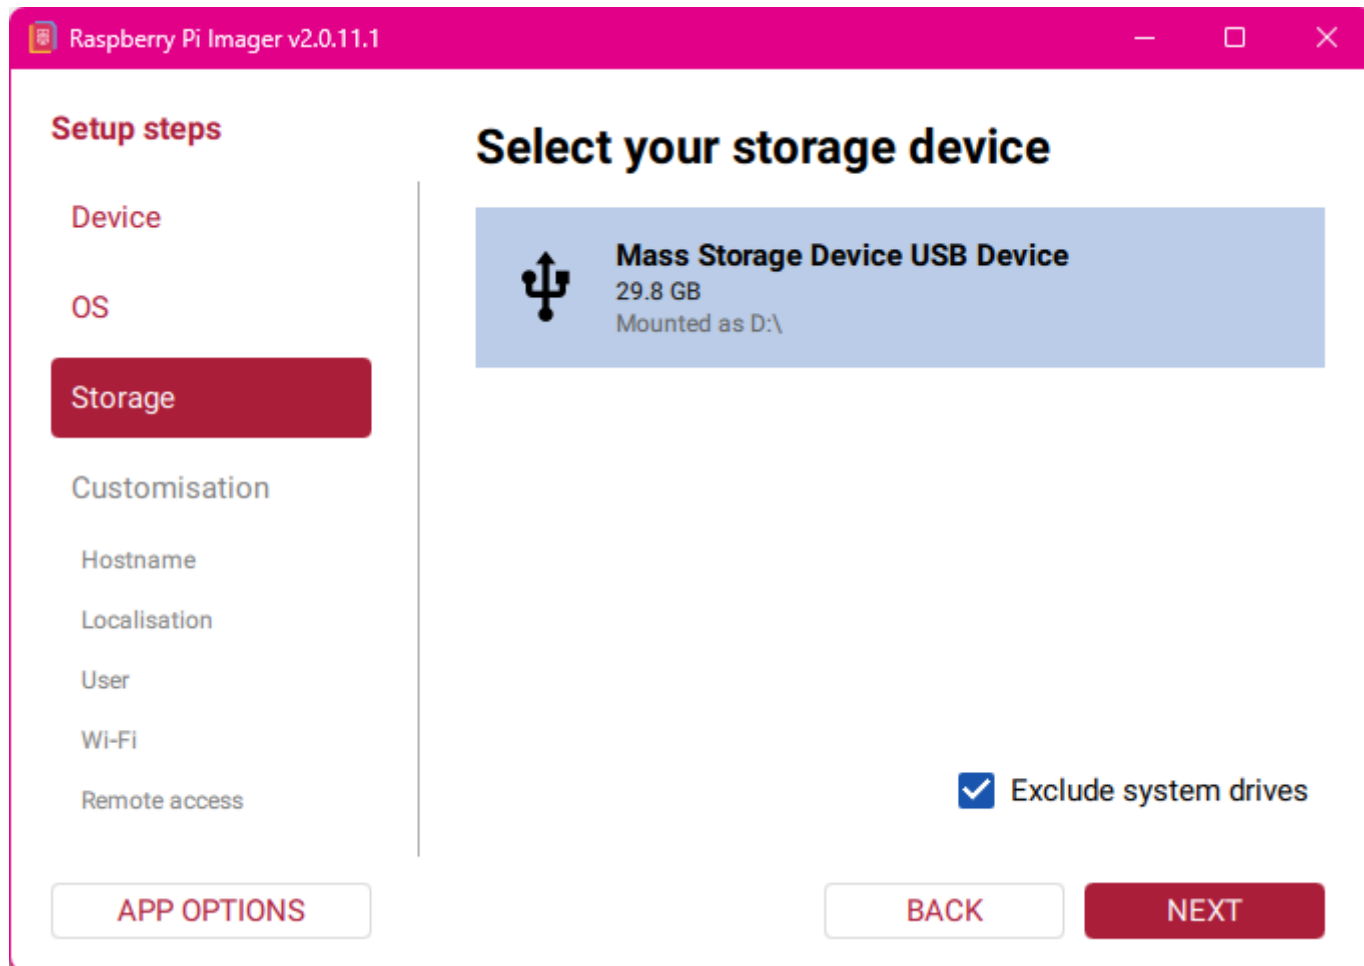

Le hostname devrait être "pi" avec le numéro de votre boîte. Ex: pi01

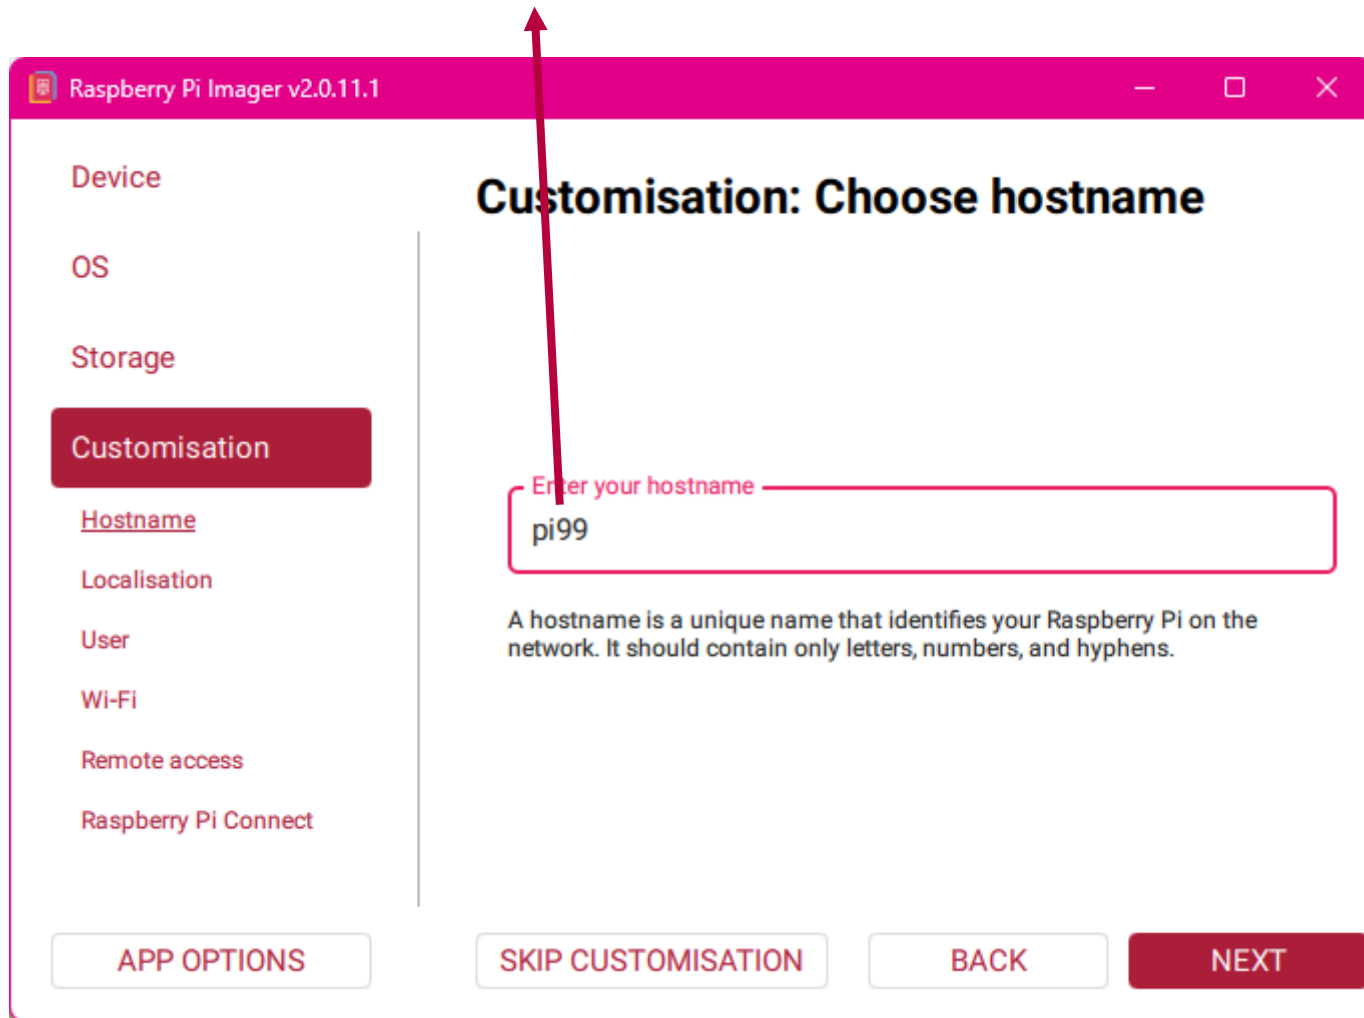

Raspberry Pi Imager v2.0.11.1

Device

OS

Storage

Customisation

Hostname

Localisation

User

Wi-Fi

Remote access

Raspberry Pi Connect

Customisation: Choose hostname

Enter your hostname

pi99

A hostname is a unique name that identifies your Raspberry Pi on the network. It should contain only letters, numbers, and hyphens.

APP OPTIONS

SKIP CUSTOMISATION

BACK

NEXT

Raspberry Pi Imager v2.0.11.1

OS

Storage

Customisation

Hostname

Localisation

User

Wi-Fi

Remote access

Raspberry Pi Connect

Writing

Customisation: Localisation

Select your location for suggested time zone and keyboard layout

Capital city: Ottawa (Canada) ⓘ

Time zone: America/Toronto

Keyboard layout: ca

APP OPTIONS

SKIP CUSTOMISATION

BACK

NEXT

Le username et password de votre choix. Prenez le en note!

Raspberry Pi Imager v2.0.11.1

Storage

Customisation

Hostname

Localisation

User

Wi-Fi

Remote access

Raspberry Pi Connect

Writing

Done

Customisation: Choose username

Create a user account for your Raspberry Pi

Username:

Password:

Confirm password:

The username must be lowercase and contain only letters, numbers, underscores, and hyphens.

APP OPTIONS

SKIP CUSTOMISATION

BACK

NEXT

Les deux rangées près de la porte: d139-A-2G
Les deux autres rangées: d139-B-2G

Raspberry Pi Imager v2.0.11.1

Storage

Customisation

Hostname

Localisation

User

Wi-Fi

Remote access

Raspberry Pi Connect

Writing

Done

Customisation: Choose Wi-Fi

SECURE NETWORK **OPEN NETWORK**

SSID: Network name d139-A-2G

Password: Network password d139-A-2G

Confirm password: Re-enter password d139-A-2G

☐ Hidden SSID

APP OPTIONS SKIP CUSTOMISATION BACK NEXT

Même password que SSID

Raspberry Pi Imager v2.0.11.1

Storage

Customisation

Hostname

Localisation

User

Wi-Fi

[Remote access](#)

Raspberry Pi Connect

Writing

Done

Customisation: SSH authentication

Configure SSH access

Enable SSH
[Learn about SSH](#)

Authentication mechanism:

☒ Use password authentication

☐ Use public key authentication

Important!


APP OPTIONS

SKIP CUSTOMISATION

BACK

NEXT

Rien à faire ici...

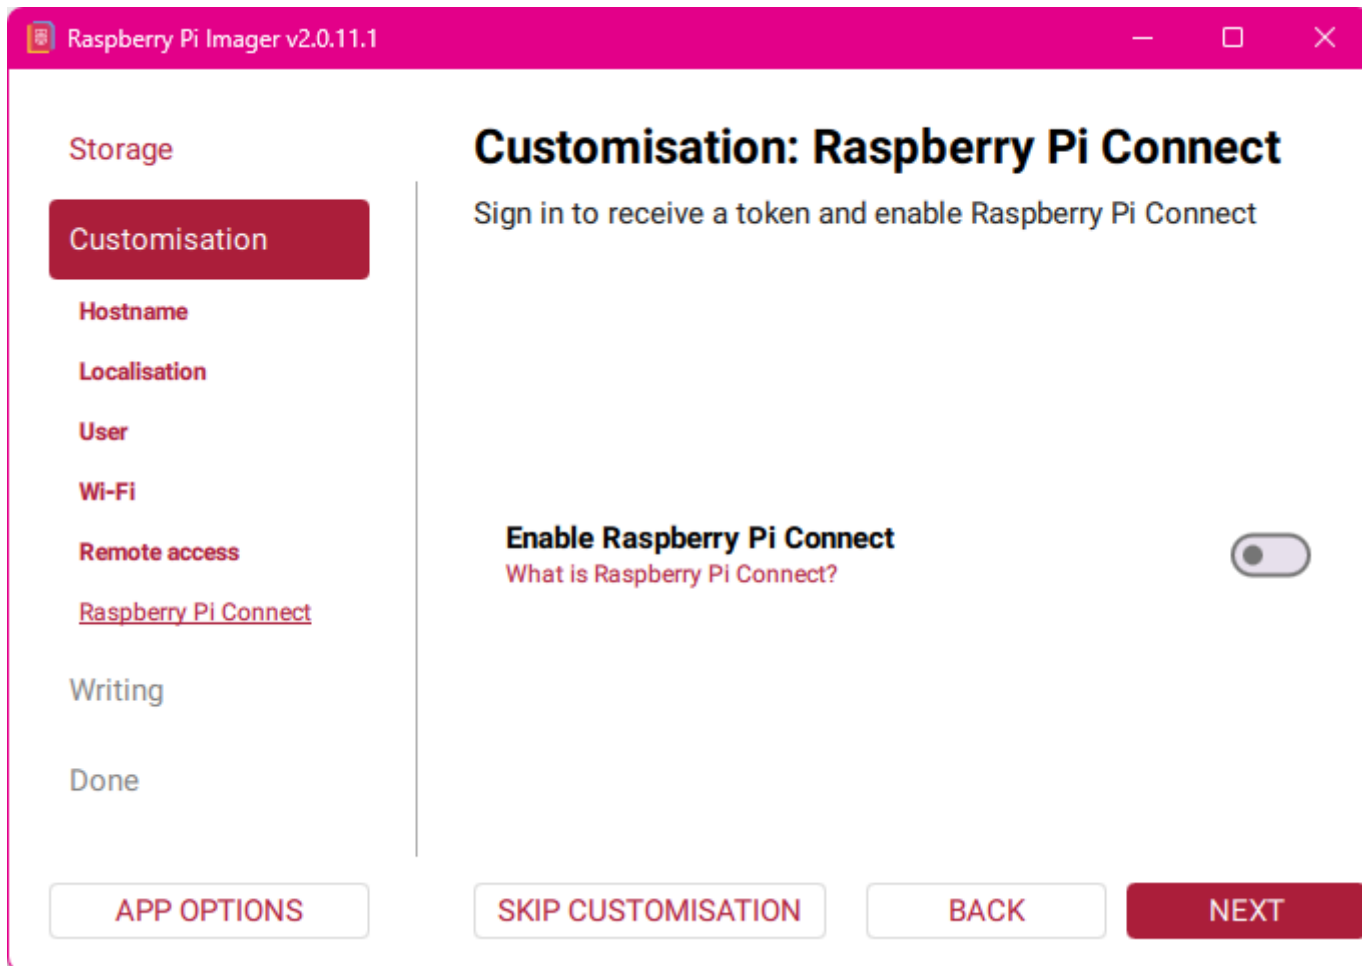

Raspberry Pi Imager v2.0.11.1

Storage

Customisation

Hostname

Localisation

User

Wi-Fi

Remote access

Raspberry Pi Connect

Writing

Done

Write image

Review your choices and write the image to the storage device

Summary

Device:	Raspberry Pi 4
Operating system:	Raspberry Pi OS (64-bit)
Storage:	Mass Storage Device USB Device

Customisations to apply:

- Hostname configured
- Localisation configured
- User account configured
- Wi-Fi configured
- SSH enabled


APP OPTIONS

BACK


WRITE




DO IT

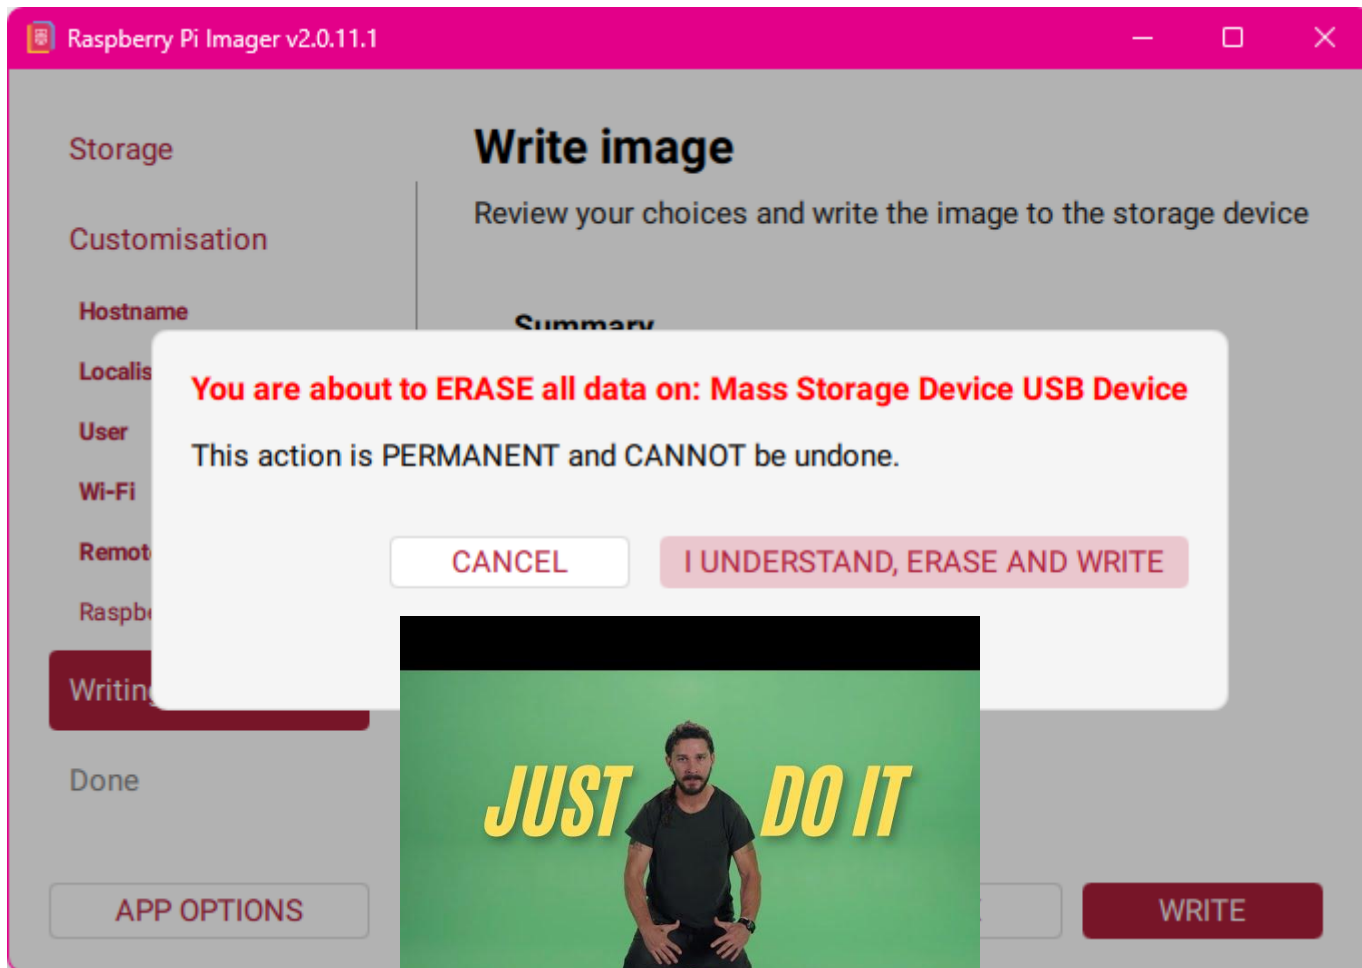


Si ce popup apparaît, il peut être ignoré et fermé

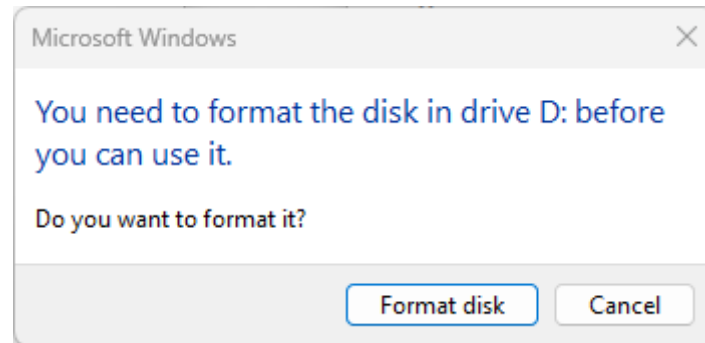


Oui, j'ai attendu qu'il soit à [42](#) pour prendre la capture d'écran.

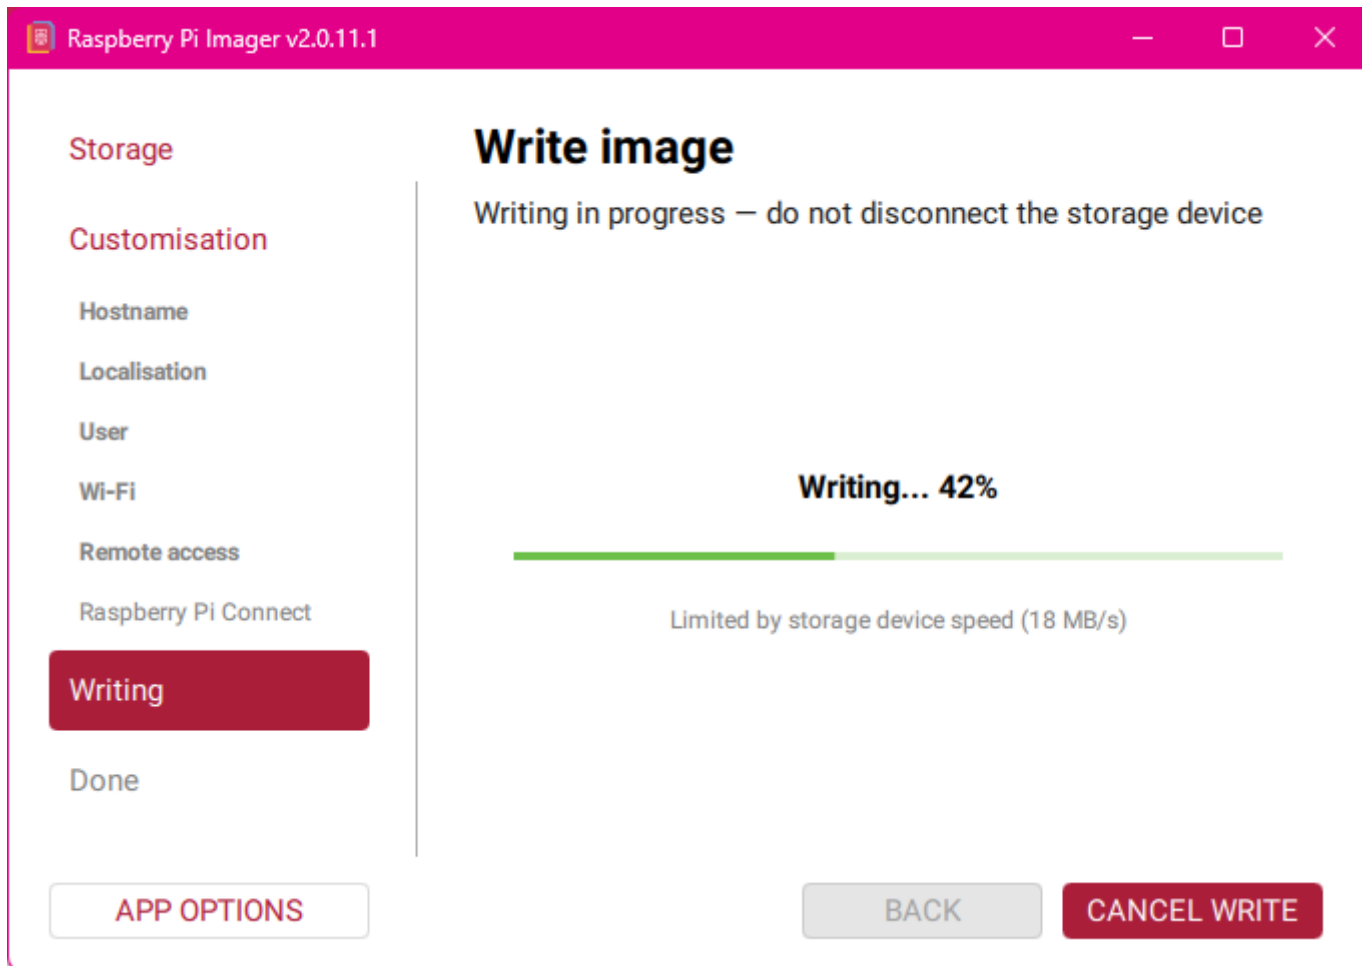

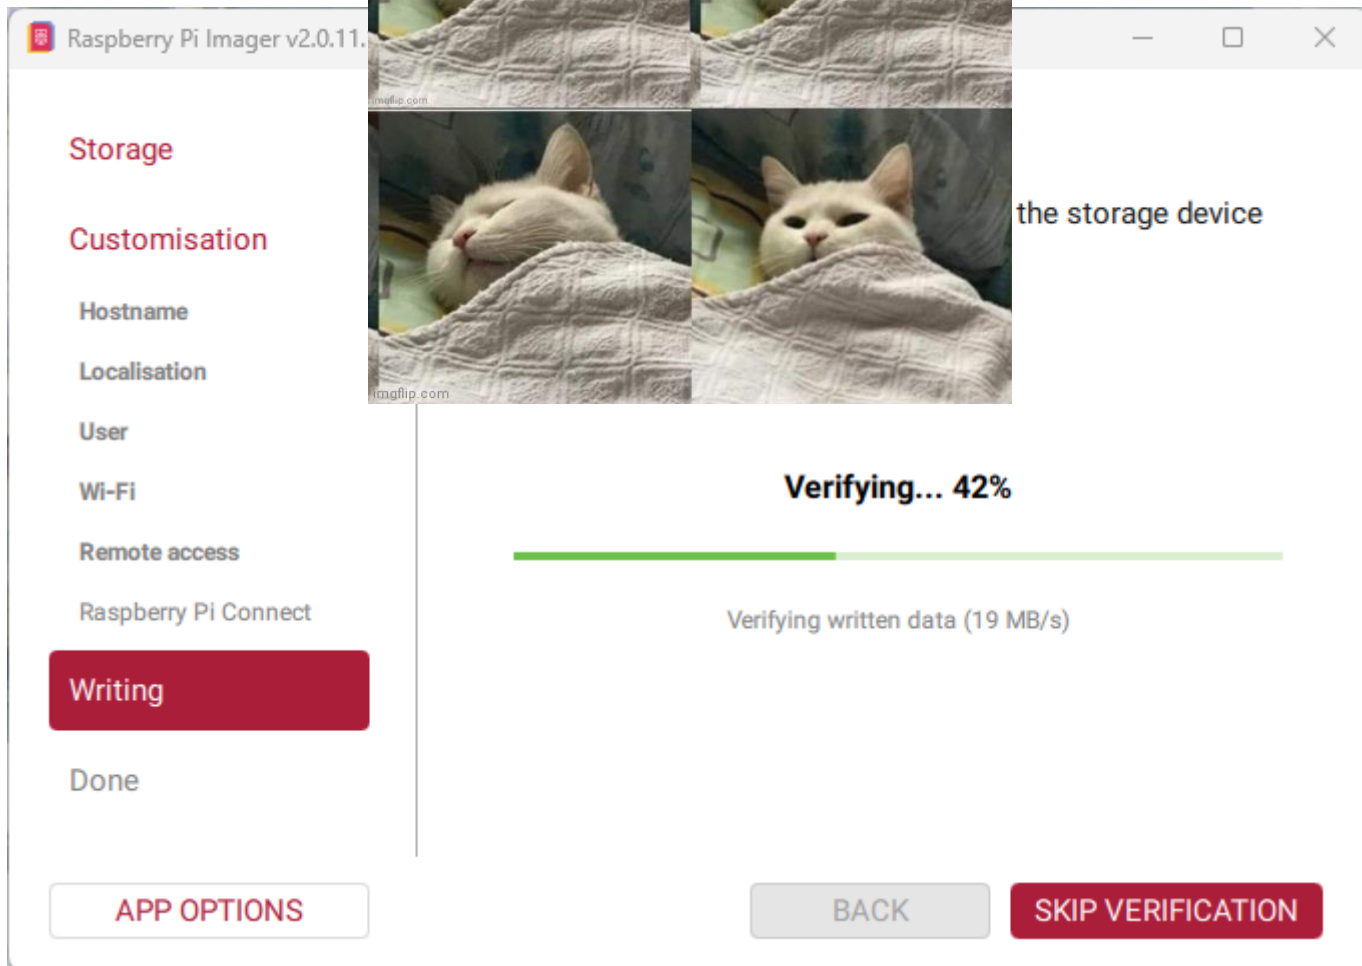


Démarrer le Pi

1. S'assurer que le Pi n'est pas branché
2. Remettre la microSD dans le Pi
3. Brancher l'écran (pour confirmer le démarrage)
4. Brancher le fil d'alimentation USB-C
5. Après une minute, le bureau devrait s'afficher

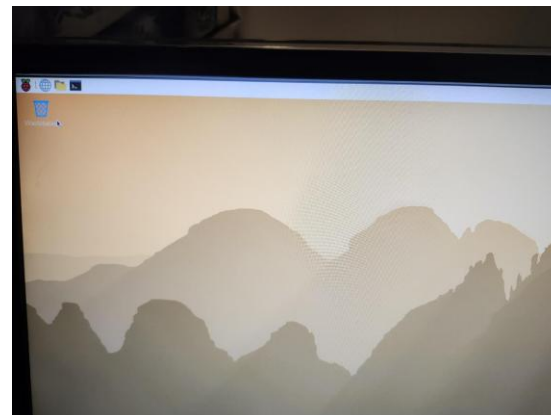

Vérification réseau

1. Connecter l'ordinateur sur le même wifi que le Pi d139-A-2G ou d139-B-2G
2. Ouvrir un terminal
3. Lancer la commande: `ping pi99.local`

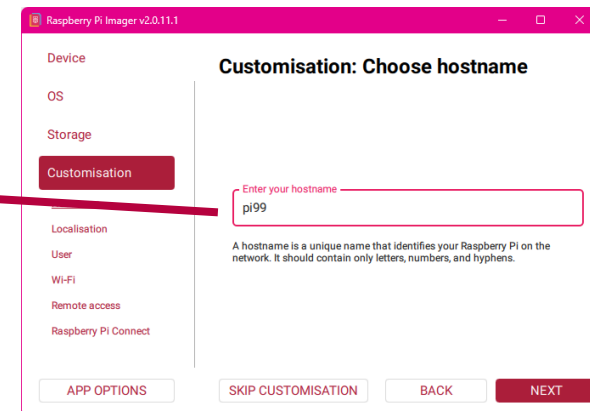

```
C:\Users\Julien>ping pi99.local
```


```
Pinging pi99.local [fe80::8aa2:9eff:fe4c:7444%24] with 32 bytes of data:  
Reply from fe80::8aa2:9eff:fe4c:7444%24: time=8ms  
Reply from fe80::8aa2:9eff:fe4c:7444%24: time=9ms
```

```
C:\Users\Julien>ping pi98.local
```

```
Ping request could not find host pi98.local. Please check the name and try again.
```

Connexion SSH

```
ssh julien@pi99.local
```

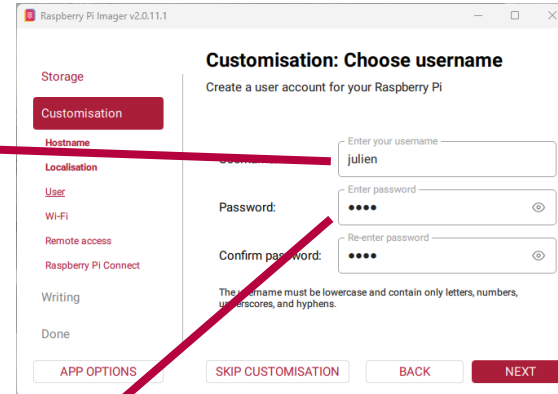

Raspberry Pi Imager v2.0.11.1

Customisation: Choose username
Create a user account for your Raspberry Pi

Storage
Customisation
Hostname
Localisation
User
Wi-Fi
Remote access
Raspberry Pi Connect
Writing
Done

Enter your username:

Enter password:

Re-enter password:

Password:

Confirm password:

The username must be lowercase and contain only letters, numbers, underscores, and hyphens.

APP OPTIONS SKIP CUSTOMISATION BACK NEXT

```
The authenticity of host 'pi99.local (fe80::8aa2:9eff:fe4c:7444%24)' can't be established.  
ED25519 key fingerprint is SHA256:A95Q85ziOdWjroAJEqBvLSJQvJzSqtPUKhj98gY3EE.  
This key is not known by any other names.  
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
```

```
julien@pi99.local's password: |
```

**Les caractères seront invisibles.
Appuyer sur "Entrer" après le mot de passe**

```
Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent  
permitted by applicable law.  
julien@pi99:~$ |
```

Mises à jour et installation de docker

Vérification et installation des mises à jours

- ▷ `sudo apt-get update`
- ▷ `sudo apt-get upgrade -y`



```
Setting up initramfs-tools-core (0.142+rpt4+deb12u3) ...
Configuration file '/etc/initramfs-tools/initramfs.conf'
==> Modified (by you or by a script) since installation.
==> Package distributor has shipped an updated version.
What would you like to do about it ? Your options are:
Y or I : install the package maintainer's version
N or O : keep your currently-installed version
D      : show the differences between the versions
Z      : start a shell to examine the situation
The default action is to keep your current version.
*** initramfs.conf (Y/I/N/O/D/Z) [default=N] ? Y
```

Installation de Docker

- ▷ `cd Downloads`
- ▷ `curl -fsSL https://get.docker.com -o get-docker.sh`
- ▷ `sudo sh get-docker.sh`
- ▷ *Être patient, ça prends quelques minutes...*
- ▷ `rm get-docker.sh`

Installation des containers

- ▷ `wget "https://cstj365-my.sharepoint.com/:u:/g/personal/jduranleau_cstj_qc_ca/IQD6i5YiPRvhRoiejq5wd1LgAScReXsjC93PSdG96pvDuqc?e=UvbFg1&download=1" -O docker.zip`
- ▷ `unzip docker.zip -d ../docker`
- ▷ `cd ../docker`
- ▷ `sudo docker compose up`

↖
Parfois le téléchargement échoue. Juste réessayer... Merci OneDrive!

Node-RED et Mosquitto... Sur le Pi!

<http://pi99.local:1880>