




McKesson Connect Wireless Handheld Mobile Companion Connection Cookbook

*Connecting to VA WI-Fi, Configuring Certificates and
Device Settings*

Version 1.3

May 24, 2021 | Development, Security, and Operations
(DevSecOps)

FOR INTERNAL USE ONLY

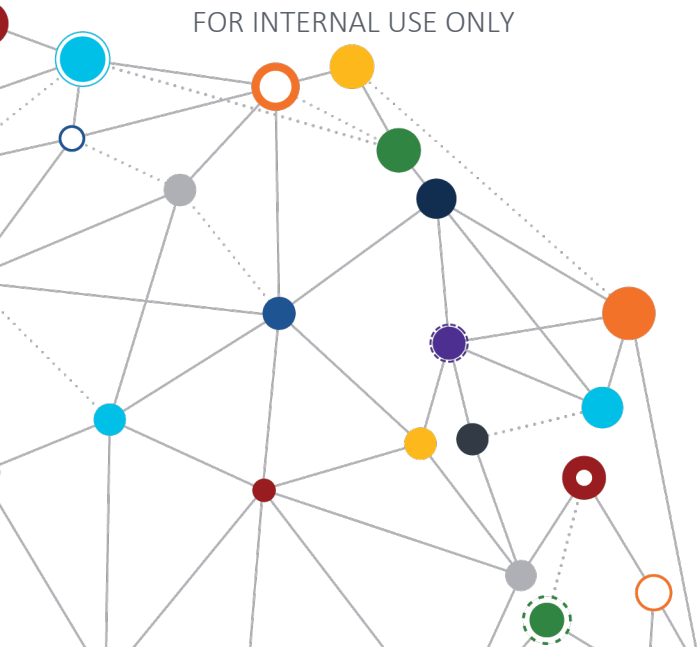

VA



U.S. Department of Veterans Affairs
Office of Information and Technology
IT Operations and Services



Revision History

Date	Reason for Changes	Version	Author
05/18/2021	Initial Document	1.0	Christian Smith
05/20/2021	Added Steps	1.1	Christian Smith
05/21/2021	Refined structure and details	1.2	Christian Smith
05/24/2021	Edited links and references	1.3	Christian Smith

Table of Contents

McKesson Connect Device Background	5
1 Gathering MAC address and creating initial ServiceNow ticket	5
1.1 Locating the MAC address	6
1.1.1 From the home screen:	6
1.1.2 Swipe down from the top of the screen twice to reveal the gear for the full Settings Menu, click the gear:	6
1.1.3 Select About phone.....	7
1.1.4 Scroll down in About phone menu	7
1.1.5 Locate MAC address and record for ServiceNow Request.....	8
1.1.6 Navigate to https://yourit.va.gov	8
1.1.7 Click Report an Issue	9
1.1.8 Click Normal Issue	9
1.1.9 Fill out User Information	10
1.1.10 Complete Incident Details as follows.	10
1.1.11 Submit Completed Incident Request	11
2 Authorizing MCMC to VLAN	12
2.1 Searching the MAC	12
2.1.1 Launch NDPS from dBat	12
2.1.2 Search for existing MAC address.....	12
2.2 Adding the MAC address	13
2.2.1 After searching, select the radio button to Add/Update MAC	13
2.2.2 Acknowledge ALERT, click OK	13
2.2.3 Enter VLAN Number 1932	14
2.2.4 Enter VLAN Name L3-SDIA-MCKESS_WLAN click Submit.....	14
2.2.5 Verify Success Message Presented	15
2.2.6 Confirm details of submission via search for provided MAC	15
3 Wi-Fi Connection Configuration on MCMC.....	16
3.1 Connecting to mobile1md	16
3.1.1 From the home screen:	16
3.1.2 Swipe down from the top of the screen twice to reveal the gear for the full Settings Menu, click the gear:	17
3.1.3 Select Network & internet:	17
3.1.4 Select WI-FI:	18
3.1.5 Select Add Network:	18
3.1.6 In the prompt to enter the SSID type: mobile1md	19
3.1.7 Select the dropdown for Security and change from None to WPA/WPA2 PSK:	19
3.1.8 In the prompt for Password enter the provided password for mobile1md:	20
3.1.9 Scroll to the bottom of the page and expand Advanced options:	20
3.1.10 Select the dropdown for IP settings, change from DHCP to Static:.....	21
3.1.11 Configure the Static information per the spreadsheet provided:	21
3.1.12 Select the dropdown for Hidden network, change from No to Yes:	22
3.1.13 Once all fields above have been configured, click "SAVE"	22
3.2 Configuring the NTP Server	23
3.2.1 From the home screen:	23
3.2.2 Swipe down from the top of the screen twice to reveal the gear for the full Settings Menu, click the gear:	23
3.2.3 Scroll to and open System.....	24

3.2.4	In System, Select Date & time.....	24
3.2.5	Set Automatic date & time as active.....	25
3.2.6	Click Select time zone	25
3.2.7	Click on the correct Time Zone for your location.....	26
3.2.8	Navigate back one menu from Select time zone to Date & Time menu.....	26
3.2.9	Select NTP server	27
3.2.10	Select User defined NTP server	27
3.2.11	Enter NTP.VA.GOV then click OK.....	28
4	Installing VA RCA on MCMC device and configuring permissions	28
4.1	Installing VA RCA	29
4.1.1	From the home screen:.....	29
4.1.2	Find and open Chrome:.....	29
4.1.3	In the Omnibar type in the URL: http://aia.pki.va.gov/pki/aia/va then press enter:	30
4.1.4	At the Certificate landing page click on the certificate named “VA-Internal-S2-RCA1-v1.cer”:	30
4.1.5	Continue and Allow when prompted to access storage	31
4.1.6	In the prompt for Certificate name type: VA-RCA-1:	31
4.1.7	Click OK:	32
4.1.8	The prompt to set a secure lock screen will appear if not already configured. Select “SET LOCK”: 32	
4.1.9	This will automatically navigate to the “Choose screen lock” menu:	33
4.1.10	In the Choose screen lock menu select PIN:	33
4.1.11	This will automatically navigate to Secure start-up, select NO:.....	34
4.1.12	Enter the VA Site Code preceded by 0 as the device PIN Click NEXT:	34
4.1.13	Re-enter the PIN from the previous screen, Click CONFIRM:	35
4.1.14	Leave the Notifications screen at the default of “Show all notification content” Click DONE:..	35
4.2	Validate the VA RCA is installed.....	36
4.2.1	From the home screen:	36
4.2.2	Swipe down from the top of the screen twice to reveal the gear for the full Settings Menu, click the gear:	36
4.2.3	Scroll to and open “Security & location” from the menu:	37
4.2.4	In the “Security & location” menu scroll to and open “Advanced”:	37
4.2.5	In the “Advanced” section scroll to and open “Encryption & credentials”:.....	38
4.2.6	In the “Encryption & credentials” section open “Trusted credentials”:	38
4.2.7	In the “Trusted credentials” section select the “USER” tab:.....	39
4.2.8	There should be one Certificate loaded in this section “VA-Internal-S2-RCA1-v1”:	39
4.2.9	Click the “VA-Internal-S2-RCA1-v1” certificate to view details:.....	40
4.2.10	Click OK:.....	40
4.2.11	Close the Menu and return to the home screen:.....	41
4.3	Launch and configure McKesson Connect Permissions:.....	41
4.3.1	From the home screen:.....	41
4.3.2	Find and open Chrome:.....	42
4.3.3	In Chrome navigate to the URL https://connect.mckesson.com	42
4.3.4	Have Pharmacy POC log in to https://connect.mckesson.com	43
4.3.5	Select Scan icon.....	43
4.3.6	Allow both prompts for camera access.....	44
4.3.7	Verify scanner functionality allowed through camera.....	44
	Referenced Resources - Appendix.....	45

McKesson Connect Device Background

The McKesson Connect Wireless Handheld Mobile Companion (MCMC) is a vendor-owned and supported device used solely for the purpose of medication inventory control. Using barcode scanning technology, a pharmacist will be able to scan barcodes located on inventory shelves to build a medication order and then transmit this data directly and wirelessly to McKesson for ordering and fulfillment. These new devices are an upgrade to and replacement for the older Mobile Manager devices currently in use.

The Pharmacy MCMC implementation is a collaborative effort between Veterans Health Administration (VHA) Pharmacy Benefits Management (PBM) and the Office of Information and Technology (OIT). The MCMC device is a Special Purpose Device and has Federal Information Processing Standard (FIPS) Publication 140-2 validation. There is no sensitive or Protected Health Information (PHI) stored or transmitted with these devices. These devices were approved by the Specialized Device Security Division (SDSD), per approved SPS-OT ERA ID: RA-RITM3947574.

This document is broken into four sections. Each section contains a critical component of authorizing the MCMC to access the VA wireless network, and additional configurations required to allow required functionality. This cookbook only covers the Zebra TC52 running Android 9.x. Other variations may have different menu structures or presentations. Multiple services and departments are required to work in concert to implement the MCMC connectivity. Please follow this guide and verify steps and settings provided are applied in order before moving to the next section. If support is needed Points of Contact (POC) are listed in the Appendix for this cookbook.

1 Gathering MAC address and creating initial ServiceNow ticket


This section will guide Pharmacy Staff in the initial request phase of connecting the MCMC to the VA Wireless network. Pharmacy will initiate contact via ServiceNow (<https://yourit.va.gov/>) with End User Operations (EUO) to request the addition of the MCMC to the VA wireless network. The Request must contain the following information:

- a. Description - Pharmacy is requesting the addition of MCMC to mobile1md
- b. Details – MAC address (Steps 1.1.1 – 1.1.5 will detail how to find the MAC Address)
- c. Point of contact – Pharmacy staff requesting addition
- d. Best method to reach POC – Phone, email, Teams
- e. Location of device – Physical room number where the device can be found


After completing the ServiceNow Incident Request EUO and Pharmacy will coordinate to give EUO physical access to the devices for the network and settings configuration steps. Devices must be fully charged prior to proceeding to the next steps.

1.1 Locating the MAC address


1.1.1 From the home screen:

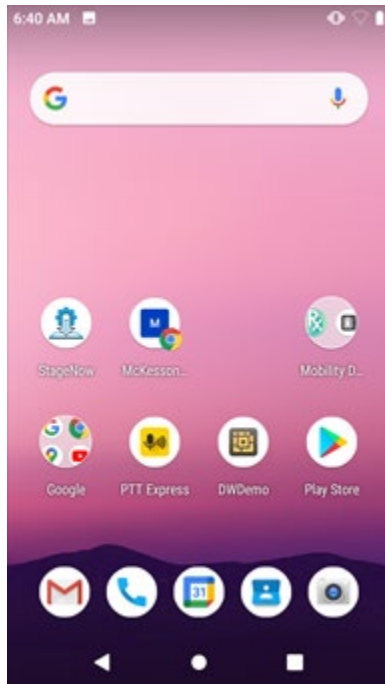


1.1.2 Swipe down from the top of the screen twice to reveal the gear for the full Settings Menu, click the gear:

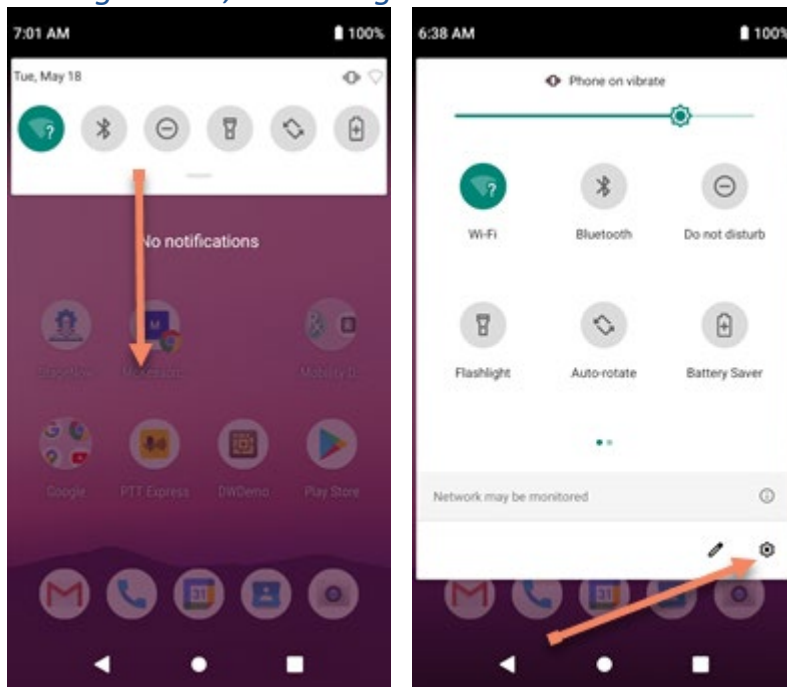


1.1.3 Select About phone

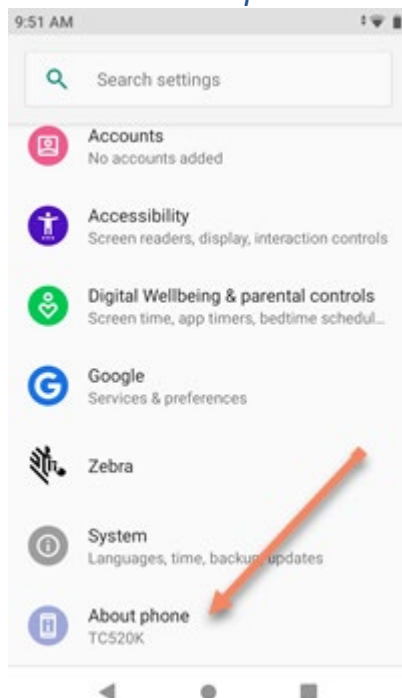


1.1.4 Scroll down in About phone menu

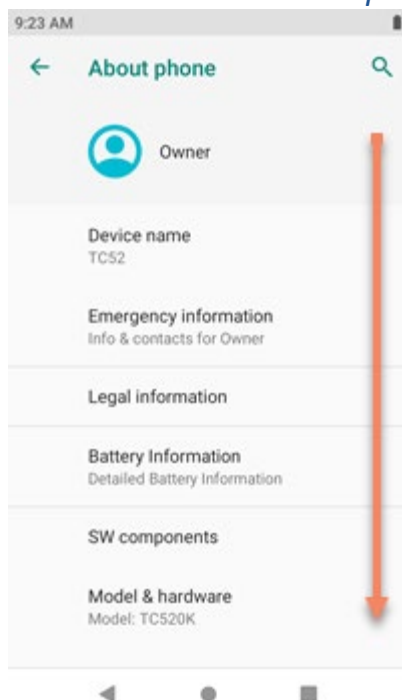


1.1.5 Locate MAC address and record for ServiceNow Request

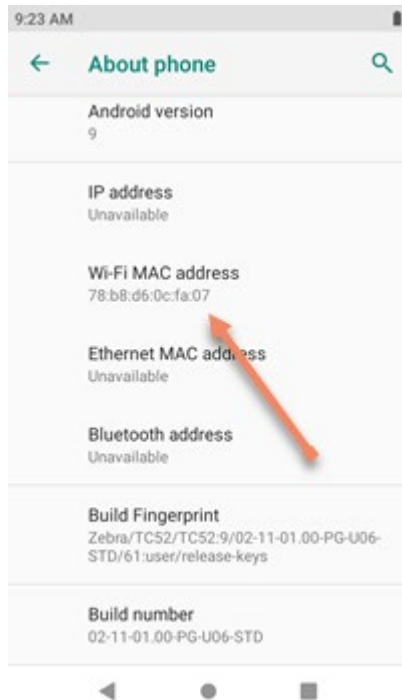


1.1.6 Navigate to <https://yourit.va.gov>

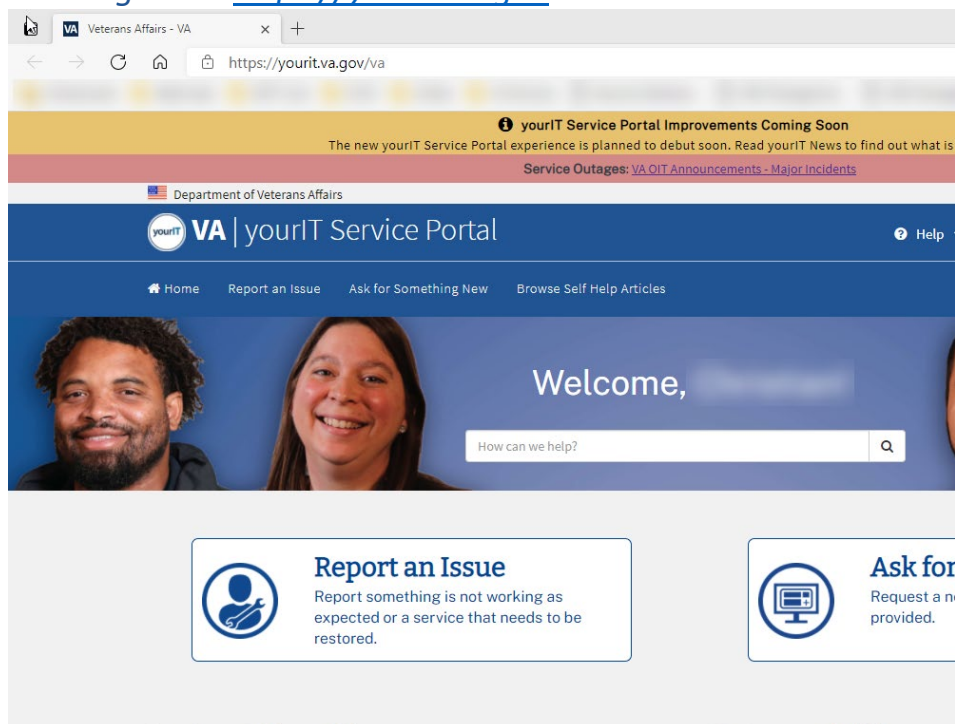

1.1.7 Click Report an Issue

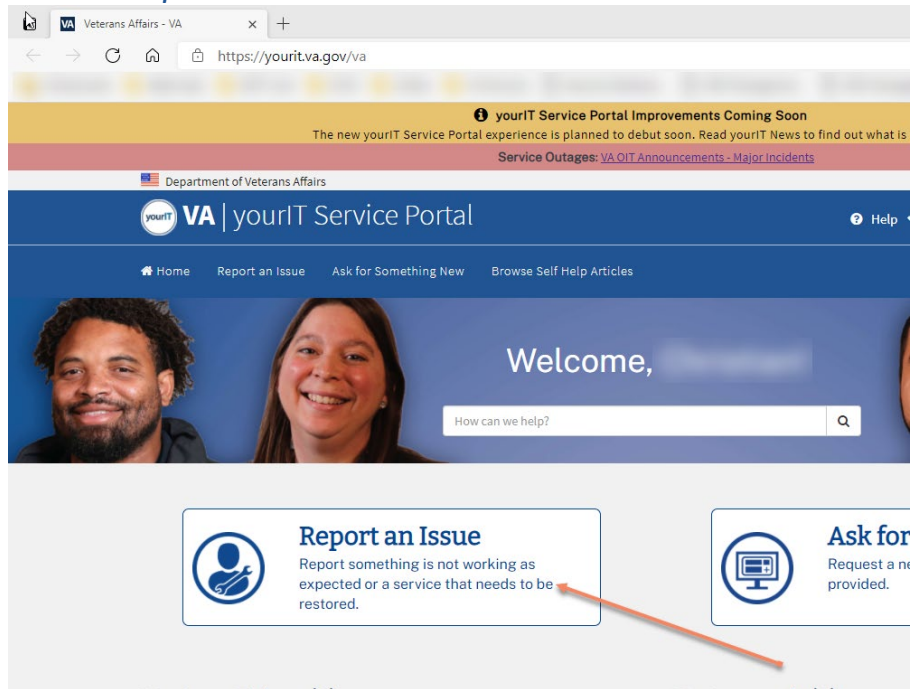

1.1.8 Click Normal Issue

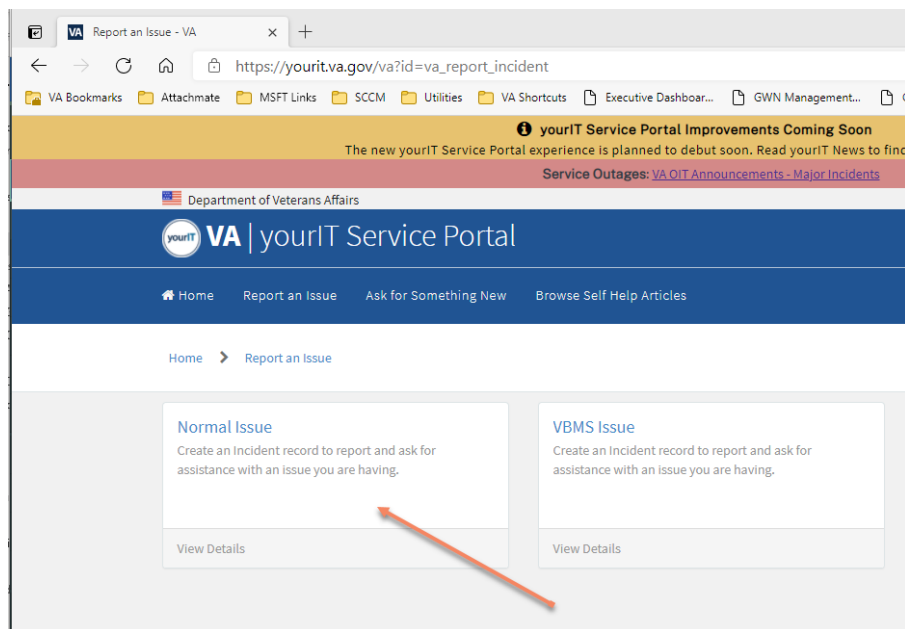

1.1.9 Fill out User Information

Create Incident - VA

Home > Service Catalogs > Create Incident

Create Incident

Create an incident record to report and ask for assistance with an issue you are having

Request assistance with an issue you are having. An incident record will be created and managed through to successful resolution. You will also be notified of progress.

We cannot process password resets initiated from this item or any item from the portal. You can access Self-Service for a 1 Day PIV Exemption at the Self-Service page: access.va.gov Or you may contact the ESD at (855) 673-4357 for ALL password resets.

USER INFORMATION

* Affected End User ⓘ
If you are entering this request on behalf of someone else, enter that person's name in this field.

* Affected End User Phone Number ⓘ
Please enter the phone number using 10 or 11 digits.

Affected End User Phone Extension ⓘ
Numeric Text Only

* Affected End User Email Address ⓘ

* Affected End User Location ⓘ

* Affected End User Building Number ⓘ

* Affected End User Room Number ⓘ

* Preferred Contact Method ⓘ
Email

* Best Follow-up Phone Number ⓘ

Chat with

1.1.10 Complete Incident Details as follows.

a. Urgency - Set at Medium

* Urgency ⓘ

3 - Medium - Work around is available

b. Category - Select Hardware

* Category ⓘ

Please choose the category that most closely identifies your incident (Facility, Hardware, Security, Service, or Software).

Hardware

c. Subcategory - Select Peripheral

* Subcategory ⓘ

Please choose the subcategory that further explains your incident.

Peripheral

d. Initiative - Leave at -None-

Initiative ⓘ

This field is NOT required, and its usage is NOT common. This field is only used to report an incident that is affiliated to or impacted by an active special initiative or challenge. For instance, if you are reporting an application failure related to an active initiative, or a software or hardware failure impeding your ability to fulfil the service expected by an active initiative, you should select the appropriate initiative (and corresponding Associated Item) value from the field below. Otherwise, DO NOT select and leave the default value "--None--".

--None--

- e. Brief Description - Type "Please authorize McKesson Mobile Connect device to mobile1md VLAN 1932"

* Brief Description ?

please authorize McKesson Mobile Connect device to mobile1md VLAN 1932

- f. Detailed Description - Type "please authorize McKesson Mobile Connect device to mobile1md VLAN 1932"

MAC Address is: XX:XX:XX:XX:XX:XX

*XX:XX:XX:XX:XX:XX should be replaced with the specific MAC address obtained in step 1.1.5

* Detailed Description ?

please authorize McKesson Mobile Connect device to mobile1md VLAN 1932
MAC Address is: XX:XX:XX:XX:XX:XX

- g. Name, EE Number... Type the device's MAC address from 1.1.5

* Please enter the Name, EE Number and/or hostname of the affected system

XX:XX:XX:XX:XX:XX

- h. Affects Patient Safety - Leave Unchecked

☐ Affects Patient Safety

1.1.11 Submit Completed Incident Request

DO NOT INCLUDE PII or PHI

* Brief Description ?

please authorize McKesson Mobile Connect device to mobile1md VLAN 1932

DO NOT INCLUDE PII or PHI

* Detailed Description ?

please authorize McKesson Mobile Connect device to mobile1md VLAN 1932
MAC Address is: XX:XX:XX:XX:XX:XX

* Please enter the Name, EE Number and/or hostname of the affected system

XX:XX:XX:XX:XX:XX

☐ Affects Patient Safety

Submit   Add attachments


Section one is complete. At this stage EUO will require physical control of the device to complete the remaining sections. Device must be fully charged.

2 Authorizing MCMC to VLAN

This section will guide EUO through the steps required to authorize the MCMC (Zebra TC52) to the VA wireless mobile1md network and VLAN 1932 via the National Dynamic Port Security MAC Tool (NDPS). This cookbook only covers NDPS version 2.0. Other versions of the tool may have different menu structures or presentations. This section presumes: the MCMC's MAC address has been provided to EUO per section one; the EUO technician performing these steps has an approved ePAS and access to NDPS; and that the MAC address has not been previously authorized via NDPS.


2.1 Searching the MAC

2.1.1 Launch NDPS from dBat

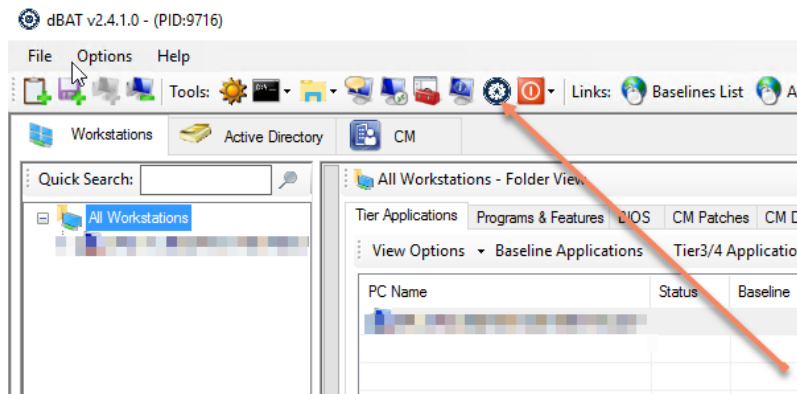

2.1.2 Search for existing MAC address


Select Site code and enter provided MAC address, Click Search

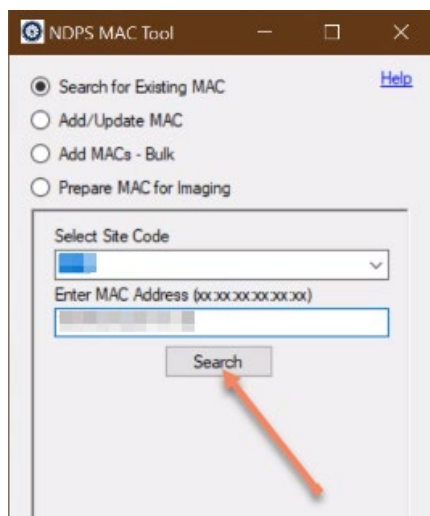


2.2 Adding the MAC address

2.2.1 After searching, select the radio button to Add/Update MAC


Select Service Area, Enter Provided MAC Address, Select Site Code, drop Identity group menu and select mobile1md.

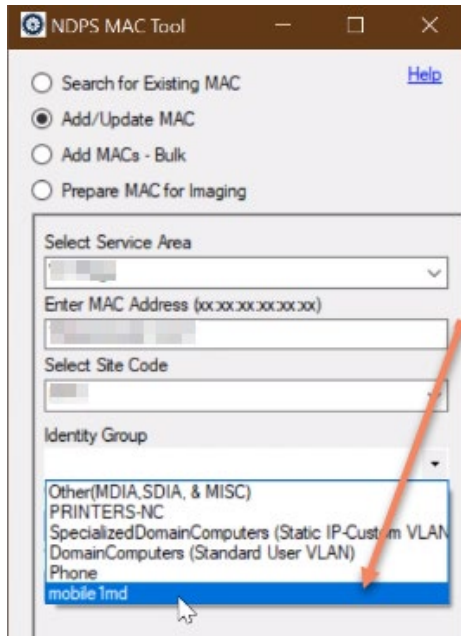

2.2.2 Acknowledge ALERT, click OK

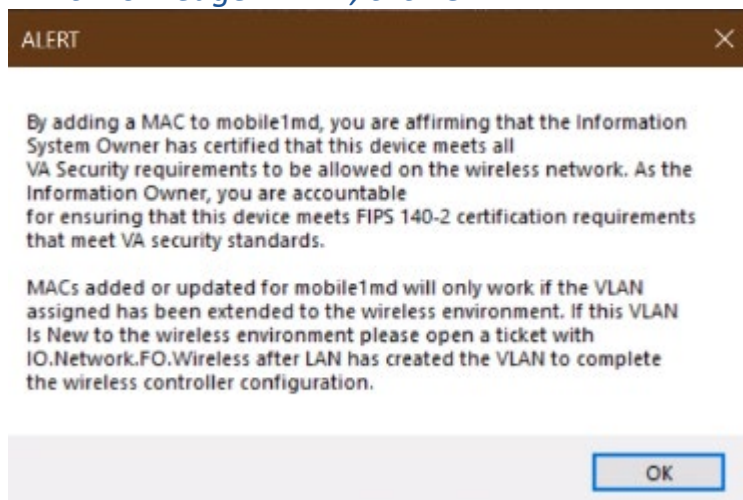


2.2.3 Enter VLAN Number 1932

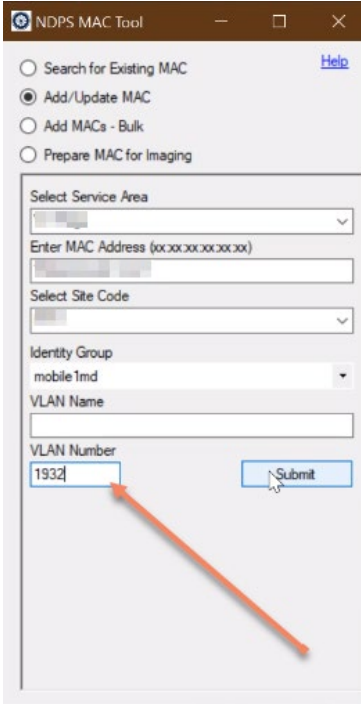


The screenshot shows the 'NDPS MAC Tool' window. The 'Add/Update MAC' radio button is selected. The 'VLAN Number' field is highlighted with a red arrow and contains the value '1932'. The 'Submit' button is visible to the right of the field.

2.2.4 Enter VLAN Name L3-SDIA-MCKESS_WLAN click Submit

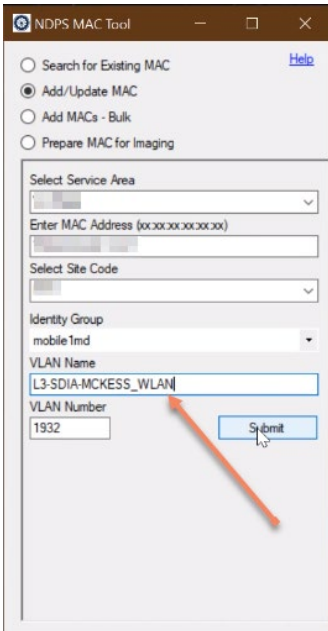

The screenshot shows the 'NDPS MAC Tool' window. The 'Add/Update MAC' radio button is selected. The 'VLAN Name' field is highlighted with a red arrow and contains the value 'L3-SDIA-MCKESS_WLAN'. The 'Submit' button is visible to the right of the field.

2.2.5 Verify Success Message Presented

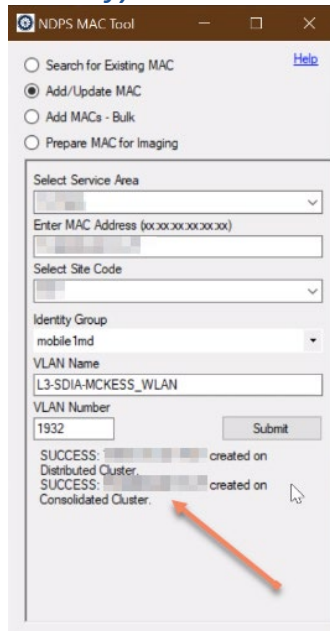

NDPS MAC Tool

☐ Search for Existing MAC [Help](#)

☒ Add/Update MAC

☐ Add MACs - Bulk

☐ Prepare MAC for Imaging

Select Service Area
[redacted]

Enter MAC Address (xxxxxxxxxx)
[redacted]

Select Site Code
[redacted]

Identity Group
mobile1md

VLAN Name
L3-SDIA-MCKESS_WLAN

VLAN Number
1932


Submit

SUCCESS: [redacted] created on Distributed Cluster.

SUCCESS: [redacted] created on Consolidated Cluster.

2.2.6 Confirm details of submission via search for provided MAC

If the device was successfully loaded the information should match below

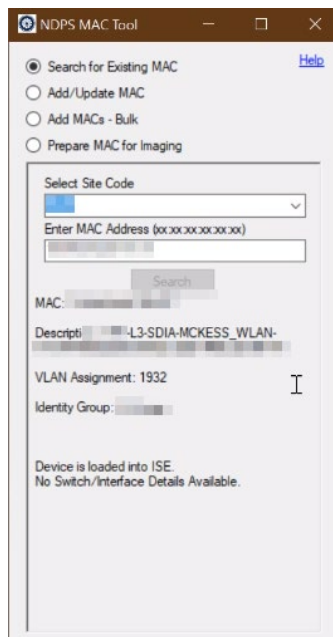

NDPS MAC Tool

☒ Search for Existing MAC [Help](#)

☐ Add/Update MAC

☐ Add MACs - Bulk

☐ Prepare MAC for Imaging

Select Site Code
[redacted]

Enter MAC Address (xxxxxxxxxx)
[redacted]

Search

MAC: [redacted]

Description: L3-SDIA-MCKESS_WLAN

VLAN Assignment: 1932

Identity Group: [redacted]

Device is loaded into ISE.
No Switch/Interface Details Available.

At this point the device MAC has been successfully authorized to allow access to mobile1md and VLAN1932. You may proceed with section three on the MCMC, configuring the wireless connection to mobile1md.

3 Wi-Fi Connection Configuration on MCMC

This section will guide EUO through connecting the MCMC (Zebra TC52) to the VA mobile1md wireless network. This cookbook only covers the Zebra TC52 running Android 9.x. Other variations may have different menu structures or presentations. This section presumes the MCMC's MAC address has been added to the correct VLAN and authorized via the NDPS tool for access to mobile1md.


*If the credentials for mobile1md are not known by EUO, a ServiceNow request must be entered by EUO to IO.Network.FO.Wireless to provide the necessary SSID and PSK information for authentication to the mobile1md network. This information will only be transmitted to OIT staff via encrypted email after the ServiceNow request has been entered.

- i. The INC short description must state "Requesting mobile1md PSK for McKesson Mobile Project"
- ii. The details of the INC must contain the Station's three letter site ID as well as geographical city. i.e., NFL - Gainesville, FL
- iii. For the Affected System Name, enter the MAC address


*The required IP configuration items referenced in the instruction steps 3.1.10 - 3.1.13 below are maintained by Network Field Operations LAN and are accessible at [Business Services - McKesson Connect Wireless Handheld Implementation ToolKit \(va.gov\)](#).

3.1 Connecting to mobile1md


3.1.1 From the home screen:

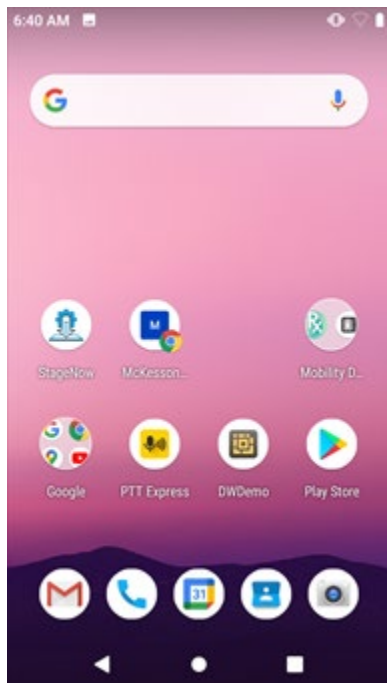


3.1.2 Swipe down from the top of the screen twice to reveal the gear for the full Settings Menu, click the gear:

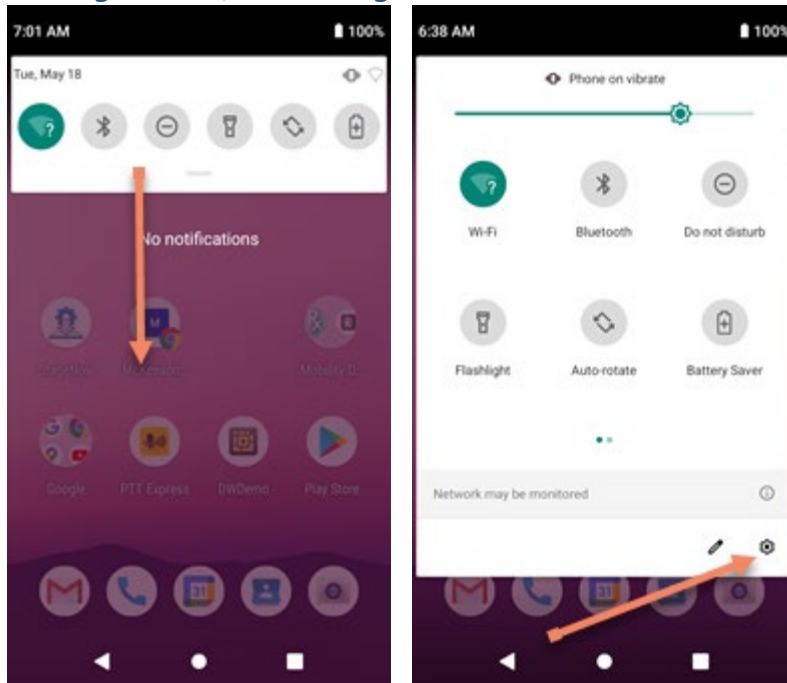

3.1.3 Select Network & internet:

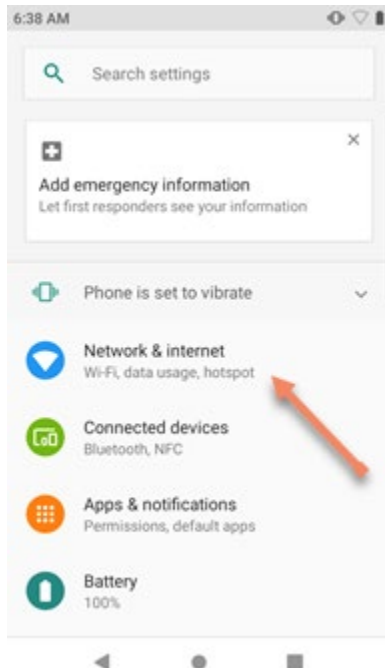


3.1.4 Select Wi-Fi:

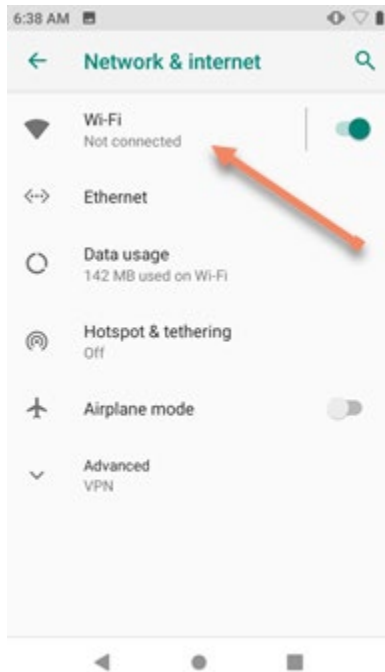


3.1.5 Select Add Network:

*Forget any existing saved networks prior to proceeding

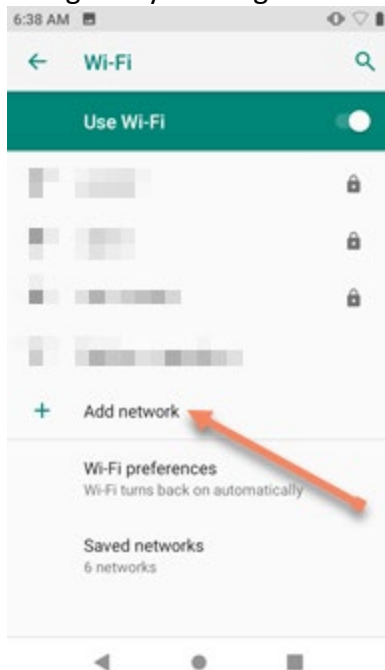


3.1.6 In the prompt to enter the SSID type: *mobile1md*

This is case sensitive

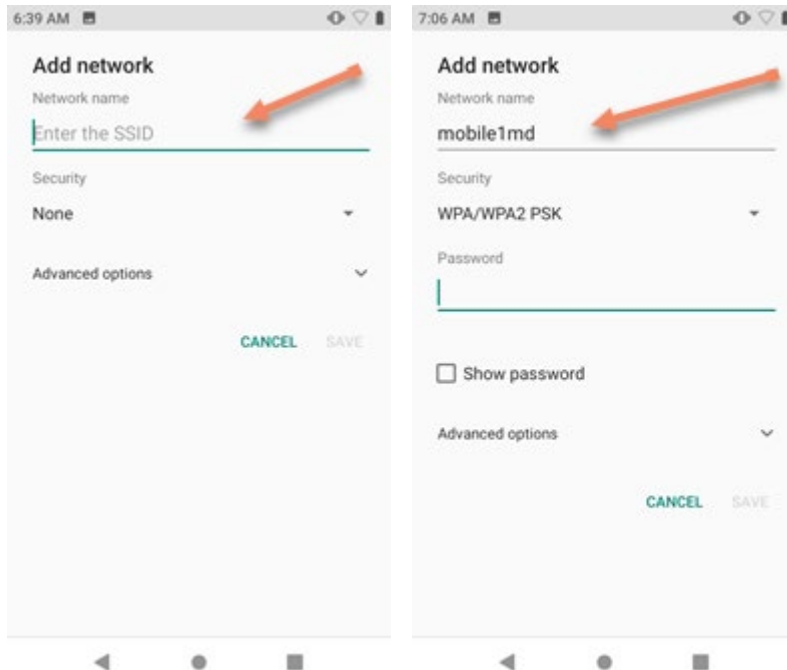


3.1.7 Select the dropdown for Security and change from None to WPA/WPA2 PSK:

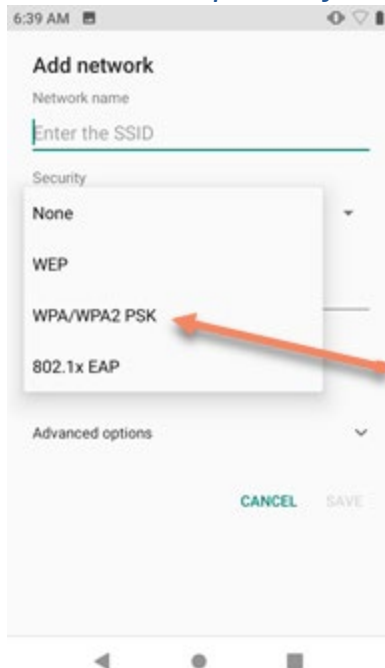


3.1.8 *In the prompt for Password enter the provided password for mobile1md:*

This is case sensitive

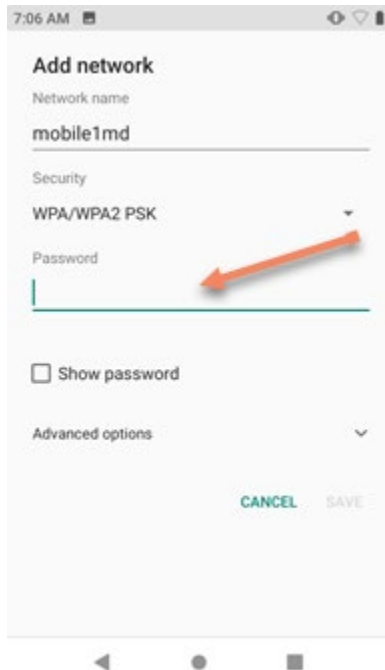


A screenshot of an Android phone's 'Add network' dialog box. The 'Network name' field is filled with 'mobile1md'. The 'Security' dropdown is set to 'WPA/WPA2 PSK'. The 'Password' field is empty and has a red arrow pointing to it. Below the password field is a checkbox for 'Show password' which is unchecked. At the bottom are 'CANCEL' and 'SAVE' buttons. The status bar at the top shows the time as 7:06 AM.

3.1.9 *Scroll to the bottom of the page and expand Advanced options:*

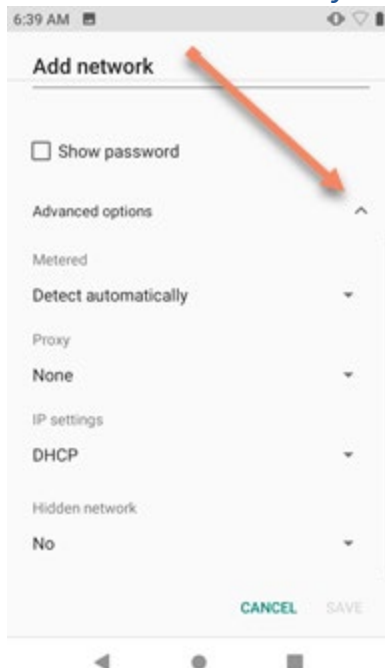


A screenshot of the same 'Add network' dialog box, but with the 'Advanced options' section expanded. A red arrow points to the upward arrow icon on the right side of the 'Advanced options' header. The expanded section shows several settings: 'Metered' (unchecked), 'Detect automatically' (checked), 'Proxy' (set to 'None'), 'IP settings' (set to 'DHCP'), and 'Hidden network' (set to 'No'). The 'CANCEL' and 'SAVE' buttons are at the bottom. The status bar at the top shows the time as 6:39 AM.

3.1.10 Select the dropdown for IP settings, change from DHCP to Static:

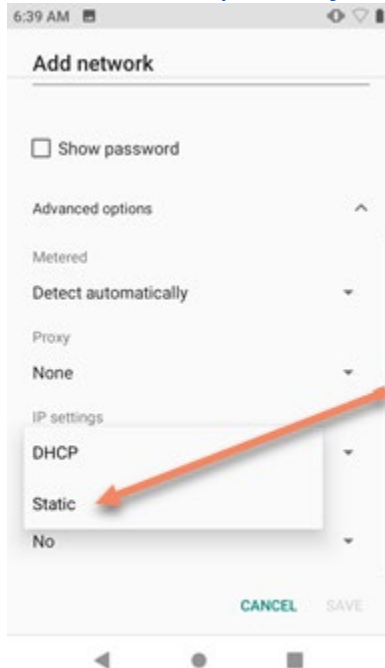

3.1.11 Configure the Static information per the spreadsheet provided:

*All fields are required, Verify DNS Settings with Local Known Good DNS

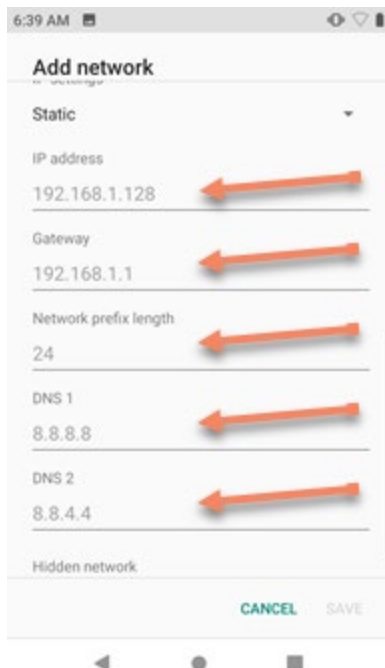

3.1.12 Select the dropdown for Hidden network, change from No to Yes:



The screenshot shows a mobile application interface titled "Add network". It contains several input fields: "IP address" (192.168.1.128), "Gateway" (192.168.1.1), "Network prefix length" (24), "DNS 1" (8.8.8.8), and "DNS 2" (8.8.4.4). Below these is a "Hidden network" dropdown menu. The dropdown is open, showing two options: "No" and "Yes". An orange arrow points from the "Yes" option to the dropdown arrow. A "SAVE" button is visible at the bottom right of the form.


3.1.13 Once all fields above have been configured, click "SAVE"




The screenshot shows the same "Add network" form as in the previous step. The "Hidden network" dropdown is now closed, and the "Yes" option is selected. An orange arrow points from the "SAVE" button at the bottom right to the "CANCEL" button at the bottom left.

3.2 Configuring the NTP Server


3.2.1 From the home screen:

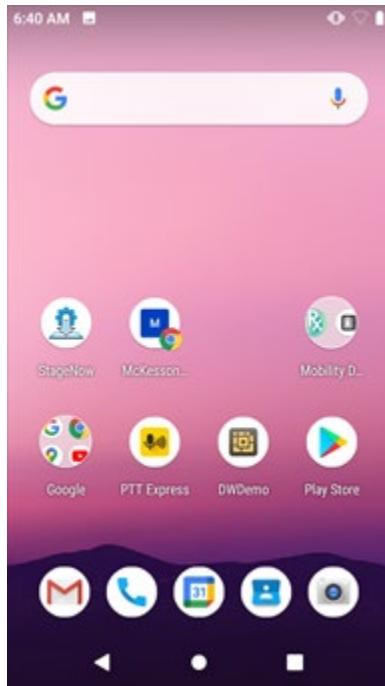


3.2.2 Swipe down from the top of the screen twice to reveal the gear for the full Settings Menu, click the gear:

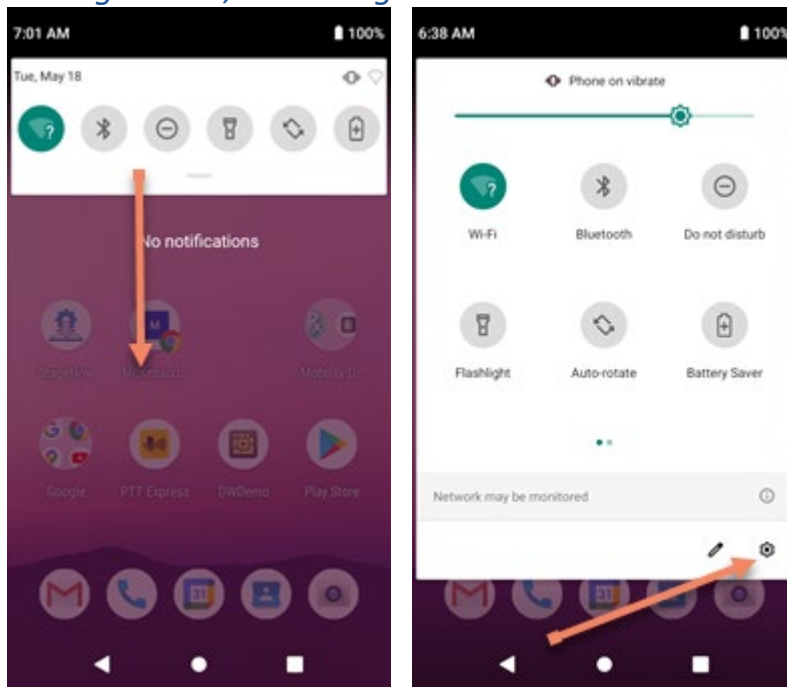


3.2.3 Scroll to and open System

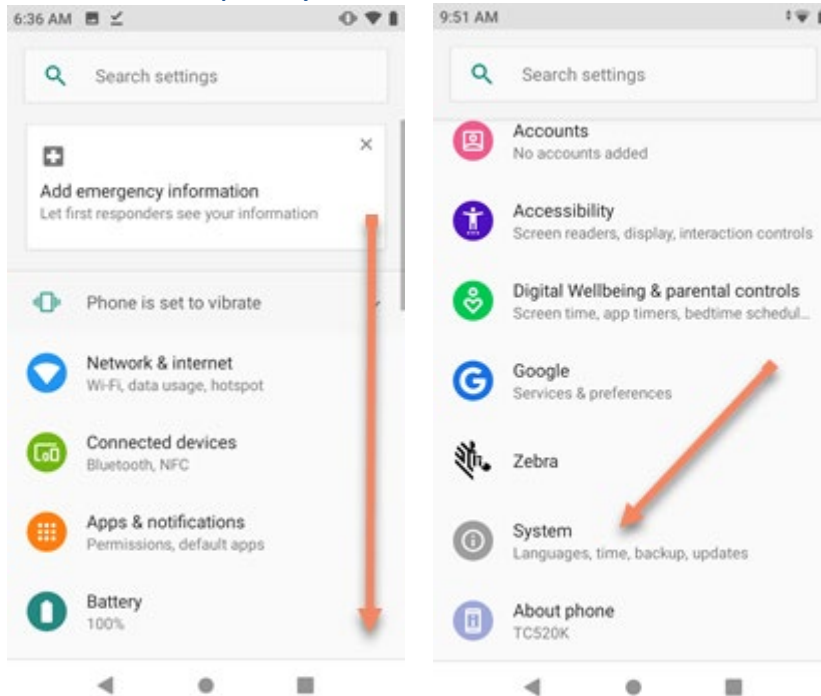


3.2.4 In System, Select Date & time

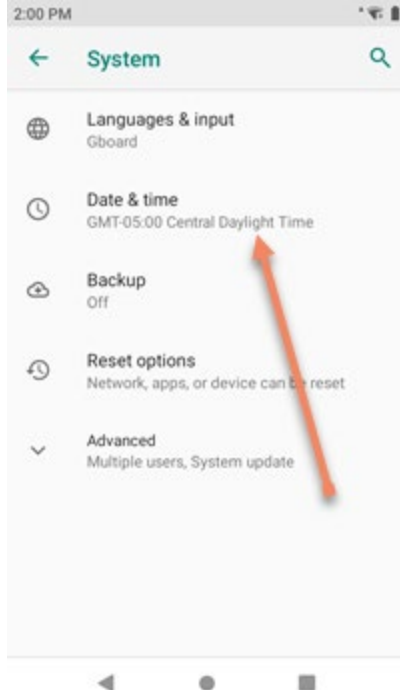


3.2.5 Set Automatic date & time as active

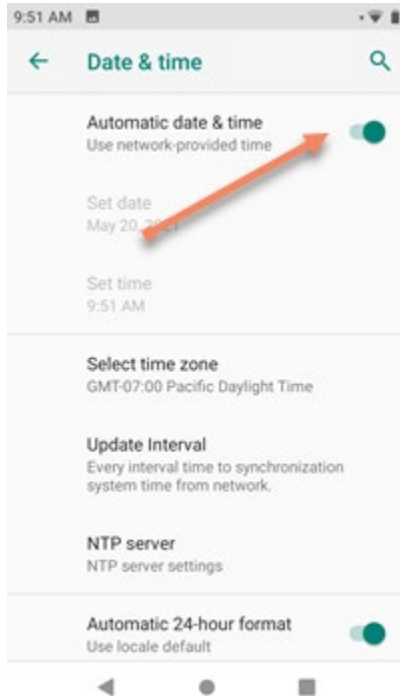


3.2.6 Click Select time zone

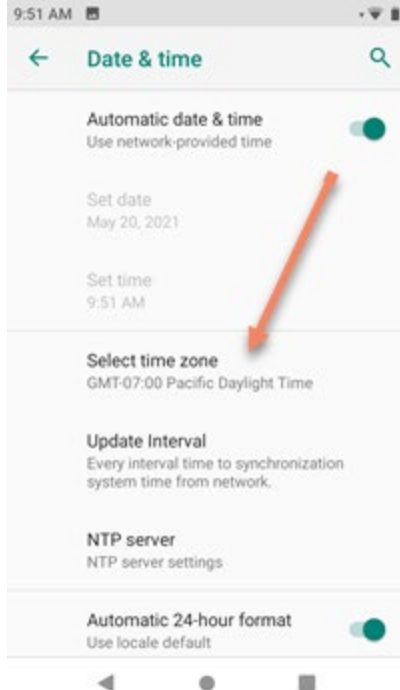


3.2.7 Click on the correct Time Zone for your location

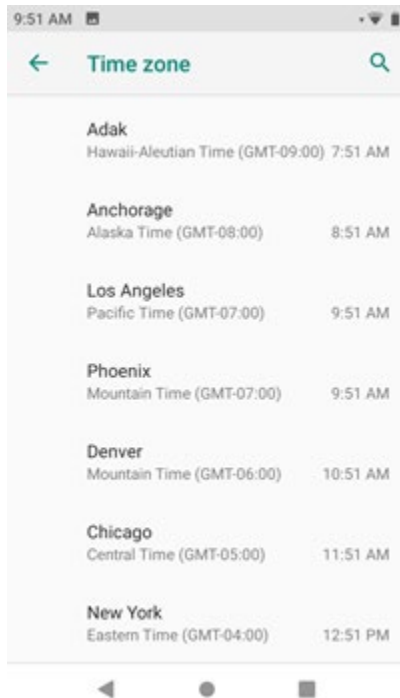


3.2.8 Navigate back one menu from Select time zone to Date & Time menu

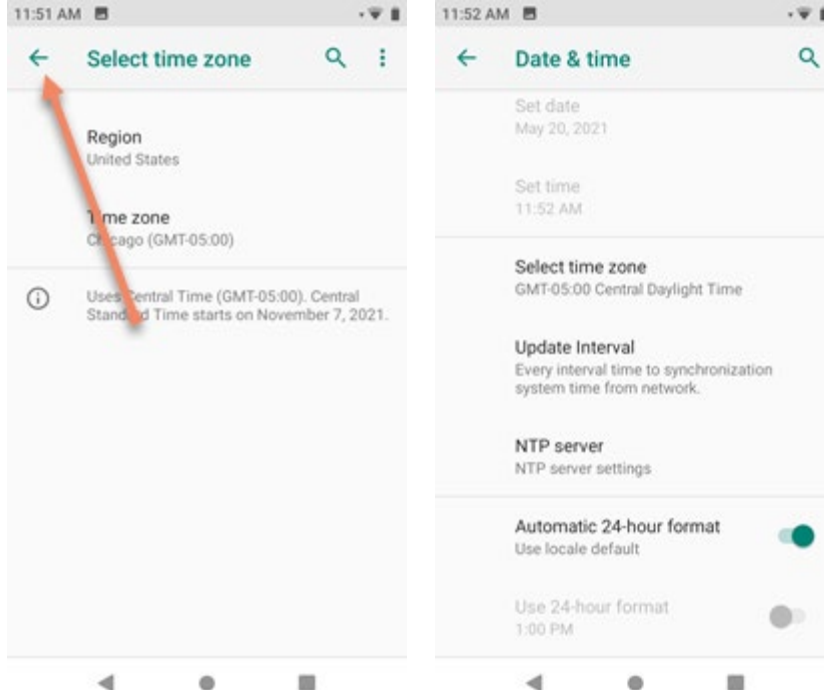


3.2.9 Select NTP server

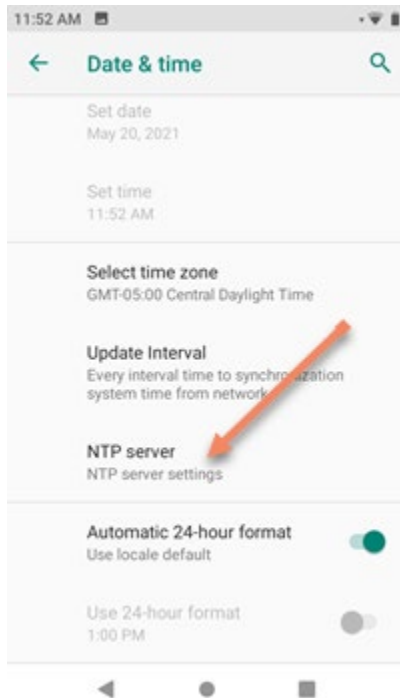

3.2.10 Select User defined NTP server

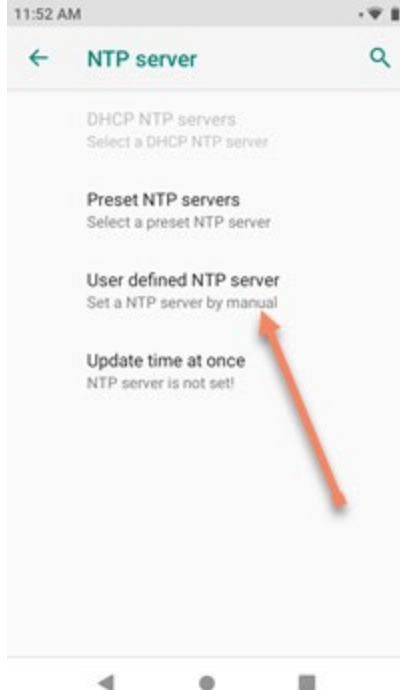

3.2.11 Enter NTP.VA.GOV then click OK

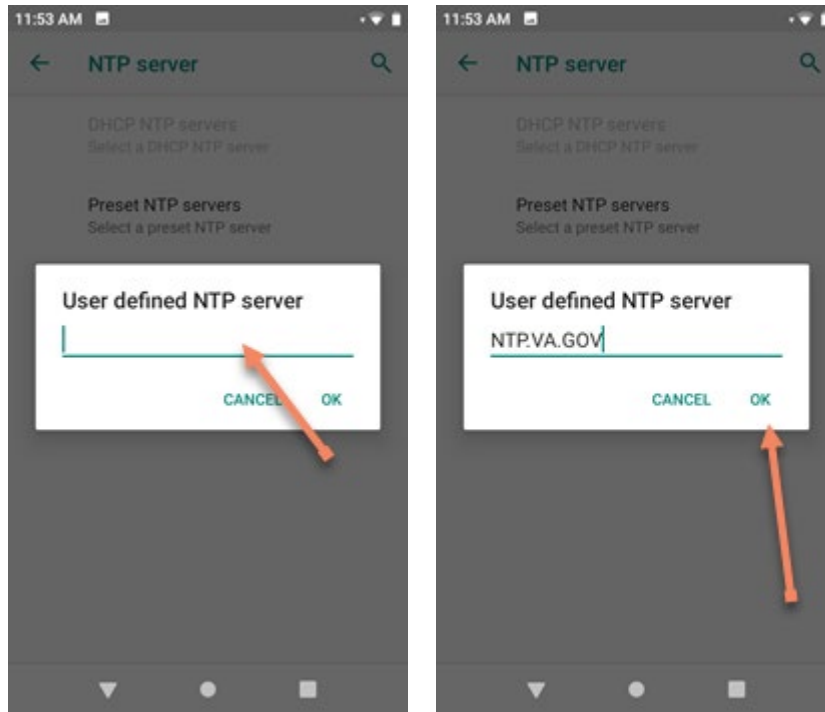


At this point the device should be correctly configured and connected to mobile1md. Next steps are to install the VA Root Certificate Authority onto the device.

4 Installing VA RCA on MCMC device and configuring permissions

This section will guide EUO and Pharmacy through certificate installation and device permissions needed to successfully connect to and use the MCMC on McKesson Connect's website. After successfully connecting the device to the mobile1md network the VA Root Certificate Authority's (RCA) Certificate must be imported to allow successful communication with the McKesson Connect website. This section of the cookbooks covers installing the VA RCA Certificate to the User store on the MCMC (Zebra TC52). This cookbook only covers the Zebra TC52 running Android 9.x. Other variations may have different menu structures or presentations. This section presumes the MCMC has been correctly added to the mobile1md network and all configurations in Section One through Three are complete.


4.1 Installing VA RCA

4.1.1 From the home screen:

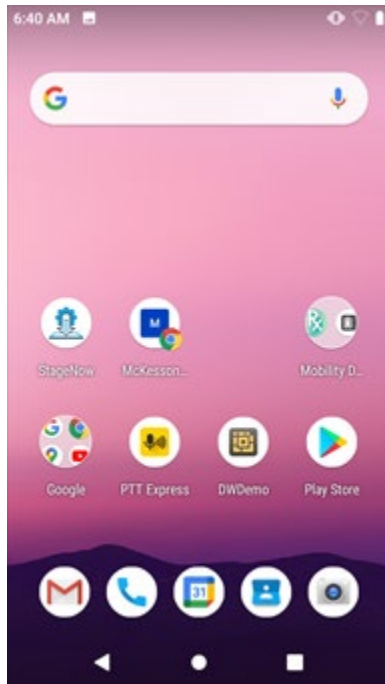

4.1.2 Find and open Chrome:

*The banner at the top of Chrome will state “No internet connection” this can be ignored

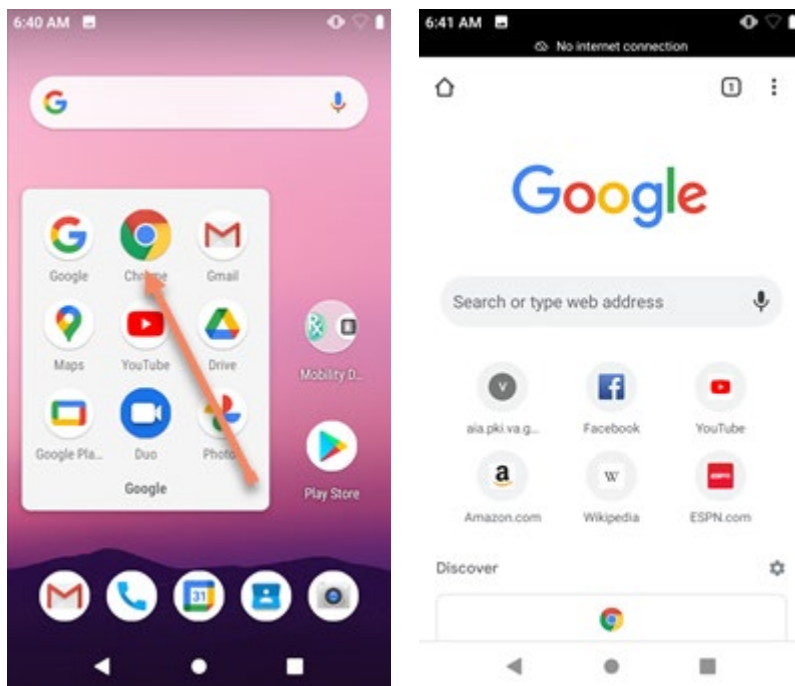


4.1.3 In the Omnibar type in the URL: <http://aia.pki.va.gov/pki/aia/va> then press enter:




4.1.4 At the Certificate landing page click on the certificate named “VA-Internal-S2-RCA1-v1.cer”:


*If the text is too small the screen can be pinched with two fingers to zoom in.

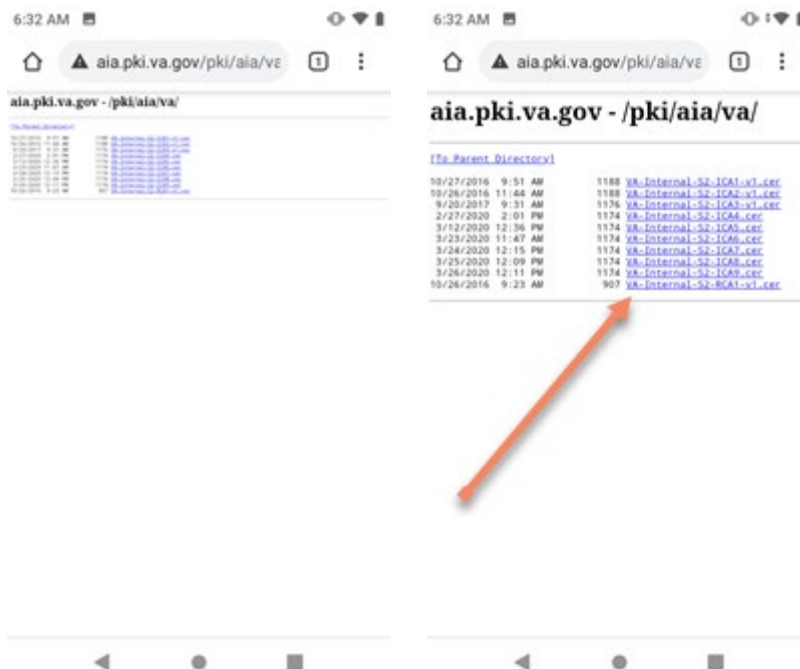


4.1.5 Continue and Allow when prompted to access storage

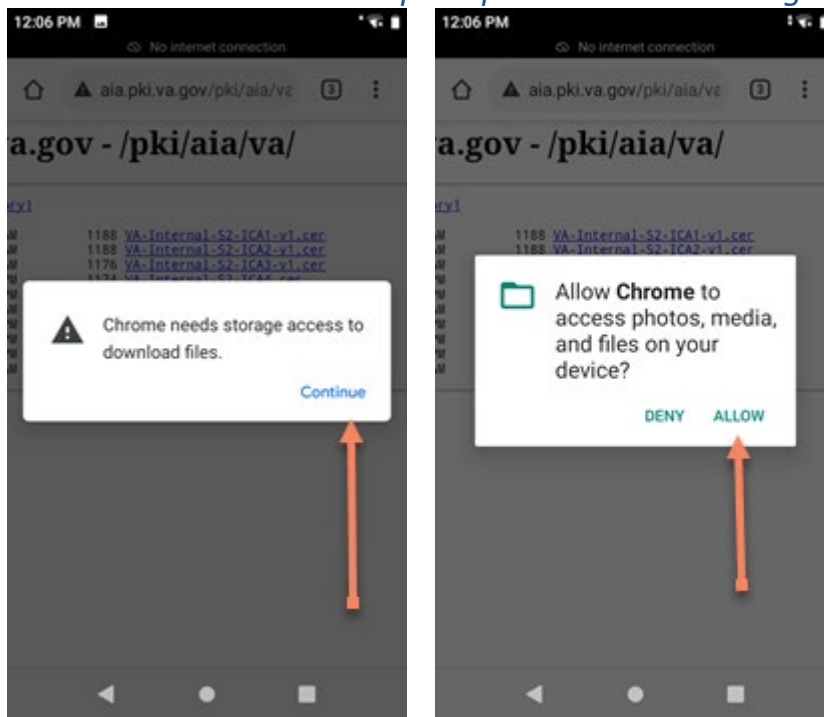


4.1.6 In the prompt for Certificate name type: VA-RCA-1:

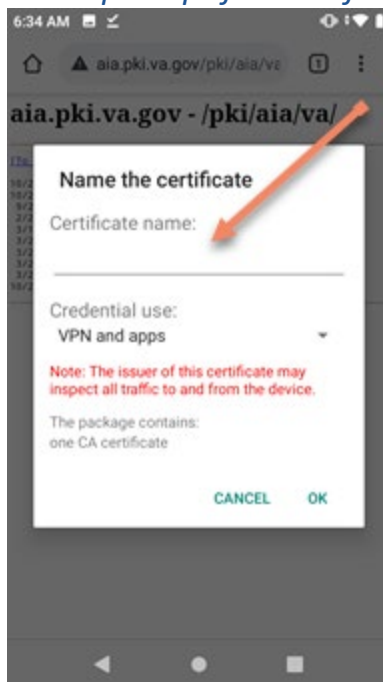


4.1.7 Click OK:

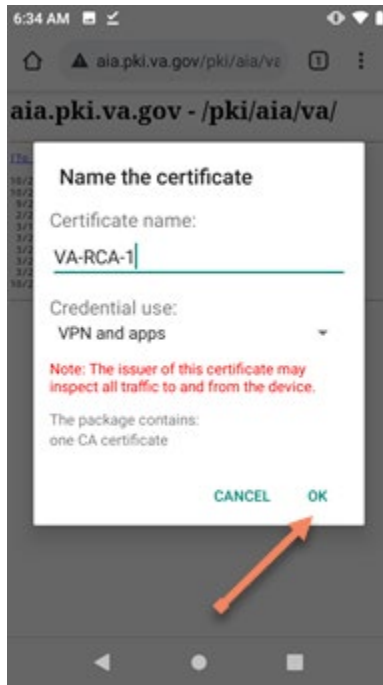


4.1.8 The prompt to set a secure lock screen will appear if not already configured. Select "SET LOCK":

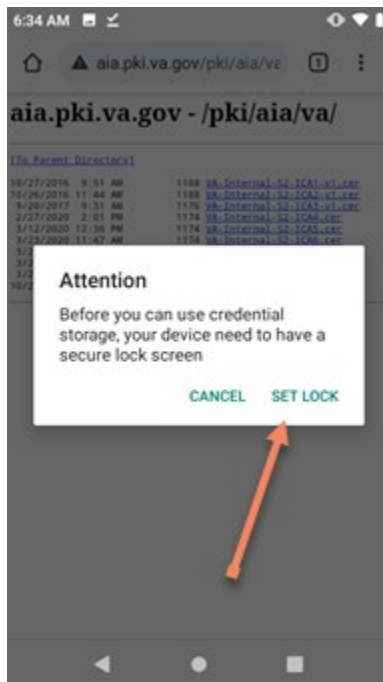


4.1.9 This will automatically navigate to the “Choose screen lock” menu:

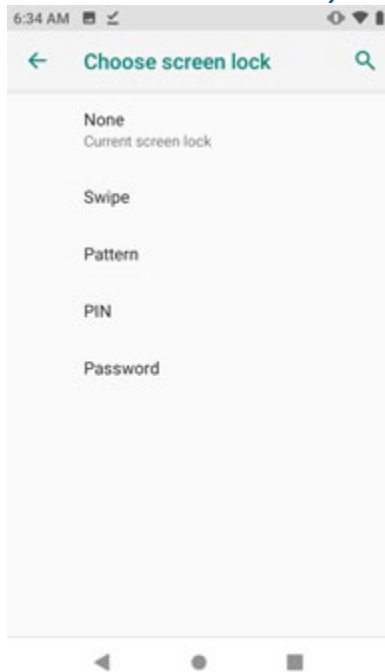

4.1.10 In the Choose screen lock menu select PIN:

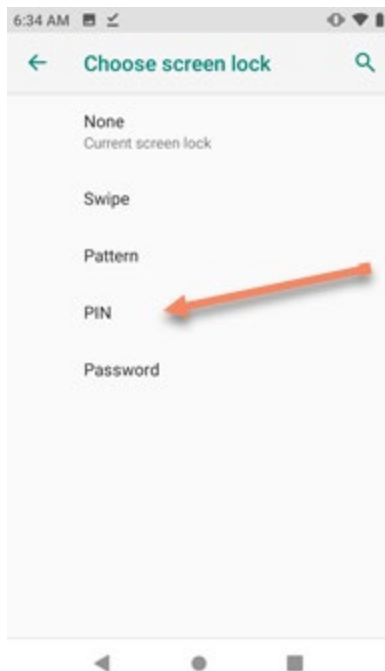


4.1.11 This will automatically navigate to Secure start-up, select NO:

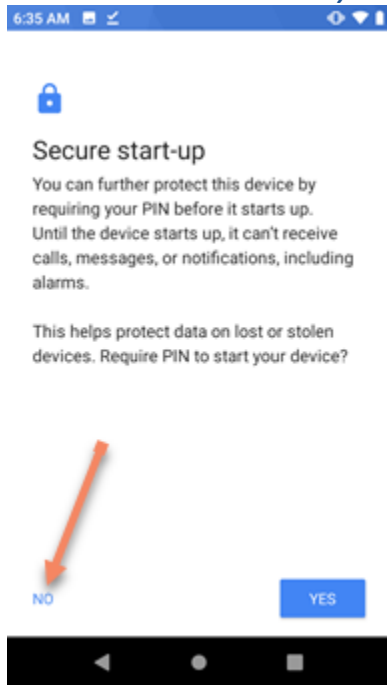


4.1.12 Enter the VA Site Code preceded by 0 as the device PIN Click NEXT:


*i.e. if the VA Site Code is 123, the PIN would be 0123

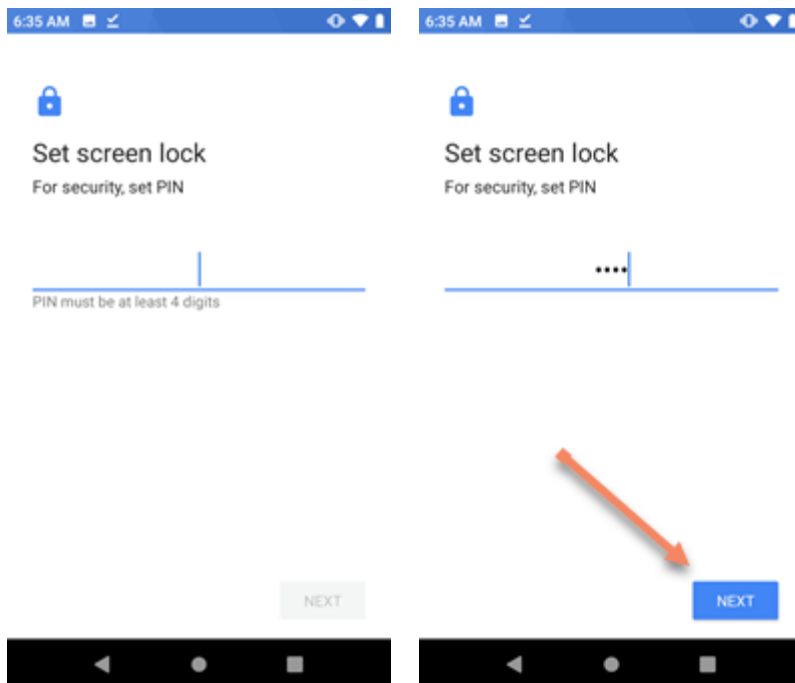

4.1.13 Re-enter the PIN from the previous screen, Click CONFIRM:

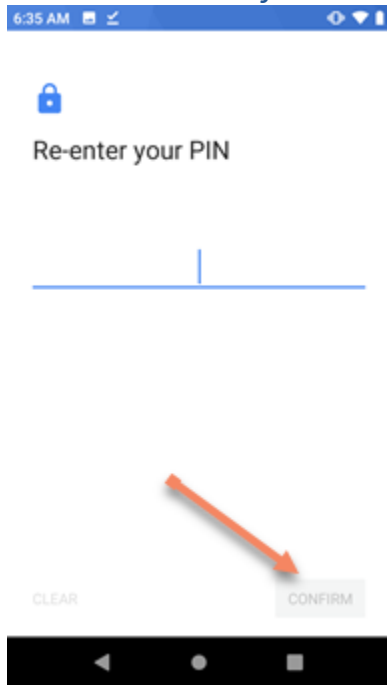


4.1.14 Leave the Notifications screen at the default of "Show all notification content" Click DONE:

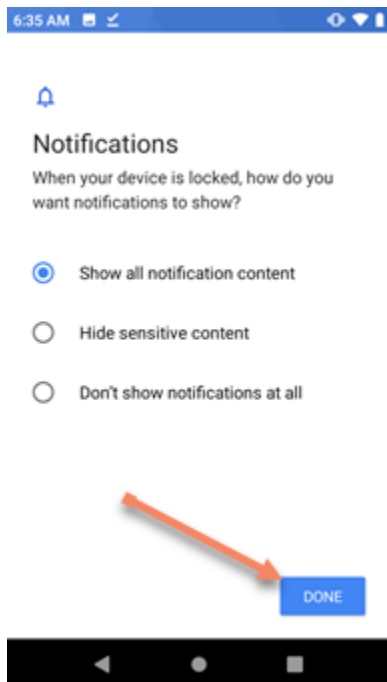


4.2 Validate the VA RCA is installed.


4.2.1 From the home screen:

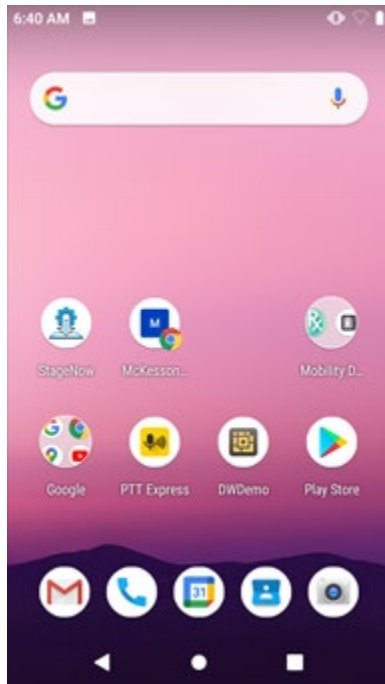


4.2.2 Swipe down from the top of the screen twice to reveal the gear for the full Settings Menu, click the gear:

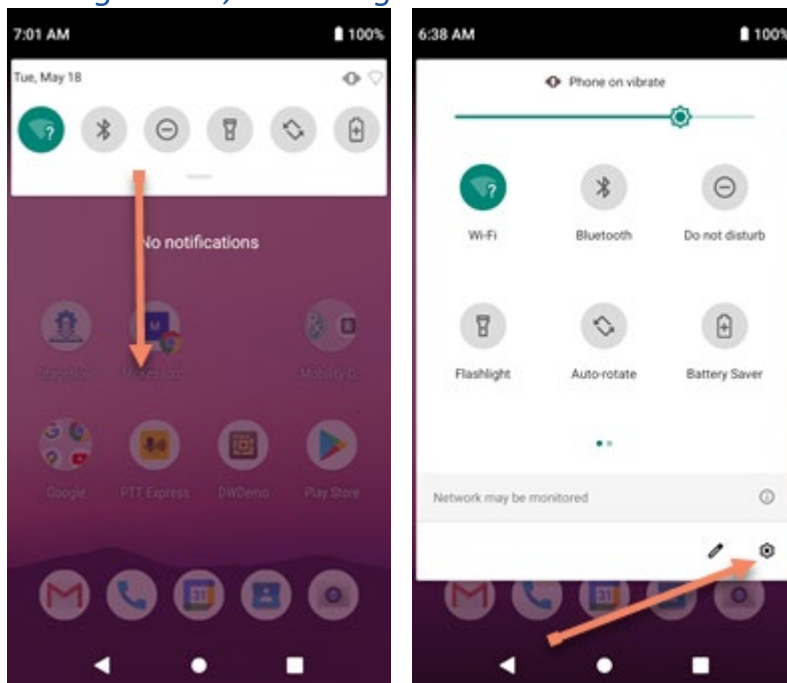


4.2.3 Scroll to and open “Security & location” from the menu:

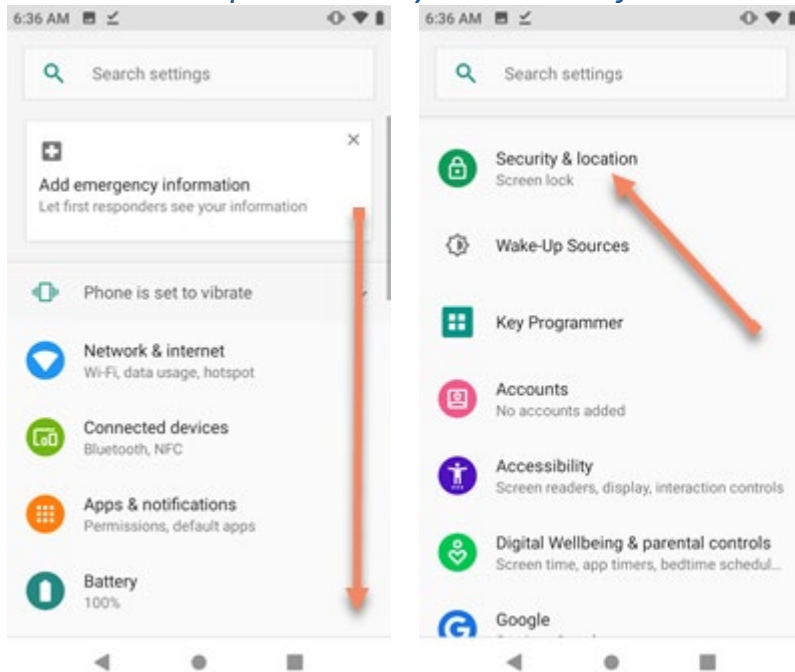


4.2.4 In the “Security & location” menu scroll to and open “Advanced”:

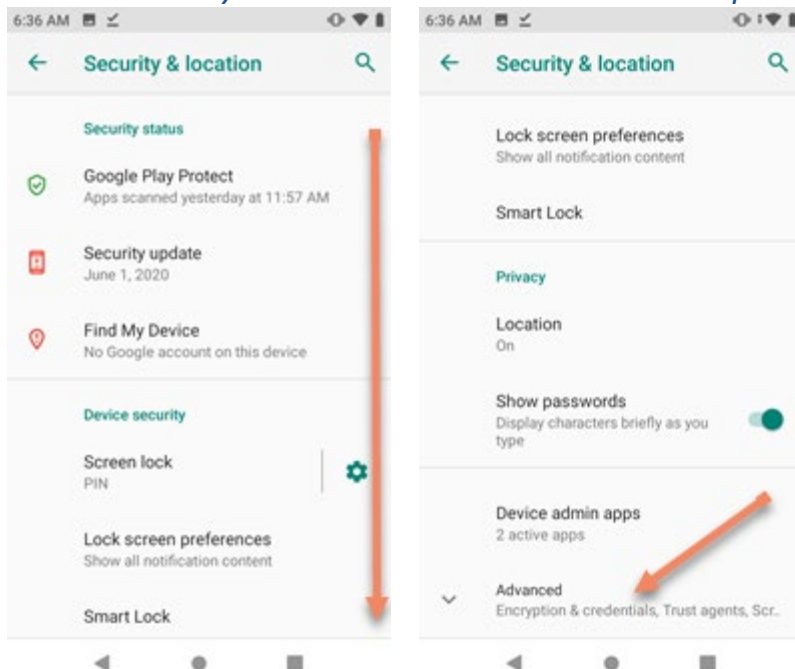


4.2.5 In the “Advanced” section scroll to and open “Encryption & credentials”:

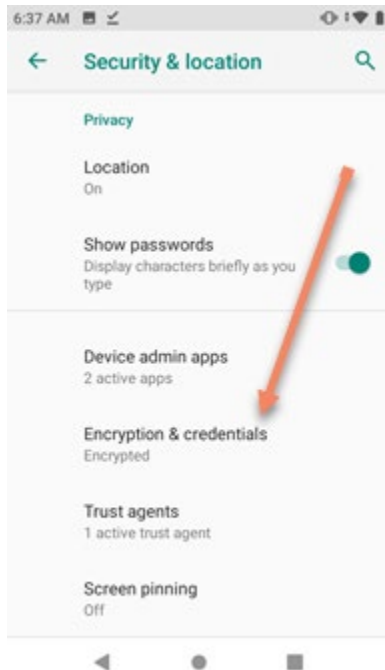

4.2.6 In the “Encryption & credentials” section open “Trusted credentials”:

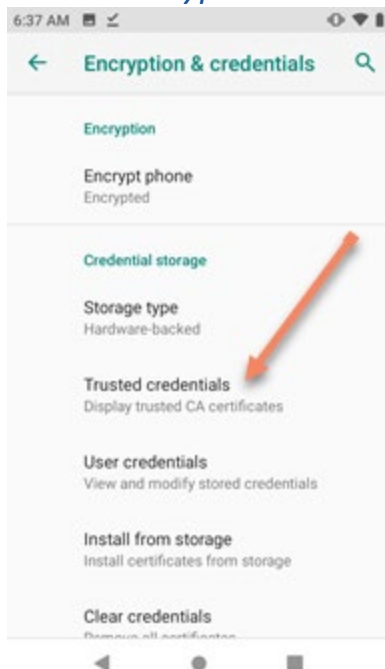


4.2.7 In the “Trusted credentials” section select the “USER” tab:

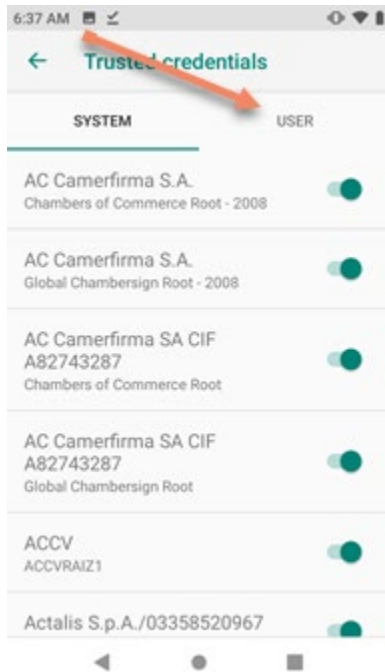


4.2.8 There should be one Certificate loaded in this section “VA-Internal-S2-RCA1-v1”:




4.2.9 Click the “VA-Internal-S2-RCA1-v1” certificate to view details:

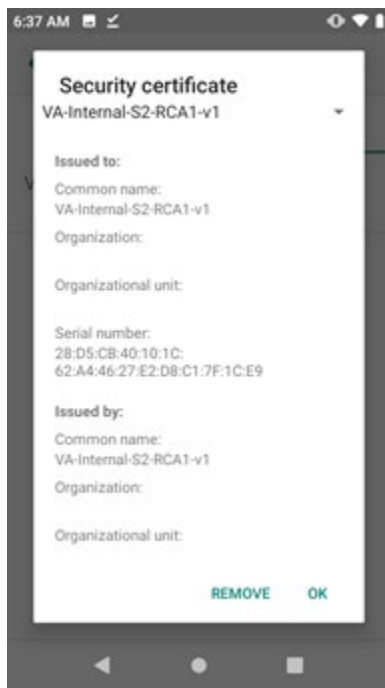

4.2.10 Click OK:

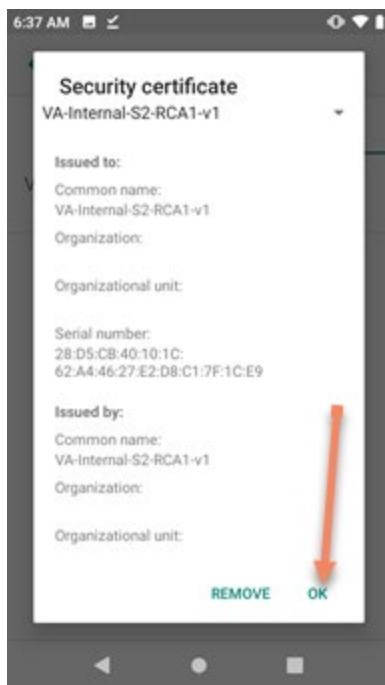


4.2.11 Close the Menu and return to the home screen:

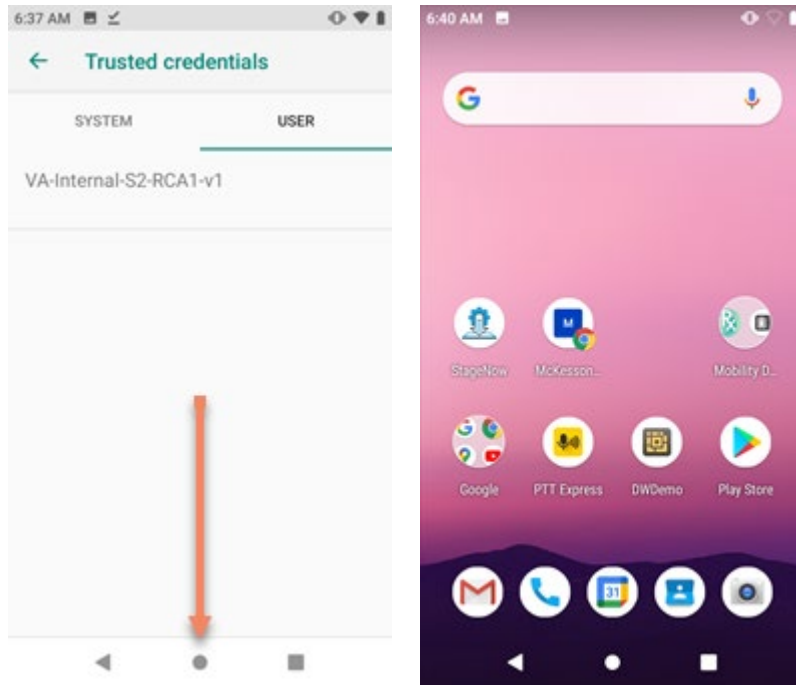

At this point the MCMC is connected to mobile1md, and has the requisite network settings, and certificates loaded. EUO will need to return the device to Pharmacy and work with Pharmacy to test/complete the remaining configuration steps.


4.3 Launch and configure McKesson Connect Permissions:

4.3.1 From the home screen:

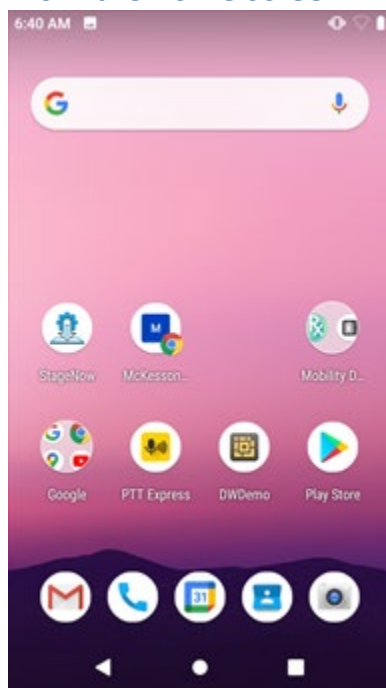


4.3.2 Find and open Chrome:

*The banner at the top of Chrome will state “No internet connection” this can be ignored

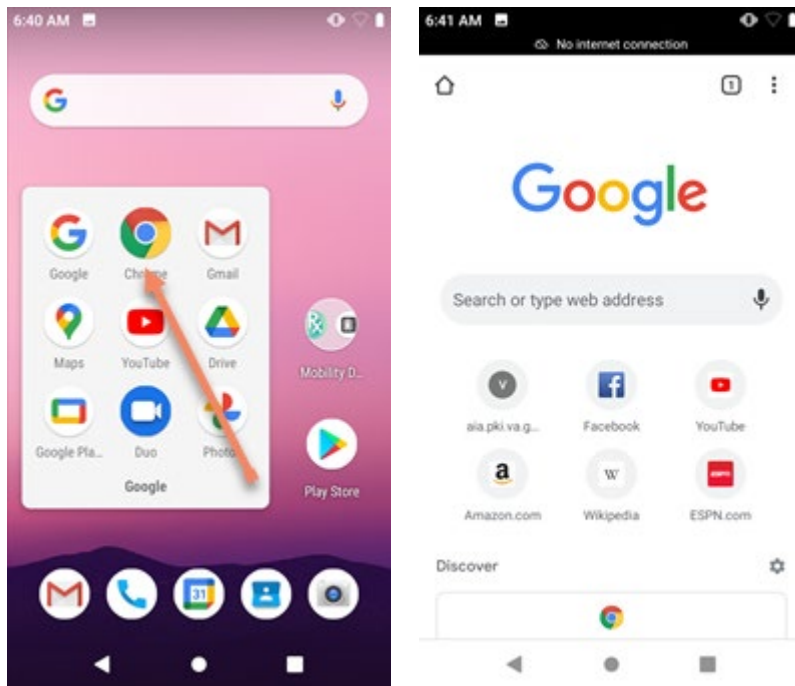


4.3.3 In Chrome navigate to the URL <https://connect.mckesson.com>

Select + New tab if no tabs are open, if any tabs are open tap the omnibar type the correct URL

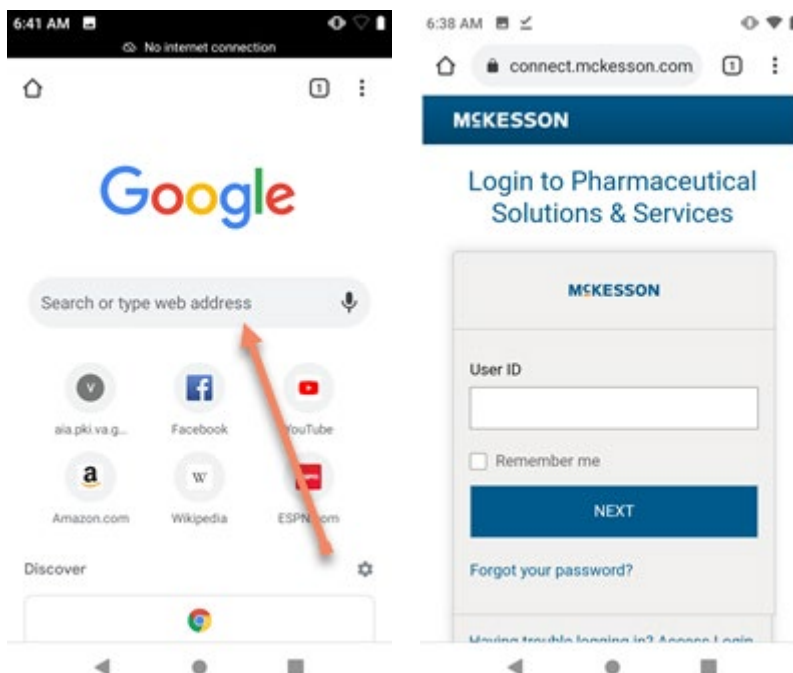


From this point an authorized Pharmacy user must sign in to McKesson on the Mobile Handheld device.


4.3.4 Have Pharmacy POC log in to <https://connect.mckesson.com>

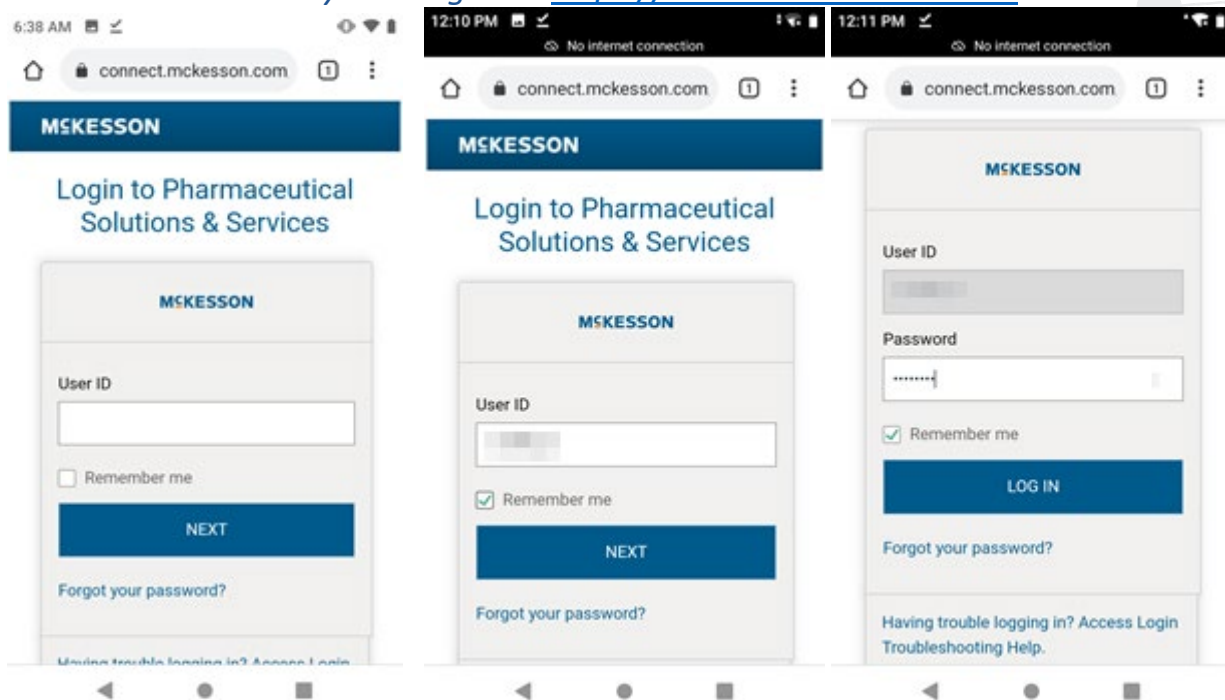

4.3.5 Select Scan icon

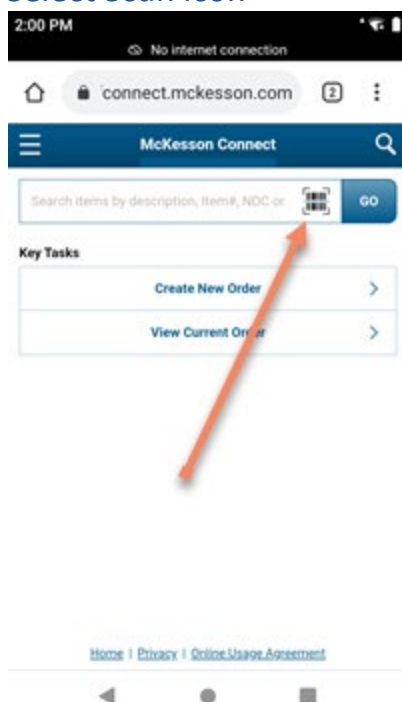

4.3.6 Allow both prompts for camera access

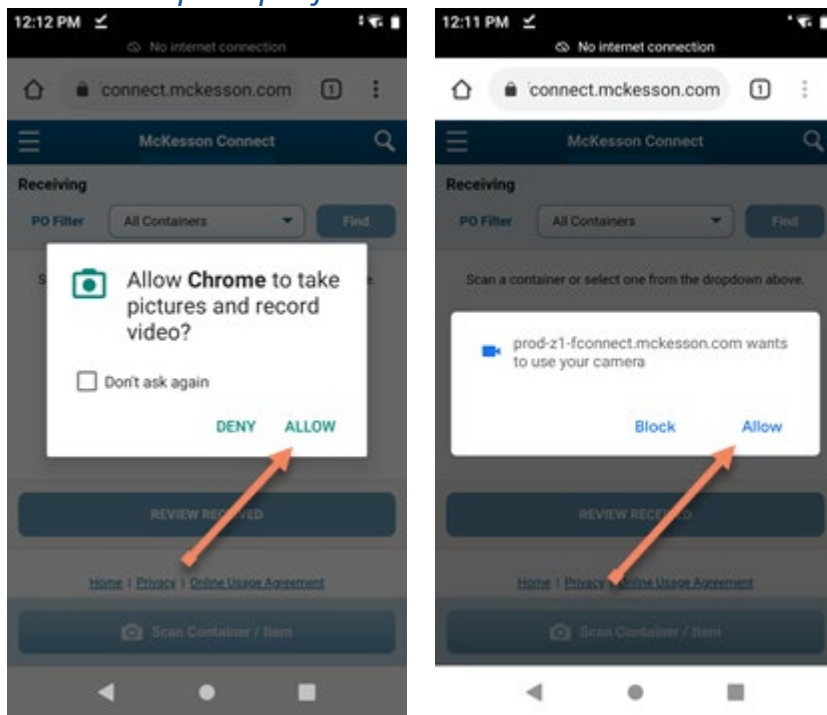

4.3.7 Verify scanner functionality allowed through camera



This completes the Cookbook instruction set. The device should be correctly configured, any related open ServiceNow Incident requests should be resolved.

Referenced Resources - Appendix

a. Web URLs

- i. VA PKI Certificates - <http://aia.pki.va.gov/PKI/AIA/VA/>
- ii. McKesson Connect - <https://connect.mckesson.com>
- iii. Zebra TC52 Support - <https://www.zebra.com/us/en/support-downloads/mobile-computers/handheld/tc52.html>
- iv. ServiceNow - <https://yourit.va.gov>

b. ServiceNow Groups

- i. EUO - Unique to each site, auto populated on initial incident creation
- ii. Network Field Operations WLAN - IO.Network.FO.Wireless
- iii. Network Field Operations LAN - IO.Network.FO.LAN

c. VA SharePoint Portals

- i. Pharmacy Benefits Management - [Clinical Informatics - McKesson Mobile Companion implementation - All Documents \(sharepoint.com\)](#)
- ii. McKesson Connect Wireless Handheld Mobile Companion Project - [Business Services - McKesson Connect Wireless Handheld Implementation ToolKit \(va.gov\)](#)

d. Points of Contact

- i. Implementation Manager - [Schneider, Douglas R](#)
- ii. Pharmacy Benefits Management - [Daum, Marian](#)
- iii. End User Operations - [Gracie, Michael H](#)
- iv. Wireless - [Cornwall, David R](#)
- v. Networking - [Baker, Scott](#)
- vi. Client Technologies - [Smith, Christian R](#)