
EXP 4

1. Struct Person with Associated Methods

    1. Define a Go struct named Person with fields: Name (string), Age (int), Job (string), and Salary (float64).
    2. Add two methods with appropriate receivers: one to read data into the struct from user input, and one to print all fields in a formatted manner.
    3. Create at least two Person objects in main() and call both methods on each.
    4. Push the source file to your GitHub repository.

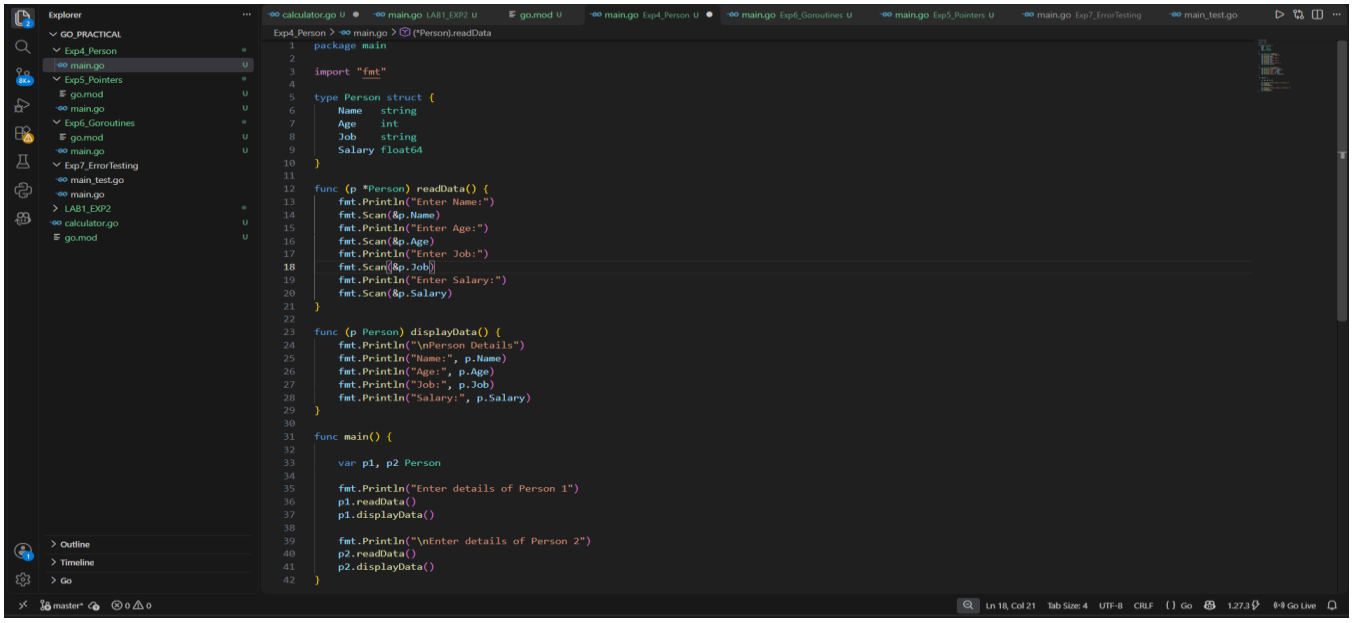

```go
package main

import "fmt"

type Person struct {
    Name   string
    Age    int
    Job    string
    Salary float64
}

func (p *Person) readData() {
    fmt.Println("Enter Name:")
    fmt.Scan(&p.Name)
    fmt.Println("Enter Age:")
    fmt.Scan(&p.Age)
    fmt.Println("Enter Job:")
    fmt.Scan(&p.Job)
    fmt.Println("Enter Salary:")
    fmt.Scan(&p.Salary)
}


func (p Person) displayData() {
    fmt.Println("\nPerson Details")
    fmt.Println("Name:", p.Name)
    fmt.Println("Age:", p.Age)
    fmt.Println("Job:", p.Job)
    fmt.Println("Salary:", p.Salary)
}

func main() {

    var p1, p2 Person

    fmt.Println("Enter details of Person 1")
    p1.readData()
    p1.displayData()

    fmt.Println("\nEnter details of Person 2")
    p2.readData()
    p2.displayData()
}
```

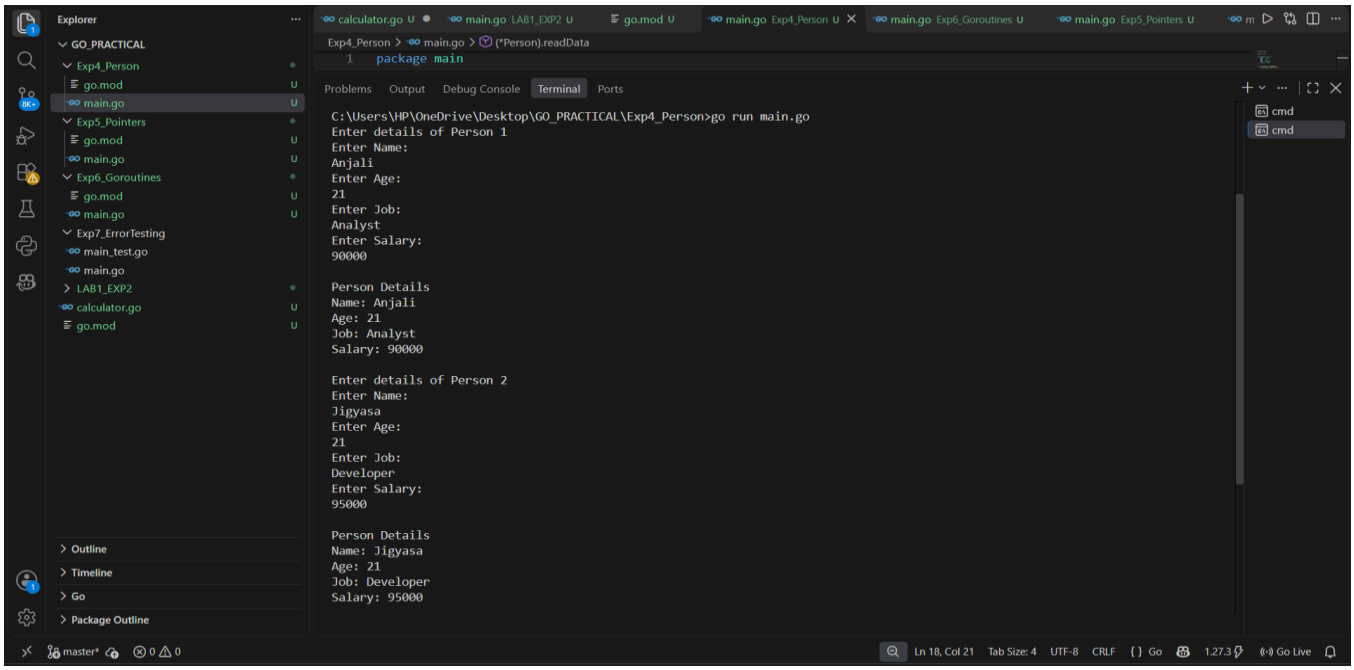

```
C:\Users\HP\OneDrive\Desktop\GO_PRACTICAL\Exp4_Person>go run main.go
Enter details of Person 1
Enter Name:
Anjali
Enter Age:
21
Enter Job:
Analyst
Enter Salary:
90000

Person Details
Name: Anjali
Age: 21
Job: Analyst
Salary: 90000

Enter details of Person 2
Enter Name:
Jigyasa
Enter Age:
21
Enter Job:
Developer
Enter Salary:
95000

Person Details
Name: Jigyasa
Age: 21
Job: Developer
Salary: 95000
```