New York City Yellow Taxi Exploratory Data Analysis Report

Submission By: Ankit Bougal

- New York City Yellow Taxi Exploratory Data Analysis Report
 - ^o1 Objective
 - ^o₂ Problem Statement
 - °3 Data Understanding
 - 3.1 Data Description
 - 3.1.1 Trip Records
 - 3.1.2 Taxi Zones
 - ^o4 Data Preparation
 - 4.1 Data Sampling
 - 4.2 Data Cleaning
 - ^o5 Exploratory Data Analysis
 - 5.1 Temporal Analysis
 - 5.1.1 Analyse the distribution of taxi pickups by hours, days of the week, and months.
 - 5.2 Financial Analysis
 - 5.2.1 Analyse the revenue distribution trend
 - 5.2.2 Relationship of Fare Amount with Trip Distance, Trip Duration and Number of Passengers
 - 5.3 Geographical Analysis
 - 5.3.1 Total Trips/Zone vs Zone-wise Number of Trips

5.4 Operational Efficiency Analysis
5.4.1 Traffic Trend Analysis
5.4.2 Pricing Strategy Analysis
5.4.3 Customer Experience Analysis
5.4.4 Variation of Passenger Count Analysis
6 Conclusion 5.4.5 Surcharges Analysis
6.1 Final Insights and Recommendations
6.1.1 Recommendations to optimize routing and dispatching based on demand patterns and operational inefficiencies
6.1.2 Suggestions on strategically positioning cabs across different zones to make best use of insights uncovered by

analysing trip trends across time, days and months.

6.1.3 Propose data-driven adjustments to the pricing strategy to maximize revenue while maintaining competitive rates with other vendors.

1 Objective

In the case study learned exploratory data analysis (EDA) with the help of a dataset on yellow taxi rides in New York City. It enabled us to understand why EDA is an important step in the process of data science and machine learning.

2 Problem Statement

As an analyst at an upcoming taxi operation in NYC, you are tasked to use the 2023 taxi trip data to uncover insights that could help optimise taxi operations. The goal is to analyse patterns in the data that can inform strategic decisions to improve service efficiency, maximise revenue, and enhance passenger experience.

3 Data Understanding

The yellow taxi trip records include fields capturing pick-up and drop-off dates/times, pick-up and drop-off locations, trip distances, itemized fares, rate types, payment types, and driver-reported passenger counts.

The data is stored in Parquet format (*.parquet*). The dataset is from 2009 to 2024. However, for this assignment, we will only be using the data from 2023.

The data for each month is present in a different parquet file. We got twelve files for each of the months in 2023.

The data was collected and provided to the NYC Taxi and Limousine Commission (TLC) by technology providers like vendors and taxi hailing apps.

You can find the link to the TLC trip records page here: https://www.nyc.gov/site/tlc/about/tlc-trip-record-data.page

3.1 Data Description

You can find the data description here: Data Dictionary

3.1.1 Trip Records

Field Name	description
VendorID	A code indicating the TPEP provider that provided the record. 1= Creative Mobile Technologies, LLC; 2= VeriFone Inc.
tpep_pickup_datetime	The date and time when the meter was engaged.
tpep_dropoff_datetime	The date and time when the meter was disengaged.
Passenger_count	The number of passengers in the vehicle. This is a driver-entered value.

Trip_distance	The elapsed trip distance in miles reported by the taximeter.				
PULocationID	TLC Taxi Zone in which the taximeter was engaged				
DOLocationID	TLC Taxi Zone in which the taximeter was disengaged				
	The final rate code in effect at the end of the trip.				
	1 = Standard rate				
	2 = JFK				
RateCodeID	3 = Newark				
	4 = Nassau or Westchester				
	5 = Negotiated fare				
	6 = Group ride				
Store_and_fwd_flag	This flag indicates whether the trip record was held in vehicle memory before sending to the vendor, aka "store and				
	forward," because the vehicle did not have a connection to the server.				
	Y= store and forward trip				
	N= not a store and forward trip				
Field Name	description				
Payment_type	A numeric code signifying how the passenger paid for the trip.				
	1 = Credit card				
	2 = Cash				
	3 = No charge				
	4 = Dispute				
	5 = Unknown				
	6 = Voided trip				

Fare_amount	The time-and-distance fare calculated by the meter. Extra Miscellaneous extras and surcharges. Currently, this only includes the 0.50 and 1 USD rush hour and overnight charges.	
MTA_tax	0.50 USD MTA tax that is automatically triggered based on the metered rate in use.	
Improvement_surcharge	0.30 USD improvement surcharge assessed trips at the flag drop. The improvement surcharge began being levied in 2015.	
Tip_amount	Tip amount – This field is automatically populated for credit card tips. Cash tips are not included.	
Tolls_amount	Total amount of all tolls paid in trip.	
total_amount	The total amount charged to passengers. Does not include cash tips.	
Congestion_Surcharge	Total amount collected in trip for NYS congestion surcharge.	
Airport_fee	1.25 USD for pick up only at LaGuardia and John F. Kennedy Airports	

Although the amounts of extra charges and taxes applied are specified in the data dictionary, you will see that some cases have different values of these charges in the actual data.

3.1.2 Taxi Zones

Each of the trip records contains a field corresponding to the location of the pickup or drop-off of the trip, populated by numbers ranging from 1-263.

These numbers correspond to taxi zones, which may be downloaded as a table or map/shapefile and matched to the trip records using a join. This is covered in more detail in later sections.

4 Data Preparation

This is the first step of data analysis in which we performed sampling, cleaning, formatting and organizing data for further analysis.

4.1 Data Sampling

To ensure a representative subset of trip records for analysis while maintaining uniform coverage across different time periods, a **stratified random sampling** approach was employed. The sampling process was carried out as follows:

1. Data Source and Structure

- The dataset consists of monthly parquet files named in the format YYYY-MM.parquet.
- o Each file contains trip records with a **pickup timestamp (tpep_pickup_datetime)**, which was used to extract the **date and hour** of each trip.

2. Sampling Strategy

The data was sampled in a structured manner to ensure uniform distribution across time. The process included:

o Extracting Unique Dates:

Each monthly dataset was processed to extract all unique dates present in that month.

o Iterating Over Each Date:

For every unique date, the dataset was filtered to retrieve all trip records corresponding to that specific day.

o Hourly Segmentation:

Each day was further divided into **24 hourly segments (0 to 23 hours)**. The dataset was filtered to include only the records belonging to each specific hour.

o Random Sampling Per Hour:

Within each hour, **5% of the available records were randomly selected** using a **randomized selection method (sample(frac=0.05, random_state=42))** to ensure consistency and reproducibility of results.

3. Data Aggregation

- o The hourly sampled data was combined to create a **sampled dataset for the entire month**.
- o Once all monthly files were processed, the sampled data from each month was merged to form a **final dataset covering the entire year**.

4. Assumptions and Considerations

- o It was assumed that all parquet files are stored in a single directory for processing.
- o The random state (42) was used to ensure the sampling process is reproducible.
- Any new columns derived during this process were labeled with a **_derived suffix** to differentiate them from the original dataset attributes.

4.2 Data Cleaning

To ensure data integrity and improve the quality of analysis, a comprehensive data cleaning process was performed on the sampled dataset.

1. Dropping Columns

Below unnecessary columns were dropped:

o store_and_fwd_flag: Not useful for analysis; indicates if the trip record was held in vehicle memory before sending to the server. o mta_tax: Fixed tax amount, does not provide variability. o tolls_amount: Not relevant for most trips, as tolls are not always applicable.

2. Datatype Correction

Below columns has incorrect data type and it was fixed as below:

- o RatecodeID: It is parsed as float64 but as per the data dictionary the values could be 1, 2, 3, 4, 5, 6 and should be changed to integer.
- o passenger_count: It is parsed as float64 but passenger cannot be in decimal so it should be chnaged to int64. o pickup_date_derived: It is parsed as object but pickup date should be chnaged to date.

3. Columns Merging

There are two airport fee columns airport_fee and Airport_fee. This is possibly an error in naming columns. These two columns were merged by adding the values of both columns and the new column was named as airport_fee_combined.

4. Fixing Negative Values

During the data cleaning process, it was observed that certain financial columns contained negative values, which were not expected in the dataset. Specifically, the below columns had negative entries that could have resulted from data entry errors or system inconsistencies.

```
    improvement_surcharge
    total_amount
    congestion_surcharge
    airport_fee_combined To address
    this issue, the absolute value function
    (abs) was applied to these columns,
    ensuring all values remained positive
    while preserving their original
    magnitude. This correction helped
    maintain data integrity and ensured
    consistency in financial calculations and
    analysis.
```

5. Fixing Missing Values

To ensure data completeness, missing values in critical columns were identified and addressed. The below columns contained missing entries, which could impact downstream analysis.

```
o passenger_count o
RatecodeID o
congestion_surcharge
```

To handle these missing values effectively, the **median function** was applied to each column. The median was chosen as it is less sensitive to extreme values and provides a robust estimate of central tendency. By filling in the missing values with the median, the dataset was improved for reliability while minimizing distortions in the overall distribution.

6. Handling Outliers

To improve data quality and ensure meaningful analysis, outliers were identified and removed based on domain knowledge and logical constraints. The following steps were taken:

```
    passenger_count: Entries where the passenger count exceeded 6 or was 0 were removed to maintain realistic trip records.
    payment_type: Rows where payment_type was 0 were filtered out, as these entries were deemed invalid as per data dictionary.
    tpep_pickup_datetime, tpep_dropoff_datetime: Only records from 2023 were retained, ensuring consistency in the analysis period.
```

o trip distance: Trips shorter than **0.62 miles** or longer than **120 miles** were removed to exclude unrealistic or erroneous trip records.


These outlier-handling measures helped refine the dataset, making it more representative of real-world scenarios.

5 Exploratory Data Analysis

Analysing and visualizing data to understand its main features, find patterns, and discover how different parts of the data are connected.

5.1 Temporal Analysis


5.1.1 Analyse the distribution of taxi pickups by hours, days of the week, and months.

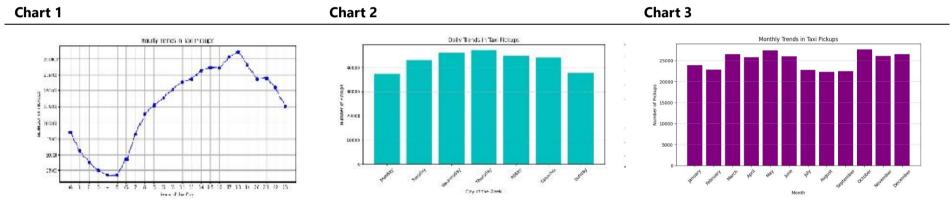

The charts reveal several key insights. The highest number of trips in May occurred on Thursdays. A clear pattern emerges, with taxi rides peaking in the morning, stabilizing around noon, and rising again in the evening. The busiest period is between 5:00 PM and 7:00 PM.

5.2 Financial Analysis


5.2.1 Analyse the revenue distribution trend

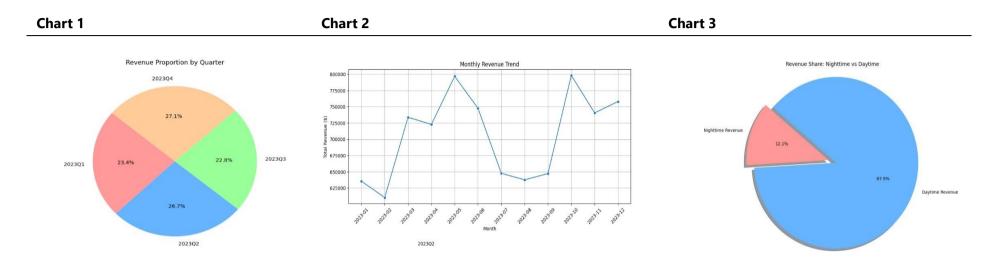

The key insights from the above charts are that the highest revenue was generated in Quarter 4, with October being the peak month. Conversely, the lowest revenue occurred in Quarter 3, with August being the bottom month. Most of the revenue was generated by the trips completed in daytime.

5.2.2 Relationship of Fare Amount with Trip Distance, Trip Duration and Number of Passengers

Chart 1 Chart 2

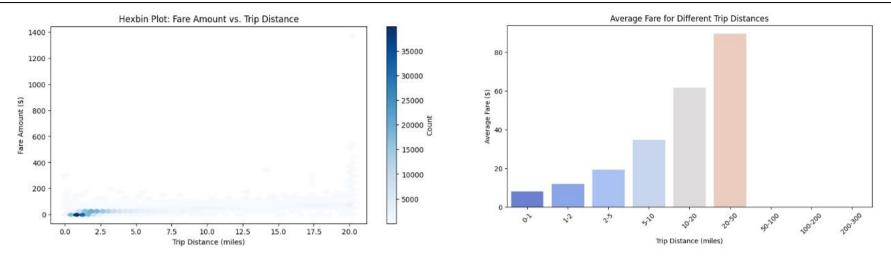


1. Relationship between Trip Distance and Fare Amount


- o There seems to be a positive correlation between trip distance and fare amount. As the trip distance increases, the fare amount generally increases as well.
- o The data points are spread out, indicating variability in fare amounts for similar trip distances. This could be due to factors like traffic, time of day, or additional charges.
- o The majority of the data points are clustered in the lower range of trip distances (0-20 miles) and fare amounts (0-200 dollars), suggesting that most trips are relatively short and inexpensive.

2. Relationship between Trip Duration and Fare Amount

- o There seems to be a positive correlation between trip duration and fare amount. As the trip duration increases, the fare amount also tends to increase. This is expected since longer trips typically cost more.
- o The data points are spread out, indicating variability in fare amounts for similar trip durations. This could be due to different rates, traffic conditions, or other variables affecting the fare.
- o Most of the data points are clustered in the lower range of trip durations (0-400 minutes) and fare amounts (0-200). This suggests that the majority of trips are relatively short and inexpensive.

Chart 3 Chart 4

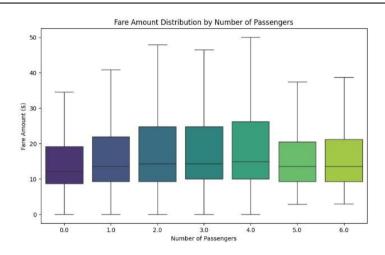

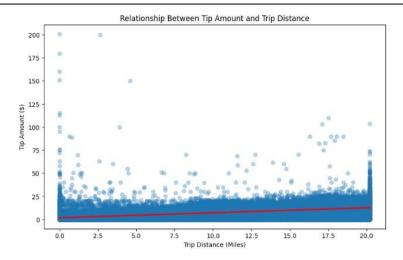

1. Relationship between Number of Passengers and Fare Amount

- o The correlation between the number of passengers and the fare amount is weak.
- o We can observe that single passengers tend to travel longer distances compared to groups, as the fare amount is higher for single passengers. This indicates a positive correlation between trip distance and fare amount.


2. Relationship between Trip Distance and Tip Amount

- o There seems to be a positive correlation between trip distance and tip amount. As the trip distance increases, the tip amount also tends to increase.
- o While there is a general upward trend, there is significant variability in tip amounts for similar trip distances. This suggests that factors other than distance (such as service quality, passenger generosity, or fare amount) may influence tipping behavior.
- o The majority of the data points are clustered in the lower range of trip distances (0-40 miles) and tip amounts (0-100). This suggests that most trips are relatively short, and tips are modest.
- o The highest tip amounts are observed for trips around 60-80 miles, but these are less frequent.

5.3 Geographical Analysis

5.3.1 Total Trips/Zone vs Zone-wise Number of Trips Chart 1

Chart 2

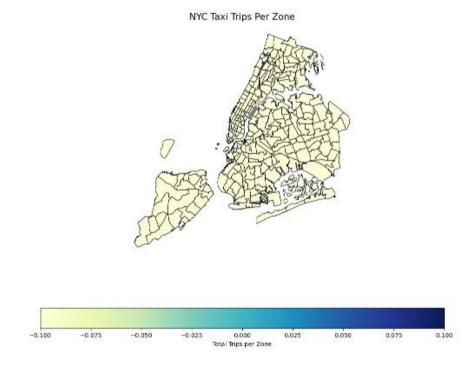



	zone	borough	total_trips
0	Newark Airport	EWR	0.0
165	Morningside Heights	Manhattan	0.0
167	Mott Haven/Port Morris	Bronx	0.0
168	Mount Hope	Bronx	0.0
169	Murray Hill	Manhattan	0.0
170	Murray Hill-Queens	Queens	0.0
171	New Dorp/Midland Beach	Staten Island	0.0
172	North Corona	Queens	0.0
173	Norwood	Bronx	0.0
174	Oakland Gardens	Queens	0.0


5.4 Operational Efficiency Analysis

5.4.1 Traffic Trend Analysis

Chart 1 Chart 2 Chart 3










5.4.2 Pricing Strategy Analysis

Chart 1 Chart 2 Chart 3










5.4.3 Customer Experience Analysis


Chart 1 Chart 2 Chart 3









5.4.4 Variation of Passenger Count Analysis

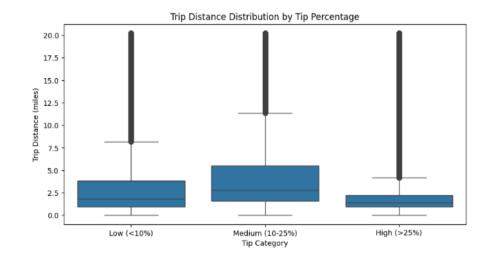

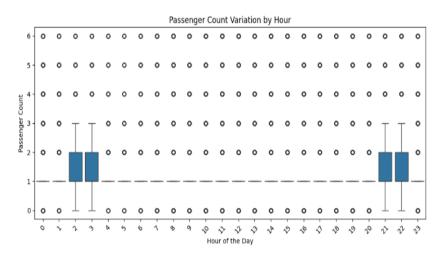

5.4.5 Surcharges Analysis

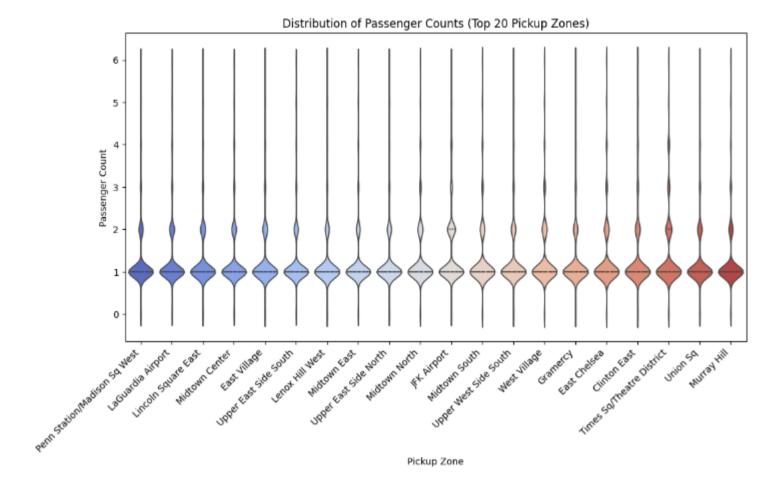

6 Conclusion

6.1 Final Insights and Recommendations

6.1.1 Recommendations to optimize routing and dispatching based on demand patterns and operational inefficiencies

Based on the analysis of demand patterns and operational inefficiencies, below are some recommendations:

Allocate more cabs during peak day hours (6 AM to 10 PM) based on the analysis at section 3.2.2.

Implement surge pricing in high-demand zones during daytime peak periods.

Adjust pricing according to the time of day and day of the week, based on the analysis of average fare per mile for different hours and days. (Derived from section 3.2.4 and 3.2.10)

As an outcome for the analysis conducted at section 3.2.7, we should increase number of cabs in high-demand pickup and dropoff zones during night hours (11 PM to 5 AM).

Repositioning algorithms can be introduced for cabs positioning to fulfill the deman surges in these areas.

6.1.2 Suggestions on strategically positioning cabs across different zones to make best use of insights uncovered by analysing trip trends across time, days and months.

Suggestions on strategically positioning cabs based on trip trends:

- From the above heatmap we can identify zones with high demand during peak hours (e.g., rush hour, evenings).
- Position more cabs in these high-demand zones during peak times to reduce wait times and improve customer satisfaction.
- Observe how demand fluctuates throughout the day.
- Adjust cab deployment accordingly, increasing presence during peak periods and reducing it during lulls.
- Deploy more cabs on weekdays during peak hours and adjust deployment for weekend demand patterns, which might be concentrated in specific areas or times. (Derived from 3.2.4)
- Position cabs strategically to efficiently serve short and long-distance trips, optimizing overall efficiency.

6.1.3 Propose data-driven adjustments to the pricing strategy to maximize revenue while maintaining competitive rates with other vendors.

Below are recommendations for data-driven adjustments to the pricing strategy to maximize revenue while maintaining competitive rates with other vendors:

- Monthly revenue is very low in July, August, September company can offer competative price as compared to other vendor during these month which can increase pickup during that time and also revenue will increase.
- Correlation between Trip Duration and Fare Amount is 0.32 which is very low. Company can impose waiting charge for the ride which will increse the corrrection between these two variables.
- Fare amount depended on count of pessenger can also increase the revenue for the company.
- Consider using machine learning models to predict demand elasticity for various distances. This would allow more precise price adjustments.