



INDIRA GANDHI NATIONAL

OPEN UNIVERSITY

Maidan Garhi New Delhi-110068

BCSP -064

Waffles Ice Cream Parlour Online

Submitted By

Name -Kumar Gaurav

Enrolment No-187310948

Programme Code - BCA

Study Centre Code - 0769

Regional Centre Code - 029

Mobile No - 8743030797

E-Mail Id - shmikashiva34@gmail.com

Under Guidance

of

Ramesh Kalia

Submitted to the School of Computer and
Information Science, IGNOU in partial fulfilment of
the requirement for the award of the degree

**Bachelor of Computer Application
(BCA)**



II. PROFORMA OF BCA PROJECT PROPOSAL (BCSP-064)
(Project's Title and Guide's Details)

Enrolment No.: 187310948..... Regional Centre Code: 029..... Study Centre: 0769
PP.No - B290063520

1. Name and Address of the student

Kumar Gaurav C-1/A st. no. 4 Chandu Nagar
near Sherpur Chowk Karawal Nagar Road
delhi-94
E-mail: shmitkashiva34@gmail.com Telephone No. 8743030797

2. Title of the Project Waffles Ice Cream Parlour Online

3. Name and Address of the Guide

Ramesh Kalra D-42/43 Yadav Nagar delhi-94

4. Qualification of the Guide
(Attach bio-data also)

Ph.D.

M.Tech.

B.Tech.

MCA

Any other

☐
☐
☐
☒
☐

(Note : i. All the above mentioned Degrees must have been awarded in Computer Science/IT only
ii. A Guide should not guide more than 8 students of BCA at any point of time)

5. Industrial / Teaching experience of the Guide (in Years) 6 years

6. Software Used for this Project: Asp.Net C# & SQL Server

(Note :

1. Use of Visual Basic and MS-Access as Front End and Back End respectively is forbidden. But, you are permitted to use Visual Basic with other Software. Also, you can use MS-Access with other software)

2. Use of C or C++ Programming Language for Project Related to Database Management is strictly forbidden.

Signature of the Student

Date: 29 Dec 2020

इन्दिरा गाँधी राष्ट्रीय मुक्त विश्वविद्यालय
INDIRA GANDHI NATIONAL OPEN UNIVERSITY

क्षेत्रीय केन्द्र, दिल्ली-2/R.C., Delhi-2
गाँधी स्मृति एवं दर्शन समिति, राजघाट, नई दिल्ली-2
Gandhi Smriti & Darshan Samiti, Rajghat, N. Delhi-2

Signature of the Guide

Date: 29 Dec 2020

Important: 1. Attach this Proforma along with Guide's Biodata and Project Synopsis in the Project Report.
2. Not more than one student is permitted to work on a project.

For Office Use Only

☒
Approved

☐
Not approved

Signature, Designation, Stamp of the
Project Proposal Evaluator


Date: 31/1/21

Suggestions for reformulating the Project:

IX CERTIFICATE OF ORIGINALITY

This is to certify that the project report entitled Waffles Ice Cream Parlour Online
Submitted to **Indira Gandhi National Open University** in partial fulfilment of the requirement
for the award of the degree of **BACHELOR OF COMPUTER APPLICATIONS (BCA)**, is
an original work carried out by Mr./ Ms. Kumar Gaurav
Enrolment No.: 187310948 under the guidance of Mr./ Ms. Ramesh Kalia

The matter embodied in this project is a genuine work done by the student and has not been
submitted whether to this University or to any other University / Institute for the fulfilment of the
requirement of any course of study.




Signature of the Student

Name and Address

of the student : Kumar Gaurav

C-1/A st.no.4 chandunagar
parawal nagar road
delhi-94

Enrolment No.: 187310948



Signature of the Guide

Name, Designation and
Address of the Guide

Name - Ramesh Kalia

Designation - Software Developer

Address - D-42/43 Yadav

nagar Delhi-42

PERSONAL SUMMARY

- A bright, talented and ambitious developer with a strong technical background who possesses self-discipline and the ability to work with the minimum of supervision.
- Able to play key role throughout the software development / support life cycle of a project to ensure that quality solution meet business objective.
- Possesses a good team spirit, deadline oriented and having the ability to organize and present complex solutions clearly and accurately.
- Looking for a suitable development position with exciting and innovative compact that offer room for progression.

TECHNICAL SUMMARY

- Extensive experience in the development of web and window based applications.
- Experience in requirement gathering and converting business requirement into technical solutions.
- Experience in working in an agile project as team member.

Currently associated with **Star Logics Solutions** as Software Developer and team leader for handling application domain.

KEY SKILLS

- ✓ **DotNet Framework** Versions 3.5, 4.0, 4.5
- ✓ **Web Based Application Development** : ASP.NET, HTML, Webservices, MVC
- ✓ **Windows Based Application Development** : C#.net, VB.net
- ✓ **SCRIPTS** : Ajax, jquery, javascript, vbscript
- ✓ **Databases** : Microsoft SQL Server 2005, 2008, 2012, Microsoft Access, MYSQL
- ✓ **Other Key Skills** : Adobe Livecycle, XML, media Streaming, Photoshop

WORK EXPERIENCE

Total Experience of 6+ Years (February 2014 - Till Date)

Star Logics Solutions – is a small scale Delhi based company working with Ministry of Urban Development (MOUD) - Central Public Works Department and handling their Websites and MIS Projects from several years.

Associated with Star logics from December 2014- Till Present

Role: Team Leader and Software Developer, Development and Maintenance of applications, web servers and client interactions.

Previous Experience:

CPD Technologies: is a small scale Delhi based company handling major project of IGNOU and other reputed companies and provide training Services.

February 2014 –November 2014

Role:Software Developer and Technical content Writer, Development and maintenance of applications, writing content for website and maintenance of web servers.

PROJECTS UNDERTAKEN

For Star logics Solution

ANNUAL PERFORMANCE APRAISAL REPORT

Type: Web based MIS Application

LINK: www.dda.org/apar

Technology: ASP.NET with c#.NET and Microsoft SQL Server

Team Size: 4

Role: Design and develop interface and logic for the application, planning of database, implement the plans and testing of application

Abstract: Application is designed for Delhi development authority. Employees performance assessment can be recorded and used for their transfer & posting and other benefits during the job.

CENTRAL PUBLIC WORKS DEPARTMENT

Type: Web based MIS Application

LINK: www.cpwd.gov.in

Technology: ASP.NET with VB.NET and Microsoft SQL Server

Team Size: 2

Role: Design and develop logics for the MIS Application, Planning how to meet the gap between the old and New Website Design interface and maintenance of the application

Abstract: Application is designed for Central Public Works Department. It allows user based access system is designed to allow users of application to upload circulars and other material on the website.

PERSONAL INFORMATION MANAGEMENT SYSTEM (PIMS)

Type: Web based MIS Application

LINK: www.cpwdpims.nic.in

Technology: ASP.NET with VB.NET and Microsoft SQL Server

Team Size: 2

Role: Design and develop logics for the MIS Application, Planning how to meet the gap between the old and New Website Design interface and maintenance of the application.

Abstract: PIMS is design to provide a personal Management system for CPWD & PWD employees. Application deals with all tasks related to employees like Personal Information, Posting details, Transfer Details, Salary details etc.

For CPD Technologies

JOBLELO.com Online Job Search Portal

CPD Technologies

Type: -Web based Data Driven Application

Technology: Asp.net with C# and Microsoft SQL Server as backend

Team Size: 1

Role: Design and develop interface and logic for the application, planning of database, implement the plans and test the application

Abstract : Application is designed as per analyzing the need for a job portal design for CPD Technologies, Application is designed in such a ways it will bridges the gap between seeker and Employer to contact each other easily. Application provide full alert

functionality for employer and users and a mechanism to browse the application by using secret key to access application by a link in email. Data will be present according to the requirement specified automatically.

Financial and Accounting Application

Client of CPD Technologies

Type: Web Based Data driven application

Technology: Asp.net with C#.net and Microsoft SQL server as backend

Team Size: 1

Role: Design and develop logic for the application, planning of database, code, test and generate required report for the client.

Abstract: F & A is a financial application which is designed as per client requirement for storing their bills and allows them to process those bills by authorities.

ACADEMIC QUALIFICATIONS

Masters in Computer Application (MCA)

Indira Gandhi national open university (IGNOU)

2010-2013

Post-Graduation Diploma in ComputerApplication (PGDCA)

Indira Gandhi national open university (IGNOU)

2010-2011

Bachelors in ComputerApplications (BCA)

Guru Gobind Singh Indraprastha University (GGSIPU)

2007-2010

PERSONAL DETAILS

Date of Birth: 24th march 1990

Gender: Male

Permanent Address: D-42/43 Yadav Nagar Samey Pur Delhi-110042

Alternative Contact Number:9555724843

Father Name: Sh. Om Kumar

Marital Status: Married

Language Proficiency: English, Hindi, Punjabi.

Hobbies: Reading, exploring Places, learning technology aspects, swimming.

I hereby declare all the above information is correct to my Knowledge and understanding

Ramesh Kalia
(Ramesh Kalia)

SYNOPSIS INDEX

S.NO	TOPICS	PAGE NO
1.	Title of the Project	4
2.	Introduction	5
	Problem Definition	6
3.	Aim & Objectives	7
4.	Project Category	8
5.	Tool & Platform	9
6.	System Analysis	11
7.	Software Model	12
8.	Software Approach	14
9.	Scheduling	16
10.	Data Flow Diagram	18
11.	ER Diagram	26
12.	Database design	27
13.	Input To The System	32
14.	Modules Description	33
15.	Output From The System	34
16.	Testing Process	35
17.	Future Scope	36
18.	Bibliography	37

PROJECT INDEX

S.NO	TOPICS	PAGE NO
1.	Title of the Project	39
2.	Introduction	40
3.	Problem Definition	41
4.	Aim & Objectives	42
5.	Project Category	43
6.	Tool & Platform	44
7.	System Analysis	46
8.	Software Model	47
9.	Scheduling	51
10.	Data Flow Diagram	53
11.	ER Diagram	60
12.	Database design	62
13.	SQL Query	67
14.	Input To The System	71
15.	Modules Description	72
16.	Interface Design	74
17.	Coding	94
18.	Output from the System	185
19.	Reports	186
20.	Testing Process	194
21.	Validation Screen	195
22.	Future Scope	199
23	Bibliography	200

SYNOPSIS

TITLE OF THE PROJECT

Waffles Ice cream parlour

INTRODUCTION

The system is made for the people who want to buy and can shop with convenience of e-commerce.

Ice Cream is one of the things that have seen maximum alterations with change of time. Experiments are happening each and every day and something or else new designs are coming up. Now with the dependable growth rate from the long past this is also being considered as a very good investment plan. With the presence of website, we can make our business go beyond boundaries, designs being getting spread around the globe.

In *Ice Cream* business the customers like to see more and more of taste which is very easy when having a website as in stores its difficult to attain so many customers, moreover they can create their own taste with the help of website. With the feedback section, we can collect information about what the customer is searching and can update the site automatically. The number of customers being huge as also their different choices the change for experimenting is much higher over here.

As a consumer product, *Ice Cream* knows no boundaries, it appeals to both men and women of all ages and cultures, so one can never run out of buyers *Ice Cream*. *Ice Cream* is also hugely diverse, sellers can offer rings, necklaces, anklets etc. which can be made from hundred of different mediums like gold, diamonds, gemstones, shells etc. Best of all *Ice Cream* is easy to store and cheap to ship so it can be delivered at the doorstep of customers.

PROBLEM DEFINITION

The system is for the people who love *Ice Cream* and don't have much time to go especially to the market for the purchase of *Ice Cream*. This system will help in making *Ice Cream* shopping easy for the people who have knowledge about *Ice Cream* and also for those who don't know much about *Ice Cream* but always have a urge to get it with latest trends. In this technological world Internet has become one of the primary components to handle various businesses. Business presence across the web helps in reducing the marketing work pressure and data redundancy. *Ice Cream* management is one of the business areas which are still untouched up to good extents in this e world. People have to visit from ice parlour to ice parlour to select the taste of their choice. It is also becoming time consuming to select Ice Cream from heaps of products and more over it also suffers from the from the working time constrains. So In order to overcome the above said issues I proposed my system "Ice cream parlour "and tried to overcome the requirement of most of the *Ice Cream* businesses.

AIM & OBJECTIVE

The aim is to make people aware enough about *Ice Cream* and details related to it so that they can make out best deal for them.

Objectives:

This system will let the users to:-

- 1) Search ice cream and taste information.
- 2) Create/ request their taste ideas.
- 3) Shop with the convenience of e-commerce.
- 4) Product will be delivered at doorstep.
- 5) Will provide up to date information about upcoming and exclusive taste.
- 6) Also provide ice cream window shopping online.
- 7) Use of internet and technology to make this business online.

PROJECT CATEGORY

This Project is a Web Application. Since, it's a web application it includes the following aspects of software engineering.

1.RDBMS

RDBMS stands for of relational database management system. RDBMS is the basis for SQL and for all modern database systems like MS SQL, Oracle etc. In this web application ADO.NET is used. The queries generated by ADO.NET, Microsoft Sql Server 2008 are included. This project uses SQL and PL- SQL in the form of RDBMS.

2.OOPS

OOP is a design philosophy. It stands for Object Oriented Programming. OOPS uses a different set of programming languages than old procedural programming languages (C, Pascal, etc.). It is a type of programming in which programmers define not only the data type of a data structure, but also the types of operations (functions) that can be applied to the data structure. In this way, the data structure becomes an object that includes both data and functions. In addition, programmers can create relationships between one object and another. For example, objects can inherit characteristics from other objects. An example of a language that support this Object oriented features is C++.

3.Networking

Networking is the practise of linking two or more computing devices for the purpose of sharing data. Networks are built with a mix of comp. hardware and software. Since this is a web project, it will have a Web Server where the web site is hosted and it will have many client computers form where this web site will be browsed by users. In sort, this project uses a Client – Server network model.

TOOLS AND PLATFORM

HARDWARE & SOFTWARE REQUIREMENT SPECIFICATION

Minimum Hardware Requirements:

Processor	: Intel i3
Secondary Storage	: 40 GB HDD
ROM	: 52X CD ROM Drive
RAM	: 1 GB RAM
Network Adapter	: Ethernet Adapter
Modem	: 128kbps Voice Fax Data
Others	: Color Monitor, Printer, Scanner, Keyboard, Mouse.

Software Requirement:

Platform	: Windows
Operating System	: Windows 10
Framework	: ASP.NET Framework 2.0
Front-End Tool	: ASP.Net with C#, AJAX
Back- End Tool	: SQL Server 2005
Editing Tool	: Visual Studio 2012
Scripting Tool	: Java script, XML (style Sheet (.xsl))
Server	: Internet Information Server(IIS)

SURVEY OF TECHNOLOGY

Software Tools

Microsoft VISUAL STUDIO 2012

Microsoft Visual Studio is an integrated development environment (IDE) from Microsoft. It can be used to develop console and graphical user interface applications along with window form applications, web sites, web applications, and web services in both native code together with managed code for all platforms supported by Microsoft Windows, Windows Mobile, Windows CE, .NET Framework, .NET Compact Framework and Microsoft Silverlight.

Visual Studio supports different programming languages by means of language services, which allow the code editor and debugger to support (to varying degrees) nearly any programming language, provided a language-specific service exists. Built-in languages include C/C++ (via Visual C++), VB.NET, C# (via Visual C#), and among others is available via language services installed separately. It also supports XML/XSLT, HTML/XHTML, and JavaScript and. Individual language-specific versions of Visual Studio also exist which provide more limited language services to the user: Microsoft Visual Basic, Visual J#, Visual C#, and Visual C++.

Microsoft SQL SERVER 2008

Microsoft SQL Server is a relational database management system developed by Microsoft. As a database, it is a software product whose primary function is to store and retrieve data as requested by other software applications, be it those on the same computer or those running on another computer across a network (including the Internet). There are at least a dozen different editions of Microsoft SQL Server aimed at different audiences and for different workloads. Its primary query languages are T-SQL and ANSI SQL.

SYSTEM ANALYSIS

The process of studying a procedure or business in order to identify its goals and purposes and create systems and procedures that will achieve them in an efficient way. the act, process, or profession of studying an activity (as a procedure, a business, or a physiological function) typically by mathematical means in order to define its goals or purposes and to discover operations and procedures for accomplishing them most efficiently.

In **INFORMATION PROCESSING**, a phase of **SYSTEMS ENGINEERING**. The principal objective of the systems-analysis phase is the specification of what the system needs to do to meet the requirements of end users. In the systems-design phase such specifications are converted to a hierarchy of charts that define the data required and the processes to be carried out on the data so that they can be expressed as instructions of a computer program. Many information systems are implemented with generic software, rather than with such custom-built programs.

SRS AND SOFTWARE MODEL

A Software requirements specification (SRS), a requirements specification for a software system, is a description of the behaviour of a system to be developed and may include a set of use cases that describe interactions the users will have with the software. In addition it also contains non-functional requirements. Non-functional requirements impose constraints on the design or implementation (such as performance engineering requirements, quality standards, or design constraints).

Software requirements specification establishes the basis for agreement between customers and contractors or suppliers (in market-driven projects, these roles may be played by the marketing and development divisions) on what the software product is to do as well as what it is not expected to do. Software requirements specification permits a rigorous assessment of requirements before design can begin and reduces later redesign. It should also provide a realistic basis for estimating product costs, risks, and schedules.

The software requirements specification document enlists enough and necessary requirements that are required for the project development. To derive the requirements we need to have clear and thorough understanding of the products to be developed or being developed. This is achieved and refined with detailed and continuous communications with the project team and customer till the completion of the software.

An SRS minimizes the time and effort required by developers to achieve desired goals and also minimizes the development cost. A good SRS defines how an application will interact with system hardware, other programs and human users in a wide variety of real-world situations. Parameters such as operating speed, response time, availability, portability, maintainability, footprint, security and speed of recovery from adverse events are evaluated.

Spiral Model

The spiral model is a software development process combining elements of both design and prototyping-in-stages, in an effort to combine advantages of top-down and bottom-up concepts. Also known as the spiral lifecycle model (or spiral development), it is a systems development method (SDM) used in information technology (IT).

The spiral model has four phases. A software project repeatedly passes through these phases in iterations called Spirals.

- **Identification:** This phase starts with gathering the business requirements in the baseline spiral. In the subsequent spirals as the product matures, identification of


system requirements, subsystem requirements and unit requirements are all done in this phase.

This also includes understanding the system requirements by continuous communication between the customer and the system analyst. At the end of the spiral the product is deployed in the identified market.

- **Design:** Design phase starts with the conceptual design in the baseline spiral and involves architectural design, logical design of modules, physical product design and final design in the subsequent spirals.
- **Construct or Build:** Construct phase refers to production of the actual software product at every spiral. In the baseline spiral when the product is just thought of and the design is being developed a POC (Proof of Concept) is developed in this phase to get customer feedback.

Then in the subsequent spirals with higher clarity on requirements and design details a working model of the software called build is produced with a version number. These builds are sent to customer for feedback.

- **Evaluation and Risk Analysis:** Risk Analysis includes identifying, estimating, and monitoring technical feasibility and management risks, such as schedule slippage and cost overrun. After testing the build, at the end of first iteration, the customer evaluates the software and provides feedback.

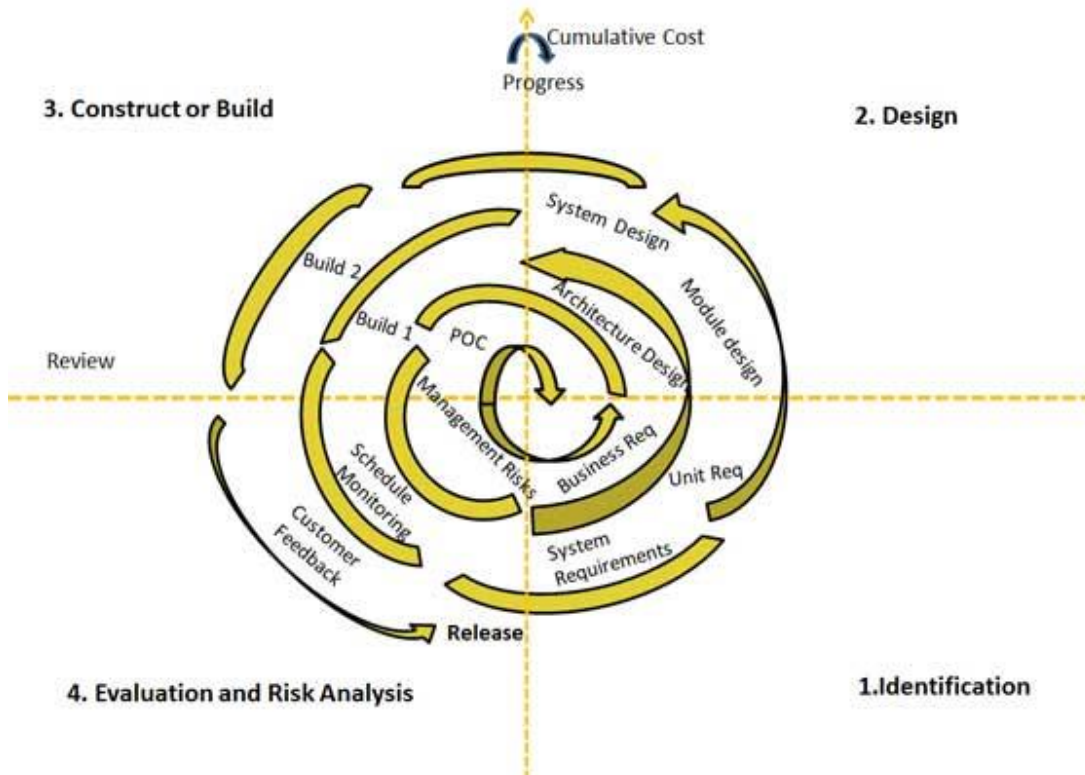

Waterfall Model: The Waterfall Model was first Process Model to be introduced. It is also referred to as a linear-sequential life cycle model. It is very simple to understand and use. In a waterfall model, each phase must be completed before the next phase can begin and there is no overlapping in the phases. Waterfall model is the earliest SDLC approach that was used for software development.

The waterfall Model illustrates the software development process in a linear sequential flow; hence it is also referred to as a linear-sequential life cycle model. This means that any phase in the development process begins only if the previous phase is complete. In waterfall model phases do not overlap.


Waterfall Model Advantage

The advantage of waterfall development is that it allows for departmentalization and control. A schedule can be set with deadlines for each stage of development and a product can proceed through the development process model phases one by one. Development moves from concept, through design, implementation, testing, installation, troubleshooting, and ends up at operation and maintenance. Each phase of development proceeds in strict order.

Waterfall Model Disadvantage

The disadvantage of waterfall development is that it does not allow for much reflection or revision. Once an application is in the testing stage, it is very difficult to go back and change something that was not well documented or thought upon in the concept stage.

Waterfall Model Design

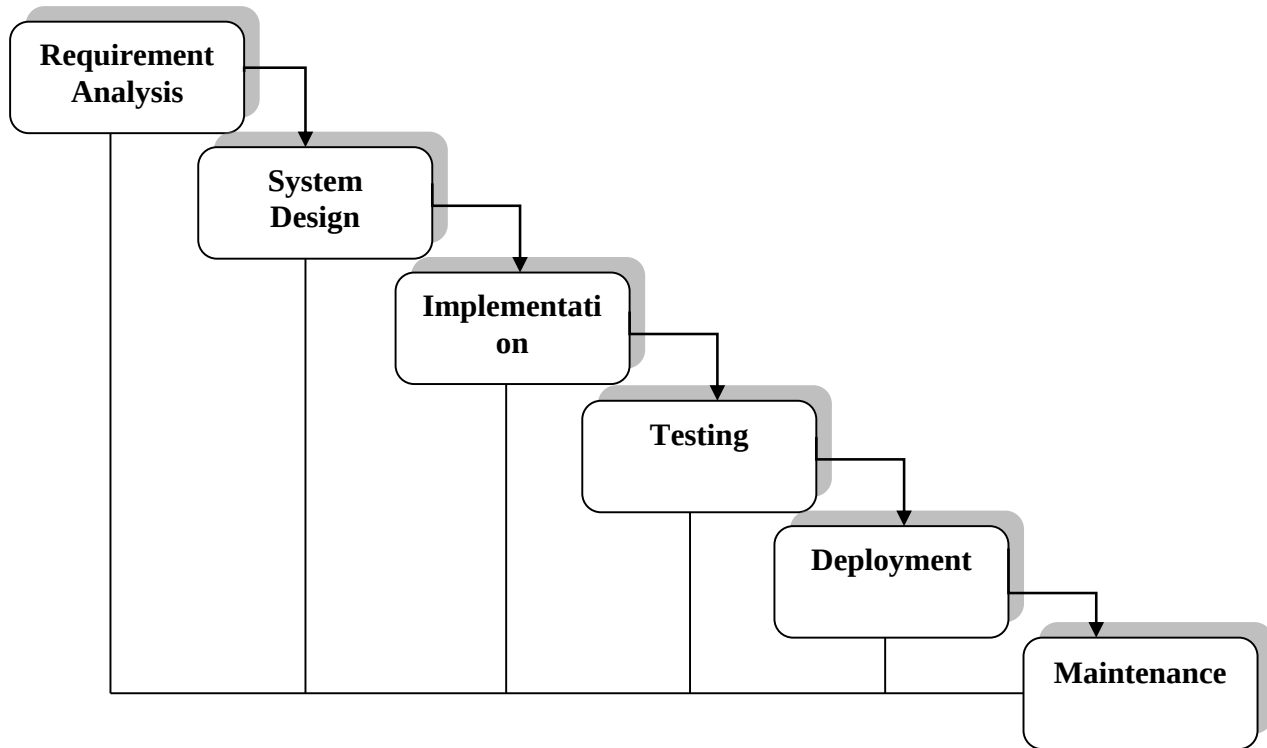


SCHEDULING

Gantt chart:


A Gantt chart is a type of bar chart, developed by Henry Gantt in the 1910s, that illustrates a project schedule. Gantt charts illustrate the start and finish dates of the terminal elements and summary elements of a project. Terminal elements and summary elements comprise the work breakdown structure of the project. Modern Gantt charts also show the dependency (i.e. precedence network) relationships between activities. Gantt charts can be used to show current schedule status using percent-complete shadings and a vertical "TODAY" line as shown here.

Although now regarded as a common charting technique, Gantt charts were considered extremely revolutionary when first introduced.^[1] In recognition of Henry Gantt's contributions, the Henry Laurence Gantt Medal is awarded for distinguished achievement in management and in community service. This chart is also used in information technology to represent data that has been collected.

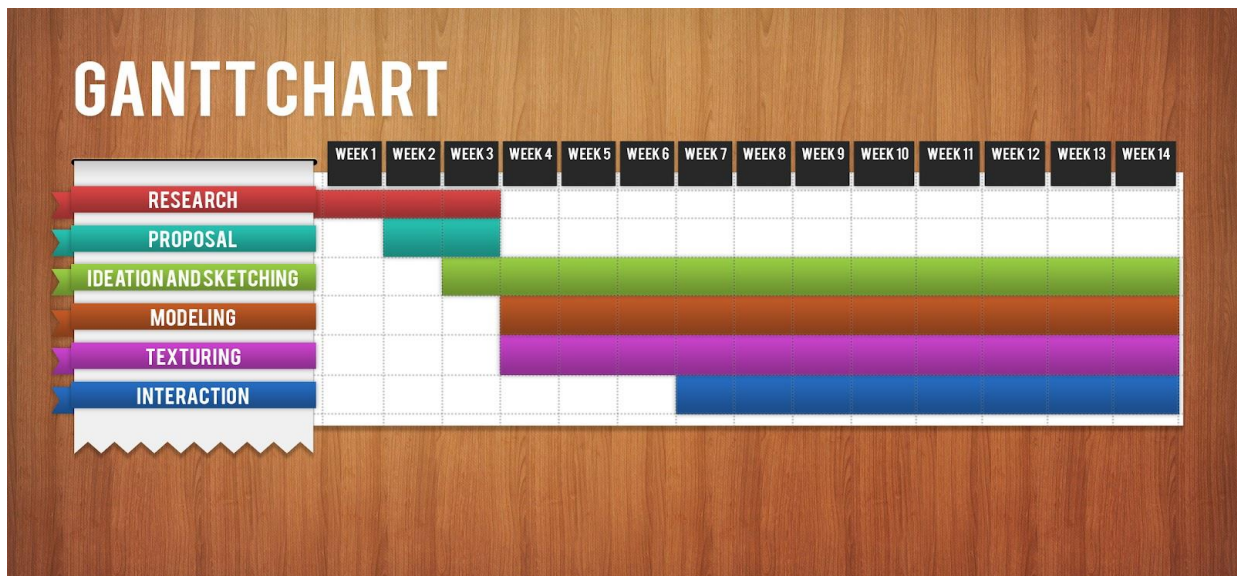

Pert Chart:

A project management tool that provides a graphical representation of a project's timeline. Pert chart was developed by the united states Navy for the polaris submarine missile program in 1950s. Pert chart allow the tasks in a particular project to be analyzed, with particular attention to the time required to complete each task, and the minimum time required to finish the entire project.

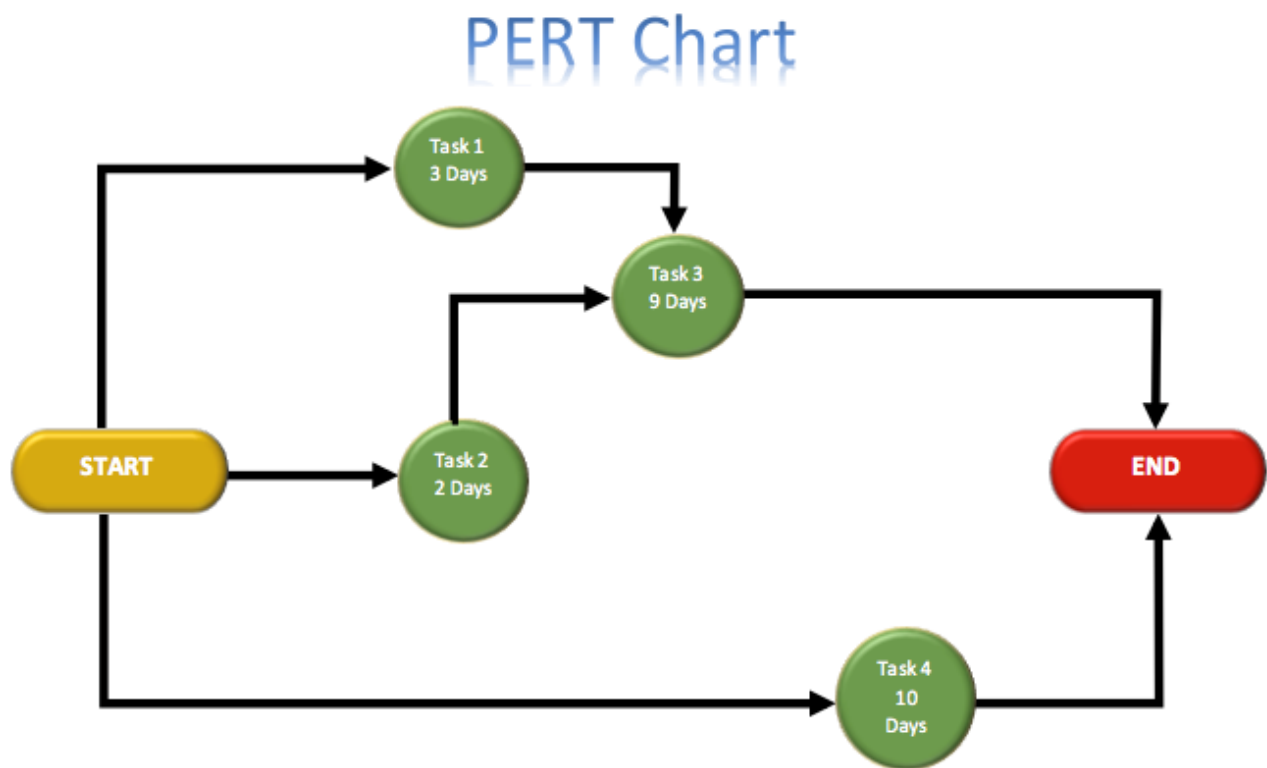

DATA FLOW DIAGRAMS

DFD graphically represents the flow of data from one point to another point in the system. It describes the processes or activities that are involved in the system and how these processes transform input into the output. It also describes system's data and how data interact with the system.

It contains four symbols:

1) EXTERNAL ENTITIES :-

These are the source or destination that provides information for the system. These may be person, organization or any other entity. This symbol is represented as rectangle.



ENTITY NAME

2) PROCESSES :-

Processes show the transformation of input data flows to output data flows. It is also known as bubble or transform. A rectangular box or circle denotes a process.



PROCESS
NAME

OR



PROCESS
NAME

3) DATA FLOW LINE: -

Data Flow Diagram shows how data travels from one point to another point in the diagram. The flow is shown as an arrowed line with the arrowhead showing the direction of flow.



DATA FLOW




4) DATA STORE:-

A data store is store house of data and information i.e. used in the system for executing multiple processes. It may be a table, a database, a file or a folder. Process stores information into the data store or retrieves information from the data store.

Data Store
Name

Ice Cream Parlour


ZeroLevelDFD:

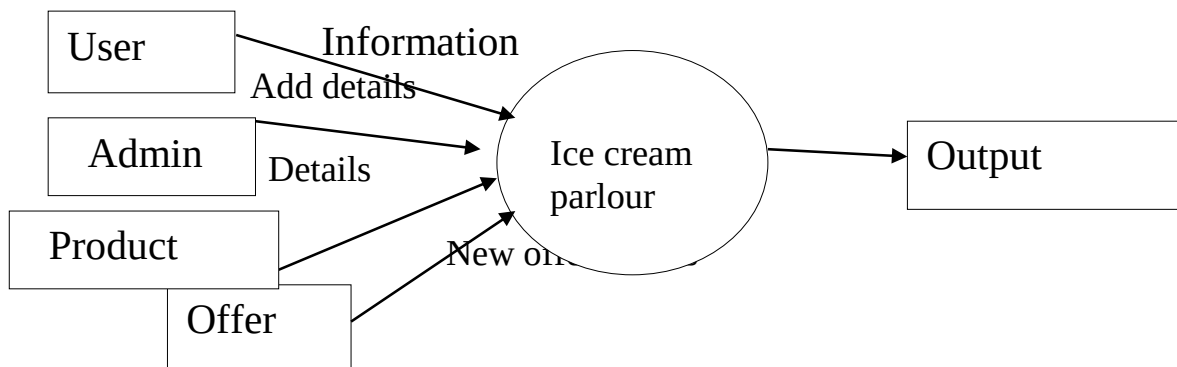

Ice Cream Parlour


1st Level DFD:

- User Point of View

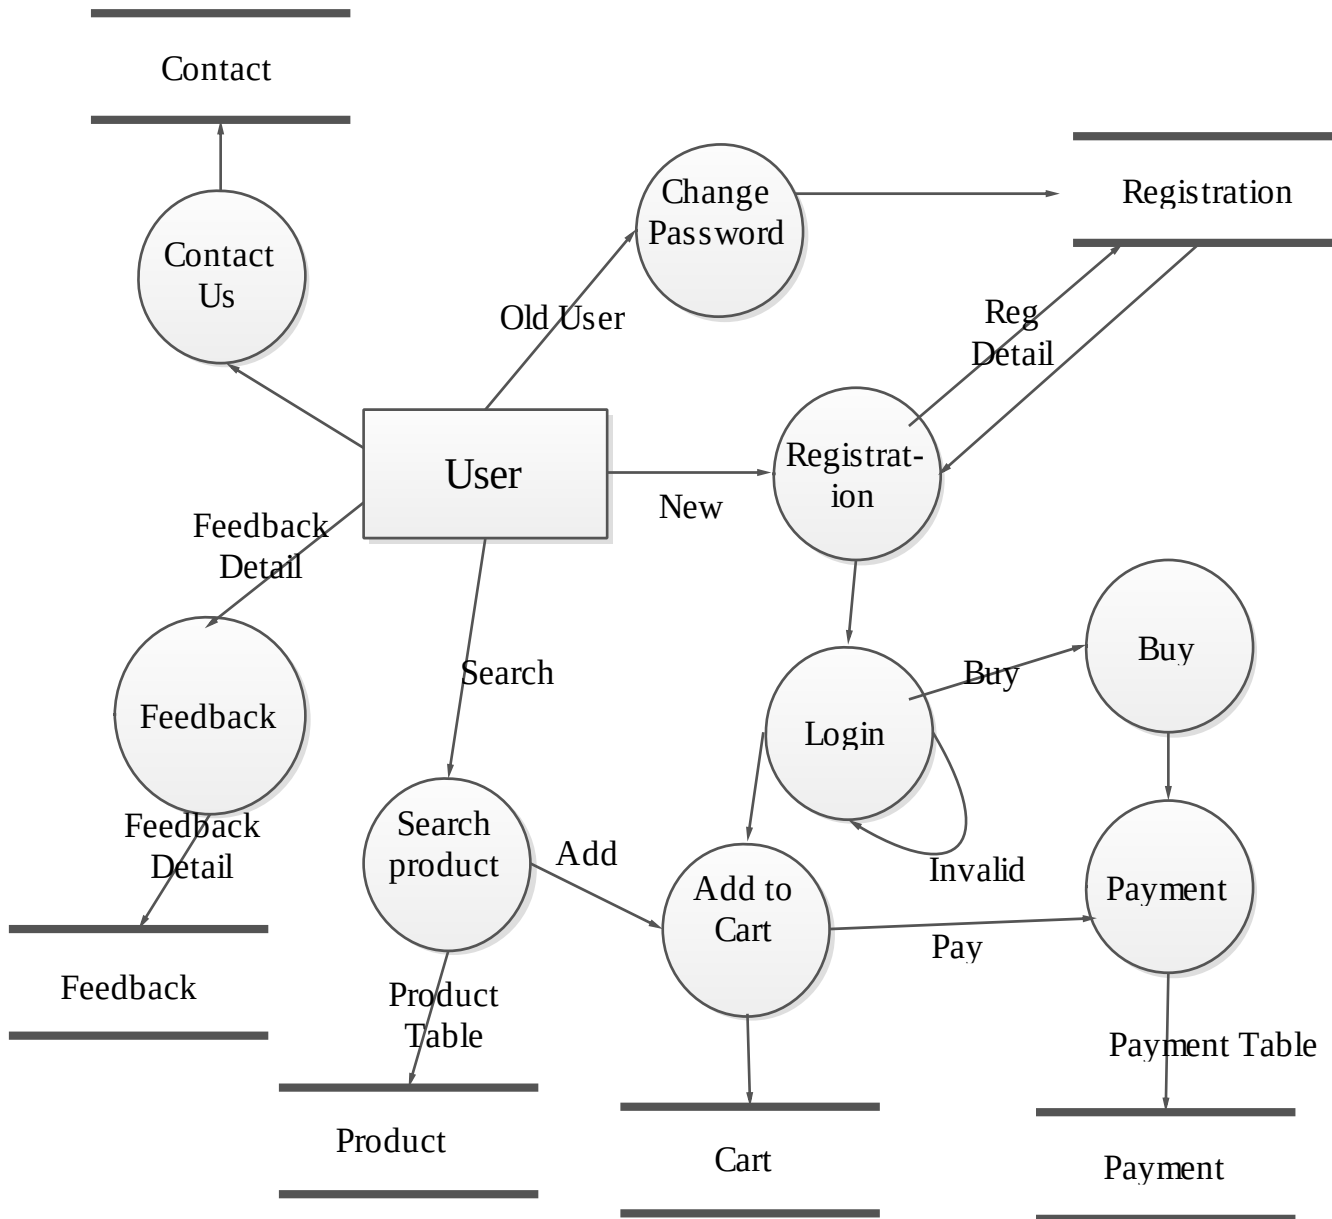


Ice Cream Parlour

- Admin Point of View

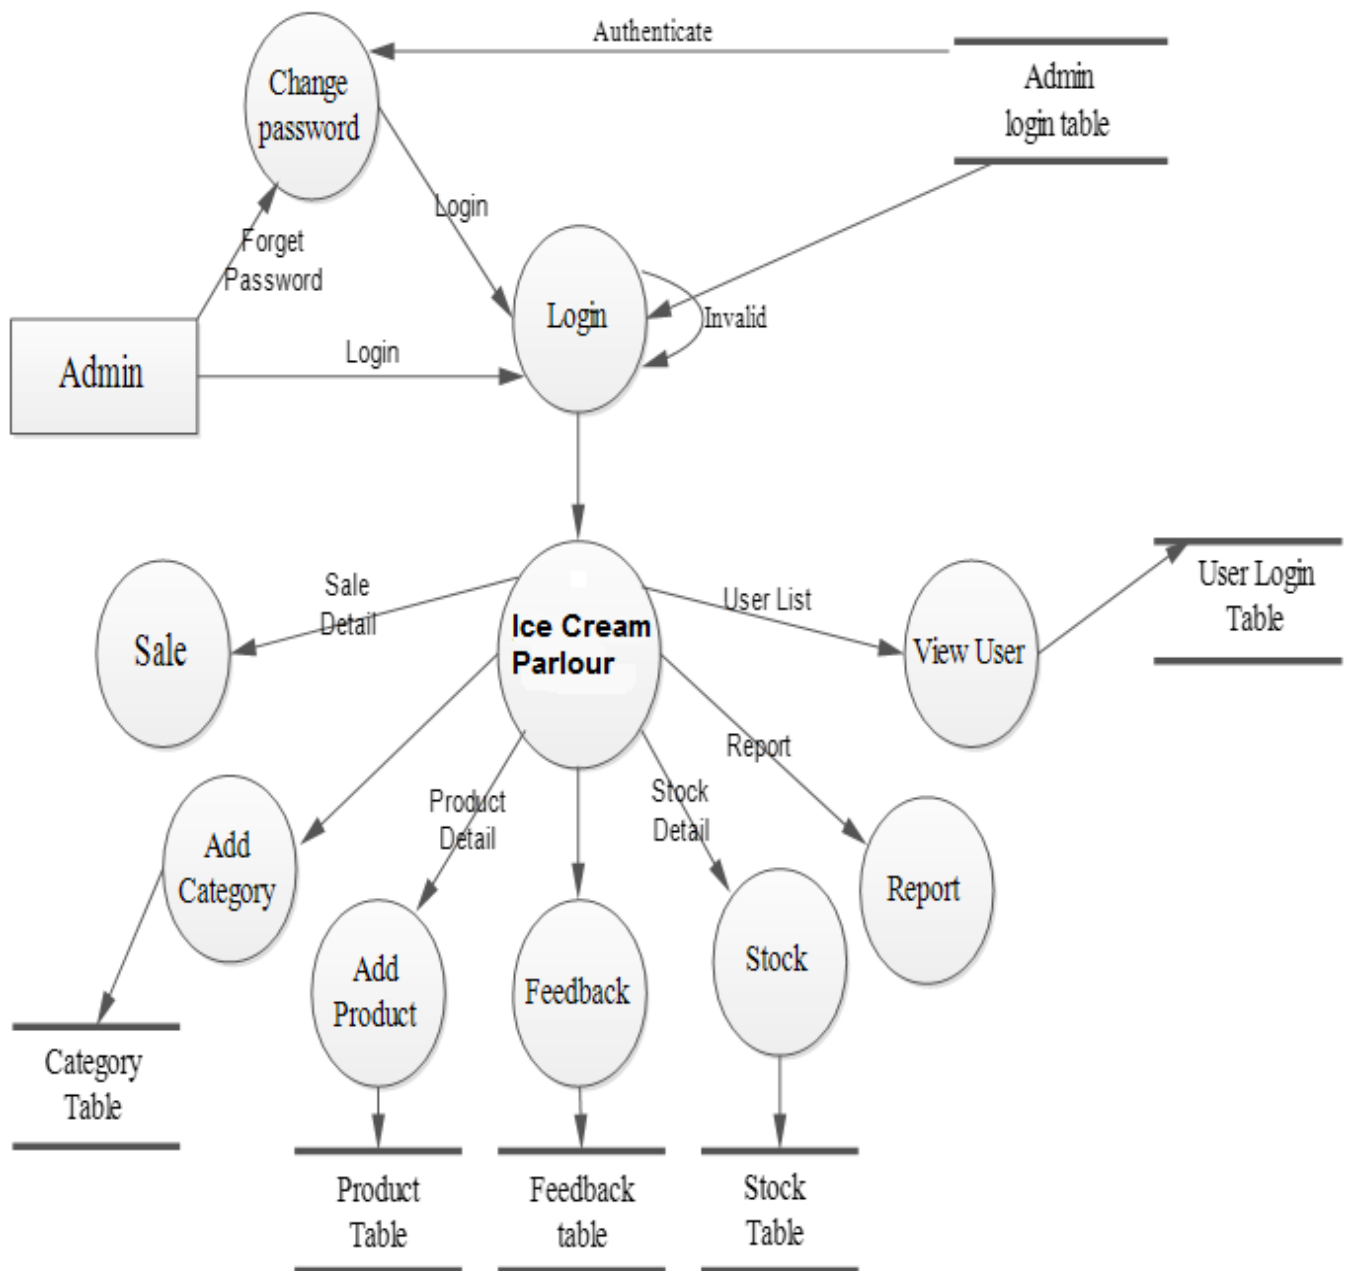


2nd Level DFD

- User Point of View

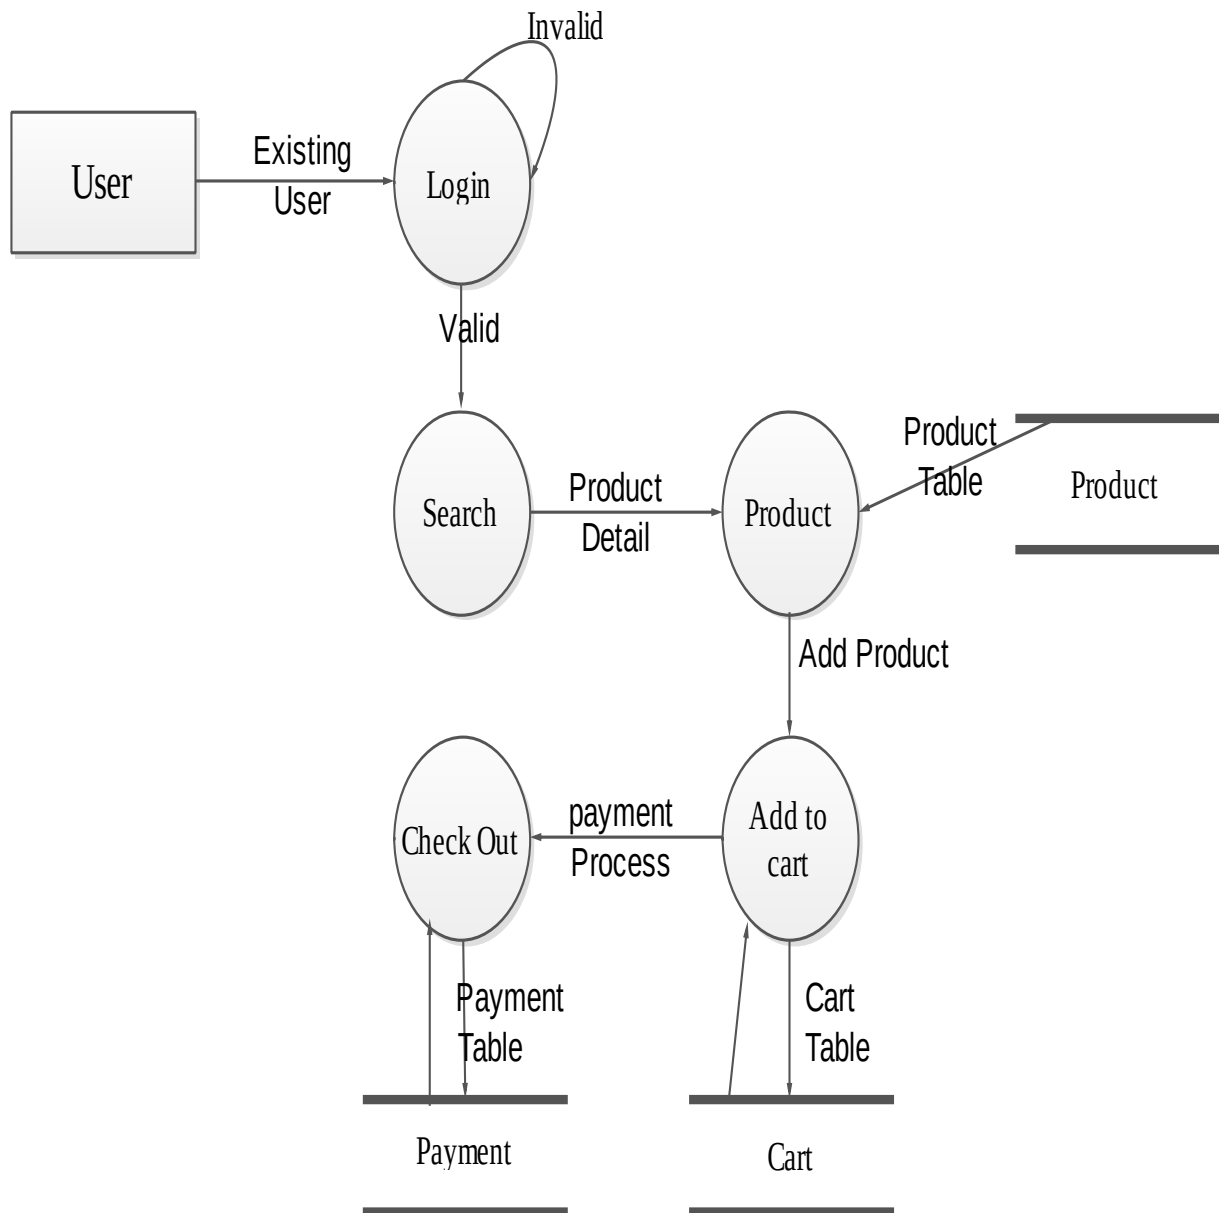

- Admin Point of View

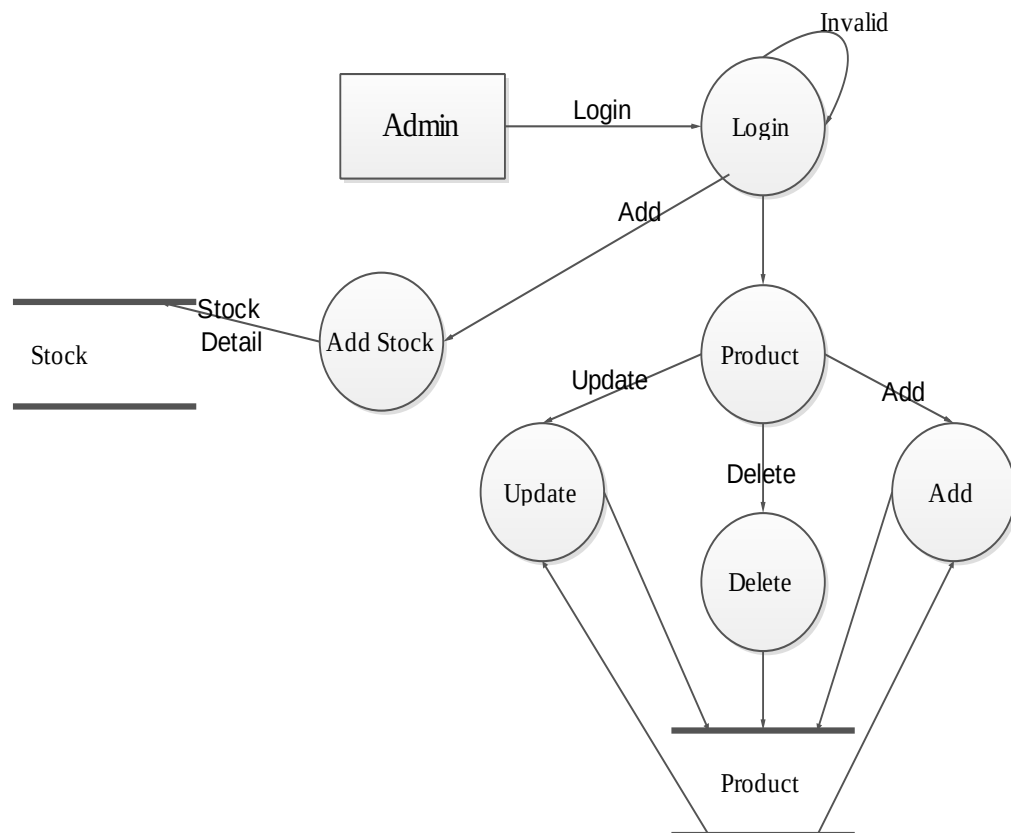


ER DIAGRAM

ER Stands for Entity Relationship. Entity Relationship Diagram is a detailed logical representation of the entities, associations and data elements for an organization or business area. This technique is used in data base design that describes how entities in an enterprise are related to one another. The Entity relationship diagram uses 3 features to describe data. These are the followings.

➤ **ENTITIES:**

An entity is a person place or thing or event of interest to the org and about which data are captured, stored or processed. For Ex-Employee is an entity. Entity is represented by symbol



➤ **ATTRIBUTE:**

Various types of data that describe an entity are known as Attributes. For ex Name, age, address, are some of the attributes of employee entity. Attributes are represented by symbol



➤ **RELATIONSHIP :**


An association of several entity in entity relationship diagram is called relationship. It is represented by symbol



➤ **LINES :**

It links attributes to entity sets and entity sets to relationship. It is represented by symbol

ERD Design

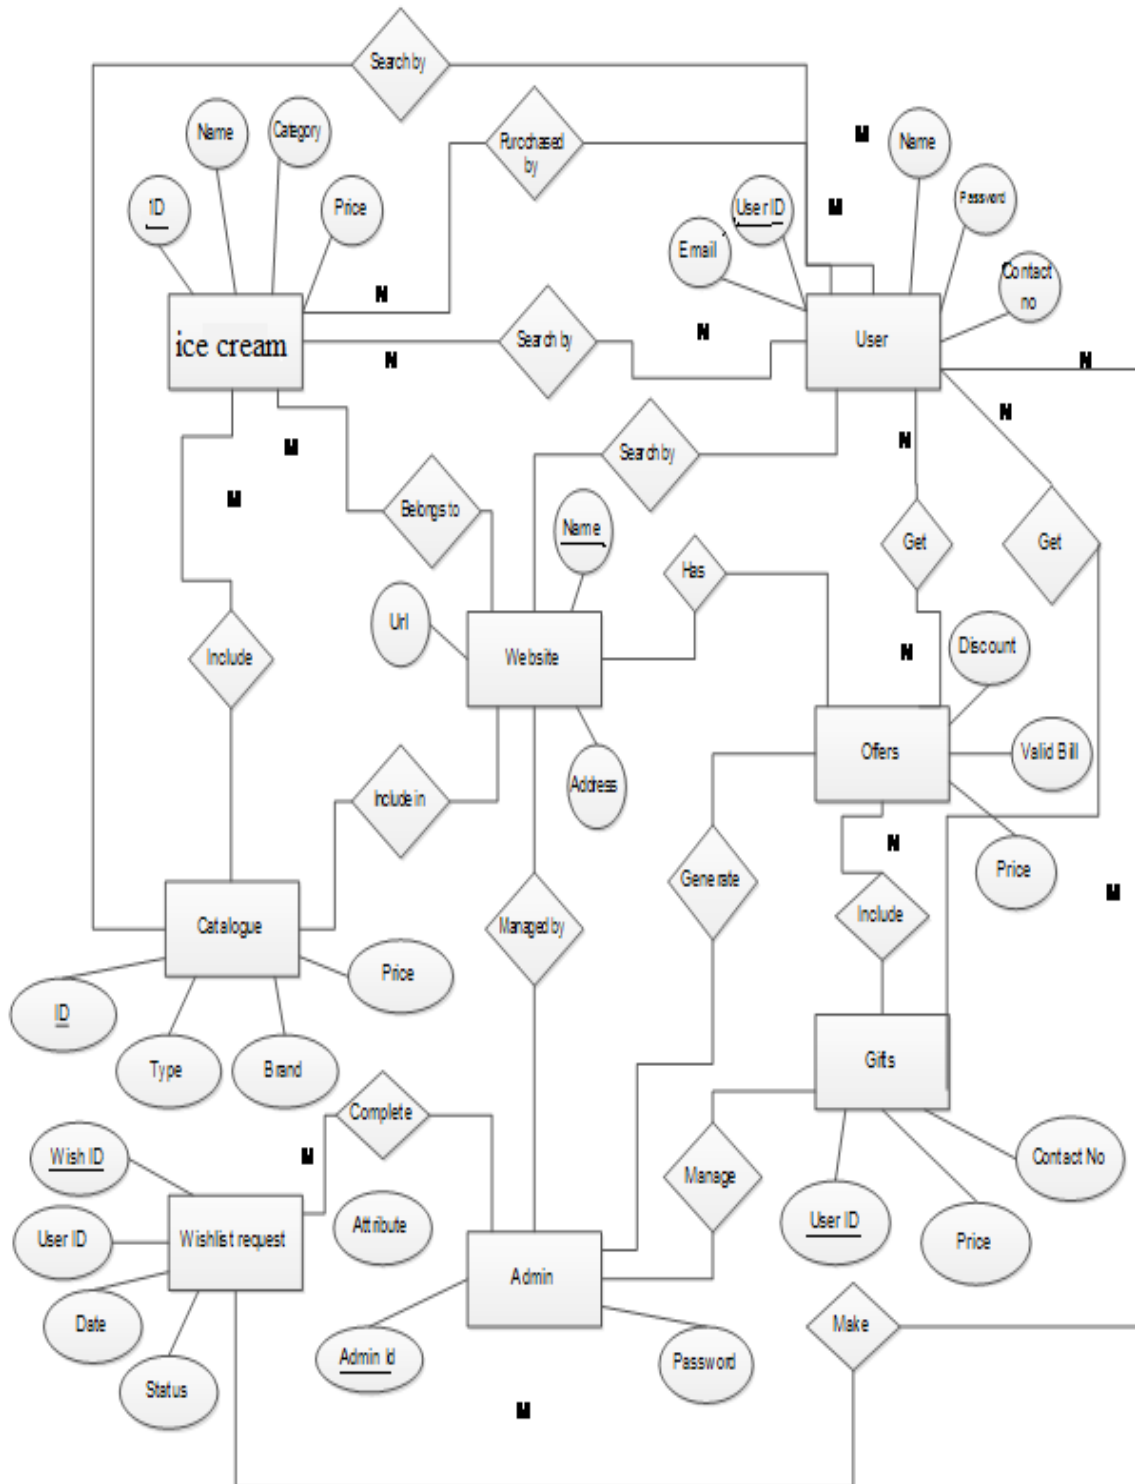

DATABASE DESIGN

A database design is a collection of stored data organized in such a way that the data requirements are satisfied by the database. The general objective is to make information access easy, quick, inexpensive and flexible for the user. There are also some specific objectives like controlled redundancy from failure, privacy, security and performance.

A collection of relative records makes up a table. To design and store data to the needed forms database tables are prepared.

Two essential settings for a database are:

- **PRIMARY KEY:** -The field that is unique for all the record occurrences.
- **FOREIGN KEY:** - The field used to set relation between tables. Normalization is a technique to avoid redundancy in the tables.

USER REGISTRATION TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
USER_ID	Int	Primary key	User registration id
NAME	Varchar (14)	Not Null	Used to store Name
PASSWORD	Varchar (10)	Not Null	To control access to user account
ADDRESS	Varchar (100)	Not Null	For delivery of items
EMAIL_ID	Varchar (30)	Not Null	Used for communication
GENDER	Varchar (8)	Not Null	Male or Female
DOB	Date/time		Date of birth of user
CONTACT_NO	Number	Not Null	User for communication purpose
REG_DATE	Date		

CATEGORY TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
CATEGORY_ID	Int	Primary key	Category ID
CATEGORY_NAME	Varchar (20)	Not Null	Category name

CONTACT US TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
ID	Int	Primary key	Used to store User ID
CONTACT NO	Big Int		Used to store contact no
EMAIL ID	Varchar(50)	Not Null	Used to store Email_ID
QUERY	Varchar(150)		Used to store Query from user
DATE	Date/time	Not Null	Used to store Date

PRODUCT TABLE

S.No	Field Name	Data Type	Constraint	Description
1.	Ice Cream_ID	Int	Primary Key	Contains ID of Ice Cream
2.	Ice Cream_name	Varchar(100)	Not Null	Contains Name of Ice Cream
3.	Category_ID	Int	Foreign Key	Contains category of Ice Cream
4.	Ice Cream_Desc	Varchar(max)		Contains Description of Ice Cream
5.	Ice Cream_Photo1	Varchar(max)	Not Null	Contains photo of Ice Cream
6.	Ice Cream_Photo1	Varchar(max)		Contains photo of Ice Cream
7.	Ice Cream_Photo1	Varchar(max)		Contains photo of Ice Cream
8.	Price	Float	Not Null	Contains price of the Ice Cream
9.	Keywords	Varchar(50)		Contains some word related to Ice Cream
10.	Speciality	Varchar(70)		Contains some special features about Ice Cream
11.	Availability	Varchar(10)	Not Null	Contains availability status of Ice Cream
12.	Posting_date	Date Time	Not Null	Contains date when Ice Cream get posted
13.	Age_group	Varchar(50)		Contains age group to which Ice Cream belongs
14.	Occasions	Varchar(20)		Contains occasions on which Ice Cream can be used
15.	ProductFor	Varchar(20)	Not Null	Contains specification of people for whom Ice Cream has been made.

Ice Cream Parlour

SALES TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
INVOICE_NO	Int	Primary key	Used to store invoice
USER_ID	Varchar(20)	Foreign key	Used to store user's unique ID
PRODUCT_ID	Varchar(10)	Foreign key	Used to store product ID
PRICE	Int	Not Null	Used to store total amount of invoice
SALE_DATE	Date/time	Not Null	Used to store selling date

CART TABLE

S.No	Field Name	Data Type	Constraint	Description
1.	Cart_ID	int	Primary Key	Contains Id of offer
2.	Ice Cream_id	Int	Foreign Key	Contains Id of Ice Cream
	User_id	Varchar(30)	Foreign Key	Contains Id of user
3.	Quantity	Int	Not Null	Contains quantity of Ice Cream
4.	Price	Float	Not Null	Contains price of Ice Cream
5.	Date_of_Purchase	Date Time	Not Null	Contains date of purchase of Ice Cream
6.	Offer_id	Int	Foreign key	Contains offer id if any offer is availed
8.	Mode_of_payment	Varchar(20)	Not Null	Contains mode of payment for the Ice Cream

FEEDBACK TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
FEED_ID	Int	Primary key	Used to store feedback id
USER_ID	Varchar (20)	Foreign key	Used to store user's unique id
REMARKS	Varchar (150)	Not Null	Any special remark given
DATE	Date/time	Not Null	Feedback given on which date
CONTACT	BigInt		Contact details of feedback provider

ADMIN TABLE

S.No	Field Name	Data Type	Constraint	Description
1.	Login	Varchar(30)	Not Null	Contains login id of the person who will login
2.	Password	Varchar(100)	Not Null	Contains password of the person who will login

Input to the System

- **Registration**
- **Login**
- **Category**
- **View product**
- **Add to cart**
- **Purchase Product**
- **Payment process**
- **Receipt Module**
- **Feedback**
- **Search**
- **Contact Us**
- **Delivery Status**
- **Return**
- **Wishlist**
- **Most viewed**
- **Recently viewed**
- **Notification**
- **FAQs**
- **About us**
- **Term of use**

Module Description

User Modules:

1. **Registration:** New Users can register by entering their details.
2. **Login:** Existing Users can login from this module.
3. **Search Product:** Users can search for desired products
4. **Purchase:** Purchases will be made from this module.
5. **Update User Information:** User can edit his/her information from this module.
6. **Product Review:** User can leave their reviews on products
7. **View Details of Product:** Individual product details will be shown here.
8. **Add to Cart:** Products can be added to the cart from this module.
9. **Remove Cart Item:** Any unwanted products can be removed from here.
10. **Payment:** Payment is done here
11. **Receipt:** Receipt is generated here.
12. **Feedback:** Users can leave their feedback.
13. **Contact Details:** Users can leave their contact details for later conversation.
14. **Log Out:** Using this, user will log out.

Admin/Employee Modules:

1. **Login:** Admin/Employee can login from here.
2. **Add Product:** Products can be added from here.
3. **Remove Product:** Products can be removed from here.
4. **Edit Product:** Products can be edited from here.
5. **Feedback Reply:** User left feedback can be responded from here.
6. **Log Out:** Admin/Employee can log out from here.

Output From The System

1. Product display
2. Price display
3. Friend invitation
4. Search display
5. List of users
6. Sales made
7. Top 10 Ice Creams
8. Hot selling products
9. List of queries received

TESTING PROCESS

The testing phase involves many activities where chances of occurrence of human errors are enormous. Logical errors, carelessness, improper communication, the need to hurry through the whole process due to the time constraint, cost constraint etc. provide ways for errors to creep in. The software must be tested thoroughly so that such errors are detected and corrected as early as possible.

TYPES OF TESTING WE ARE GOING TO USE

1) WHITE BOX TESTING:

White-box testing is concerned with the implementation of the program. In this type of testing different programming structures and data structures used in the program are tested for the implementation of the coding.

2) BLACK BOX TESTING:

Black box testing is concerned with the proper execution of the program specifications. In this testing each function or sub-program used in the main program is first identified. For Example a payroll Calc_grosspay(), may be the functions, used to calculate the grosspay and printing of payslips.

3) ALPHA BOX TESTING:

Tests performed at developer's site before the system is finally installed in the real working environment is known as Alpha testing. It involves testing the system with live data supplied by the organization rather than by the test data used by the system designer.

4) BETA TESTING:-

The Beta test is conducted at one or more customer's site by the end of software unlike alpha testing; the developer is generally not present. Therefore Beta test is a "LIVE" application that cannot be controlled by the developer.

5) SYSTEM TESTING :-

In System testing, we have to check out the capabilities of system and software. Software is the one component of a large computer system. Many software products are designed to run on different variety of hardware. So, the software should actually work on different environment

FUTURE SCOPE

Scope in Future of Waffles ice cream parlour online is:

- The system is not ready to sell the products it can be enhanced in future to do so.
- It will also scope to enhance in improvement of Delivery methodologies like try at home and cash on delivery.
- System will also be scaled to Mobile Technology
- System will also be improvised in Security mechanisms
- Right now System is using third party gateways for payments in later stage it will have its on Payment Gateway.

This System is scaled and taste as per the understanding of current needs Regular surveys will be performed and more triggers will be added as the per the input received and time changes.

BIBLIOGRAPHY

➤ **BOOKS**

- ❖ ASP.NET OF Unleashed publication
- ❖ System Analysis and Design (IGNOU)
- ❖ Professional Asp.net by Wrox publication
- ❖ C# by Balagoswamy
- ❖ SQLSERVER by Iran Bayors , Mark Maslakowski
- ❖ HTML/DHTML/Java Script by PBP Publication
- ❖ ASP.NET technical reference by NIIT
- ❖ Java script technical reference by NIIT
- ❖ SQL SERVER technical reference by NIIT
- ❖ Software Engineering by Roger S.Pressman

➤ **WEBSITES**

- ❖ www.csharp.com
- ❖ www.microsoft.com
- ❖ www.asp.net
- ❖ www.dotnetspider.com

REPORT

TITLE OF THE PROJECT

Waffle Ice Cream parlour

INTRODUCTION

The system is made for the people who want to buy and can shop with convenience of e-commerce.

Ice Cream is one of the things that have seen maximum alterations with change of time. Experiments are happening each and every day and something or else new designs are coming up. Now with the dependable growth rate from the long past this is also being considered as a very good investment plan. With the presence of website, we can make our business go beyond boundaries, designs being getting spread around the globe.

In *Ice Cream* business the customers like to see more and more of taste which is very easy when having a website as in stores its difficult to attain so many customers, moreover they can create their own taste with the help of website. With the feedback section, we can collect information about what the customer is searching and can update the site automatically. The number of customers being huge as also their different choices the change for experimenting is much higher over here.

As a consumer product, *Ice Cream* knows no boundaries, it appeals to both men and women of all ages and cultures, so one can never run out of buyers *Ice Cream*. *Ice Cream* is also hugely diverse, sellers can offer rings, necklaces, anklets etc. which can be made from hundred of different mediums like gold, diamonds, gemstones, shells etc. Best of all *Ice Cream* is easy to store and cheap to ship so it can be delivered at the doorstep of customers.

PROBLEM DEFINITION

The system is for the people who love *Ice Cream* and don't have much time to go especially to the market for the purchase of *Ice Cream*. This system will help in making *Ice Cream* shopping easy for the people who have knowledge about *Ice Cream* and also for those who don't know much about *Ice Cream* but always have a urge to get it with latest trends. In this technological world Internet has become one of the primary components to handle various businesses. Business presence across the web helps in reducing the marketing work pressure and data redundancy. *Ice Cream* management is one of the business areas which are still untouched up to good extents in this e world. People have to visit from ice parlour to ice parlour to select the taste of their choice. It is also becoming time consuming to select Ice Cream from heaps of products and more over it also suffers from the from the working time constrains. So In order to overcome the above said issues I proposed my system "Waffles ice cream parlour online "and tried to overcome the requirement of most of the *Ice Cream* businesses.

AIM & OBJECTIVE

The aim is to make people aware enough about *Ice Cream* and details related to it so that they can make out best deal for them.

Objectives:

This system will let the users to:-

- 8) Search ice cream and taste information.
- 9) Create/ request their taste ideas.
- 10) Shop with the convenience of e-commerce.
- 11) Product will be delivered at doorstep.
- 12) Will provide up to date information about upcoming and exclusive taste.
- 13) Also provide ice cream window shopping online.
- 14) Use of internet and technology to make this business online.

PROJECT CATEGORY

This Project is a Web Application. Since, it's a web application it includes the following aspects of software engineering.

1.RDBMS

RDBMS stands for of relational database management system. RDBMS is the basis for SQL and for all modern database systems like MS SQL, Oracle etc. In this web application ADO.NET is used. The queries generated by ADO.NET, Microsoft Sql Server 2008 are included. This project uses SQL and PL- SQL in the form of RDBMS.

2.OOPS

OOP is a design philosophy. It stands for Object Oriented Programming. OOPS uses a different set of programming languages than old procedural programming languages (C, Pascal, etc.). It is a type of programming in which programmers define not only the data type of a data structure, but also the types of operations (functions) that can be applied to the data structure. In this way, the data structure becomes an object that includes both data and functions. In addition, programmers can create relationships between one object and another. For example, objects can inherit characteristics from other objects. An example of a language that support this Object oriented features is C++.

3.Networking

Networking is the practise of linking two or more computing devices for the purpose of sharing data. Networks are built with a mix of comp. hardware and software. Since this is a web project, it will have a Web Server where the web site is hosted and it will have many client computers form where this web site will be browsed by users. In sort, this project uses a Client – Server network model.

TOOLS AND PLATFORM

HARDWARE & SOFTWARE REQUIREMENT SPECIFICATION

Minimum Hardware Requirements:

Processor	: Intel i3
Secondary Storage	: 40 GB HDD
ROM	: 52X CD ROM Drive
RAM	: 1 GB RAM
Network Adapter	: Ethernet Adapter
Modem	: 128kbps Voice Fax Data
Others	: Color Monitor, Printer, Scanner, Keyboard, Mouse.

Software Requirement:

Platform	: Windows
Operating System	: Windows 10
Framework	: ASP.NET Framework 2.0
Front-End Tool	: ASP.Net with C#, AJAX
Back- End Tool	: SQL Server 2005
Editing Tool	: Visual Studio 2012
Scripting Tool	: Java script, XML (style Sheet (.xsl))
Server	: Internet Information Server(IIS)

SURVEY OF TECHNOLOGY

Software Tools

Microsoft VISUAL STUDIO 2012

Microsoft Visual Studio is an integrated development environment (IDE) from Microsoft. It can be used to develop console and graphical user interface applications along with window form applications, web sites, web applications, and web services in both native code together with managed code for all platforms supported by Microsoft Windows, Windows Mobile, Windows CE, .NET Framework, .NET Compact Framework and Microsoft Silverlight.

Visual Studio supports different programming languages by means of language services, which allow the code editor and debugger to support (to varying degrees) nearly any programming language, provided a language-specific service exists. Built-in languages include C/C++ (via Visual C++), VB.NET, C# (via Visual C#), and among others is available via language services installed separately. It also supports XML/XSLT, HTML/XHTML, and JavaScript and. Individual language-specific versions of Visual Studio also exist which provide more limited language services to the user: Microsoft Visual Basic, Visual J#, Visual C#, and Visual C++.

Microsoft SQL SERVER 2008

Microsoft SQL Server is a relational database management system developed by Microsoft. As a database, it is a software product whose primary function is to store and retrieve data as requested by other software applications, be it those on the same computer or those running on another computer across a network (including the Internet). There are at least a dozen different editions of Microsoft SQL Server aimed at different audiences and for different workloads. Its primary query languages are T-SQL and ANSI SQL.

SYSTEM ANALYSIS

The process of studying a procedure or business in order to identify its goals and purposes and create systems and procedures that will achieve them in an efficient way. the act, process, or profession of studying an activity (as a procedure, a business, or a physiological function) typically by mathematical means in order to define its goals or purposes and to discover operations and procedures for accomplishing them most efficiently.

In **INFORMATION PROCESSING**, a phase of **SYSTEMS ENGINEERING**. The principal objective of the systems-analysis phase is the specification of what the system needs to do to meet the requirements of end users. In the systems-design phase such specifications are converted to a hierarchy of charts that define the data required and the processes to be carried out on the data so that they can be expressed as instructions of a computer program. Many information systems are implemented with generic software, rather than with such custom-built programs.

SRS AND SOFTWARE MODEL

A Software requirements specification (SRS), a requirements specification for a software system, is a description of the behaviour of a system to be developed and may include a set of use cases that describe interactions the users will have with the software. In addition it also contains non-functional requirements. Non-functional requirements impose constraints on the design or implementation (such as performance engineering requirements, quality standards, or design constraints).

Software requirements specification establishes the basis for agreement between customers and contractors or suppliers (in market-driven projects, these roles may be played by the marketing and development divisions) on what the software product is to do as well as what it is not expected to do. Software requirements specification permits a rigorous assessment of requirements before design can begin and reduces later redesign. It should also provide a realistic basis for estimating product costs, risks, and schedules.

The software requirements specification document enlists enough and necessary requirements that are required for the project development. To derive the requirements we need to have clear and thorough understanding of the products to be developed or being developed. This is achieved and refined with detailed and continuous communications with the project team and customer till the completion of the software.

An SRS minimizes the time and effort required by developers to achieve desired goals and also minimizes the development cost. A good SRS defines how an application will interact with system hardware, other programs and human users in a wide variety of real-world situations. Parameters such as operating speed, response time, availability, portability, maintainability, footprint, security and speed of recovery from adverse events are evaluated.

Spiral Model

The spiral model is a software development process combining elements of both design and prototyping-in-stages, in an effort to combine advantages of top-down and bottom-up concepts. Also known as the spiral lifecycle model (or spiral development), it is a systems development method (SDM) used in information technology (IT).

The spiral model has four phases. A software project repeatedly passes through these phases in iterations called Spirals.

- **Identification:** This phase starts with gathering the business requirements in the baseline spiral. In the subsequent spirals as the product matures, identification of


system requirements, subsystem requirements and unit requirements are all done in this phase.

This also includes understanding the system requirements by continuous communication between the customer and the system analyst. At the end of the spiral the product is deployed in the identified market.

- **Design:** Design phase starts with the conceptual design in the baseline spiral and involves architectural design, logical design of modules, physical product design and final design in the subsequent spirals.
- **Construct or Build:** Construct phase refers to production of the actual software product at every spiral. In the baseline spiral when the product is just thought of and the design is being developed a POC (Proof of Concept) is developed in this phase to get customer feedback.

Then in the subsequent spirals with higher clarity on requirements and design details a working model of the software called build is produced with a version number. These builds are sent to customer for feedback.

- **Evaluation and Risk Analysis:** Risk Analysis includes identifying, estimating, and monitoring technical feasibility and management risks, such as schedule slippage and cost overrun. After testing the build, at the end of first iteration, the customer evaluates the software and provides feedback.

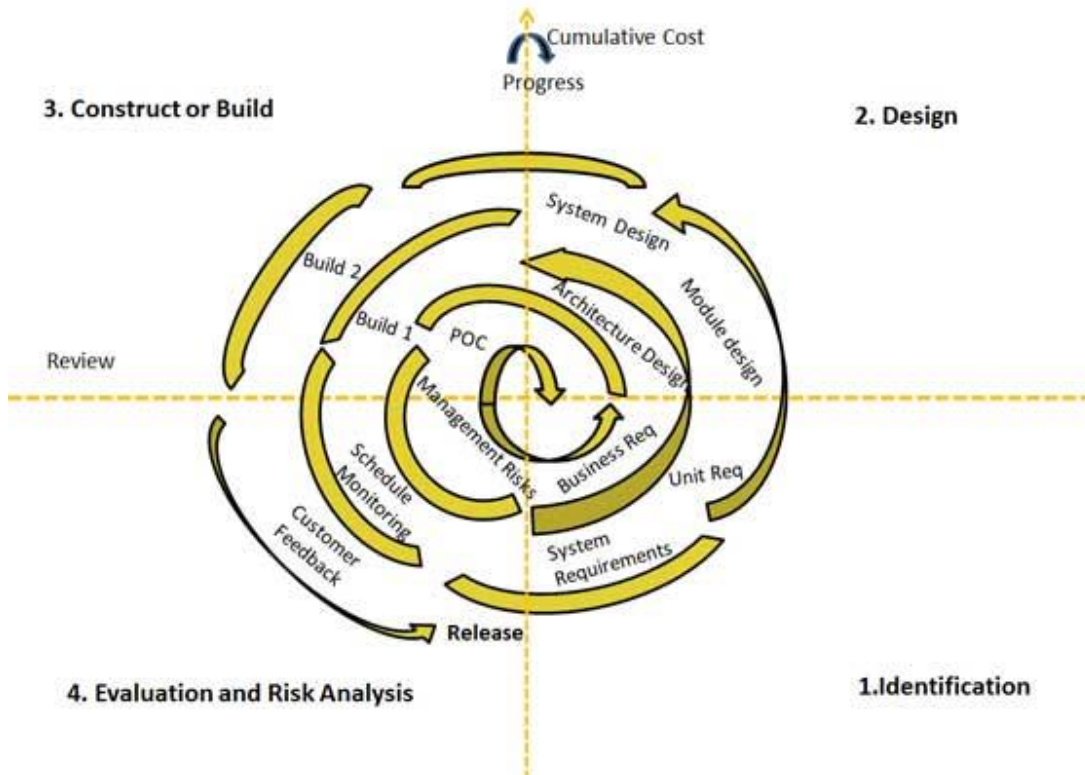

Waterfall Model: The Waterfall Model was first Process Model to be introduced. It is also referred to as a linear-sequential life cycle model. It is very simple to understand and use. In a waterfall model, each phase must be completed before the next phase can begin and there is no overlapping in the phases. Waterfall model is the earliest SDLC approach that was used for software development.

The waterfall Model illustrates the software development process in a linear sequential flow; hence it is also referred to as a linear-sequential life cycle model. This means that any phase in the development process begins only if the previous phase is complete. In waterfall model phases do not overlap.


Waterfall Model Advantage

The advantage of waterfall development is that it allows for departmentalization and control. A schedule can be set with deadlines for each stage of development and a product can proceed through the development process model phases one by one. Development moves from concept, through design, implementation, testing, installation, troubleshooting, and ends up at operation and maintenance. Each phase of development proceeds in strict order.

Waterfall Model Disadvantage

The disadvantage of waterfall development is that it does not allow for much reflection or revision. Once an application is in the testing stage, it is very difficult to go back and change something that was not well documented or thought upon in the concept stage.

Waterfall Model Design

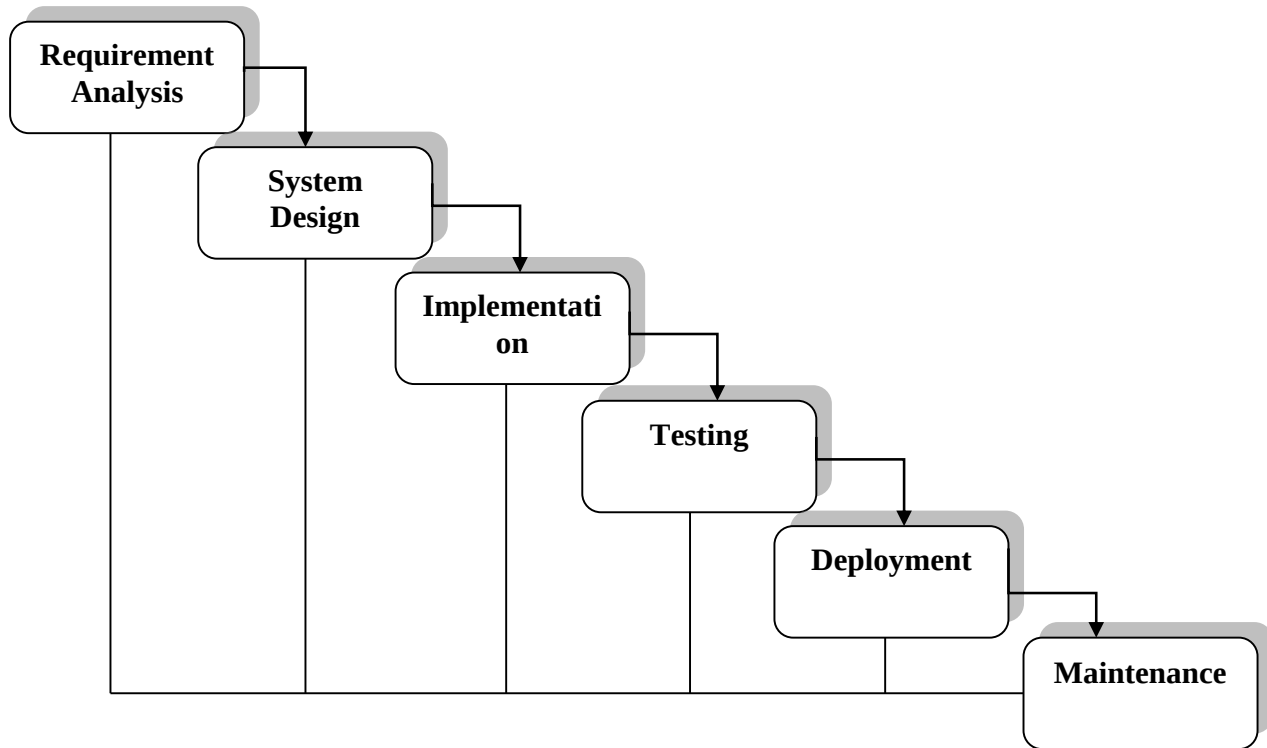


SCHEDULING

Gantt chart:


A Gantt chart is a type of bar chart, developed by Henry Gantt in the 1910s, that illustrates a project schedule. Gantt charts illustrate the start and finish dates of the terminal elements and summary elements of a project. Terminal elements and summary elements comprise the work breakdown structure of the project. Modern Gantt charts also show the dependency (i.e. precedence network) relationships between activities. Gantt charts can be used to show current schedule status using percent-complete shadings and a vertical "TODAY" line as shown here.

Although now regarded as a common charting technique, Gantt charts were considered extremely revolutionary when first introduced.^[1] In recognition of Henry Gantt's contributions, the Henry Laurence Gantt Medal is awarded for distinguished achievement in management and in community service. This chart is also used in information technology to represent data that has been collected.

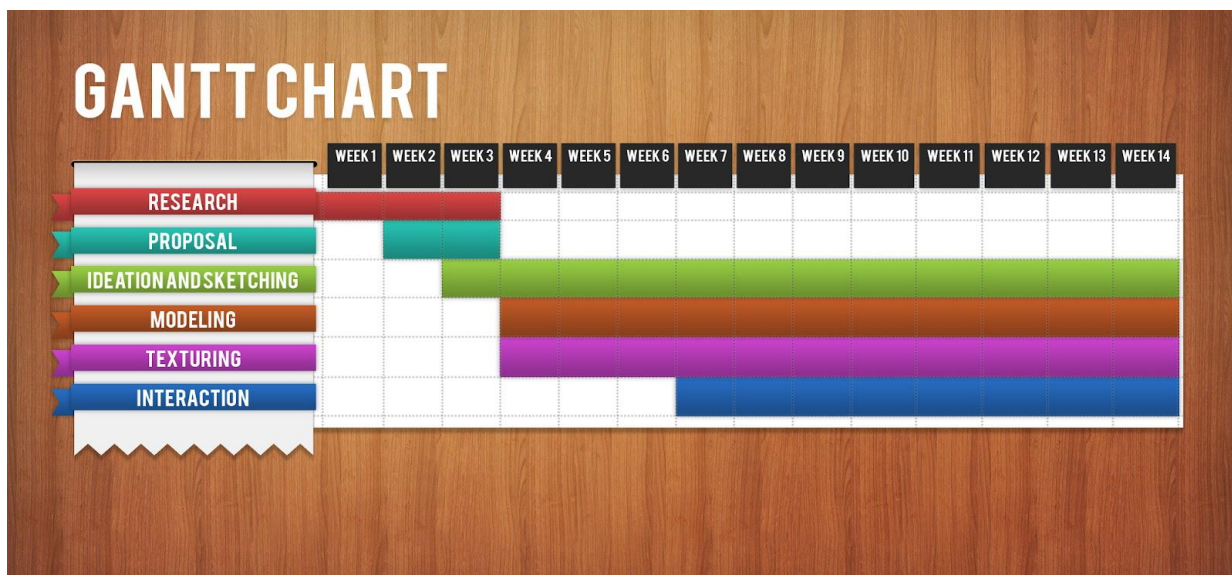

Pert Chart:

A project management tool that provides a graphical representation of a project's timeline. Pert chart was developed by the united states Navy for the polaris submarine missile program in 1950s. Pert chart allow the tasks in a particular project to be analyzed, with particular attention to the time required to complete each task, and the minimum time required to finish the entire project.

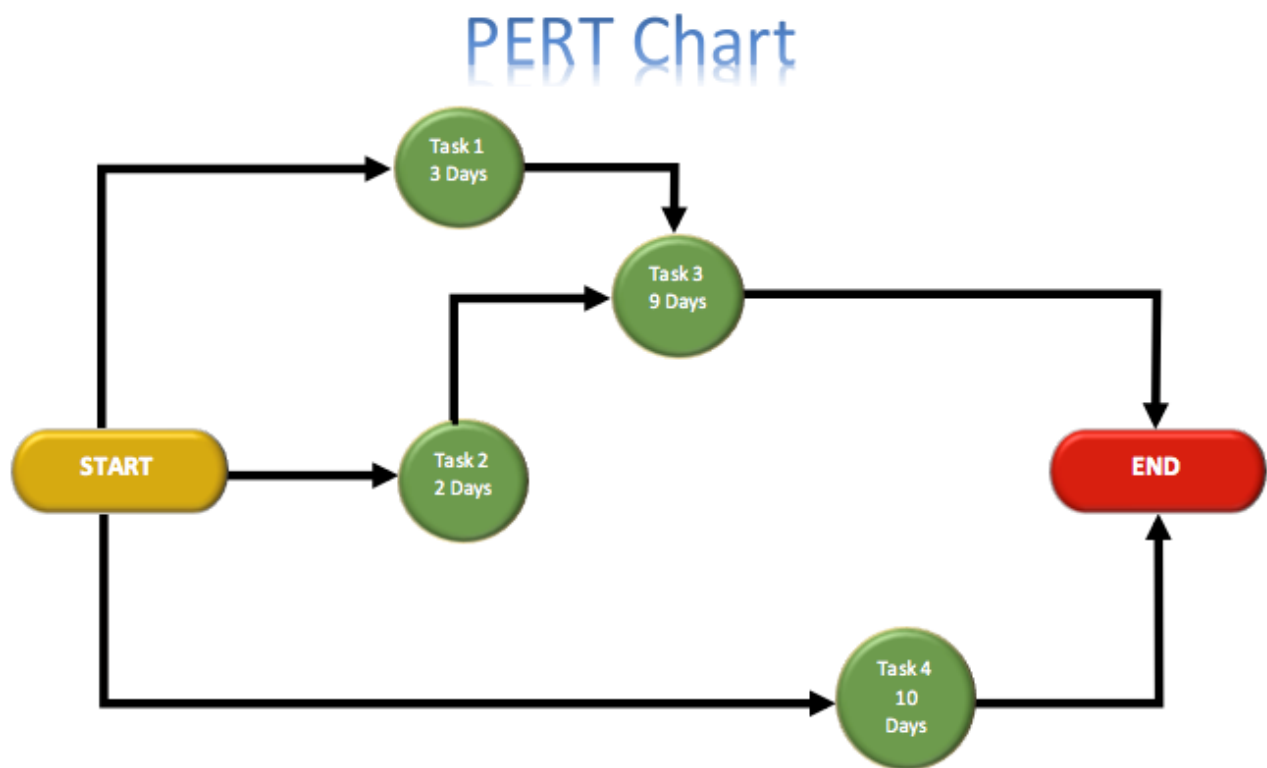

DATA FLOW DIAGRAMS

DFD graphically represents the flow of data from one point to another point in the system. It describes the processes or activities that are involved in the system and how these processes transform input into the output. It also describes system's data and how data interact with the system.

It contains four symbols:

5) EXTERNAL ENTITIES :-

These are the source or destination that provides information for the system. These may be person, organization or any other entity. This symbol is represented as rectangle.



ENTITY NAME

6) PROCESSES :-

Processes show the transformation of input data flows to output data flows. It is also known as bubble or transform. A rectangular box or circle denotes a process.



PROCESS
NAME

OR



PROCESS
NAME

7) DATA FLOW LINE: -

Data Flow Diagram shows how data travels from one point to another point in the diagram. The flow is shown as an arrowed line with the arrowhead showing the direction of flow.



DATA FLOW




8) DATA STORE:-

A data store is store house of data and information i.e. used in the system for executing multiple processes. It may be a table, a database, a file or a folder. Process stores information into the data store or retrieves information from the data store.


Data Store
Name

ZeroLevelDFD:

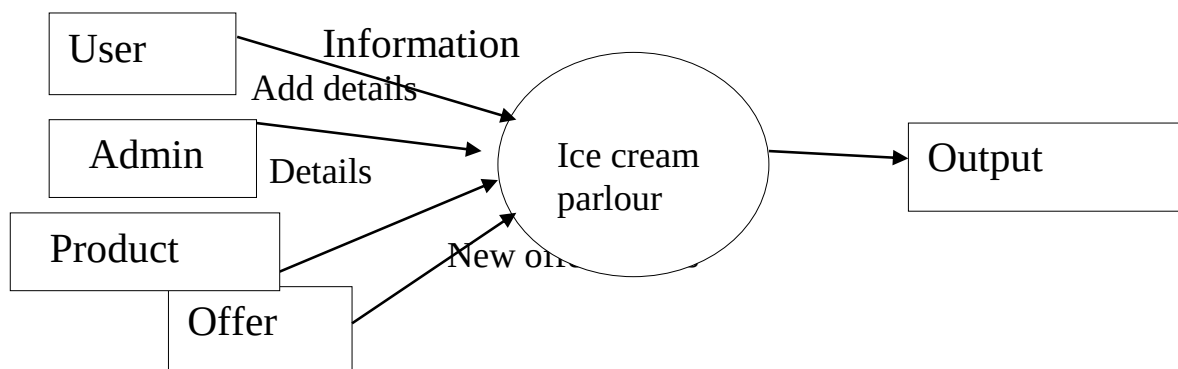


1st Level DFD:

- User Point of View

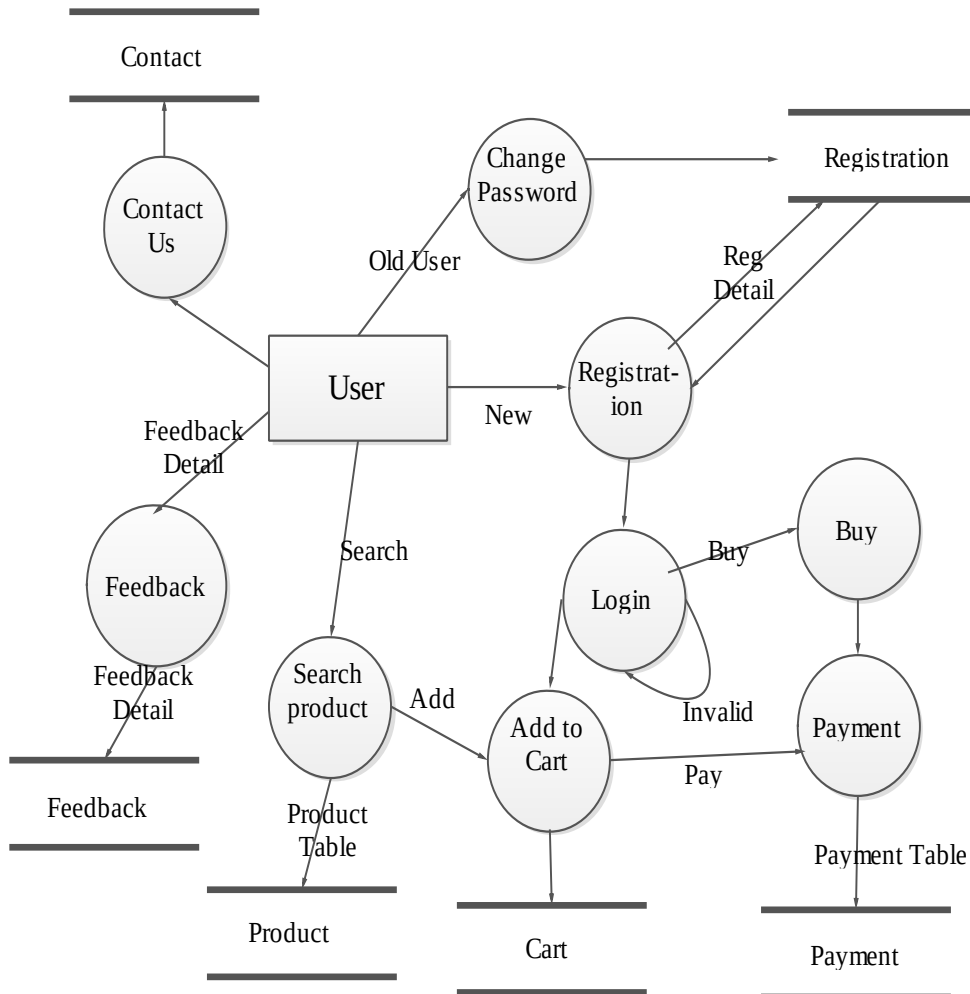


Ice Cream Parlour

- Admin Point of View

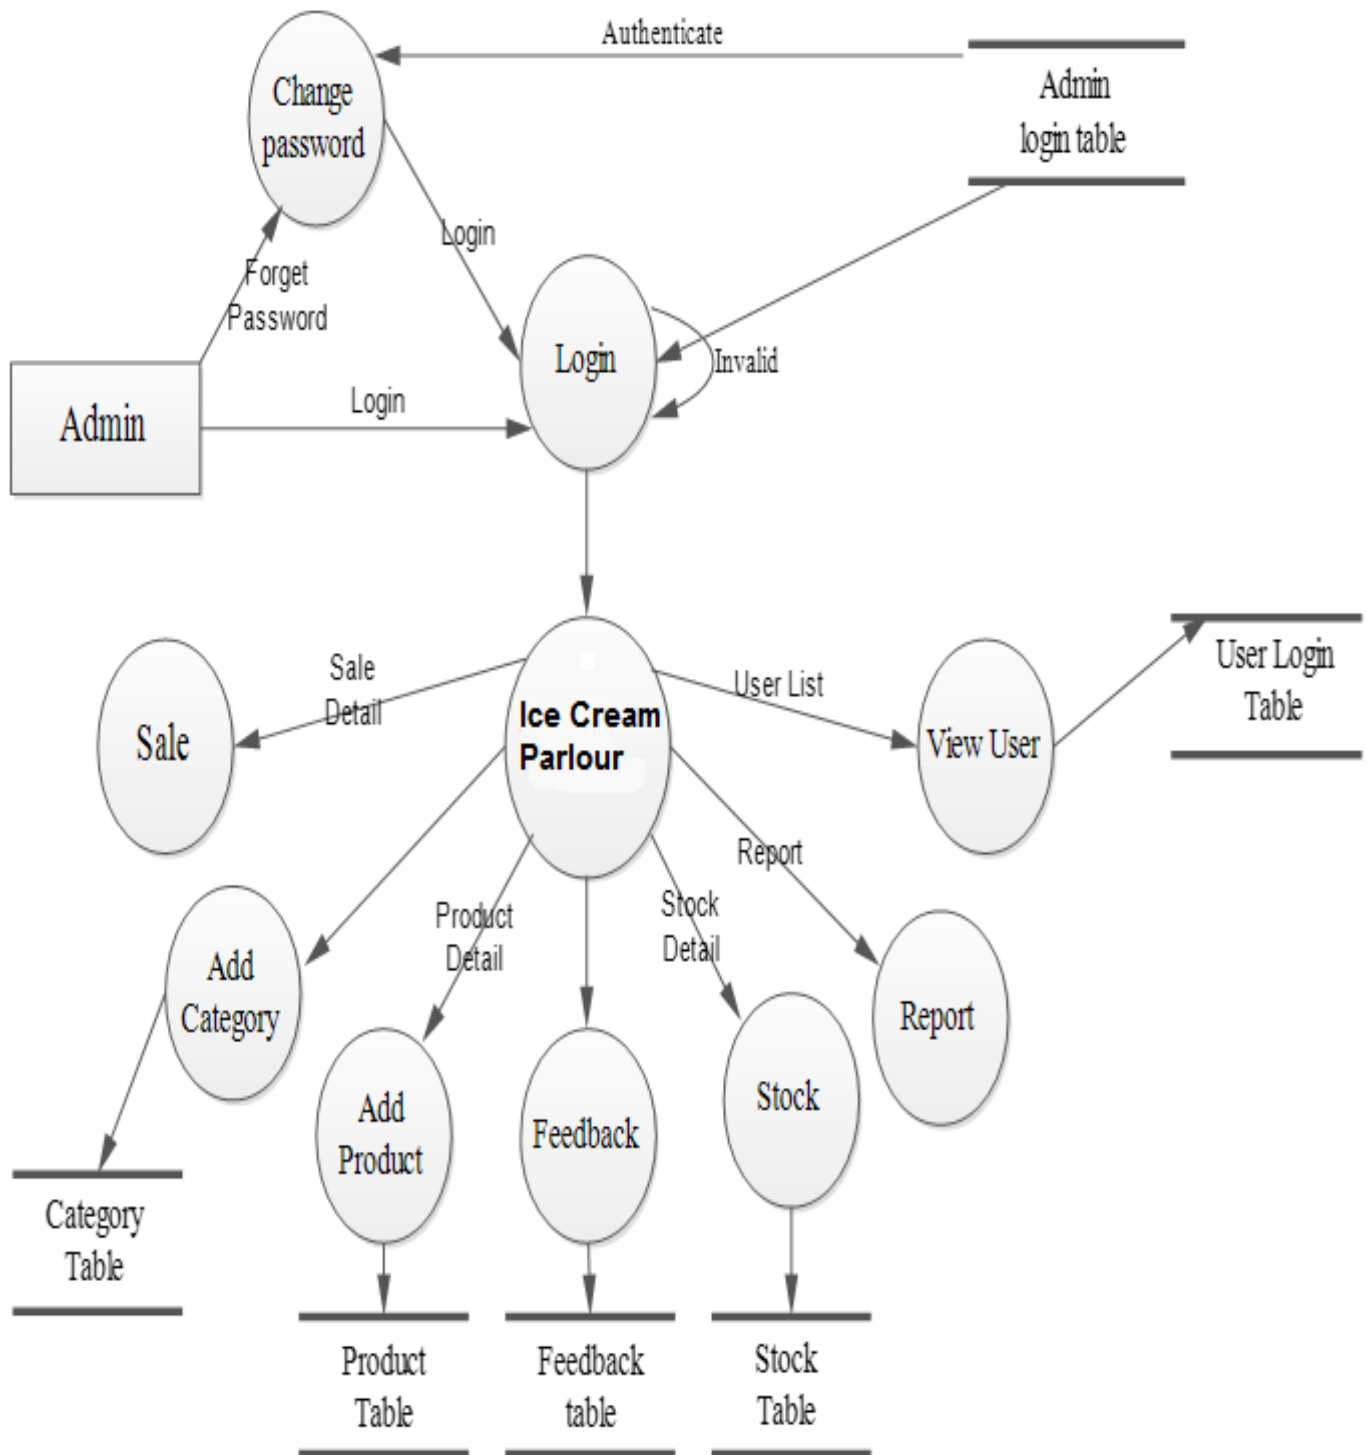


2nd Level DFD

- User Point of View

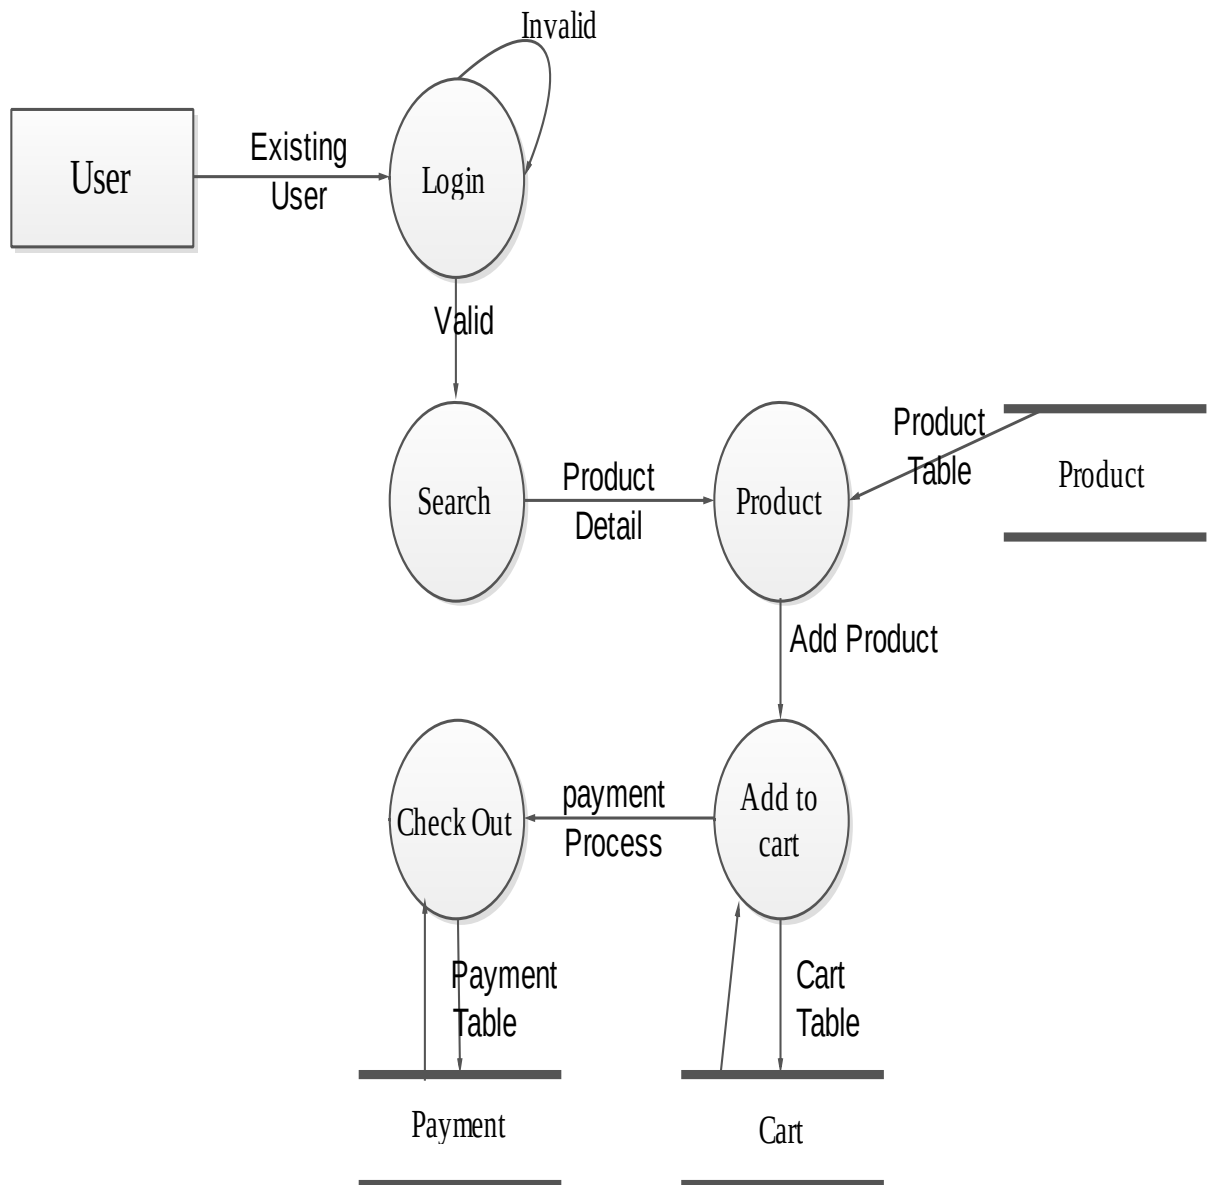

- Admin Point of View

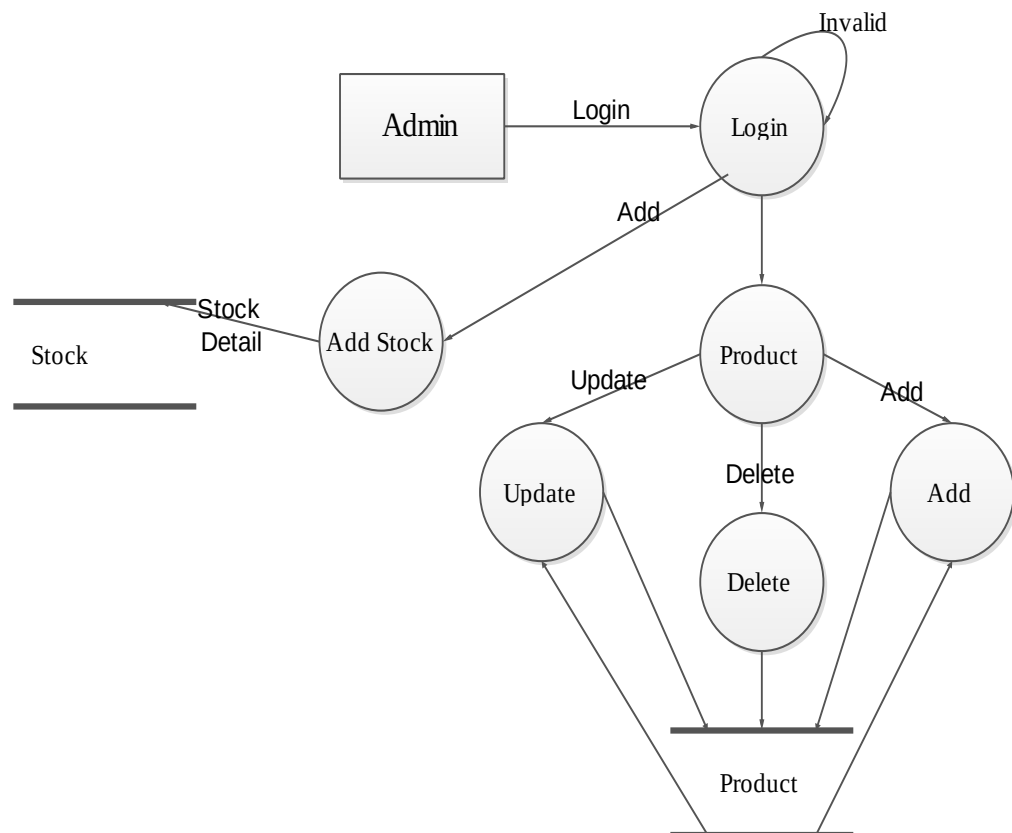


ER DIAGRAM

ER Stands for Entity Relationship. Entity Relationship Diagram is a detailed logical representation of the entities, associations and data elements for an organization or business area. This technique is used in data base design that describes how entities in an enterprise are related to one another. The Entity relationship diagram uses 3 features to describe data. These are the followings.

➤ **ENTITIES:**

An entity is a person place or thing or event of interest to the org and about which data are captured, stored or processed. For Ex-Employee is an entity. Entity is represented by symbol



➤ **ATTRIBUTE:**

Various types of data that describe an entity are known as Attributes. For ex Name, age, address, are some of the attributes of employee entity. Attributes are represented by symbol



➤ **RELATIONSHIP :**


An association of several entity in entity relationship diagram is called relationship. It is represented by symbol



➤ **LINES :**

It links attributes to entity sets and entity sets to relationship. It is represented by symbol

ERD Design

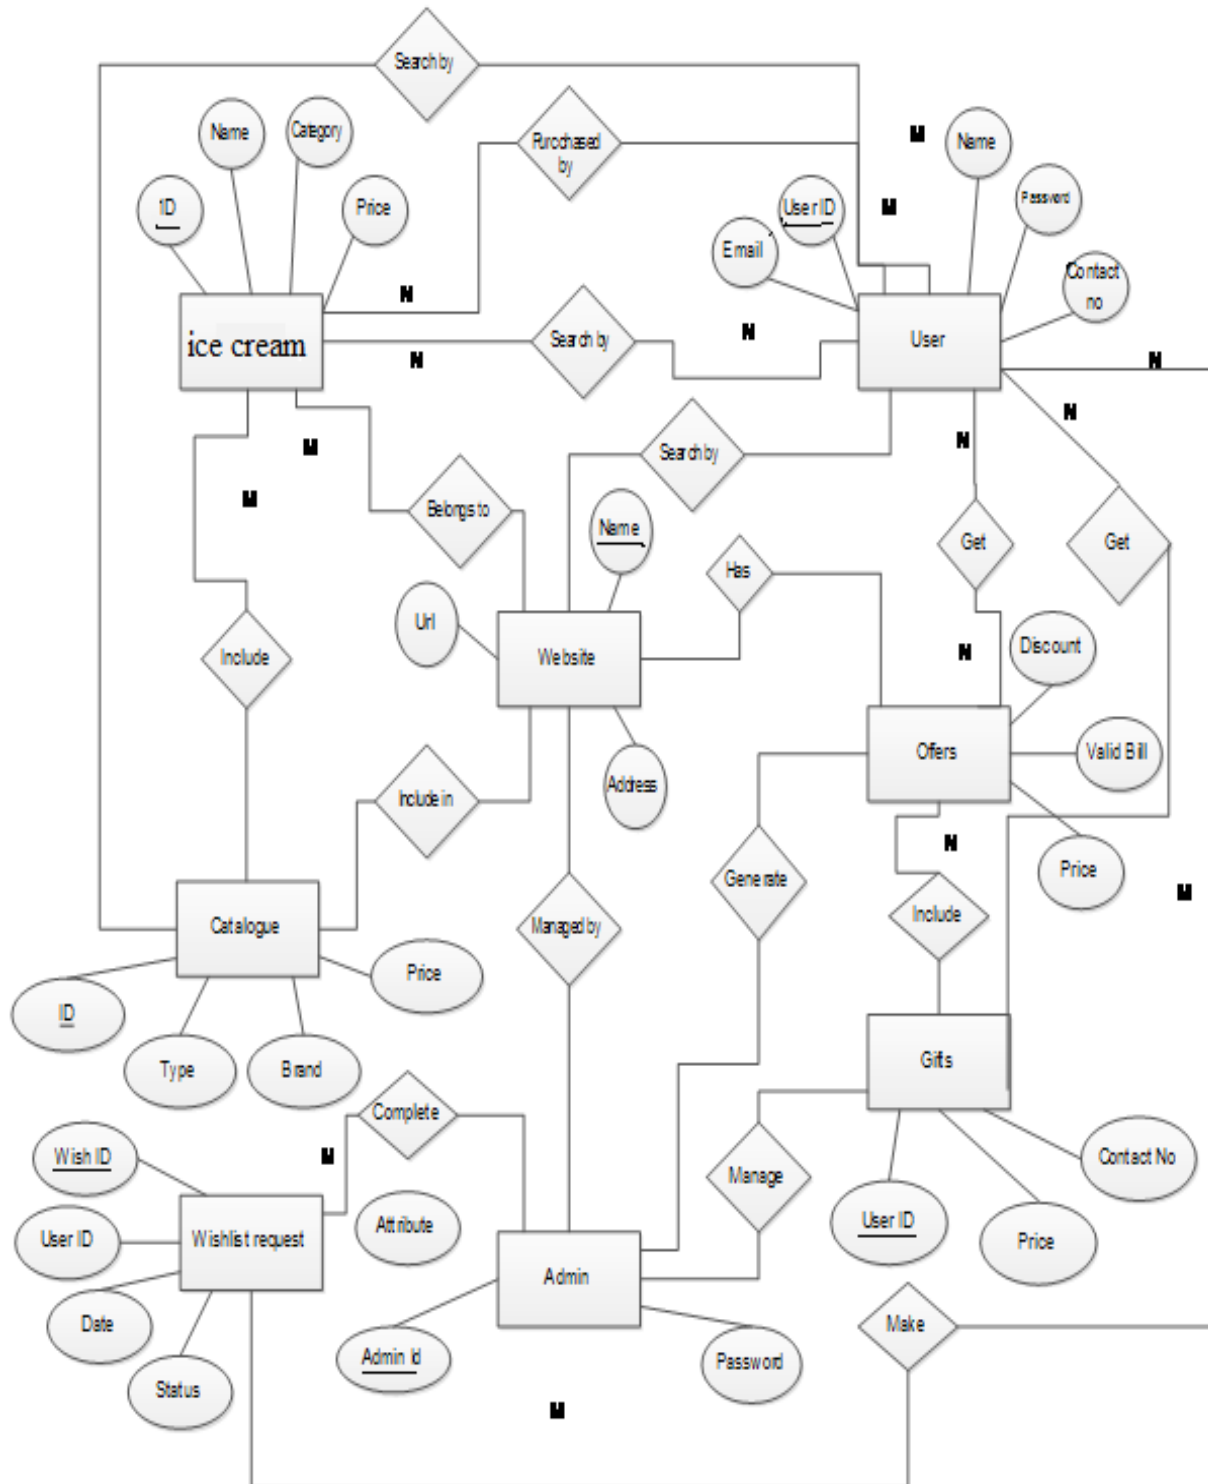

DATABASE DESIGN

A database design is a collection of stored data organized in such a way that the data requirements are satisfied by the database. The general objective is to make information access easy, quick, inexpensive and flexible for the user. There are also some specific objectives like controlled redundancy from failure, privacy, security and performance.

A collection of relative records makes up a table. To design and store data to the needed forms database tables are prepared.

Two essential settings for a database are:

- **PRIMARY KEY:** -The field that is unique for all the record occurrences.
- **FOREIGN KEY:** - The field used to set relation between tables. Normalization is a technique to avoid redundancy in the tables.

USER REGISTRATION TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
USER_ID	Int	Primary key	User registration id
NAME	Varchar (14)	Not Null	Used to store Name
PASSWORD	Varchar (10)	Not Null	To control access to user account
ADDRESS	Varchar (100)	Not Null	For delivery of items
EMAIL_ID	Varchar (30)	Not Null	Used for communication
GENDER	Varchar (8)	Not Null	Male or Female
DOB	Date/time		Date of birth of user
CONTACT_NO	Number	Not Null	User for communication purpose
REG_DATE	Date		

CATEGORY TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
CATEGORY_ID	Int	Primary key	Category ID
CATEGORY_NAME	Varchar (20)	Not Null	Category name

CONTACT US TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
ID	Int	Primary key	Used to store User ID
CONTACT NO	Big Int		Used to store contact no
EMAIL ID	Varchar(50)	Not Null	Used to store Email_ID
QUERY	Varchar(150)		Used to store Query from user
DATE	Date/time	Not Null	Used to store Date

Ice Cream Parlour

PRODUCT TABLE

S.No	Field Name	Data Type	Constraint	Description
1.	Ice Cream_ID	Int	Primary Key	Contains ID of Ice Cream
2.	Ice Cream_name	Varchar(100)	Not Null	Contains Name of Ice Cream
3.	Category_ID	Int	Foreign Key	Contains category of Ice Cream
4.	Ice Cream_Desc	Varchar(max)		Contains Description of Ice Cream
5.	Ice Cream_Photo1	Varchar(max)	Not Null	Contains photo of Ice Cream
6.	Ice Cream_Photo1	Varchar(max)		Contains photo of Ice Cream
7.	Ice Cream_Photo1	Varchar(max)		Contains photo of Ice Cream
8.	Price	Float	Not Null	Contains price of the Ice Cream
9.	Keywords	Varchar(50)		Contains some word related to Ice Cream
10.	Speciality	Varchar(70)		Contains some special features about Ice Cream
11.	Availability	Varchar(10)	Not Null	Contains availability status of Ice Cream
12.	Posting_date	Date Time	Not Null	Contains date when Ice Cream get posted
13.	Age_group	Varchar(50)		Contains age group to which Ice Cream belongs
14.	Occasions	Varchar(20)		Contains occasions on which Ice Cream can be used
15.	ProductFor	Varchar(20)	Not Null	Contains specification of people for whom Ice Cream has been made.

Ice Cream Parlour

SALES TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
INVOICE_NO	Int	Primary key	Used to store invoice
USER_ID	Varchar(20)	Foreign key	Used to store user's unique ID
PRODUCT_ID	Varchar(10)	Foreign key	Used to store product ID
PRICE	Int	Not Null	Used to store total amount of invoice
SALE_DATE	Date/time	Not Null	Used to store selling date

CART TABLE

S.No	Field Name	Data Type	Constraint	Description
1.	Cart_ID	int	Primary Key	Contains Id of offer
2.	Ice Cream_id	Int	Foreign Key	Contains Id of Ice Cream
	User_id	Varchar(30)	Foreign Key	Contains Id of user
3.	Quantity	Int	Not Null	Contains quantity of Ice Cream
4.	Price	Float	Not Null	Contains price of Ice Cream
5.	Date_of_Purchase	Date Time	Not Null	Contains date of purchase of Ice Cream
6.	Offer_id	Int	Foreign key	Contains offer id if any offer is availed
8.	Mode_of_payment	Varchar(20)	Not Null	Contains mode of payment for the Ice Cream

FEEDBACK TABLE

FIELD NAME	DATATYPE	CONSTRAINTS	DESCRIPTION
FEED_ID	Int	Primary key	Used to store feedback id
USER_ID	Varchar (20)	Foreign key	Used to store user's unique id
REMARKS	Varchar (150)	Not Null	Any special remark given
DATE	Date/time	Not Null	Feedback given on which date
CONTACT	BigInt		Contact details of feedback provider

ADMIN TABLE

S.No	Field Name	Data Type	Constraint	Description
1.	Login	Varchar(30)	Not Null	Contains login id of the person who will login
2.	Password	Varchar(100)	Not Null	Contains password of the person who will login

SQL QUERY

```
-----  
-----  
  
createdatabase ICECREAM;  
use ICECREAM
```

```
-----  
-----  
  
createtableadmin  
(  
Adminid varchar(20)primarykey,  
Adminpass varchar(20)notnull,  
)  
select*fromadmin  
droptableadmin  
  
insertintoadminvalues('admin','123')
```

```
-----  
-----  
  
createtable User_reg  
(  
USERID Varchar(40)primarykey,  
NAME varchar(20)notnull,  
PASSWORDvarchar(20)notnull,  
ADDRESSvarchar(70)notnull,  
EMAIL_ID varchar(25)notnull,  
GENDER varchar(7)notnull,  
DOB varchar(12)notnull,  
CONTACT_NO Bigintnotnull,  
REG_DATE datenotnull,  
)  
  
select*from User_reg  
droptable User_reg
```


Ice Cream Parlour

```
-----  
  
createtable category  
(  
CATEGORY_ID intprimarykey,  
CATEGORY_NAME varchar(20)notnull,  
)
```

```
select*from category  
droptable category  
  
-----  
-----
```

```
createtable PRODUCT  
(  
PRODUCT_ID intprimarykey,  
DSC varchar(max)notnull,  
NAME varchar(90)notnull,  
Category varchar(90)notnull,  
SubCategory varchar(80)notnull,  
COLOR varchar(200)notnull,  
IMG varchar(MAX)notnull,  
PRICE Bigintnotnull,  
STOCK_QTY intnotnull,  
)
```

```
select*from PRODUCT  
droptable PRODUCT  
  
-----  
-----
```

```
createtable SALES  
(  
INVOICE_NO intidentity(1000,1)primarykey,  
USERID intnotnull,  
NO_OF_PRODUCTS intnotnull,  
PRICE intnotnull,  
SALE_DATE datenotnull,
```

Ice Cream Parlour

)

```
select*from SALES
droptable SALES
```


```
createtable MYCART
(
Cartid intprimarykeyidentity,
Product_id intreferences PRODUCT(PRODUCT_ID),
Price Bigintnotnull,
CustomerID varchar(12),
Datedatetimenotnull,
)

```

```
select*from MyCart
```

```
droptable MyCart
```


```
createtable FEEDBACK
(
FEED_ID intidentityprimarykey,
USERID Varchar(40)notnull,
REMARKS varchar(300)notnull,
DATEdatetimenotnull,
CONTACT Bigintnotnull
)
select*from FEEDBACK
```

```
droptable FEEDBACK
```


Ice Cream Parlour

```
createtable CONTACTUS
(
CON_ID intidentityprimarykey,
CONTACT_NO bigintnotnull,
EMAIL varchar(25)notnull,
QUERY varchar(300)notnull,
DATEdatenotnull,
)
select*from CONTACTUS
```

```
droptable CONTACTUS
```

```
createtable Payment
(
P_ID intprimarykeyidentity,
CustomerId varchar(50)notnull,
TotalProduct bigintnotnull,
TotalAmount bigintnotnull,
PaymentMode varchar(50)notnull,
bank varchar(50)notnull,
CardNo bigintnotnull,
CVV intnotnull,
Validity varchar(50)notnull,
Addressvarchar(Max)notnull,
PaymentDate datetimenotnull,
)
select*from Payment
```

```
droptable Payment
```

INPUT TO THE SYSTEM

- 1. Registration.**
- 2. Login**
- 3. Password management**
- 4. Catalogue module**
- 5. Special offers and gift module**
- 6. Add to Cart Process**
- 7. Sale process**
- 8. Delivery status**
- 9. Query module.(Ask Experts)**
- 10. Invite friends**

MODULE DESCRIPTION

1. Registration.

Customer will register through this module on the website by providing few details about him\her.

2. Login

Through login module user can enter in the system

3. Password management

This module will keep the track about authentication of the user. The user will enter same password every time.

4. Catalogue module

User can visit the catalogue of the website i.e. all the taste available.

5. Special offer and gift module

Through this module user can avail various offers available. Information regarding to the various offers will be added to the system.

6. Cart Process: if User wish to buy any Ice Cream from the system then he/she can put that Ice Cream into temporary sale table ie cart table and proceed forward

7. Sale process

It includes the sale process like shopping cart in which customer will enter his details like address, phone no.etc.payment details by whichever mode he wants to pay like credit card, debit card etc giving the confirmation about details and then bill generation.

8. Invite friends

User can invite various friends to make them view or purchase a particular product.

9. Delivery status

User can see the delivery status of a particular product. This module also allows the admin to enter the delivery status of the product into the system.

10. Query module

User can clear various queries through this module. They can mail any of the representatives for any query. On the other side it will also allow the admin to response back to the query of the users to maintain healthy communication.

Interface Design

Ice Cream Parlour

Home

ICE CREAM PARLOUR

[HOME](#) [PRODUCTS](#) [ABOUT US](#) [CONTACT US](#) [FEEDBACK](#) [SEARCH](#) [REGISTER](#) [LOGIN](#)



ICE CREAM PARLOUR

[HOME](#) [PRODUCTS](#) [ABOUT US](#) [CONTACT US](#) [FEEDBACK](#) [SEARCH](#) [REGISTER](#) [LOGIN](#)



Ice Cream Parlour

ICE CREAM PARLOUR

HOME PRODUCTS ABOUT US CONTACT US FEEDBACK SEARCH REGISTER LOGIN



Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

localhost:54472/index.aspx#myCarousel



Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

localhost:54472/index.aspx#myCarousel

Products Category Wise

➤ Butterscoch

ICE CREAM PARLOUR

[HOME](#) [➤ PRODUCTS](#) [ABOUT US](#) [CONTACT US](#) [FEEDBACK](#) [SEARCH](#) [REGISTER](#) [LOGIN](#)



SELECTED CATEGORY PRODUCTS



Name: ButterScoch

Price: 230

Description:

Butter Scoch 100 ml Ice Cream

[VIEW DETAILS](#)

[ADD TO CART](#)

Chocolate

ICE CREAM PARLOUR

[HOME](#) [PRODUCTS](#) [ABOUT US](#) [CONTACT US](#) [FEEDBACK](#) [SEARCH](#) [REGISTER](#) [LOGIN](#)



SELECTED CATEGORY PRODUCTS



Name: Chocolate Ice

Price: 250

Description:

100 ml Ice Cream.

[VIEW DETAILS](#)

[ADD TO CART](#)



DOUBLE
CHOCOLATE
500
ml

Name: Double Chocolate

Price: 300

Description:

Combo Pack 200 ml

[VIEW DETAILS](#)

[ADD TO CART](#)

➤ Stabery

ICE CREAM PARLOUR

HOMEPRODUCTSABOUT USCONTACT USFEEDBACKSEARCHREGISTERLOGIN

SELECTED CATEGORY PRODUCTS



NATURAL
STRAWBERRY
1 Ltr

Name:Strabery Combo

Price:350

Description:
250 ml Strabery Ice Cream

VIEW DETAILS

ADD TO CART

Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

➤ Vanila

ICE CREAM PARLOUR

[HOME](#) [PRODUCTS](#) [ABOUT US](#) [CONTACT US](#) [FEEDBACK](#) [SEARCH](#) [REGISTER](#) [LOGIN](#)



SELECTED CATEGORY PRODUCTS



Name: Vanilla Ice Cream

Price: 175

Description:

Vanilla Teasty Ice cream 75 MI

[VIEW DETAILS](#)

[ADD TO CART](#)

Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

Ice Cream Parlour

➤ All Products

ICE CREAM PARLOUR

HOME ▶ PRODUCTS ABOUT US CONTACT US FEEDBACK SEARCH REGISTER LOGIN

AVAILABLE PRODUCTS



Chocolate Ice

Category: Chocolate

Price: 250

Description: 100 ml Ice Cream.

[MORE](#) [ADD TO CART](#)



Double Chocolate

Category: Chocolate

Price: 300

Description: Combo Pack 200 ml

[MORE](#) [ADD TO CART](#)



Vanilla Ice Cream

Category: Vanilla

Price: 175

Description: Vanilla Teasty Ice cream 75 MI

[MORE](#) [ADD TO CART](#)



ButterScotch

Category: Butter Scotch

Price: 230

Description: Butter Scoch 100 ml Ice Cream

[MORE](#) [ADD TO CART](#)



Vanilla Ice Cream

Category: Vanilla

Price: 250

Description: 100 ml Ice Cream.

[MORE](#) [ADD TO CART](#)



Double Chocolate

Category: Chocolate

Price: 300

Description: Combo Pack 200 ml

[MORE](#) [ADD TO CART](#)



Vanilla Ice Cream

Category: Vanilla

Price: 175

Description: Vanilla Teasty Ice cream 75 MI

[MORE](#) [ADD TO CART](#)



ButterScotch

Category: Butter Scotch

Price: 230

Description: Butter Scoch 100 ml Ice Cream

[MORE](#) [ADD TO CART](#)

Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

Product Detail

ICE CREAM PARLOUR

[HOME](#)

[▼ PRODUCTS](#)

[ABOUT US](#)

[CONTACT US](#)

[FEEDBACK](#)

[SEARCH](#)

[REGISTER](#)

[LOGIN](#)



Details of *ButterScoch*



Product Name: ButterScoch

Product ID: 805

Price: 230

Description: Butter Scoch 100 ml Ice Cream

[ADD TO CART](#)

ICE CREAM PARLOUR

[HOME](#)

[▼ PRODUCTS](#)

[ABOUT US](#)

[CONTACT US](#)

[FEEDBACK](#)

[SEARCH](#)

[REGISTER](#)

[LOGIN](#)



Details of *Double Chocolate*



Product Name: Double Chocolate

Product ID: 803

Price: 300

Description: Combo Pack 200 ml

[ADD TO CART](#)

Ice Cream Parlour

ICE CREAM PARLOUR

[HOME](#) [PRODUCTS](#) [ABOUT US](#) [CONTACT US](#) [FEEDBACK](#) [SEARCH](#) [REGISTER](#) [LOGIN](#)



Details of *Strabery Combo*



Product Name: Strabery Combo
Product ID: 806
Price: 350
Description: 250 ml Strabery Ice Cream

[ADD TO CART](#)

ICE CREAM PARLOUR

[HOME](#) [PRODUCTS](#) [ABOUT US](#) [CONTACT US](#) [FEEDBACK](#) [SEARCH](#) [REGISTER](#) [LOGIN](#)



Details of *Vanilla Ice Cream*



Product Name: Vanilla Ice Cream
Product ID: 802
Price: 175
Description: Vanilla Teasty Ice cream 75 Ml

[ADD TO CART](#)

View Cart

ICE CREAM PARLOUR

[HOME](#) [PRODUCTS](#) [ABOUT US](#) [CONTACT US](#) [FEEDBACK](#) [SEARCH](#) [LOGOUT](#) 

MY CART

Total Products in Your Cart: 2



ButterScoch
Price (Rs.) 230

REMOVE



Double Chocolate
Price (Rs.) 300

REMOVE

Total Payable Amount: 530

[CLICK HERE TO SHOP MORE](#)

[CLICK HERE FOR PAYMENT](#)

Payment

ICE CREAM PARLOUR

[HOME](#)

[PRODUCTS](#)

[ABOUT US](#)

[CONTACT US](#)

[FEEDBACK](#)

[SEARCH](#)

[LOGOUT](#)



Payment

User ID:	Raj
Total Product(s):	2
Total Amount:	530
Payment Mode:	Select Card
Bank	Select
Card no:	
CVV:	
Card validity:	
Address:	
Pay Now Reset	

Thanks

ICE CREAM PARLOUR

[HOME](#)

[▼ PRODUCTS](#)

[ABOUT US](#)

[CONTACT US](#)

[FEEDBACK](#)

[SEARCH](#)

[LOGOUT](#)



PAYMENT HAS BEEN ACCEPTED!

[GO TO MORE SHOPPING](#)

[GO TO HOME PAGE](#)

Feedback

ICE CREAM PARLOUR

[HOME](#)

[PRODUCTS](#)

[ABOUT US](#)

[CONTACT US](#)

[FEEDBACK](#)

[SEARCH](#)

[LOGOUT](#)



FEEDBACK

Contact Number:

Remarks:

SUBMIT

RESET

Contact Us

ICE CREAM PARLOUR

[HOME](#)

[▼ PRODUCTS](#)

[ABOUT US](#)

[CONTACT US](#)

[FEEDBACK](#)

[SEARCH](#)

[LOGOUT](#)



CONTACT US

Contact No:

Email ID:

Your Query:

RESET

SUBMIT

Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

Registration

ICE CREAM PARLOUR

[HOME](#)

[▼ PRODUCTS](#)

[ABOUT US](#)

[CONTACT US](#)

[FEEDBACK](#)

[SEARCH](#)

[REGISTER](#)

[LOGIN](#)



Registration

User ID:

Name:

Password:

Confirm Pass:

Address:

Email:

Gender: ☐ Male ☐ Female

DOB:

Contact No:

[SUBMIT](#)

[RESET](#)

Login

ICE CREAM PARLOUR

HOME

▼ PRODUCTS

ABOUT US

CONTACT US

FEEDBACK

SEARCH

REGISTER

LOGIN



USER LOGIN

User ID:

Password:

LOGIN

RESET

[CLICK HERE TO NEW USER](#)

Ice Cream Parlour

Admin login

ICE CREAM PARLOUR

[ADMIN HOME](#) | [ADD CATEGORY](#) | [ADD PRODUCT](#) | [ALL REPORTS](#) ▶

Admin Login

ADMIN ID:

PASSWORD:

SUBMIT

Home

ICE CREAM PARLOUR

[ADMIN HOME](#) | [ADD CATEGORY](#) | [ADD PRODUCT](#) | [ALL REPORTS](#) ▶

[LOG OUT](#)

WELCOME IN ADMIN HOME PAGE

NEW
CATEGORY

NEW
PRODUCT

localhost:54472/AdminHome.aspx

Add Category

ICE CREAM PARLOUR

ADMIN HOME | ADD CATEGORY | ADD PRODUCT | ALL REPORTS ▶

LOG OUT

Category

CATEGORY ID:

CATEGORY NAME:

SUBMIT

localhost:54472/AddCategory.aspx

Add New Product

ICE CREAM PARLOUR

ADMIN HOME | ADD CATEGORY | ADD PRODUCT | ALL REPORTS ▶

LOG OUT

Add Product

PRODUCT ID:

CATEGORY:

Select Category ▼

NAME:

IMAGE:

Choose File

No file chosen

PRICE:

DESCRIPTION:

SUBMIT

localhost:54472/AddProduct.aspx

CODING

AddCategory.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\Admin.master"AutoEventWireup=
>true"CodeFile="AddCategory.aspx.cs"Inherits="AddCategory"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
<linkrel="stylesheet"type="text/css"href="style2.css"/>
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">

<div><center>
<tablestyle="width: 400px">
<tr>
<tdalign="center"colspan="2">
Category</td>

</tr>
<tr>
<td>
<asp:LabelID="Label2"runat="server"Text="Label">Category
ID:</asp:Label></td>
<td>
<asp:TextBoxID="CategoryID"Width="99%"runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator1"runat="server"ErrorM
essage="Category ID cannot be
empty"ControlToValidate="categoryID"ValidationGroup="A"></asp:RequiredField
Validator>

</tr>
<tr>
<td>
<asp:LabelID="Label3"runat="server"Text="Label">Category
Name:</asp:Label></td>
<td>
<asp:TextBoxID="CategoryName"Width="99%"runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator2"runat="server"ErrorM
essage="Category name cannot be
empty"ControlToValidate="categoryname"Display="None"ValidationGroup="A"></a
sp:RequiredFieldValidator>

</tr>
<tr>
<tdalign="center"colspan="2">
<asp:ButtonID="Button1"runat="server"Text="SUBMIT"OnClick="Button1_Click"Va
lidationGroup="A"/></td>
```

Ice Cream Parlour

```
</tr>  
</table>
```

```
<asp:ValidationSummaryID="ValidationSummary1"runat="server"ShowMessageBox="True"ShowSummary="False"ValidationGroup="A"/>  
</center></div>
```

```
</asp:Content>
```

Add category.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data.SqlClient;
using System.Data;
using System.Configuration;

public partial class AddCategory : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();

    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Adminid"] == null)
        {
            Response.Redirect("AdminLogin.aspx");
        }
    }

    protected void Button1_Click(object sender, EventArgs e)
    {
        con.Open();
        cmd = new SqlCommand("Insert Into category Values('" +
        CategoryID.Text + "', '" + CategoryName.Text + "')", con);
        cmd.ExecuteNonQuery();
        con.Close();
        Response.Write("<script>alert('Data Submitted!')</script>");
        CategoryID.Text = null;
        CategoryName.Text = null;
    }
}
```

Add Product.aspx

```
<%@PageTitle="" Language="C#" MasterPageFile="~/Admin.master" AutoEventWireup=
"true" CodeFile="AddProduct.aspx.cs" Inherits="AddProduct"%>

<asp:ContentID="Content1" ContentPlaceHolderID="head" runat="Server">
<linkrel="stylesheet" type="text/css" href="style2.css"/>
</asp:Content>
<asp:ContentID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="S
erver">
<divalign="center">
<tableclass="x" style="width: 400px">
<tr>
<tdalign="center" colspan="2">Add Product</td>
</tr>
<tr>
<td>
<asp:LabelID="Label2" runat="server" Text="Label">Product
ID:</asp:Label></td>
<td>
<asp:TextBoxID="ProductID" Width="99%" runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator1" runat="server" ErrorM
essage="Product ID cannot be
empty" ControlToValidate="productID" Display="None" ValidationGroup="A"></asp:
RequiredFieldValidator>

</tr>
<tr>
<td>
<asp:LabelID="Label8" runat="server" Text="Label">Category:</asp:Label></td>
<td>
<asp:DropDownListID="DropDownList_Category" runat="server" Width="127px"></as
p:DropDownList></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator3" runat="server" ErrorM
essage="Product Category cannot be
empty" ControlToValidate="DropDownList_Category" Display="None" ValidationGrou
p="A"></asp:RequiredFieldValidator>

</tr>
<tr>
<td>
<asp:LabelID="Label9" runat="server" Text="Label">Sub
Category:</asp:Label></td>
<td>
```

Ice Cream Parlour

```
<asp:TextBoxID="TextBox2"Width="99%"runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator4"runat="server"ErrorM
essage="Product Sub Category cannot be
empty"ControlToValidate="TextBox2"Display="None"ValidationGroup="A"></asp:R
equiredFieldValidator>

</tr>
<tr>
<td>
<asp:LabelID="Label4"runat="server"Text="Label">Description:</asp:Label></t
d>
<td>
<asp:TextBoxID="ProductDescription"Width="98%"TextMode="MultiLine"runat="se
rver"></asp:TextBox></td>
</tr>
<tr>
<td>
<asp:LabelID="Label3"runat="server"Text="Label">Product
Name:</asp:Label></td>
<td>
<asp:TextBoxID="ProductName"Width="99%"runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator2"runat="server"ErrorM
essage="Product Name cannot be
empty"ControlToValidate="productname"Display="None"ViewStateMode="Enabled"V
alidationGroup="A"></asp:RequiredFieldValidator>

</tr>

<tr>
<td>
<asp:LabelID="Label5"runat="server"Text="Label">Colour(s):</asp:Label></td>
<td>
<asp:TextBoxID="color"Width="99%"runat="server"></asp:TextBox></td>
</tr>
<tr>
<td>
<asp:LabelID="Label7"runat="server"Text="Label">Product
Image:</asp:Label></td>
<td>
<asp:FileUploadID="FileUpload1"runat="server"/>
<asp:RequiredFieldValidatorID="RequiredFieldValidator5"runat="server"ErrorM
essage="Upload an image for the
product"ControlToValidate="FileUpload1"Display="None"ValidationGroup="A"></
asp:RequiredFieldValidator>
</td>
```


Ice Cream Parlour

```
</tr>

<tr>
<td>
<asp:LabelID="Label1"runat="server"Text="Price"></asp:Label></td>
<td>
<asp:TextBoxID="Price"runat="server"Width="99%"></asp:TextBox></td>
</tr>
<tr>
<td>
<asp:LabelID="Label6"runat="server"Text="Quantity"></asp:Label></td>
<td>
<asp:TextBoxID="Quantity"runat="server"Width="99%"></asp:TextBox></td>
</tr>
<tr>
<tdalign="center"colspan="2">
<asp:ButtonID="Button1"runat="server"Text="SUBMIT"OnClick="Button1_Click"ValidationGroup="A"/></td>
<asp:ValidationSummaryID="ValidationSummary1"runat="server"ShowMessageBox="True"ShowSummary="false"ValidationGroup="A"/>
</tr>
</table>
</div>
</asp:Content>
```

Add Product.aspx.cs

```
<%@PageTitle="" Language="C#" MasterPageFile="~/Admin.master" AutoEventWireup=
"true" CodeFile="AddProduct.aspx.cs" Inherits="AddProduct"%>

<asp:ContentID="Content1" ContentPlaceHolderID="head" runat="Server">
<linkrel="stylesheet" type="text/css" href="style2.css"/>
</asp:Content>
<asp:ContentID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="S
erver">
<divalign="center">
<tableclass="x" style="width: 400px">
<tr>
<tdalign="center" colspan="2">Add Product</td>
</tr>
<tr>
<td>
<asp:LabelID="Label2" runat="server" Text="Label">Product
ID:</asp:Label></td>
<td>
<asp:TextBoxID="ProductID" Width="99%" runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator1" runat="server" ErrorM
essage="Product ID cannot be
empty" ControlToValidate="productID" Display="None" ValidationGroup="A"></asp:
RequiredFieldValidator>

</tr>
<tr>
<td>
<asp:LabelID="Label8" runat="server" Text="Label">Category:</asp:Label></td>
<td>
<asp:DropDownListID="DropDownList_Category" runat="server" Width="127px"></as
p:DropDownList></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator3" runat="server" ErrorM
essage="Product Category cannot be
empty" ControlToValidate="DropDownList_Category" Display="None" ValidationGrou
p="A"></asp:RequiredFieldValidator>

</tr>
<tr>
<td>
<asp:LabelID="Label9" runat="server" Text="Label">Sub
Category:</asp:Label></td>
<td>
<asp:TextBoxID="TextBox2" Width="99%" runat="server"></asp:TextBox></td>
```

Ice Cream Parlour

```
<asp:RequiredFieldValidatorID="RequiredFieldValidator4"runat="server"ErrorMessage="Product Sub Category cannot be empty"ControlToValidate="TextBox2"Display="None"ValidationGroup="A"></asp:RequiredFieldValidator>

</tr>
<tr>
<td>
<asp:LabelID="Label4"runat="server"Text="Label">Description:</asp:Label></td>
<td>
<asp:TextBoxID="ProductDescription"Width="98%"TextMode="MultiLine"runat="server"></asp:TextBox></td>
</tr>
<tr>
<td>
<asp:LabelID="Label3"runat="server"Text="Label">Product Name:</asp:Label></td>
<td>
<asp:TextBoxID="ProductName"Width="99%"runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator2"runat="server"ErrorMessage="Product Name cannot be empty"ControlToValidate="productname"Display="None"ViewStateMode="Enabled"ValidationGroup="A"></asp:RequiredFieldValidator>

</tr>

<tr>
<td>
<asp:LabelID="Label5"runat="server"Text="Label">Colour(s):</asp:Label></td>
<td>
<asp:TextBoxID="color"Width="99%"runat="server"></asp:TextBox></td>
</tr>
<tr>
<td>
<asp:LabelID="Label7"runat="server"Text="Label">Product Image:</asp:Label></td>
<td>
<asp:FileUploadID="FileUpload1"runat="server"/>
<asp:RequiredFieldValidatorID="RequiredFieldValidator5"runat="server"ErrorMessage="Upload an image for the product"ControlToValidate="FileUpload1"Display="None"ValidationGroup="A"></asp:RequiredFieldValidator>
</td>
</tr>
```

Ice Cream Parlour

```
<tr>
<td>
<asp:LabelID="Label1"runat="server"Text="Price"></asp:Label></td>
<td>
<asp:TextBoxID="Price"runat="server"Width="99%"></asp:TextBox></td>
</tr>
<tr>
<td>
<asp:LabelID="Label6"runat="server"Text="Quantity"></asp:Label></td>
<td>
<asp:TextBoxID="Quantity"runat="server"Width="99%"></asp:TextBox></td>
</tr>
<tr>
<tdalign="center"colspan="2">
<asp:ButtonID="Button1"runat="server"Text="SUBMIT"OnClick="Button1_Click"Va
lidationGroup="A"/></td>
<asp:ValidationSummaryID="ValidationSummary1"runat="server"ShowMessageBox="
True"ShowSummary="false"ValidationGroup="A"/>
</tr>
</table>
</div>
</asp:Content>
```

Admin.Master

```
<%@MasterLanguage="C#"AutoEventWireup="true"CodeFile="Admin.master.cs"Inherits="Admin"%>

<!DOCTYPEhtml>

<htmlxmlns="http://www.w3.org/1999/xhtml">
<headrunat="server">
<linkrel="stylesheet"type="text/css"href="style2.css"/>
<title></title>
<asp:ContentPlaceHolderID="head"runat="server">
</asp:ContentPlaceHolder>
</head>
<bodyclass="grad">
<formid="form1"runat="server">
<divalign="center">
<a href="AdminHome.aspx">
<h1class="tit">ICE CREAM PARLOUR</h1>
</a>
<divid="log"style="float:right; margin-right:10px; padding:12px;
border:1pxdottedwhite;"runat="server">

<asp:LinkButtonID="log_out"runat="server"OnClick="log_out_Click"ForeColor="
White">LOG OUT</asp:LinkButton></div>
<divstyle="margin: 0auto0auto; width: 530px; margin-bottom:30px;">
<asp:MenuCssClass="menu"ID="Menu1"runat="server"BackColor="#E3EAEB"Font-
Names="Verdana"DynamicHorizontalOffset="-10"Font-
Size="0.8em"ForeColor="#666666"StaticSubMenuIndent="20px"Orientation="Horiz
ontal">
<DynamicHoverStyleBackColor="#666666"ForeColor="White"/>
<DynamicMenuItemStyleHorizontalPadding="15px"VerticalPadding="8px"/>
<DynamicMenuStyleBackColor="#E3EAEB"/>
<DynamicSelectedStyleBackColor="#1C5E55"/>
<Items>
<asp:MenuItemNavigateUrl="~/Home.aspx"Text="UserPanel"Value="UserPanel"></a
sp:MenuItem>
<asp:MenuItemNavigateUrl="~/AdminHome.aspx"Text="Home"Value="Home"></asp:Me
nuItem>
<asp:MenuItemNavigateUrl="~/AddCategory.aspx"Text="New Category"Value="New
Category"></asp:MenuItem>
<asp:MenuItemNavigateUrl="~/AddProduct.aspx"Text="New Product"Value="New
Product"></asp:MenuItem>
<asp:MenuItemText="Reports"Value="Reports">
```

Ice Cream Parlour

```
<asp:MenuItemNavigateUrl=~ /REPORTOfCart.aspx"Text="Cart"Value="Cart"></asp:MenuItem>
<asp:MenuItemNavigateUrl=~ /REPORTOfContactUs.aspx"Text="ContactUs"Value="ContactUs"></asp:MenuItem>
<asp:MenuItemNavigateUrl=~ /REPORTOfFeedback.aspx"Text="Feedback"Value="Feedback"></asp:MenuItem>
<asp:MenuItemNavigateUrl=~ /REPORTOfPayment.aspx"Text="Payments"Value="Payments"></asp:MenuItem>
<asp:MenuItemNavigateUrl=~ /REPORTOfSales.aspx"Text="Sales"Value="Sales"></asp:MenuItem>
<asp:MenuItemNavigateUrl=~ /REPORTOfUsers.aspx"Text="Users"Value="Users"></asp:MenuItem>
</asp:MenuItem>
</Items>
<StaticHoverStyleBackColor="#666666"ForeColor="White"/>
<StaticMenuItemStyleHorizontalPadding="15px"VerticalPadding="8px"/>
<StaticSelectedStyleBackColor="#1C5E55"/>
</asp:Menu>

</div>
<asp:ContentPlaceHolderID="ContentPlaceHolder1"runat="server">
</asp:ContentPlaceHolder>

</div>
</form>
</body>
</html>
```

Admin.master.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Configuration;
using System.Data.SqlClient;

public partial class Admin : System.Web.UI.MasterPage
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Adminid"] != null)
        {
            log_out.Visible = true;
            log.Visible = true;
        }
        else
        {
            log_out.Visible = false;
            log.Visible = false;
        }
    }
    protected void log_out_Click(object sender, EventArgs e)
    {
        Session.Clear();
        Session.Abandon();
        log_out.Visible = false;
        Response.Redirect("AdminHome.aspx");
        log.Visible = false;
    }
}
```

AdminHome.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile="~/Admin.master"AutoEventWireup=
"true"CodeFile="AdminHome.aspx.cs"Inherits="AdminHome"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">

<divalign="center">
<divstyle="padding: 50px; float: left; margin-left: 250px;">
<a href="AddCategory.aspx">
<imgsrc="Images/h4.png"onmouseover="this.src='Images/h4 hov.png';"
onmouseout="this.src='Images/h4.png';"style="border-radius: 12px; width:
350px;"/></a>
</div>

<divstyle="padding: 50px; float: right; margin-right: 250px;">
<a href="AddProduct.aspx">
<imgsrc="Images/h5.png"onmouseover="this.src='Images/h5 hov.png';"
onmouseout="this.src='Images/h5.png';"style="border-radius: 12px; width:
350px;"/></a>
</div>
</div>
</asp:Content>
```


AdminHome.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

public partial class AdminHome : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {

    }
}
```

AdminLogin.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\Admin.master"AutoEventWireup=
"true"CodeFile="AdminLogin.aspx.cs"Inherits="AdminLogin"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"runat="Server">

</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"runat="S
erver">

<divalign="center">
<tablestyle="width: 400px">
<tr>
<tdalign="center"colspan="2">Login</td>
</tr>

<tr>
<td>
<asp:LabelID="Label1"runat="server"Text="Label">Admin ID: </asp:Label></td>

<td>
<asp:TextBoxID="AdminID"runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator1"runat="server"Contro
lToValidate="AdminID"ErrorMessage="Enter
ID"Display="None"></asp:RequiredFieldValidator>
</tr>

<tr>
<td>
<asp:LabelID="Label2"runat="server"Text="Label2">Password: </asp:Label>

</td>
<td>
<asp:TextBoxID="Password"runat="server"TextMode="Password"></asp:TextBox></
td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator2"runat="server"Contro
lToValidate="Password"ErrorMessage="Enter
Pass"Display="None"></asp:RequiredFieldValidator>
</tr>

<tr>
<tdalign="center"colspan="2">
```

Ice Cream Parlour

```
<asp:ButtonID="Button1"runat="server"Text="SUBMIT"OnClick="Button1_Click"/>
</td>
</tr>

</table>
</div>
<asp:ValidationSummaryID="ValidationSummary1"runat="server"ShowMessageBox="
True"ShowSummary="False"/>
</asp:Content>
```

AdminLogin.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data;
using System.Data.SqlClient;
using System.Configuration;

public partial class AdminLogin : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();

    protected void Page_Load(object sender, EventArgs e)
    {

    }

    protected void Button1_Click(object sender, EventArgs e)
    {

        con.Open();
        cmd = new SqlCommand("select Adminid,Adminpass from admin where
        Adminid='" + AdminID.Text + "' and Adminpass='" + Password.Text + "'",
        con);
        SqlDataReader dr = cmd.ExecuteReader();
        if (dr.HasRows)
        {
            while (dr.Read())
            {
                Session["Adminid"] = dr["Adminid"].ToString();
                Response.Redirect("AdminHome.aspx");
            }
        }
        else
        {

```

Ice Cream Parlour

```
        Response.Write("<script>alert('Admin Id & Password are  
Incorrect.*)</script>");  
    }  
  
}
```

ContactUs.aspx

```
<%@PageTitle="" Language="C#" MasterPageFile="~/User.master" AutoEventWireup="
true" CodeFile="ContactUs.aspx.cs" Inherits="ContactUs"%>

<asp:ContentID="Content1" ContentPlaceHolderID="head" Runat="Server">
</asp:Content>
<asp:ContentID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="S
erver">

<div class="form" align="center">
<table>
<tr>
<td align="center" colspan="2">
        Contact Us</td>

</tr>

<tr>
<td>
<asp:LabelID="Label3" runat="server" Text="Label">Contact
Number:</asp:Label></td>
<td>
<asp:TextBoxID="contact_number" Width="98%" MaxLength="12" MinLength="10" runat
="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator2" runat="server" ErrorM
essage="Contact number cannot be
empty" ControlToValidate="contact_number" Display="None" ValidationGroup="A"><
/asp:RequiredFieldValidator>

</tr>

<tr>
<td>
<asp:LabelID="Label1" runat="server" Text="Label">Email ID:</asp:Label></td>
<td>
<asp:TextBoxID="email" Width="98%" runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator3" runat="server" ErrorM
essage="Email ID cannot be
empty" ControlToValidate="email" ValidationGroup="A"></asp:RequiredFieldValid
ator>
<asp:RegularExpressionValidatorID="RegularExpressionValidator1" runat="serve
r" ControlToValidate="Email" ValidationExpression="\w+([-+.']\w+)*@\w+([-
.] \w+)*\.\w+([-.] \w+)*" ErrorMessage="Enter Correct
Email" Display="None" ValidationGroup="A"></asp:RegularExpressionValidator>
```

```
</tr>
<tr>
<td>
<asp:LabelID="Label4"runat="server"Text="Label">Your
Query:</asp:Label></td>
<td>
<asp:TextBoxID="query"TextMode="MultiLine"Width="97%"runat="server"Height="
121px"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator4"runat="server"ErrorM
essage="Query should be
provided!"ControlToValidate="query"Display="None"ValidationGroup="A"></asp:
RequiredFieldValidator>

</tr>
<tr>
<tdalign="center"colspan="2">
<asp:ButtonID="Button1"runat="server"Text="SUBMIT"Height="40px"Width="125px
"OnClick="Button1_Click"ValidationGroup="A"/></td>
</tr>
</table>
<asp:ValidationSummaryID="ValidationSummary1"runat="server"ShowMessageBox="
True"ShowSummary="False"ValidationGroup="A"/>
</div>
</asp:Content>
```

ContactUs.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data.SqlClient;
using System.Data;
using System.Configuration;

public partial class ContactUs : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();

    protected void Page_Load(object sender, EventArgs e)
    {
    }

    protected void Button1_Click(object sender, EventArgs e)
    {
        con.Open();
        cmd = new SqlCommand("Insert Into CONTACTUS Values('" +
        contact_number.Text + "', '" + email.Text + "', '" + query.Text + "', '" +
        DateTime.Now.ToString() + "')" , con);
        cmd.ExecuteNonQuery();
        con.Close();
        Response.Write("<script>alert('Data Submitted!')</script>");
        contact_number.Text = null;
        email.Text = null;
        query.Text = null;
    }
}
```


Feedback.aspx

```
<%@PageTitle="" Language="C#" MasterPageFile="~/User.master" AutoEventWireup="
true" CodeFile="Feedback.aspx.cs" Inherits="Feedback"%>

<asp:ContentID="Content1" ContentPlaceHolderID="head" Runat="Server">
</asp:Content>
<asp:ContentID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="S
erver">
<div align="center">
<table>
<tr>
<td align="center">Feedback</td>
</tr>
<tr>
<td>
<asp:LabelID="Label1" runat="server" Text="Label">Remarks:</asp:Label></td>
</tr>
<tr>
<td>
<asp:TextBoxWidth="370px" ID="Remarks" TextMode="MultiLine" runat="server" Heig
ht="160px"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator1" runat="server" ErrorM
essage="Remarks should be
provided" ControlToValidate="remarks" Display="None" ValidationGroup="A"></asp
:RequiredFieldValidator>
</tr>

<tr>
<td>
<asp:LabelID="Label4" runat="server" Text="Label">Contact
Number:</asp:Label></td>
</tr>
<tr>
<td>
<asp:TextBoxID="feed_contact" Width="100%" runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator4" runat="server" ErrorM
essage="Contact number cannot be
empty" ControlToValidate="feed_contact" Display="None" ValidationGroup="A"></a
sp:RequiredFieldValidator>
<asp:RegularExpressionValidatorID="RegularExpressionValidator5" runat="serve
r" ControlToValidate="feed_contact" Display="None" ErrorMessage="Provide
correct contact Number(10 digits)" ValidationExpression="[0-
9]{10}" ValidationGroup="A"></asp:RegularExpressionValidator>
```

Ice Cream Parlour

```
</tr>
<tr>
<td align="center" style="padding: 8px">
<asp:Button ID="Button1" runat="server" Text="SUBMIT" OnClick="Button1_Click" ValidationGroup="A" /></td>
</tr>
</table>
<asp:ValidationSummary ID="ValidationSummary1" runat="server" ShowMessageBox="True" ValidationGroup="A" />
</div>
</asp:Content>
```

Feedback.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data.SqlClient;
using System.Data;
using System.Configuration;

public partial class Feedback : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();

    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["USERID"] == null)
        {
            Response.Redirect("UserLogin.aspx");
        }
    }

    protected void Button1_Click(object sender, EventArgs e)
    {
        con.Open();
        cmd = new SqlCommand("Insert Into FEEDBACK Values('" +
        Session["USERID"] + "', '" + Remarks.Text + "', '" + DateTime.Now.ToString()
        + "', '" + feed_contact.Text + "')" , con);
        cmd.ExecuteNonQuery();
        con.Close();
        Response.Write("<script>alert('Data Submitted!')</script>");
        Remarks.Text = null;
        feed_contact.Text = null;
    }
}
```

Ice Cream Parlour

Home.aspx

```
<%@ Page Title="" Language="C#" MasterPageFile="~/User.master" AutoEventWireup="true"
CodeFile="Home.aspx.cs" Inherits="Home" %>

<asp:Content ID="Content1" ContentPlaceHolderID="head" Runat="Server">
</asp:Content>
<asp:Content ID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="Server">

    <div class="slider-area">
        <!-- Slider -->
        <div class="block-slider block-slider4">
            <ul class="" id="bxslider-home4">
                <li>
                    
                    <div class="caption-group">
                        <h2 class="caption title">
                            Liquid <span class="primary">
                                <strong>Glow</strong></span>
                                </h2>
                                <h4 class="caption subtitle">Branded</h4>
                                <a class="caption button-radius"
href="#"><span class="icon"></span>Shop now</a>
                                </div>
                                </li>
                                <li>
                                    <div class="caption-group">
                                        <h2 class="caption title">
                                            by one, get one <span
class="primary">50% <strong>off</strong></span>
                                            </h2>
                                            <h4 class="caption subtitle">Eye Linear</h4>
                                            <a class="caption button-radius"
href="#"><span class="icon"></span>Shop now</a>
                                            </div>
                                            </li>
                                            <li>
                                                <div class="caption-group">
                                                    <h2 class="caption title">
                                                        Educational <span
class="primary">Training <strong>Kit</strong></span>
                                                        </h2>
                                                        <h4 class="caption subtitle">Select Item</h4>
                                                        <a class="caption button-radius"
href="#"><span class="icon"></span>Shop now</a>
                                                        </div>
                                                        </li>
                                                        <%--<li>
                                                            <div class="caption-group">
                                                                <h2 class="caption title">
                                                                    <span class="primary">Parcos
<strong>Product</strong></span>
                                                                    </h2>
                                                                    <h4 class="caption subtitle"></h4>
```

Ice Cream Parlour

```
href="#"><span class="icon"></span>Shop now</a>
                                </div>
                                </li>--%>
                                </ul>
                                </div>
                                <!-- ./Slider -->
</div> <!-- End slider area -->

<div class="promo-area">
  <div class="zigzag-bottom"></div>
  <div class="container">
    <div class="row">
      <div class="col-md-3 col-sm-6" style="margin-left:150px;">
        <div class="single-promo promo1">
          <i class="fa fa-refresh"></i>
          <p>30 Days return</p>
        </div>

        <div class="col-md-3 col-sm-6">
          <div class="single-promo promo3">
            <i class="fa fa-lock"></i>
            <p>Secure payments</p>
          </div>
        </div>
        <div class="col-md-3 col-sm-6">
          <div class="single-promo promo4">
            <i class="fa fa-gift"></i>
            <p>New products</p>
          </div>
        </div>
      </div>
    </div>
  </div> <!-- End promo area -->

  <div class="brands-area">
    <div class="zigzag-bottom"></div>
    <div class="container">
      <div class="row">
        <div class="col-md-12">
          <div class="brand-wrapper">
            <div class="brand-list">
              
              
              
              
              
              
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</div>
```

Ice Cream Parlour

</div> <!-- End brands area -->

</asp:Content>

Home.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

public partial class Home : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {

    }
}
```

Ice Cream Parlour

Payment.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\User.master"AutoEventWireup="
true"CodeFile="Payment.aspx.cs"Inherits="Payment"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">

<divalign="center">
<tableborder="0"cellpadding="0"cellspacing="15"style="font-family: 'times
New Roman', Times, serif">
<tr>
<tdalign="center"colspan="2"style="padding: 14px">Payment
</td>
</tr>
<tr>
<td>
<span>User ID:</span>
</td>
<td>
<asp:TextBoxID="Label_CustName"Enabled="false"runat="server"Width="100%"></
asp:TextBox>
</td>
</tr>
<tr>
<td>
<span>Total Product(s):</span>
</td>
<td>
<asp:TextBoxID="Label_count"Enabled="false"runat="server"Width="100%"></asp
:TextBox>
</td>
</tr>
<tr>
<td>
<span>Total Amount:</span>
</td>
<td>
<asp:TextBoxID="TextBox_PaymentAmount"Enabled="false"runat="server"Width="1
00%"></asp:TextBox>
</td>
</tr>
```


Ice Cream Parlour

```
<tr>
<td>
<span>Payment Mode:</span>
</td>
<td>
<center>
<asp:RadioButtonListID="RadioButtonList_PMode"RepeatDirection="Horizontal"r
unat="server"Width="370px">

<asp:ListItem>Debit</asp:ListItem>
<asp:ListItem>Credit</asp:ListItem>
</asp:RadioButtonList></center>
<asp:RequiredFieldValidatorID="RequiredFieldValidator1"runat="server"
ControlToValidate="RadioButtonList_PMode"Display="None"
ErrorMessage="Select Payment
Mode"ValidationGroup="pay"></asp:RequiredFieldValidator>
</td>

</tr>
<tr>
<td><span>Bank</span>
</td>
<td>
<asp:DropDownListID="dropdownlist_bank"Width="100%"runat="server">
<asp:ListItem>Select</asp:ListItem>
<asp:ListItem>SBI</asp:ListItem>
<asp:ListItem>PNB</asp:ListItem>
<asp:ListItem>Canara bank</asp:ListItem>
<asp:ListItem>HDFC Bank</asp:ListItem>
<asp:ListItem>Axis bank</asp:ListItem>

</asp:DropDownList>

<asp:RequiredFieldValidatorID="RequiredFieldValidator2"runat="server"
ControlToValidate="dropdownlist_bank"Display="None"ErrorMessage="Select
Bank"
ValidationGroup="pay"></asp:RequiredFieldValidator>

</td>
</tr>
<tr>
<td><span>Card no:</span>
</td>
<td>
<asp:TextBoxID="textboxcardno"runat="server"Width="100%"></asp:TextBox>
```

Ice Cream Parlour

```
<asp:RegularExpressionValidatorID="RegularExpressionValidator1"runat="server"ControlToValidate="textboxcardno"Display="None"ErrorMessage="Enter 16 Digit Card No"ValidationExpression="[0-9]{16}"ValidationGroup="pay"></asp:RegularExpressionValidator>

<asp:RequiredFieldValidatorID="RequiredFieldValidator3"runat="server"ControlToValidate="textboxcardno"Display="None"ErrorMessage="Enter card no"ValidationGroup="pay"></asp:RequiredFieldValidator>
</td>
</tr>
<tr>
<td><span>CVV:</span>
</td>
<td>
<asp:TextBoxID="cvv"runat="server"Width="100%"></asp:TextBox>

<asp:RegularExpressionValidatorID="RegularExpressionValidator2"runat="server"ControlToValidate="cvv"Display="None"ErrorMessage="Enter 3 digit CVV"ValidationExpression="[0-9]{3}"ValidationGroup="pay"></asp:RegularExpressionValidator>

<asp:RequiredFieldValidatorID="RequiredFieldValidator6"runat="server"ControlToValidate="cvv"Display="None"ErrorMessage="Enter CVV"ValidationGroup="pay"></asp:RequiredFieldValidator>
</td>

</tr>
<tr>
<td><span>Card validity:</span>
</td>
<td>
<asp:TextBoxID="textboxvalidity"runat="server"Width="100%"></asp:TextBox>
<asp:RequiredFieldValidatorID="RequiredFieldValidator4"runat="server"ControlToValidate="textboxvalidity"Display="None"ErrorMessage="Enter card validity"ValidationGroup="pay"></asp:RequiredFieldValidator>
</td>
</tr>
<tr>
<td><span>Address:</span>
</td>
<td>
<asp:TextBoxID="textbox_address"TextMode="MultiLine"runat="server"Width="100%"></asp:TextBox>
```

Ice Cream Parlour

```
<asp:RequiredFieldValidatorID="RequiredFieldValidator5"runat="server"
ControlToValidate="textbox_address"Display="None"ErrorMessage="Enter
address"
ValidationGroup="pay"></asp:RequiredFieldValidator>
</td>
</tr>
<tr>
<divalign="center">
<td>
<asp:ButtonID="Button1"runat="server"Text="Pay
Now"OnClick="Button1_Click"ValidationGroup="pay"/>
</td>

<td>
<asp:ButtonID="Button2"align="center"runat="server"Text="Reset"OnClick="But
ton2_Click"/>
</td>
</div>
</tr>
<asp:ValidationSummaryID="ValidationSummary1"ValidationGroup="pay"ShowMessa
geBox="true"ShowSummary="false"runat="server"/>
</table>
</div>

</asp:Content>
```

Payment.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data.SqlClient;
using System.Configuration;
using System.IO;
using System.Data;

public partial class Payment : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["connection"].Connection
    String);
    SqlCommand cmd;
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["USERID"] == null)
        {
            Response.Redirect("UserLogin.aspx");
        }

        if (!IsPostBack)
        {
            totalamount();//for count total amount of the products
            totalcount();//for count total items
        }
        Label_CustName.Text = Session["USERID"].ToString();
    }
    public void totalcount()
    {
        SqlDataAdapter da1 = new SqlDataAdapter("select count(Cartid) as
        numberOfItem from MyCart where CustomerID='" + Session["USERID"].ToString()
        + "'", con);
        DataTable dt1 = new DataTable();//data table object declared to store data
        da1.Fill(dt1);// filling datatable object from data adaptor
        if (dt1.Rows.Count > 0)// checking whether dt has rows or not
        {
```

Ice Cream Parlour

```
        Label_count.Text = dt1.Rows[0]["numberofItem"].ToString();
    }
}

public void totalamount()
{
    SqlDataAdapter da = new SqlDataAdapter("select sum(Price) as totalamount
from MyCart where CustomerID='" + Session["USERID"].ToString() + "'", con);
    DataTable dt = new DataTable();
    da.Fill(dt);
    if (dt.Rows.Count > 0)
    {
        TextBox_PaymentAmount.Text =
dt.Rows[0]["totalamount"].ToString();
    }
}

protected void Button1_Click(object sender, EventArgs e)
{
    con.Open();
    cmd = new SqlCommand("insert into Payment values('" +
Label_CustName.Text + "','" + Label_count.Text + "','" +
TextBox_PaymentAmount.Text + "','" +
RadioButtonList_PMode.SelectedItem.Text + "','" +
dropdownlist_bank.SelectedItem.Text + "','" + textboxcardno.Text + "','" +
cvv.Text + "','" + textboxvalidity.Text + "','" + textbox_address.Text +
"', '" + DateTime.Now.ToString() + "')", con);
    cmd.ExecuteNonQuery();
    con.Close();

    con.Open();
    cmd = new SqlCommand("insert into SALES values('" +
Label_CustName.Text + "','" + Label_count.Text + "','" +
TextBox_PaymentAmount.Text + "','" + DateTime.Now.ToString() + "')", con);
    cmd.ExecuteNonQuery();
    con.Close();

    Response.Write("<script>alert('Your Payment Has Been
Accepted')</script>");

    con.Open();
```

Ice Cream Parlour

```
SqlCommand cmddelete = newSqlCommand("delete from MyCart where
CustomerID='" + Session["USERID"].ToString() + "'", con);
    cmddelete.ExecuteNonQuery();
    con.Close();
    Response.Redirect("Thanks.aspx");
}
protectedvoid Button2_Click(object sender, EventArgs e)
{
    Response.Redirect("payment.aspx");
}
}
```

ProductDetail.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile="~/User.master"AutoEventWireup="true"CodeFile="ProductDetail.aspx.cs"Inherits="ProductDetail"%>
```

```
<asp:ContentID="Content1" ContentPlaceHolderID="head" Runat="Server">
</asp:Content>
<asp:ContentID="Content2" ContentPlaceHolderID="ContentPlaceholder1" Runat="Server">
<div align="center">
<asp:DataListID="DataList1" OnItemCommand="DataList1_ItemCommand" runat="server">
<ItemStyle/>
<ItemTemplate><table style="padding: 10px width= "100%">
<p align="center" style="font-size: x-large">
<asp:Label ID="H1" runat="server">Details of
</asp:Label><asp:Label ID="H2" runat="server" Text='<%#bind("NAME")%>' ></asp:Label>
</p>
<br />
<tr>
<td align="center" valign="top">
<asp:Image Style="padding: 5px" ID="Image1" runat="server" Width="400" Height="390" ImageUrl='<%#Bind("IMG") %>' BorderStyle="Groove" BorderColor="#CCCCCC"/>
</td>
<td rowspan="6" valign="top" style="padding-left: 15px; vertical-align: top; font-size: medium;">
<table style="letter-spacing: -1px; white-space: nowrap; vertical-align: top;">
<tr>
<td>
<asp:Label ID="Label14" runat="server" Text="Product Name:&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&~::~:"></asp:Label>
</td>
<td>
<asp:Label ID="Label_ProdName" runat="server" Text='<%#bind("NAME")%>' ></asp:Label><br/>
</td>
</tr>
<tr>
<td>
<asp:Label ID="Label12" runat="server" Text="Color:"></asp:Label>
</td>
```

Ice Cream Parlour

```
<td>
<asp:LabelID="Label13"runat="server"Text='<%#bind("COLOR")
%>'></asp:Label><br/>
</td>
</tr>
<tr>
<td>
<asp:LabelID="Label6"runat="server"Text="Price:"></asp:Label>
</td>
<td>
<asp:LabelID="Label7"runat="server"Text='<%#bind("PRICE") %>'></asp:Label>
</td>
</tr>
<tr>
<tdstyle="vertical-align:top;">
<asp:LabelID="Label3"runat="server"Text="Description:"></asp:Label>
</td>
<td>
<asp:LabelID="Label4"runat="server"Text='<%#Bind("DSC")%>'></asp:Label>
</td>
</tr>

<tr>
<td>
<asp:LabelID="Label5"runat="server"Text="Product ID:"></asp:Label>
</td>
<td>
<asp:LabelID="Label8"runat="server"Text='<%#Bind("PRODUCT_ID")%>'></asp:Lab
el>
</td>
</tr>

<tr>
<td>
<br/>
</td>
</tr>
<tr>
<td colspan="2"align="center">

<asp:LinkButtonID="LinkButton1"runat="server"CommandName="Add"CommandArgume
nt='<%#bind("PRODUCT_ID") %>'>
```


Ice Cream Parlour

```
ToolTip="Click Here & Add This Product To Cart"ForeColor="#ff9900"Font-
Bold="False"Font-Underline="False"Font-Size="small">Add To
Cart</asp:LinkButton>
<br/><br/>
<%-- <asp:ImageButton ID="ImageButton1" runat="server"
ImageUrl="~/images/add-to-cart.jpg"
                                Width="100"
Height="60" CommandArgument='<%#bind("product_ID") %>' CommandName="Add"
/>--%>

</td>
</tr>
<br/>
</table>
</td>
</tr>
</table>
</ItemTemplate>
</asp:DataList></div>
</asp:Content>
```

ProductDetail.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data;
using System.Configuration;
using System.Data.SqlClient;

public partial class ProductDetail : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["USERID"] == null)
        {
            Response.Redirect("UserLogin.aspx");
        }

        if (!IsPostBack)
        {
            string sproductid = Request.QueryString["PRODUCT_ID"].ToString();
            SqlDataAdapter da = new SqlDataAdapter("select * from PRODUCT where
            PRODUCT_ID=" + sproductid + "", con);
            DataTable dt = new DataTable();
            da.Fill(dt);
            DataList1.DataSource = dt;
            DataList1.DataBind();
        }
    }

    protected void DataList1_SelectedIndexChanged1(object sender, EventArgs e)
    {

```

```
    }

protectedvoid DataList1_ItemCommand(object source, DataListCommandEventArgs e)
{
    if (e.CommandName == "Add")
    {

        string sCustomerID = "";
        if (Session["USERID"] == null)
        {
            Response.Redirect("UserLogin.aspx");
        }
        else
        {
            sCustomerID = Session["USERID"].ToString();
        }

        string sproduct_id = e.CommandArgument.ToString();
        string sprice = "";

        SqlDataAdapter daGetPrice = newSqlDataAdapter("select PRICE from PRODUCT
where PRODUCT_ID=" + sproduct_id + "", con);
        DataTable dtGetPrice = newDataTable();
        daGetPrice.Fill(dtGetPrice);
        if (dtGetPrice.Rows.Count > 0)
        {
            sprice = dtGetPrice.Rows[0]["PRICE"].ToString();
        }
        con.Open();
        cmd = newSqlCommand("insert into MyCart values(" + sproduct_id
+ "," + sprice + "," + sCustomerID + "," + DateTime.Now + ")", con);
        cmd.ExecuteNonQuery();
        con.Close();
        Response.Write("<script>alert('Product Added
Successfully')</script>");
    }
}
}
```

Registration.aspx

```
<%@PageTitle="" Language="C#" MasterPageFile="~/User.master" AutoEventWireup="
true" CodeFile="Registration.aspx.cs" Inherits="Registration"%>

<asp:ContentID="Content1" ContentPlaceHolderID="head" Runat="Server">
</asp:Content>
<asp:ContentID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" Runat="S
erver">

<div align="center"><table style="width: 450px">
<tr>
<td align="center" colspan="2" style="padding-bottom:7px;">User
Registration</td>
</tr>

<tr>
<td>
<asp:LabelID="Label1" runat="server" Text="Label">User ID: </asp:Label></td>
<td>
<asp:TextBoxWidth="99%" ID="userid" runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator1" runat="server" ErrorM
essage="Enter a User
ID" ControlToValidate="userid" Display="None" ValidationGroup="A"></asp:Requir
edFieldValidator>
</tr>

<tr>
<td>
<asp:LabelID="Label9" runat="server" Text="Label">Name: </asp:Label></td>
<td>
<asp:TextBoxID="Name" Width="99%" runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator10" runat="server" Error
Message="Enter
Name" ControlToValidate="name" Display="None" ValidationGroup="A"></asp:Requir
edFieldValidator>
</tr>

<tr>
<td>
<asp:LabelID="Label2" runat="server" Text="Label">Password:
</asp:Label></td>

<td>
```

Ice Cream Parlour

```
<asp:TextBoxID="password"Width="99%"TextMode="Password"runat="server"></asp:
:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator2"runat="server"ErrorM
essage="Enter
Password"ControlToValidate="password"Display="None"ValidationGroup="A"></as
p:RequiredFieldValidator>
</tr>
<tr>
<td>
<asp:LabelID="Label5"runat="server"Text="Label">Confirm Pass:
</asp:Label></td>
<td>
<asp:TextBoxID="ConPass"Width="99%"TextMode="Password"runat="server"></asp:
TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator3"runat="server"ErrorM
essage="Enter Password
Again"ControlToValidate="ConPass"Display="None"ValidationGroup="A"></asp:Re
quiredFieldValidator>
<asp:CompareValidatorID="CompareValidator1"runat="server"ErrorMessage="Pass
words Do Not
Match"ControlToCompare="password"ControlToValidate="ConPass"Display="Dynam
ic"BackColor="#FFFF66"Font-
Bold="True"ValidationGroup="A"></asp:CompareValidator>
</tr>

<tr>
<td>
<asp:LabelID="Label4"runat="server"Text="Label">Address</asp:Label></td>
<td>
<asp:TextBoxID="Address"Width="99%"runat="server"></asp:TextBox></td>

</tr>
<tr>
<td>
<asp:LabelID="Label6"runat="server"Text="Label">Email: </asp:Label></td>
<td>
<asp:TextBoxID="Email"Width="99%"runat="server"></asp:TextBox></td>
<asp:RegularExpressionValidatorID="RegularExpressionValidator1"runat="serve
r"ControlToValidate="Email"ValidationExpression="\w+([-+.']\w+)*@\w+([-
.]\w+)*\.\w+([-.\]\w+)*"ErrorMessage="Enter Correct
Email"ValidationGroup="A"></asp:RegularExpressionValidator>
<asp:RequiredFieldValidatorID="RequiredFieldValidator5"runat="server"ErrorM
essage="Enter
Email"ControlToValidate="Email"Display="None"ValidationGroup="A"></asp:Requ
iredFieldValidator>
```

Ice Cream Parlour

```
</tr>
<tr>
<td>
<asp:LabelID="Label3"runat="server"Text="Label">Gender: </asp:Label></td>
<td>
<asp:RadioButtonListID="RadioButtonList1"runat="server"RepeatDirection="Horizontal"Width="99%">
<asp:ListItem>Male</asp:ListItem>
<asp:ListItem>Female</asp:ListItem>
</asp:RadioButtonList>
<asp:RequiredFieldValidatorID="RequiredFieldValidator4"ControlToValidate="RadioButtonList1"Display="None"runat="server"ErrorMessage="Select gender"></asp:RequiredFieldValidator>
</td>

</tr>
<tr>
<td>
<asp:LabelID="Label7"runat="server"Text="Label">DOB: </asp:Label></td>
<td>
<asp:DropDownListID="DD"runat="server"></asp:DropDownList>
<asp:RequiredFieldValidatorID="RequiredFieldValidator7"InitialValue="Select Date"runat="server"ErrorMessage="Select Date"ControlToValidate="DD"ValidationGroup="A"Display="None"></asp:RequiredFieldValidator>
<asp:DropDownListID="MM"runat="server"></asp:DropDownList>
<asp:RequiredFieldValidatorID="RequiredFieldValidator8"InitialValue="Select Month"runat="server"ErrorMessage="Select Month"ControlToValidate="MM"ValidationGroup="A"Display="None"></asp:RequiredFieldValidator>
<asp:DropDownListID="YY"runat="server"></asp:DropDownList>
<asp:RequiredFieldValidatorID="RequiredFieldValidator9"InitialValue="Select Year"runat="server"ErrorMessage="Select Year"ControlToValidate="YY"ValidationGroup="A"Display="None"></asp:RequiredFieldValidator>

</td>
</tr>
<tr>
<td>
<asp:LabelID="Label8"runat="server"Text="Label">Contact No:
</asp:Label></td>
<td>
```

Ice Cream Parlour

```
<asp:TextBoxID="Contact"Width="99%"MaxLength="10"TextMode="Phone"runat="server"></asp:TextBox></td>
<asp:RequiredFieldValidatorID="RequiredFieldValidator6"runat="server"ErrorMessage="Enter Contact
Number"ControlToValidate="Contact"Display="None"ValidationGroup="A"></asp:RequiredFieldValidator>
</tr>
<tr>
<tdalign="center"colspan="2"style="padding: 10px">
<asp:ButtonID="Button1"runat="server"Text="Submit"OnClick="Button1_Click"ValidationGroup="A"/></td>
</tr>
<asp:ValidationSummaryID="ValidationSummary1"runat="server"ShowMessageBox="True"ShowSummary="false"ValidationGroup="A"/>
</table></div>

</asp:Content>
```

Registration.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data.SqlClient;
using System.Data;
using System.Configuration;

public partial class Registration : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();
    int i;
    protected void Page_Load(object sender, EventArgs e)
    {
        Session.Clear();
        Session.Abandon();

        for (int i = 1; i <= 31; i++)
        {
            DD.Items.Add(i.ToString());
        }
        DD.Items.Insert(0, "Select Date");

        for (int i = 1; i <= 12; i++)
        {
            MM.Items.Add(i.ToString());
        }
        MM.Items.Insert(0, "Select Month");

        for (int i = 1940; i <= 2017; i++)
        {
            YY.Items.Add(i.ToString());
        }
        YY.Items.Insert(0, "Select Year");
    }
}
```



```
protectedvoid Button1_Click(object sender, EventArgs e)
{
    string DOB = DD.SelectedItem.Text + "/" + MM.SelectedItem.Text + "/" +
    YY.SelectedItem.Text;
    con.Open();
    cmd = newSqlCommand("Insert Into User_reg Values('" + userid.Text +
    "',' ' + Name.Text + "',' ' + password.Text + "',' ' + Address.Text + "',' ' +
    Email.Text + "',' ' + RadioButtonList1.SelectedValue + "',' ' + DOB + "',' ' +
    Contact.Text + "',' ' + DateTime.Now.ToString() + '")", con);
    cmd.ExecuteNonQuery();
    con.Close();
    Response.Write("<script>alert('Data Submitted!')</script>");
    userid.Text = null;
    password.Text = null;
    ConPass.Text = null;
    Name.Text = null;
    Address.Text = null;
    Email.Text = null;
    DD.SelectedIndex = 0;
    MM.SelectedIndex = 0;
    YY.SelectedIndex = 0;
    Contact.Text = null;
    RadioButtonList1.ClearSelection();
}
}
```

REPORTOfCart.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\Admin.master"AutoEventWireup=
"true"CodeFile="REPORTOfCart.aspx.cs"Inherits="REPORTOfCart"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
<linkrel="stylesheet"href="Style.css"/>
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">
<div>
<center>
<h1>Cart List</h1>
<asp:GridViewID="GridView1"runat="server"BackColor="White"BorderColor="#CCC
CCC"BorderStyle="None"BorderWidth="1px"CellPadding="3">
<FooterStyleBackColor="White"ForeColor="#000066"/>
<HeaderStyleBackColor="#006699"Font-Bold="True"ForeColor="White"/>
<PagerStyleBackColor="White"ForeColor="#000066"HorizontalAlign="Left"/>
<RowStyleForeColor="#000066"/>
<SelectedRowStyleBackColor="#669999"Font-Bold="True"ForeColor="White"/>
<SortedAscendingCellStyleBackColor="#F1F1F1"/>
<SortedAscendingHeaderStyleBackColor="#007DBB"/>
<SortedDescendingCellStyleBackColor="#CAC9C9"/>
<SortedDescendingHeaderStyleBackColor="#00547E"/>

</asp:GridView>
</center>
</div>
</asp:Content>
```

REPORTOfCart.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Configuration;
using System.Data.SqlClient;
public partial class REPORTOfCart : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Adminid"] == null)
        {
            Response.Redirect("AdminLogin.aspx");
        }
        if (!IsPostBack)
        {
            SqlDataAdapter da = new SqlDataAdapter("select * from MyCart", con);
            DataTable dt = new DataTable();
            da.Fill(dt);
            GridView1.DataSource = dt;
            GridView1.DataBind();
        }
    }
}
```

REPORTOfContactUs.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\Admin.master"AutoEventWireup=
"true"CodeFile="REPORTOfContactUs.aspx.cs"Inherits="REPORTOfContactUs"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
<linkrel="stylesheet"href="Style.css"/>
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">
<div>
<center>
<h1>ContactUs List</h1>
<asp:GridViewID="GridView1"runat="server"BackColor="White"BorderColor="#CCC
CCC"BorderStyle="None"BorderWidth="1px"CellPadding="3">
<FooterStyleBackColor="White"ForeColor="#000066"/>
<HeaderStyleBackColor="#006699"Font-Bold="True"ForeColor="White"/>
<PagerStyleBackColor="White"ForeColor="#000066"HorizontalAlign="Left"/>
<RowStyleForeColor="#000066"/>
<SelectedRowStyleBackColor="#669999"Font-Bold="True"ForeColor="White"/>
<SortedAscendingCellStyleBackColor="#F1F1F1"/>
<SortedAscendingHeaderStyleBackColor="#007DBB"/>
<SortedDescendingCellStyleBackColor="#CAC9C9"/>
<SortedDescendingHeaderStyleBackColor="#00547E"/>

</asp:GridView>
</center>
</div>
</asp:Content>
```

REPORTOfContactUs.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Configuration;
using System.Data.SqlClient;
public partial class REPORTOfContactUs : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Adminid"] == null)
        {
            Response.Redirect("AdminLogin.aspx");
        }
        if (!IsPostBack)
        {
            SqlDataAdapter da = new SqlDataAdapter("select * from CONTACTUS", con);
            DataTable dt = new DataTable();
            da.Fill(dt);
            GridView1.DataSource = dt;
            GridView1.DataBind();
        }
    }
}
```

REPORTOfFeedback.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile="~/Admin.master"AutoEventWireup=
"true"CodeFile="REPORTOfFeedback.aspx.cs"Inherits="REPORTOfFeedback"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
<linkrel="stylesheet"href="Style.css"/>
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">
<div>
<center>
<h1>Feedback List</h1>
<asp:GridViewID="GridView1"runat="server"BackColor="White"BorderColor="#CCC
CCC"BorderStyle="None"BorderWidth="1px"CellPadding="3">
<FooterStyleBackColor="White"ForeColor="#000066"/>
<HeaderStyleBackColor="#006699"Font-Bold="True"ForeColor="White"/>
<PagerStyleBackColor="White"ForeColor="#000066"HorizontalAlign="Left"/>
<RowStyleForeColor="#000066"/>
<SelectedRowStyleBackColor="#669999"Font-Bold="True"ForeColor="White"/>
<SortedAscendingCellStyleBackColor="#F1F1F1"/>
<SortedAscendingHeaderStyleBackColor="#007DBB"/>
<SortedDescendingCellStyleBackColor="#CAC9C9"/>
<SortedDescendingHeaderStyleBackColor="#00547E"/>

</asp:GridView>
</center>
</div>
</asp:Content>
```

REPORTOfFeedback.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Configuration;
using System.Data.SqlClient;
public partial class REPORTOfFeedback : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Adminid"] == null)
        {
            Response.Redirect("AdminLogin.aspx");
        }
        if (!IsPostBack)
        {
            SqlDataAdapter da = new SqlDataAdapter("select * from FEEDBACK", con);
            DataTable dt = new DataTable();
            da.Fill(dt);
            GridView1.DataSource = dt;
            GridView1.DataBind();
        }
    }
}
```

REPORTOfPayment.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\Admin.master"AutoEventWireup=
"true"CodeFile="REPORTOfPayment.aspx.cs"Inherits="REPORTOfPayment"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
<linkrel="stylesheet"href="Style.css"/>
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">
<div>
<center>
<h1>Payment List</h1>
<asp:GridViewID="GridView1"runat="server"BackColor="White"BorderColor="#CCC
CCC"BorderStyle="None"BorderWidth="1px"CellPadding="3">
<FooterStyleBackColor="White"ForeColor="#000066"/>
<HeaderStyleBackColor="#006699"Font-Bold="True"ForeColor="White"/>
<PagerStyleBackColor="White"ForeColor="#000066"HorizontalAlign="Left"/>
<RowStyleForeColor="#000066"/>
<SelectedRowStyleBackColor="#669999"Font-Bold="True"ForeColor="White"/>
<SortedAscendingCellStyleBackColor="#F1F1F1"/>
<SortedAscendingHeaderStyleBackColor="#007DBB"/>
<SortedDescendingCellStyleBackColor="#CAC9C9"/>
<SortedDescendingHeaderStyleBackColor="#00547E"/>

</asp:GridView>
</center>
</div>
</asp:Content>
<a href="REPORTOfPayment.aspx">REPORTOfPayment.aspx</a>
```


REPORTOfPayment.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Configuration;
using System.Data.SqlClient;
public partial class REPORTOfPayment : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Adminid"] == null)
        {
            Response.Redirect("AdminLogin.aspx");
        }
        if (!IsPostBack)
        {
            SqlDataAdapter da = new SqlDataAdapter("select * from Payment", con);
            DataTable dt = new DataTable();
            da.Fill(dt);
            GridView1.DataSource = dt;
            GridView1.DataBind();
        }
    }
}
```

REPORTOfSales.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\Admin.master"AutoEventWireup=
"true"CodeFile="REPORTOfSales.aspx.cs"Inherits="REPORTOfSales"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
<linkrel="stylesheet"href="Style.css"/>
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">
<div>
<center>
<h1>Sales List</h1>
<asp:GridViewID="GridView1"runat="server"BackColor="White"BorderColor="#CCC
CCC"BorderStyle="None"BorderWidth="1px"CellPadding="3">
<FooterStyleBackColor="White"ForeColor="#000066"/>
<HeaderStyleBackColor="#006699"Font-Bold="True"ForeColor="White"/>
<PagerStyleBackColor="White"ForeColor="#000066"HorizontalAlign="Left"/>
<RowStyleForeColor="#000066"/>
<SelectedRowStyleBackColor="#669999"Font-Bold="True"ForeColor="White"/>
<SortedAscendingCellStyleBackColor="#F1F1F1"/>
<SortedAscendingHeaderStyleBackColor="#007DBB"/>
<SortedDescendingCellStyleBackColor="#CAC9C9"/>
<SortedDescendingHeaderStyleBackColor="#00547E"/>

</asp:GridView>
</center>
</div>
</asp:Content>
```

REPORTOfSales.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Configuration;
using System.Data.SqlClient;
public partial class REPORTOfSales : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Adminid"] == null)
        {
            Response.Redirect("AdminLogin.aspx");
        }
        if (!IsPostBack)
        {
            SqlDataAdapter da = new SqlDataAdapter("select * from SALES", con);
            DataTable dt = new DataTable();
            da.Fill(dt);
            GridView1.DataSource = dt;
            GridView1.DataBind();
        }
    }
}
```

REPORTOfUsers.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\Admin.master"AutoEventWireup=
"true"CodeFile="REPORTOfUsers.aspx.cs"Inherits="REPORTOfUsers"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
<linkrel="stylesheet"href="Style.css"/>
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">
<div>
<center>
<br/>
<h1>Users List</h1>
<asp:GridViewID="GridView1"runat="server"BackColor="White"BorderColor="#CCC
CCC"BorderStyle="None"BorderWidth="1px"CellPadding="3">
<FooterStyleBackColor="White"ForeColor="#000066"/>
<HeaderStyleBackColor="#006699"Font-Bold="True"ForeColor="White"/>
<PagerStyleBackColor="White"ForeColor="#000066"HorizontalAlign="Left"/>
<RowStyleForeColor="#000066"/>
<SelectedRowStyleBackColor="#669999"Font-Bold="True"ForeColor="White"/>
<SortedAscendingCellStyleBackColor="#F1F1F1"/>
<SortedAscendingHeaderStyleBackColor="#007DBB"/>
<SortedDescendingCellStyleBackColor="#CAC9C9"/>
<SortedDescendingHeaderStyleBackColor="#00547E"/>

</asp:GridView>
</center>
</div>
</asp:Content>
```

REPORTOfUsers.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;
using System.Data;
using System.Configuration;
using System.Data.SqlClient;
public partial class REPORTOfUsers : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["Adminid"] == null)
        {
            Response.Redirect("AdminLogin.aspx");
        }
        if (!IsPostBack)
        {
            SqlDataAdapter da = new SqlDataAdapter("select * from User_reg", con);
            DataTable dt = new DataTable();
            da.Fill(dt);
            GridView1.DataSource = dt;
            GridView1.DataBind();
        }
    }
}
```

Thanks.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile="~/User.master"AutoEventWireup="true"CodeFile="Thanks.aspx.cs"Inherits="Thanks"%>
```

```
<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">  
</asp:Content>
```

```
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="Server">
```

Payment has been accepted!

```
</asp:Content>
```

Thanks.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

public partial class Thanks : System.Web.UI.Page
{
    protected void Page_Load(object sender, EventArgs e)
    {

    }
}
```

Ice Cream Parlour

User.master

```
<%@ Master Language="C#" AutoEventWireup="true" CodeFile="User.master.cs" Inherits="User" %>

<!DOCTYPE html>

<html xmlns="http://www.w3.org/1999/xhtml">
<head runat="server">
    <head>
        <title>Ice Cream Parlour</title>
        <meta charset="utf-8">
        <meta name="viewport" content="width=device-width, initial-scale=1.0, maximum-
scale=1.0, user-scalable=no">
        <link href="layout/styles/layout.css" rel="stylesheet" type="text/css" media="all">
        <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/css/bootstrap.min.css"
integrity="sha384-Gn5384xqQ1aoWXA+058RXPxPg6fy4IWvTNh0E263XmFcJlSAwiGgFAW/dAiS6JXm"
crossorigin="anonymous">
        <script src="https://maxcdn.bootstrapcdn.com/bootstrap/4.0.0/js/bootstrap.min.js"
integrity="sha384-JZR6Spejh4U02d8j0t6vLEHfe/JQGiRRSQQxSfFWpi1MquVdAyjUar5+76PVCmY1"
crossorigin="anonymous"></script>
        <script src="https://code.jquery.com/jquery-3.2.1.slim.min.js" integrity="sha384-
KJ3o2DKtIkvYIK3UEJm7KCKRr/rE9/Qpg6aAZGJwFDMVNA/GpGFF93hXpG5KkN"
crossorigin="anonymous"></script>
        <script
src="https://cdnjs.cloudflare.com/ajax/libs/popper.js/1.12.9/umd/popper.min.js"
integrity="sha384-ApNbgh9B+Y1QKtv3Rn7W3mgPxhU9K/ScQsAP7hUibX39j7fakFPskvXusvfa0b4Q"
crossorigin="anonymous"></script>
    </head>
    <asp:ContentPlaceholder ID="head" runat="server">
    </asp:ContentPlaceholder>
</head>
<body id="top">
    <form id="form1" runat="server">

        <!--
#####
## -->
        <!-- Top Background Image Wrapper -->
        <div class="bgded overlay">
            <!--
#####
## -->

            <div class="wrapper row1">
                <header id="header" class="hoc clear">
                    <!--
#####
## -->

                    <div id="logo" class="fl_left">
                        <h1><a href="index.aspx">ICE CREAM PARLOUR</a></h1>
                    </div>
                    <!--
#####
## -->
```


Ice Cream Parlour

```
<nav id="mainnav" class="fl_right">
  <ul class="clear">
    <li class="active"><a href="index.aspx">Home</a></li>

    <li><a class="drop" href="ViewProducts.aspx">Products</a>
      <ul>
        <li>
          <asp:DataList ID="DataList1" RepeatColumns="1"
Style="color: #3399FF" runat="server" OnItemCommand="DataList1_ItemCommand1">
            <ItemStyle />
            <ItemTemplate>

              <li>
                <asp:LinkButton ID="LinkButton1"
runat="server" Text='<%#bind("Category") %>'
                                CommandArgument='<%#bind("Category")
%>' CommandName="view" ForeColor="White" CausesValidation="false"></asp:LinkButton>
              </li>
            </ItemTemplate>
          </asp:DataList></li>

        </ul>
      </li>
      <!-- <li><a class="drop" href="#">Dropdown</a>
        <ul>
          <li><a href="#">Level 2</a></li>
          <li><a class="drop" href="#">Level 2 + Drop</a>
            <ul>
              <li><a href="#">Level 3</a></li>
              <li><a href="#">Level 3</a></li>
              <li><a href="#">Level 3</a></li>
            </ul>
          </li>
          <li><a href="#">Level 2</a></li>
        </ul>
      </li>-->
      <li><a href="About Us.aspx">About Us</a></li>
      <li><a href="ContactUs.aspx">Contact Us</a></li>
      <li><a href="Feedback.aspx">Feedback</a></li>
      <li><a href="Search.aspx">Search</a></li>
      <li>
        <asp:LinkButton ID="LinkButton_Register" runat="server"
PostBackUrl="~/Registration.aspx">Register</asp:LinkButton></li>

      <li>
        <asp:LinkButton ID="LinkButtonLog" runat="server"
CausesValidation="false" OnClick="LinkButtonLog_Click">Login</asp:LinkButton>
        <asp:LinkButton ID="LinkButtonOut" runat="server"
CausesValidation="false" OnClick="LinkButtonOut_Click">Logout</asp:LinkButton>
      </li>
      <li class="nav-item">
        <asp:ImageButton ID="ImageButton2" CssClass="fl_right"
CausesValidation="false" ImageUrl="~/img/Basket.png" PostBackUrl="~/ViewCart.aspx"
Height="30px" Width="30px" runat="server" />
      </li>

    </ul>
  </nav>
```

Ice Cream Parlour

```
</nav>
<!--
#####
## -->

</header>
</div>
</div>
<!--
#####
## -->

<div style="height: auto; background-color: white; color: black; padding-top: 20px;
padding-bottom: 20px; padding-left: 20px; padding-right: 30px">
    <asp:ContentPlaceHolder ID="ContentPlaceHolder1" runat="server">
    </asp:ContentPlaceHolder>
</div>

<!--
#####
## -->

<!-- End Top Background Image Wrapper -->

<!--
#####
## -->
<%--<div class="wrapper row4">
    <footer id="footer" class="hoc clear">
        <!--
#####
## -->

        <div class="one_half first">
            <h6 class="heading">Ipsum accumsan mauris semper</h6>
            <p class="btmspace-30">Nec tortor nec ultrices donec lobortis orci vitae
arcu.</p>
            <ul class="nospace linklist contact">
                <li><i class="fa fa-map-marker"></i>
                    <address>
                        Street Name & Number, Town, Postcode/Zip
                    </address>
                </li>
                <li><i class="fa fa-phone"></i>+00 (123) 456 7890</li>
                <li><i class="fa fa-envelope-o"></i>info@domain.com</li>
            </ul>
        </div>
        <div class="one_quarter">
            <h6 class="heading">Tempor sollicitudin</h6>
            <ul class="nospace linklist">
                <li><a href="#">Sollicitudin sapien tortor</a></li>
                <li><a href="#">Vestibulum condimentum</a></li>
                <li><a href="#">Feugiat suspendisse rhoncus</a></li>
                <li><a href="#">Pharetra erat sed commodo</a></li>
            </ul>
        </div>
        <div class="one_quarter">
```

Ice Cream Parlour

```
<h6 class="heading">Justo iaculis donec</h6>
<p class="nospace btmspace-15">A condimentum odio.</p>
<form method="post" action="#">
  <fieldset>
    <legend>Newsletter:</legend>
    <input class="btmspace-15" type="text" value=""
placeholder="Name">
    <input class="btmspace-15" type="text" value=""
placeholder="Email">
    <button type="submit" value="submit">Submit</button>
  </fieldset>
</form>
</div>
<!--
#####
## -->
    </footer>
  </div>--%>

  <!--
#####
## -->
    <div class="wrapper row5">
      <div id="copyright" class="hoc clear">
        <!--
#####
## -->
          <p class="fl_left">Copyright &copy; 2019 - All Rights Reserved - <a
href="#">Online Ice Cream Parlour</a></p>
          <p class="fl_right">Website Designed by <a target="_blank"
href="AdminLogin.aspx" title="Free Website Templates">Admin</a></p>
        <!--
#####
## -->
      </div>
    </div>

    <!--
#####
## -->
      <a id="backtotop" href="#top"><i class="fa fa-chevron-up"></i></a>
      <!-- JAVASCRIPTS -->
      <script src="layout/scripts/jquery.min.js"></script>
      <script src="layout/scripts/jquery.backtotop.js"></script>
      <script src="layout/scripts/jquery.mobilemenu.js"></script>
    </form>
  </body>
</html>
```

User.master.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

public partial class User : System.Web.UI.MasterPage
{
    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["USERID"] == null)
        {
            login.Visible = true;
            logout.Visible = false;
            viewcart.Visible = false;
            checkout.Visible = false;
            register.Visible = true;
            cart.Visible = false;
        }
        else
        {
            login.Visible = false;
            logout.Visible = true;
            viewcart.Visible = true;
            checkout.Visible = true;
            register.Visible = false;
            cart.Visible = true;
        }
    }
    protected void login_Click(object sender, EventArgs e)
    {
        Response.Redirect("UserLogin.aspx");
    }
    protected void logout_Click(object sender, EventArgs e)
    {
        Session.Clear();
        Session.Abandon();
        logout.Visible = false;
        login.Visible = true;
        Response.Redirect("UserLogin.aspx");
        cart.Visible = false;
    }
}
```

```
    }  
  
protectedvoid Cart_Click(object sender, EventArgs e)  
{  
    Response.Redirect("ViewCart.aspx");  
}  
  
protectedvoid Checkout_Click(object sender, EventArgs e)  
{  
    Response.Redirect("Payment.aspx");  
}  
  
protectedvoid register_Click(object sender, EventArgs e)  
{  
    Response.Redirect("Registration.aspx");  
}  
  
}
```

UserLogin.aspx

```
<%@PageTitle=""Language="C#"MasterPageFile=~\User.master"AutoEventWireup="
true"CodeFile="UserLogin.aspx.cs"Inherits="UserLogin"%>

<asp:ContentID="Content1"ContentPlaceHolderID="head"Runat="Server">
</asp:Content>
<asp:ContentID="Content2"ContentPlaceHolderID="ContentPlaceHolder1"Runat="S
erver">

<divalign="center">

<table>
<tr>
<tdalign="center"colspan="2"style="padding-bottom:7px;">User Login</td>
</tr>
<tr>
<td>
<asp:LabelID="Label1"runat="server"Text="Label">User ID: </asp:Label></td>
<td>
<asp:TextBoxID="Username"Width="250px"runat="server"align="right"></asp:Tex
tBox></td>
</tr>

<tr>
<td>
<asp:LabelID="Label2"runat="server"Text="Label2">Password: </asp:Label>

</td>
<td>
<asp:TextBoxID="Password"Width="250px"TextMode="Password"runat="server"alig
n="right"></asp:TextBox></td>
</tr>

<tr>
<tdalign="center"colspan="2">
<asp:ButtonID="Button1"runat="server"Text="SUBMIT"OnClick="Button1_Click"/>
</td>
</tr>

</table>
</div>

</asp:Content>
```

UserLogin.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data;
using System.Data.SqlClient;
using System.Configuration;

public partial class UserLogin : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();

    protected void Page_Load(object sender, EventArgs e)
    {

    }

    protected void Button1_Click(object sender, EventArgs e)
    {

        con.Open();
        cmd = new SqlCommand("select USERID,PASSWORD from User_reg where
        USERID='" + Username.Text + "' and PASSWORD='" + Password.Text + "'", con);
        SqlDataReader dr = cmd.ExecuteReader();
        if (dr.HasRows)
        {
            while (dr.Read())
            {
                Session["USERID"] = dr["USERID"].ToString();
                Response.Redirect("Home.aspx");
            }
        }
        else
        {

```

Ice Cream Parlour

```
        Response.Write("<script>alert('User ID & Password are  
Incorrect.*)</script>");  
    }  
  
}
```


ViewCart.aspx

```
<%@PageTitle="" Language="C#" MasterPageFile="~/User.master" AutoEventWireup="
true" CodeFile="ViewCart.aspx.cs" Inherits="ViewCart"%>

<asp:ContentID="Content1" ContentPlaceHolderID="head" runat="Server">
</asp:Content>
<asp:ContentID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="S
erver">

<div align="center">
<table border="0" cellpadding="0" cellspacing="0">
<tr>
<td align="center" colspan="2">
<h2>
<asp:LabelID="Label4" runat="server">My Cart</asp:Label></h2>
</td>
</tr>

<tr>
<td>
<center>
<asp:LabelID="Label5" runat="server" Text="Product(s) in cart:
"></asp:Label><asp:LabelID="Label3" runat="server" Text="Label"></asp:Label><
/center>
<asp:DataListID="DataList1" runat="server" CellPadding="15" CellSpacing="15"
OnItemCommand="DataList1_ItemCommand" RepeatColumns="2">
<ItemTemplate>
<table style="padding:10px" border="0" cellpadding="1" cellspacing="1">
<tr>
<td align="center" valign="top">
<asp:ImageID="Image1" runat="server" ImageUrl='<%#bind("IMG") %>' Width="150"
Height="150" AlternateText="Product Image"/>
</td>
<td valign="top">
<table style="padding:10px" border="0" cellpadding="1" cellspacing="1">
<tr>
<td align="center">
<asp:LabelID="Label1" runat="server" Text='<%#bind("NAME") %>'></asp:Label>
</td>
</tr>
<tr>
<td>
<asp:LabelID="Label2" runat="server" Text="Price (Rs.)"></asp:Label>
```

Ice Cream Parlour

```
<asp:LabelID="Label_Price"runat="server"Text='<%#bind("PRICE")
%>'></asp:Label>
</td>
</tr>
<tr>
<td>
<asp:LabelID="Label4"runat="server"Text="Color : "></asp:Label>
<asp:LabelID="Label_Desc"runat="server"Text='<%#bind("COLOR")
%>'></asp:Label>
</td>
</tr>
<tr>
<td>
<asp:LinkButtonID="LinkButton1"runat="server"CommandArgument='<%#bind("Cart
id") %>'CommandName="Remove"ForeColor="#33ccff">Remove</asp:LinkButton>
</td>
</tr>
</table>

</td>
</tr><tr></tr>
</table>
</ItemTemplate>
</asp:DataList><divstyle="padding: 25px; width: auto; position: static;">
<asp:ButtonID="Button1"runat="server"Text="Click Here To Shop
More"OnClick="Button1_Click"/>
&nbsp;
<asp:ButtonID="Button2"runat="server"Text="Click Here For Payment"
PostBackUrl="~/payment.aspx"/>
</div>
</td>
</tr>
</table>
</div>

</asp:Content>
```

ViewCart.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data.SqlClient;
using System.Configuration;
using System.Data;

public partial class ViewCart : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd;

    protected void Page_Load(object sender, EventArgs e)
    {
        if (Session["USERID"] == null)
        {
            Response.Redirect("UserLogin.aspx");
        }
        totalcount();

        if (!IsPostBack)
        {
            if (Session["USERID"] != null)
            {
                SqlDataAdapter da = new SqlDataAdapter("select
                m.Cartid,p.PRICE,p.NAME,p.Color,p.IMG from MYCART as m,PRODUCT as p where
                m.Product_id=p.PRODUCT_ID and CustomerID='" + Session["USERID"].ToString()
                + "'", con);
                DataTable dt = new DataTable();
                da.Fill(dt);
                DataList1.DataSource = dt;
                DataList1.DataBind();
            }
        }
    }
}
```

```
    }
    public void totalcount()
    {
        SqlDataAdapter da1 = new SqlDataAdapter("select count(Cartid) as
        numberOfItem from MYCART where CustomerID='" + Session["USERID"].ToString()
        + "'", con);
        DataTable dt1 = new DataTable(); //data table object declared to store data
        da1.Fill(dt1); // filling datatable object from data adaptor
        //if (dt1.Rows.Count > 0) // checking whether dt has rows or not
        //{

            Label3.Text = dt1.Rows[0]["numberOfItem"].ToString();
            string X = dt1.Rows[0]["numberOfItem"].ToString();
            int A = Convert.ToInt32(X);
            if (A == 0)
            {
                Label5.Visible = false;
                //Response.Write("<script>alert('Cart is Empty!!')</script>");
                Label3.Text = "[ Your Cart Is Empty ]";
            }

        //}
        //else
        //{
        //    Response.Write("<script>alert'Cart Empty'</script>");
        //}
    }

    protected void DataList1_ItemCommand(object source, DataListCommandEventArgs e)
    {
        if (e.CommandName == "Remove")
        {
            string CartID = e.CommandArgument.ToString();

            con.Open();
            cmd = new SqlCommand("delete from MYCART where Cartid=" + CartID
            + " ", con);
```

Ice Cream Parlour

```
cmd.ExecuteNonQuery();
con.Close();

Response.Write("<script>alert('Product Removed
Successfully')</script>");

SqlDataAdapter da = new SqlDataAdapter("select
m.Cartid,p.PRICE,p.NAME,p.COLOR,p.IMG from MYCART as m,PRODUCT as p where
m.Product_id=p.PRODUCT_ID and CustomerID='" + Session["USERID"].ToString()
+ "'", con);
DataTable dt = new DataTable();
da.Fill(dt);
DataList1.DataSource = dt;
DataList1.DataBind();

SqlDataAdapter da1 = new SqlDataAdapter("select count(Cartid) as
numberOfItem from MYCART where CustomerID='" + Session["USERID"].ToString()
+ "'", con);
DataTable dt1 = new DataTable();//data table object declared to store data
da1.Fill(dt1);// filling datatable object from data adaptor
Label3.Text = dt1.Rows[0]["numberOfItem"].ToString();
string X = dt1.Rows[0]["numberOfItem"].ToString();
int A = Convert.ToInt32(X);
if (A == 0)
{
    Label5.Visible = false;
    //Response.Write("<script>alert('Cart is Empty!!')</script>");
    Label3.Text = "[ All the products have been removed! ]";
}

}
}
protectedvoid Button1_Click(object sender, EventArgs e)
{
    Response.Redirect("ViewProduct.aspx");
}
}
```

ViewProducts.aspx

```
<%@PageTitle="" Language="C#" MasterPageFile="~/User.master" AutoEventWireup="
true" CodeFile="ViewProducts.aspx.cs" Inherits="ViewProducts"%>

<asp:ContentID="Content1" ContentPlaceHolderID="head" runat="Server">
</asp:Content>
<asp:ContentID="Content2" ContentPlaceHolderID="ContentPlaceHolder1" runat="S
erver">
<body>

<tablestyle="margin-right: 50px; margin-left: 50px; color: #333333;">
<tr>
<tdalign="center">
<h2>Our Products<br/>
</h2>
</td>
</tr>
<tr>
<td>
<asp:DataListID="DataList1" runat="server" OnItemCommand="DataList1_ItemComma
nd1" RepeatColumns="1" CellSpacing="10"
CellPadding="10" Width="100%" OnSelectedIndexChanged="DataList1_SelectedIndex
Changed1">
<ItemStyle/>
<ItemTemplate>
<tableborder="0" cellpadding="0" width="100%" cellspacing="10">
<tr>
<tdalign="center" valign="top">
<asp:ImageID="Image1" runat="server" Width="200" Height="200px" ImageUrl='<%#Bi
nd("IMG") %>'
BorderStyle="Groove" BorderColor="#CCCCCC"/>
</td>
<td rowspan="5" valign="top" style="padding-left: 15px; font-size: large;">
<tablewidth="100%" style="font-family: 'times New Roman', Times, serif">
<tr>
<td>
<asp:LabelID="Label14" runat="server" Text="Name:
" Width="120px"></asp:Label></td>
<td>
<asp:LabelID="Label_ProdName" runat="server" Text='<%#bind("NAME") %>'
></asp:Label><br/>
</td>
</tr>
</tr>
<tr>
```

Ice Cream Parlour

```
<td>  
<asp:LabelID="Label12"runat="server"Text="Color:"Font-  
Size="15px"></asp:Label>  
</td>  
<td>  
<asp:LabelID="Label13"runat="server"Font-Size="15px"Text='<%#bind("COLOR")  
<br/>'></asp:Label>  
</td>  
</tr>  
<tr>  
<td>  
<asp:LabelID="Label6"runat="server"Text="Price:"Font-  
Size="15px"></asp:Label>  
</td>  
<td>  
<asp:LabelID="Label7"runat="server"Font-Size="15px"Text='<%#bind("PRICE")  
<br/>'></asp:Label>  
</td>  
</tr>  
<tr>  
<td>  
<asp:LabelID="Label2"runat="server"Font-Size="15px"Style="vertical-align:  
top"Text="Description:"></asp:Label></td>  
<td>  
<asp:LabelID="Label1"runat="server"Font-  
Size="15px"Text='<%#Bind("DSC")<br/>'></asp:Label></td>  
</tr>  
<tr>  
<td>  
<br/>  
</td>  
</tr>  
<tr>  
<tdalign="center"colspan="2">  
<br/>  
<asp:LinkButtonID="LinkButton2"CssClass="caption button-  
radius"CommandName="View"Font-  
Underline="False"CommandArgument='<%#bind("PRODUCT_ID") <br/>'  
runat="server"Font-Bold="False"><spanclass="icon"></span>View  
Details</asp:LinkButton>  
  
&nbsp;&nbsp;&
```

Ice Cream Parlour

```
<asp:LinkButtonID="LinkButton1"CssClass="caption button-
radius"runat="server"CommandName="Add"CommandArgument='<%#bind("PRODUCT_ID"
)' %>'
ToolTip="Click To Add this Product to your Cart"Font-Bold="False"Font-
Underline="False"><spanclass="icon"></span>Add To Cart</asp:LinkButton>
<br/>
<br/>

<%--      <asp:ImageButton ID="ImageButton1" runat="server"
ImageUrl="~/images/add-to-cart.jpg"
Width="100"
Height="60" CommandArgument='<%#bind("product_ID") %>' CommandName="Add"
/>--%>
</td>

</tr>
<caption>
<br/>
</caption>
</table>
</td>

</tr>

<tr>
<td>
<hrsize="4px"width="100%"/>
</td>
<td></td>
</tr>
</table>
</ItemTemplate>
</asp:DataList>
</td>
</tr>
</table>

</body>
</asp:Content>
```


ViewProducts.aspx.cs

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Web;
using System.Web.UI;
using System.Web.UI.WebControls;

using System.Data;
using System.Configuration;
using System.Data.SqlClient;

public partial class ViewProducts : System.Web.UI.Page
{
    SqlConnection con =
    new SqlConnection(ConfigurationManager.ConnectionStrings["Connection"].Connection
    String);
    SqlCommand cmd = new SqlCommand();

    protected void Page_Load(object sender, EventArgs e)
    {
        if (!IsPostBack)
        {
            SqlDataAdapter da = new SqlDataAdapter("select * from PRODUCT", con);
            DataTable dt = new DataTable();
            da.Fill(dt);
            DataList1.DataSource = dt;
            DataList1.DataBind();
        }
    }

    protected void DataList1_SelectedIndexChanged1(object sender, EventArgs e)
    {
    }

    protected void DataList1_ItemCommand1(object source,
    DataListCommandEventArgs e)
    {
        if (e.CommandName == "View")
    }
```

```
{

    Response.Redirect("ProductDetail.aspx?Product_Id=" +
e.CommandArgument.ToString() + ""); // redirecting to search button
}

if (e.CommandName == "Add")
{

string sCustomerID = "";
if (Session["USERID"] == null)
{
    Response.Redirect("UserLogin.aspx");
}
else
{
    sCustomerID = Session["USERID"].ToString();
}

string sproduct_id = e.CommandArgument.ToString();
string sprice = "";

SqlDataAdapter daGetPrice = new SqlDataAdapter("select PRICE from PRODUCT
where PRODUCT_ID=" + sproduct_id + "", con);
DataTable dtGetPrice = new DataTable();
daGetPrice.Fill(dtGetPrice);
if (dtGetPrice.Rows.Count > 0)
{
    sprice = dtGetPrice.Rows[0]["PRICE"].ToString();
}
con.Open();
cmd = new SqlCommand("insert into MYCART values(" + sproduct_id
+ "," + sprice + "," + sCustomerID + "," + DateTime.Now + ")", con);
cmd.ExecuteNonQuery();
con.Close();
Response.Write("<script>alert('Product Added
Successfully')</script>");
}
}
```

Web.config

```
<?xmlversion="1.0"?>
<!--
  For more information on how to configure your ASP.NET application, please
  visit
    http://go.microsoft.com/fwlink/?LinkId=169433
-->
<configuration>
<connectionStrings>
<addconnectionString="Data Source=DELL; initial Catalog=IceCreamhop;
integrated Security=true;"name="Connection"providerName="using
System.Data.SqlClient"/>
</connectionStrings>
<system.web>
<compilationdebug="true"targetFramework="4.5"/>
<httpRuntimetargetFramework="4.5"/>
</system.web>
<appSettings>
<addkey="ValidationSettings:UnobtrusiveValidationMode"value="None"/>
</appSettings>
</configuration>
```

style.css

```
@charset "utf-8";
/*
Template Name: Glozzom
Author: <a href="http://www.os-templates.com/">OS Templates</a>
Author URI: http://www.os-templates.com/
Licence: Free to use under our free template licence terms
Licence URI: http://www.os-templates.com/template-terms
File: Layout CSS
*/

@import url("font-awesome.min.css");
@import url("framework.css");

/* Rows
----- */
----- */
.row1, .row1 a{}
.row2, .row2 a{}
.row3, .row3 a{}
.row4, .row4 a{}
.row5, .row5 a{}

/* Header
----- */
----- */
#header{border-bottom:1px solid;}

#header #logo{margin-top:35px;}
#header #logo *{margin:0; padding:0; line-height:1;}
#header #logo h1{font-size:22px;}

/* Page Intro
----- */
----- */
#pageintro{padding:250px 0 100px;}

#pageintro article{}
#pageintro article .heading{font-size:26px;}
#pageintro article p{margin-bottom:20px; font-size:16px;}

/* Content Area
----- */
----- */
.container{padding:80px 0;}

/* Content */
.container .content{}

.sectiontitle{display:block; max-width:55%; margin:0 auto 80px; text-align:center;}
.sectiontitle *{margin:0;}
```

Ice Cream Parlour

```
.services{}
.services article{display:block; padding-top:150px;}
.services article *{margin:0; padding:0;}
.services article div{padding:15px;}

.meta li{display:inline-block; font-size:.8rem;}
.meta li::after{margin-left:5px; content:"|";}
.meta li:last-child::after{margin:0; content:"";}

/* Comments */
#comments ul{margin:0 0 40px 0; padding:0; list-style:none;}
#comments li{margin:0 0 10px 0; padding:15px;}
#comments .avatar{float:right; margin:0 0 10px 10px; padding:3px; border:1px solid;}
#comments address{font-weight:bold;}
#comments time{font-size:smaller;}
#comments .comcont{display:block; margin:0; padding:0;}
#comments .comcont p{margin:10px 5px 10px 0; padding:0;}

#comments form{display:block; width:100%;}
#comments input, #comments textarea{width:100%; padding:10px; border:1px solid;}
#comments textarea{overflow:auto;}
#comments div{margin-bottom:15px;}
#comments input[type="submit"], #comments input[type="reset"]{display:inline-block;
width:auto; min-width:150px; margin:0; padding:8px 5px; cursor:pointer;}

/* Sidebar */
.container .sidebar{}

.sidebar .sdb_holder{margin-bottom:50px;}
.sidebar .sdb_holder:last-child{margin-bottom:0;}

/* Footer
-----
----- */
#footer{padding:80px 0;}

#footer .heading{margin-bottom:50px; font-size:1.2rem;}

#footer .linklist li{display:block; margin-bottom:15px; padding:0 0 15px 0; border-bottom:1px
solid;}
#footer .linklist li:last-child{margin:0; padding:0; border:none;}
#footer .linklist li::before, #footer .linklist li::after{display:table; content:"";}
#footer .linklist li, #footer .linklist li::after{clear:both;}

#footer .contact{}
#footer .contact.linklist li, #footer .contact.linklist li:last-child{position:relative;
padding-left:40px;}
#footer .contact li *{margin:0; padding:0; line-height:1.6;}
#footer .contact li i{display:block; position:absolute; top:0; left:0; width:30px; font-
size:16px; text-align:center;}

#footer input, #footer button{border:1px solid;}
#footer input{display:block; width:100%; padding:8px;}
#footer button{padding:8px 18px 10px; text-transform:uppercase; font-weight:700;
cursor:pointer;}
```

Ice Cream Parlour

```
/* Copyright
-----
----- */
#copyright{padding:20px 0;}
#copyright *{margin:0; padding:0;}

/* Transition Fade
This gives a smooth transition to "ALL" elements used in the layout - other than the
navigation form used in mobile devices
If you don't want it to fade all elements, you have to list the ones you want to be faded
individually
Delete it completely to stop fading
-----
----- */
*, *::before, *::after{transition:all .3s ease-in-out;}
#mainav form *{transition:none !important;}

/* -----
----- */
/* -----
----- */
/* -----
----- */
/* -----
----- */
/* -----
----- */
/* -----
----- */

/* Navigation
-----
----- */
nav ul, nav ol{margin:0; padding:0; list-style:none;}

#mainav, #breadcrumb, .sidebar nav{line-height:normal;}
#mainav .drop::after, #mainav li li .drop::after, #breadcrumb li a::after, .sidebar nav
a::after{position:absolute; font-family:"FontAwesome"; font-size:10px; line-height:10px;}

/* Top Navigation */
#mainav{}
#mainav ul.clear{}
#mainav ul{text-transform:uppercase;}
#mainav ul ul{z-index:9999; position:absolute; width:180px; text-transform:none;}
#mainav ul ul ul{left:180px; top:0;}
#mainav li{display:inline-block; position:relative; margin:0 15px 0 0; padding:0;}
#mainav li:last-child{margin-right:0;}
#mainav li li{width:100%; margin:0;}
#mainav li a{display:block; padding:30px 0;}
#mainav li li a{border:solid; border-width:0 0 1px 0;}
#mainav .drop{padding-left:15px;}
#mainav li li a, #mainav li li .drop{display:block; margin:0; padding:10px 15px;}
#mainav .drop::after, #mainav li li .drop::after{content:"\f0d7";}
#mainav .drop::after{top:35px; left:5px;}
```

Ice Cream Parlour

```
#mainav li li .drop::after{top:15px; left:5px;}
#mainav ul ul{visibility:hidden; opacity:0;}
#mainav ul li:hover > ul{visibility:visible; opacity:1;}

#mainav form{display:none; margin:0; padding:0;}
#mainav form select, #mainav form select option{display:block; cursor:pointer; outline:none;}
#mainav form select{width:100%; padding:5px; border:none;}
#mainav form select option{margin:5px; padding:0; border:none;}

/* Breadcrumb */
#breadcrumb{padding:150px 0 30px;}
#breadcrumb ul{margin:0 0 30px 0; padding:0; list-style:none; text-transform:uppercase;}
#breadcrumb li{display:inline-block; margin:0 6px 0 0; padding:0; opacity:.4;}
#breadcrumb:hover li{opacity:.8;}
#breadcrumb li a{display:block; position:relative; margin:0; padding:0 12px 0 0; font-size:12px;}
#breadcrumb li a::after{top:3px; right:0; content:"\f101";}
#breadcrumb li:last-child a{margin:0; padding:0; font-weight:700;}
#breadcrumb li:last-child a::after{display:none;}
#breadcrumb .heading{margin:0; font-size:2rem;}

/* Sidebar Navigation */
.sidebar nav{display:block; width:100%;}
.sidebar nav li{margin:0 0 3px 0; padding:0;}
.sidebar nav a{display:block; position:relative; margin:0; padding:5px 10px 5px 15px; text-decoration:none; border:solid; border-width:0 0 1px 0;}
.sidebar nav a::after{top:9px; left:5px; content:"\f101";}
.sidebar nav ul ul a{padding-left:35px;}
.sidebar nav ul ul a::after{left:25px;}
.sidebar nav ul ul ul a{padding-left:55px;}
.sidebar nav ul ul ul a::after{left:45px;}

/* Pagination */
.pagination{display:block; width:100%; text-align:center; clear:both;}
.pagination li{display:inline-block; margin:0 2px 0 0;}
.pagination li:last-child{margin-right:0;}
.pagination a, .pagination strong{display:block; padding:8px 11px; border:1px solid; background-clip:padding-box; font-weight:normal;}

/* Back to Top */
#backtotop{z-index:999; display:inline-block; position:fixed; visibility:hidden; bottom:20px; right:20px; width:36px; height:36px; line-height:36px; font-size:16px; text-align:center; opacity:.2;}
#backtotop i{display:block; width:100%; height:100%; line-height:inherit;}
#backtotop.visible{visibility:visible; opacity:.5;}
#backtotop:hover{opacity:1;}

/* Tables
-----
----- */
table, th, td{border:1px solid; border-collapse:collapse; vertical-align:top;}
table, th{table-layout:auto;}
table{width:100%; margin-bottom:15px;}
th, td{padding:5px 8px;}
td{border-width:0 1px;}
```

Ice Cream Parlour

```
/* Gallery
----- */
#gallery{display:block; width:100%; margin-bottom:50px;}
#gallery figure figcaption{display:block; width:100%; clear:both;}
#gallery li{margin-bottom:30px;}

/* ----- */
/* ----- */
/* ----- */
/* ----- */
/* ----- */
/* ----- */
/* ----- */

/* Colours
----- */
----- */
body{color:#7F7F7F; background-color:#252525;}
a{color:#57ADC4;}
a:active, a:focus{background:transparent;}/* IE10 + 11 Bugfix - prevents grey background */
hr, .borderedbox{border-color:#D7D7D7;}
label span{color:#FF0000; background-color:inherit;}
input:focus, textarea:focus, *:required:focus{border-color:#57ADC4;}

.overlay{color:#FFFFFF; background-color:inherit;}
.overlay::after{color:inherit; background-color:rgba(0,0,0,.55);}
.overlay.light{color:#141414;}
.overlay.light::after{background-color:rgba(255,255,255,.8);}
.overlay.coloured::after{}

.btn, .btn.inverse:hover{color:#FFFFFF; background-color:#57ADC4; border-color:#57ADC4;}
.btn:hover, .btn.inverse{color:inherit; background-color:transparent; border-color:inherit;}

/* Rows */
.row1{color:#FFFFFF;}
.row2{color:#141414; background-color:#F3F3F3;}
.row3{color:#141414; background-color:#FFFFFF;}
.row4{color:#7F7F7F; background-color:#010101;}
.row5, .row5 a{color:#7F7F7F; background-color:#252525;}

/* Header */
#header{border-color:rgba(255,255,255,.2);}
#header #logo h1 a{color:inherit; background-color:inherit;}

/* Content Area */
.services article *{color:#FFFFFF;}
.services article:hover a{color:#57ADC4;}
```


Ice Cream Parlour

```
/* Footer */
#footer .heading{color:#FFFFFF;}
#footer hr, #footer .borderedbox, #footer .linklist li{border-color:rgba(255,255,255,.2);}

#footer input, #footer button{border-color:transparent;}
#footer input{color:#FFFFFF; background-color:#292929;}
#footer input:focus{border-color:#57ADC4;}
#footer button{color:#FFFFFF; background-color:#57ADC4;}

/* Navigation */
#mainav li a{color:inherit;}
#mainav .active a, #mainav a:hover, #mainav li:hover > a{color:#57ADC4; background-
color:inherit;}
#mainav li li a, #mainav .active li a{color:#FFFFFF; background-color:rgba(0,0,0,.3); border-
color:rgba(0,0,0,.6);}
#mainav li li:hover > a, #mainav .active .active > a{color:#FFFFFF; background-color:#57ADC4;}
#mainav form select{color:#FFFFFF; background-color:#141414;}

#breadcrumb a{color:inherit; background-color:inherit;}
#breadcrumb li:last-child a{color:#57ADC4;}

.container .sidebar nav a{color:inherit; border-color:#D7D7D7;}
.container .sidebar nav a:hover{color:#57ADC4;}

.pagination a, .pagination strong{border-color:#D7D7D7;}
.pagination .current *{color:#FFFFFF; background-color:#57ADC4;}

#backtotop{color:#FFFFFF; background-color:#57ADC4;}

/* Tables + Comments */
table, th, td, #comments .avatar, #comments input, #comments textarea{border-color:#D7D7D7;}
#comments input:focus, #comments textarea:focus, #comments *:required:focus{border-
color:#57ADC4;}
th{color:#FFFFFF; background-color:#373737;}
tr, #comments li, #comments input[type="submit"], #comments input[type="reset"]{color:inherit;
background-color:#FBFBFB;}
tr:nth-child(even), #comments li:nth-child(even){color:inherit; background-color:#F7F7F7;}
table a, #comments a{background-color:inherit;}

/* ----- */
/* ----- */
/* ----- */
/* ----- */
/* ----- */
/* ----- */
/* ----- */

/* Media Queries
```

Ice Cream Parlour

```
-----  
-----  
/*  
@-ms-viewport{width:device-width;}  
  
/* Max Wrapper Width - Laptop, Desktop etc.  
-----  
-----  
/*  
@media screen and (min-width:978px){  
    .hoc{max-width:978px;}  
}  
  
/* Mobile Devices  
-----  
-----  
/*  
@media screen and (max-width:900px){  
    .hoc{max-width:90%;}  
  
    #header{padding:30px 0;}  
    #header #logo{margin:0;}  
  
    #mainav{}  
    #mainav ul{display:none;}  
    #mainav form{display:block;}  
  
    #breadcrumb{}  
  
    .container{}  
    #comments input[type="reset"]{margin-top:10px;}  
    .pagination li{display:inline-block; margin:0 5px 5px 0;}  
  
    #footer{}  
  
    #copyright{}  
    #copyright p:first-of-type{margin-bottom:10px;}  
}  
  
@media screen and (max-width:750px){  
    .imgl, .imgr{display:inline-block; float:none; margin:0 0 10px 0;}  
    .fl_left, .fl_right{display:block; float:none;}  
    .group .group > *:last-child, .clear .clear > *:last-child, .clear .group > *:last-child, .group .clear > *:last-child{margin-bottom:0;}/* Experimental - Needs more testing in different situations, stops double margin when stacking */  
    .one_half, .one_third, .two_third, .one_quarter, .two_quarter, .three_quarter{display:block; float:none; width:auto; margin:0 0 30px 0; padding:0;}  
  
    #header{text-align:center;}  
    #header #logo{margin:0 0 30px 0;}  
  
    #pageintro{padding:100px 0;}  
  
    .sectiontitle{max-width:none;}  
  
    .services article{max-width:320px;}
```

Ice Cream Parlour

```
        .container, #footer{padding-bottom:50px;}/* Not neccessary - just looks better */
    }

    /* Other
    ----- */
    @media screen and (max-width:650px){
        .scrollable{display:block; width:100%; margin:0 0 30px 0; padding:0 0 15px 0;
        overflow:auto; overflow-x:scroll;}
        .scrollable table{margin:0; padding:0; white-space:nowrap;}

        .inline li{display:block; margin-bottom:10px;}
        .pushright li{margin-right:0;}

        .font-x2{font-size:1.4rem;}
        .font-x3{font-size:1.6rem;}
    }
```

Ice Cream Parlour

Styke2.css

```
@import "compass/css3";

* {
  margin:0;
  padding:0;
}

a {
  text-decoration:none;
}

a:hover {
  text-decoration:none;
}

.menu {
  font-family:Verdana;
  text-transform:uppercase;
  margin:0 auto;
  table-layout:fixed;
}

.tit {
  -webkit-box-sizing: content-box;
  -moz-box-sizing: content-box;
  box-sizing: content-box;
  cursor: pointer;
  border: none;
  font: normal 72px/normal "Passero One", Helvetica, sans-serif;
  color: rgba(255,255,255,1);
  text-align: center;
  -o-text-overflow: clip;
  text-overflow: clip;
  text-shadow: 0 1px 0 rgb(204,204,204) , 0 2px 0 rgb(201,201,201) , 0 3px 0 rgb(187,187,187)
, 0 4px 0 rgb(185,185,185) , 0 5px 0 rgb(170,170,170) , 0 6px 1px rgba(0,0,0,0.0980392) , 0 0
5px rgba(0,0,0,0.0980392) , 0 1px 3px rgba(0,0,0,0.298039) , 0 3px 5px rgba(0,0,0,0.2) , 0 5px
10px rgba(0,0,0,0.247059) , 0 10px 10px rgba(0,0,0,0.2) , 0 20px 20px rgba(0,0,0,0.14902) ;
  -webkit-transition: all 300ms cubic-bezier(0.42, 0, 0.58, 1);
  -moz-transition: all 300ms cubic-bezier(0.42, 0, 0.58, 1);
  -o-transition: all 300ms cubic-bezier(0.42, 0, 0.58, 1);
  transition: all 300ms cubic-bezier(0.42, 0, 0.58, 1);
}

.tit:hover {
  color:#ff5e00;
}

body {
  text-align: center;
  background-color:rgb(153, 216, 208);
}
s
```

Ice Cream Parlour

```
h1{color:#eee;
    text-decoration:none;
}

table {

    /*background-color:rgb(153, 216, 208);*/
    border: 1px solid white;
    border-radius:10px;
    padding:40px;
    font-size:20px;
}

span {
    text-transform:uppercase;
}
```

Output From The System

- **Registered user**
- **List of Product**
- **Available Feedback**
- **List of Contact as details**
- **List of Stock**
- **List of Reviews**
- **List of Payment Details**

Reports

Users

ICE CREAM PARLOUR

[ADMIN HOME](#) | [ADD CATEGORY](#) | [ADD PRODUCT](#) | [ALL REPORTS ▶](#)

LOG OUT

Users List

USERID	NAME	PASSWORD	ADDRESS	EMAIL_ID	GENDER	DOB	CONTACT_NO	REG_DATE
abhi	abhishek kumar	12345	anand parvat	ak@gmail.com	Male	2018-07-01	9953080000	20-Dec-20 12:00:00 AM
Raj	Raman Kumar	123	West delhi	sheshusharma@gmail.com	Male	1998-01-12	8786767867	20-Dec-20 12:00:00 AM
suman	Suman	12345	Lajpat Nagar	sheshusharma@gmail.com	Male	12/12/1989	8969857597	20-Dec-20 12:00:00 AM

Contact Us

ICE CREAM PARLOUR

[ADMIN HOME](#) | [ADD CATEGORY](#) | [ADD PRODUCT](#) | [ALL REPORTS](#) ▶

[LOG OUT](#)

ContactUs List

CON_ID	CONTACT_NO	EMAIL	QUERY	DATE
1	852852588585	rk@gmail.com	Hlo	20-Dec-20 12:00:00 AM
2	965058525285	raan@gmail.com	I Wantt to Purchase Some special Icecream	20-Dec-20 12:00:00 AM
3	782585522522	seema@gmail.com	Urgent Meeting.	20-Dec-20 12:00:00 AM

Feedback

ICE CREAM PARLOUR

[ADMIN HOME](#) | [ADD CATEGORY](#) | [ADD PRODUCT](#) | [ALL REPORTS](#) ▶

[LOG OUT](#)

Feedback List

FEED_ID	USERID	REMARKS	CONTACT	DATE
1	Raj	Awasome Site	8528555252	20-Dec-20 12:00:00 AM
2	Raj	All products are Awasome	7858555258	20-Dec-20 12:00:00 AM
3	pooja	Some Products are Bad Quality	8587885855	20-Dec-20 12:00:00 AM

Payments

ICE CREAM PARLOUR

ADMIN HOME | ADD CATEGORY | ADD PRODUCT | ALL REPORTS ▶

LOG OUT

Payment List

P_ID	CustomerId	TotalProduct	TotalAmount	PaymentMode	bank	CardNo	CVV	Validity	Address	PaymentDate
1	abhi	1	250	Credit Card	SBI	1234567891234567	123	2020-12	anand parvat	20-Dec-20 12:00:00 AM
2	abhi	1	250	Credit Card	SBI	1234567891234567	123	2033-12	anand parvat	20-Dec-20 12:00:00 AM
3	Raj	2	425	Debit Card	Canara bank	5657547575757567	453	2024-09	Pitam Pura	20-Dec-20 12:00:00 AM
4	suman	2	530	Debit Card	SBI	5434567876567656	435	2020-03	Shalimar Bagh	20-Dec-20 12:00:00 AM
5	Raj	2	530	Debit Card	PNB	7685945364903245	473	2029-02	Badli	28-Dec-20 9:38:34 PM

Sales

ICE CREAM PARLOUR

[ADMIN HOME](#) | [ADD CATEGORY](#) | [ADD PRODUCT](#) | [ALL REPORTS](#) ▶

[LOG OUT](#)

Sales List

INVOICE_NO	USERID	NO_OF_PRODUCTS	PRICE	SALE_DATE
1000	abhi	1	250	20-Dec-20 12:00:00 AM
1001	Raj	2	425	20-Dec-20 12:00:00 AM
1002	suman	2	530	20-Dec-20 12:00:00 AM
1003	Raj	2	530	28-Dec-20 12:00:00 AM

Cart

ICE CREAM PARLOUR

[ADMIN HOME](#) | [ADD CATEGORY](#) | [ADD PRODUCT](#) | [ALL REPORTS](#) ▶

[LOG OUT](#)

Cart List

Cartid	Product_id	Price	CustomerID	Date
26	801	250	suman	20-Dec-20 12:00:00 AM
27	803	300	suman	20-Dec-20 12:00:00 AM
28	802	175	suman	20-Dec-20 12:00:00 AM
29	802	175	suman	20-Dec-20 12:00:00 AM

Ice Cream Parlour

Products

ICE CREAM PARLOUR

ADMIN HOME | ADD CATEGORY | ADD PRODUCT | ALL REPORTS ▶

LOG OUT

Products

PRODUCT_ID	NAME	Category	IMG	PRICE	DSC
801	Chocolate Ice	Chocolate	~\Images\Butturscoch.jpg	250	100 ml Ice Cream.
802	Vanilla Ice Cream	Vanilla	~\Images\ice-cream-vanilla.jpg	175	Vanilla Teasty Ice cream 75 MI
803	Double Chocolate	Chocolate	~\Images\double-chocolate.jpg	300	Combo Pack 200 ml
805	ButterScoch	Butter Scotch	~\Images\Butturscoch.jpg	230	Butter Scoch 100 ml Ice Cream
806	Strabery Combo	Strawberry	~\Images\strawberry-family-pack.jpg	350	250 ml Strabery Ice Cream

Ice Cream Parlour

Category

ICE CREAM PARLOUR

[ADMIN HOME](#) | [ADD CATEGORY](#) | [ADD PRODUCT](#) | [ALL REPORTS](#) ▶

[LOG OUT](#)

Products

PRODUCT_ID	NAME	Category	IMG	PRICE	DSC
801	Chocolate Ice	Chocolate	~\Images\Butturscoch.jpg	250	100 ml Ice Cream.
802	Vanilla Ice Cream	Vanilla	~\Images\ice-cream-vanilla.jpg	175	Vanilla Teasty Ice cream 75 MI
803	Double Chocolate	Chocolate	~\Images\double-chocolate.jpg	300	Combo Pack 200 ml
805	ButterScoch	Butter Scotch	~\Images\Butturscoch.jpg	230	Butter Scoch 100 ml Ice Cream
806	Strabery Combo	Strawberry	~\Images\strawberry-family-pack.jpg	350	250 ml Strabery Ice Cream

TESTING PROCESS

The testing phase involves many activities where chances of occurrence of human errors are enormous. Logical errors, carelessness, improper communication, the need to hurry through the whole process due to the time constraint, cost constraint etc. provide ways for errors to creep in. The software must be tested thoroughly so that such errors are detected and corrected as early as possible.

TYPES OF TESTING WE ARE GOING TO USE

6) WHITE BOX TESTING:

White-box testing is concerned with the implementation of the program. In this type of testing different programming structures and data structures used in the program are tested for the implementation of the coding.

7) BLACK BOX TESTING:

Black box testing is concerned with the proper execution of the program specifications. In this testing each function or sub-program used in the main program is first identified. For Example a payroll `Calc_grosspay()`, may be the functions, used to calculate the grosspay and printing of payslips.

8) ALPHA BOX TESTING:

Tests performed at developer's site before the system is finally installed in the real working environment is known as Alpha testing. It involves testing the system with live data supplied by the organization rather than by the test data used by the system designer.

9) BETA TESTING:-

The Beta test is conducted at one or more customer's site by the end of software unlike alpha testing; the developer is generally not present. Therefore Beta test is a "LIVE" application that cannot be controlled by the developer.

10) SYSTEM TESTING :-

In System testing, we have to check out the capabilities of system and software. Software is the one component of a large computer system. Many software products are designed to run on different variety of hardware. So, the software should actually work on different environment

Validation Screen

ICE CREAM PARLOUR

localhost:54472 says
Enter User ID

OK

DBACK SEARCH REGISTER LOGIN

USER LOGIN

User ID:

Password:

LOGIN RESET

CLICK HERE TO NEW USER

Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

ICE CREAM PARLOUR

localhost:54472 says
- Enter a User ID
- Enter Name
- Enter Password
- Enter Password Again
- Enter Email
- Enter Contact Number

OK

DBACK SEARCH REGISTER LOGIN

User ID:

Name:

Password:

Confirm Pass:

Address:

Email:

Gender: ☐ Male ☐ Female

DOB:

Contact No:

SUBMIT RESET

Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

Ice Cream Parlour

ICE CREAM PARLOUR

localhost:54472 says

- Contact number cannot be empty
- Email ID cannot be empty
- Query should be provided!

OK

Contact No:

Email ID:

Your Query:

RESET

SUBMIT

Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

ICE CREAM PARLOUR

localhost:54472 says

- Enter Contact Number
- Enter Remarks

OK

FEEDBACK

Contact Number:

Remarks:

SUBMIT

RESET

Copyright © All Rights Reserved - Online Ice Cream Parlour

Website Designed by Admin

Ice Cream Parlour

localhost:54472 says

- Enter ID
- Enter Pass

OK

ADMIN P

ORTS ▶

Admin Login

ADMIN ID:

PASSWORD:

SUBMIT

localhost:54472 says

Admin Id & Password are Incorrect.

OK

Ice Cream Parlour

ADMIN

localhost:54472 says

- Category ID cannot be empty
- Category name cannot be empty

OK

PORTS ▶

LOG OUT

Category

CATEGORY ID:

CATEGORY NAME:

SUBMIT

ADMIN

localhost:54472 says

- Product ID cannot be empty
- Product Name cannot be empty
- Upload an image for the product

OK

PORTS ▶

LOG OUT

Add Product

PRODUCT ID:

CATEGORY:

NAME:

IMAGE: No file chosen

PRICE:

DESCRIPTION:

SUBMIT

FUTURE SCOPE

Scope in Future of Waffles ice cream parlour online is:

- The system is not ready to sell the products it can be enhanced in future to do so.
- It will also scope to enhance in improvement of Delivery methodologies like try at home and cash on delivery.
- System will also be scaled to Mobile Technology
- System will also be improvised in Security mechanisms
- Right now System is using third party gateways for payments in later stage it will have its on Payment Gateway.

This System is scaled and taste as per the understanding of current needs Regular surveys will be performed and more triggers will be added as the pet the input received and time changes.

BIBLIOGRAPHY

➤ **BOOKS**

- ❖ ASP.NET OF Unleashed publication
- ❖ System Analysis and Design (IGNOU)
- ❖ Professional Asp.net by Wrox publication
- ❖ C# by Balagoswamy
- ❖ SQLSERVER by Iran Bayors , Mark Maslakowski
- ❖ HTML/DHTML/Java Script by PBP Publication
- ❖ ASP.NET technical reference by NIIT
- ❖ Java script technical reference by NIIT
- ❖ SQL SERVER technical reference by NIIT
- ❖ Software Engineering by Roger S.Pressman

➤ **WEBSITES**

- ❖ www.csharp.com
- ❖ www.microsoft.com
- ❖ www.asp.net
- ❖ www.dotnetspider.com