CBS-SW
V500R020C11LG7637

Charging Data Record Reference

Issue	01
Date	2022-12-30

HUAWEI TECHNOLOGIES CO., LTD.

Copyright © Huawei Technologies Co., Ltd. 2022. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

Notice

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

Huawei Technologies Co., Ltd.

Address: Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China

Website: https://www.huawei.com

Email: support@huawei.com

About This Document

Purpose

This document describes details about charging data records (CDRs).

This document provides guides to understand the basic concepts and terminology related to CDRs.

Intended Audience

This document is intended for:

- Installation and commissioning engineers
- Technical support engineers
- Service administrators

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
DANGER	Indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.
WARNING	Indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
CAUTION	Indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
NOTICE	Indicates a potentially hazardous situation which, if not avoided, could result in equipment damage, data loss, performance deterioration, or unanticipated results. NOTICE is used to address practices not related to personal injury.

 Copyright © Huawei Technologies Co., Ltd.

Symbol	Description
NOTE	Supplements the important information in the main text. NOTE is used to address information not related to personal injury, equipment damage, and environment deterioration.

Change History

Changes between document issues are cumulative. The latest document issue contains all the changes made in earlier issues.

Issue 01 (2022-12–30)

This issue is used for first office application (FOA).

 Copyright © Huawei Technologies Co., Ltd.

Contents

About This Document ii

1 Basic Concepts 1

2 Input CDRs for Offline Rating 3

2.1 w_abr CDR 3

2.2 w_smo CDR 12

2.3 GPRS CDR 20

2.4 TAPIN_VOICE CDR 32

2.5 TAPIN_SMS CDR 46

2.6 TAPIN_GPRS CDR 59

3 CDR Files Generated in the OCG 74

3.1 Basic Information About OCG CDR Files 74

3.1.1 CDR Storage Directories in OCG 74

3.1.2 Process of Generating offline CDRs in the OCG 75

3.1.3 File Name Format of OCG-Generated CDRs 75

3.1.4 Requirements on OCG-Generated CDR Files 77

3.1.5 Configuring the Function of Automatically Deleting CDRs by the OCG 77

3.2 OCG-Generated CDR Files 78

3.2.1 w_abr CDR 78

3.2.2 w_smo CDR 90

4 Charging Output CDRs 101

4.1 Basic Information About Charging Output CDRs 101

4.1.1 Charging Output CDR Storage Directories 101

4.1.2 Process of Generating Charging Output CDRs 102

4.1.3 Content Format of a Charging Output CDR File 103

4.1.4 File Name Format of Charging Output CDRs 103

4.1.5 Charging Output CDR Types 104

4.2 Charging Output CDR Files 106

4.2.1 Common Fields in a Charging Output CDR File 106

4.2.2 Extended Charging Service Information 173

4.2.2.1 Extended Charging Service Information in a Voice CDR 173

4.2.2.2 Extended Charging Service Information in an SMS CDR 187

 Copyright © Huawei Technologies Co., Ltd.

4.2.2.3 Extended Charging Service Information in an MMS CDR 198
4.2.2.4 Extended Charging Service Information in a GPRS CDR 208
4.2.2.5 Extended Charging Service Information in a Recurring Charging CDR 217
4.2.2.6 Extended Charging Service Information in a Management Flow CDR 223
4.2.2.7 Extended Charging Service Information in the Content-based Charging Process 227
4.2.2.8 Extended Charging Service Information in a Resource Clearance CDR 233
4.2.2.9 Extended Charging Service Information in a First Time Activation CDR 235
4.3 Prepaid Transaction CDR Files 238
4.3.1 Recharge CDR 238
4.3.2 Transfer CDR 293
4.3.3 Adjustment CDR 339
4.3.4 Switch Primary Offering CDR 387
4.3.5 Loan CDR 390
4.4 BM CDR Files 411
4.4.1 BeepCallOpt CDR 411
4.5 Daily Dump Files 412
4.5.1 Loan Daily Dump 412

 Copyright © Huawei Technologies Co., Ltd.

1 Basic Concepts

This topic describes the basic concepts related to CDRs.

CDR

A CDR collects and records information about a charging event in a specific format. The information includes the call start time, call duration, and transmitted data amount. The CDR can be provided for the CBS to perform charging and settlement or for a subscriber as a service usage record.

If the CBS does not specify the charged party, it generates a CDR respectively for both the calling and called parties of the charging event. If the call duration reaches the CDR splitting threshold or there are multiple charged parties, the CBS generates multiple CDRs for the charging event.

CDRs are not generated for postpaid balance operations, including payment, transfer, and adjustment. If a site requires CDRs for postpaid balance operations, you can export the CDRs from the AR.

Complex Field

A complex field consists of inextensible simple fields and complex sub-fields. For example, if the **USAGE** complex field in CBP-generated CDRs consists of the **USAGE_MEASURE_ID**, **ACTUAL_USAGE**, **RATE_USAGE**, and **SERVICE_UNIT_TYPE** simple fields, the format of **USAGE** is {**USAGE_MEASURE_ID**,**ACTUAL_USAGE**,**RATE_USAGE**,**SERVICE_UNIT_TYPE**}.

Time

In this document, time-related CDR fields are recorded based on the UTC time unless otherwise stated.

Currency Unit

For fee-related CDR fields, the CBS converts the fee to the minimum currency unit and multiplies the result by an integer that represents the currency precision. To query the currency precision, choose **Unified System Management** > **Organization and Employee** > **Business Entity** and click the **Currency** tab of the corresponding BE. For example, if the

 Copyright © Huawei Technologies Co., Ltd.

currency precision is set to **1**, the CBS converts 1 euro to **1000** (1 x 100 x 10) before saving the amount to a CDR.

Reserved Field

When checking CDRs, you do not need to pay attention to fields that are reserved.

 Copyright © Huawei Technologies Co., Ltd.

2 Input CDRs for Offline Rating

About This Chapter

This topic describes the formats of CDR files that are sent from third-party systems, normalized by the Mediation, and then transferred to CBP for offline rating.

2.1 w_abr CDR

This topic describes the format of offline voice CDR files sent from a third-party system (for example, MSC) and normalized by the Mediation.

2.2 w_smo CDR

This topic describes the format of offline SMS CDR files sent from a third-party system (for example, SMSC or MSC) and normalized by the Mediation.

2.3 GPRS CDR

This topic describes the format of offline data service CDR files sent from a third-party system (for example, GGSN) and normalized by the Mediation.

2.4 TAPIN_VOICE CDR

This topic describes the format of offline roam-out voice CDR files sent from a third-party system and normalized by the Mediation.

2.5 TAPIN_SMS CDR

This topic describes the format of offline roam-out SMS CDR files sent from a third-party system and normalized by the Mediation.

2.6 TAPIN_GPRS CDR

This topic describes the format of offline roam-out data CDR files sent from a third-party system and normalized by the Mediation.

2.1 w_abr CDR

This topic describes the format of offline voice CDR files sent from a third-party system (for example, MSC) and normalized by the Mediation.

 Copyright © Huawei Technologies Co., Ltd.

CDR File Name Format

w_abr_YYYYMMDD_Seqno.unl

Example: w_abr_20071012_0001.unl

CDR File Format

Table 2-1 describes the fields in the w_abr CDR.

Table 2-1 Fields in the w_abr CDR file

SN	Field Name	Field Type	Description
1	ServiceKey	NUMBER[10]	Service key. This field identifies a traditional intelligent network service and has a fixed value of **91** for the CBS call service. This field cannot be left empty.
2	SubCosID	NUMBER[10]	ID of the primary offering subscribed by the subscriber. This field can be left empty.
3	Calling-Party-Address	VARCHAR2[20]	Calling number. The number formats are as follows: • Country code + MSISDN • Country code + Area code + PSTN This field cannot be left empty in most cases. This field can be left empty only in the scenario where the process of charging the called party is irrelevant to the calling party in the MT process. In this scenario, the calling number is not recorded in CDRs.
4	Called-Party-Address	VARCHAR2[20]	Called number. The number formats are as follows: • MSISDN • National prefix + MSISDN • National prefix + Area code + PSTN • International prefix + Country code + MSISDN • International prefix + Country code + Area code + PSTN This field can contain the prefix or infix of specific services. This field cannot be left empty.
5	Calling-Party-NP	VARCHAR2[16]	NP prefix of the calling number. This field can be left empty. This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
6	Called-Party-NP	VARCHAR2[16]	NP prefix of the called number. This field is reserved. This field can be left empty.
7	SSP-Time	VARCHAR2[14]	Timestamp reported by the SSP, which is in the time zone of the corresponding SSP. Format: YYYYMMDDhhmmss This field cannot be left empty.
8	MF-Indicator	NUMBER[10]	Call forwarding flag. The options are as follows: • **0**: not forwarded • **1**: forwarded This field cannot be left empty.
9	Real-Called-Number	VARCHAR2[20]	Actual called number. The number formats are as follows: • Country code + MSISDN • Country code + Area code + PSTN This field cannot be left empty.
10	Connect-Called-Number	VARCHAR2[20]	Called number that is connected. The value can be in any format that can be recognized by the MSC. Generally, the CBS directly records the value in CDRs. This field cannot be left empty.
11	Charge-Flow-Type	NUMBER[10]	Charging process type. The options are as follows: • **0**: MO • **1**: MT • **3**: MF This field cannot be left empty.
12	Calling-Partys-Category	NUMBER[10]	Calling party category. For a call initiated by an operator, this field also specifies the service language. The value is obtained from the CAP_InitialDP.CallingPartysCategory parameter that is reported. For example, value **00001001** indicates that the calling party is a national operator. This field can be left empty.
13	Calling-Vlr-Number	VARCHAR2[10]	VLR number of the area where the calling party visits. The VLR number is reported in an IDP message. If no value is reported, this field is left empty. In the MO process, if the CBS uses this field to

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			analyze the visited area, this field cannot be left empty. If the CBS does not use this field to analyze the visited area, this field can be left empty. In the MT process, if the visited area does not need to be analyzed for the calling party, this field can be left empty. Format: Country code + NDC + LSP
14	Calling-CellID	VARCHAR 2[36]	Cell ID of the calling party. If the CBS does not need to analyze the visited area based on the cell ID, this field can be left empty. The format is Three-digit MCC + Two-digit MNC + Five-digit LAC + Five-digit cell ID, for example, **460002230320412**.
15	Called-Vlr-Number	VARCHAR 2[10]	VLR number of the area where the called party visits. In the MO process, if the CBS uses this field to analyze the visited area, this field cannot be left empty. If the CBS does not use this field to analyze the visited area, this field can be left empty. In the MT process, if the CBS uses this field to analyze the visited area, this field cannot be left empty. If the CBS does not use this field to analyze the visited area, this field can be left empty.
16	Called-CellID	VARCHAR 2[36]	Cell ID of the called party. The format is Three-digit MCC + Two-digit MNC + Five-digit LAC + Five-digit cell ID, for example, **460002230320412**. This field can be left empty.
17	Original-Called-Party-Id	VARCHAR 2[20]	Original called number. • In the MO process, this field is left empty. • In the MF process, this field records the original called number reported in an IDP message. The value can be in any format that can be recognized by the MSC. Generally, the CBS directly records the value in CDRs. This field can be left empty.
18	Additional-Calling-Party-Number	VARCHAR 2[20]	Additional calling number. This field specifies the original calling number in the MF process and is generally left empty in other processes.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			The original calling number reported by the MSC is recorded and can be in any format. The CBS does not authenticate or process the value. This field can be left empty.
19	Bearer-Capability	VARCHAR2[10]	Bearer capability for connecting calls. Bearer capability connection type or transmission medium requirement on subscribers, which is reported in an IDP message. If video call, fax, and data services exist, this field specifies these special services. This field can be left empty. An empty value indicates a common call.
20	EventType-BCSM	NUMBER[10]	Event report. This field specifies the request report event type. This field can be left empty. This field is reserved.
21	Redirecting-Party-Id	VARCHAR2[20]	Redirected-to number, which is implemented through the number conversion function. This field indicates the redirected-to number in the MT process. The number formats are as follows: • International prefix + Country code + MSISDN • International prefix + Country code + Area code + PSTN This field can be left empty in offline CDRs. If this field is transferred, the CBS does not authenticate the value but directly records it to output CDRs.
22	Redirection-Information	VARCHAR2[36]	Redirection information. The value is the same as that of **Redirectingnumber** in IDP messages. The CBS does not authenticate the value. This field can be left empty.
23	Redirection-Reason	NUMBER[10]	Redirection reason, which is reported from the network side. For the GSM network, the options are as follows: • **0**: no call forwarding • **1**: user busy • **2**: no reply • **3**: call forwarding unconditional • **4**: others

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **6**: mobile subscriber not reachable This field cannot be left empty. The default value is 0.
24	UE-IMSI	VARCHAR 2[20]	IMSI of a subscriber. This field can be left empty.
25	CallReferenceNumber	VARCHAR 2[128]	Call reference number. • On the CDMA network, this field records the **BillID** value. • On the GSM network, this field records the **CallReferenceNumber** value reported in an IDP message. • For a SIP call, this field records the **Call-ID** value reported in a SIP message. If an external system does not report the call reference number, the OCG generates one in the format YYYYMMDDhhmmss + Three-digit OCG ID + Four-digit automaton number. **NOTE** If the automaton number contains less than four digits, prefix the number with 0. If the automaton number contains more than four digits, obtain the last four digits. This field can be left empty.
26	MSC-Address	VARCHAR 2[20]	MSC address. If the CBS uses this field to analyze the visited area for the charged party, this field cannot be left empty. If the CBS does not use this field to analyze the visited area for the charged party, this field can be left empty. Format: Country code + NDC + LSP
27	Time-Zone	NUMBER[10]	Time zone where the calling party locates. This field can be left empty. If this field is left empty, the time zone in the MSC of the subscriber's visited area is the same as that of the home server.
28	CallBeginTime	VARCHAR 2[14]	Call start time. Format: YYYYMMDDhhmmss This field cannot be left empty.
29	CallDuration	NUMBER[10]	Call duration used for charging, in seconds. This field cannot be left empty.
30	SuccessACDuration	NUMBER[10]	Duration for which fees are deducted successfully, in seconds. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
31	FailACDuration	NUMBER[10]	Duration for which fees fail to be deducted, in seconds. This field cannot be left empty.
32	VPMNCallFlag	NUMBER[10]	Corporate call flag. The default value is **-1**. This field can be left empty. This field is reserved.
33	CBEResultCode	NUMBER[10]	Error code sent from the CBP. This field can be left empty. This field is reserved.
34	DDS-Discount	NUMBER[10]	Dynamic discount. This field is valid only when the dynamic discount feature is enabled and the MSC determines the dynamic discount. The default value is **0**.
35	DiameterSessionID	VARCHAR2[128]	Diameter session ID. This field specifies the session ID for OCG-generated CDRs and is used for CDR audit. This field can be left empty.
36	NPPrefix	VARCHAR2[10]	NP prefix of the called number. This field can be left empty. This field is reserved.
37	CalledHomeNetWork	VARCHAR2[10]	Home network code of the called party. This field can be left empty.
38	CallingPartyLRN	VARCHAR2[20]	This field is reserved. This field can be left empty.
39	CalledPartyLRN	VARCHAR2[20]	This field is reserved. This field can be left empty.
40	OpposeTenantID	NUMBER[10]	Home tenant ID of the called party. This field can be left empty. This field is reserved.
41	Service-Free-Indicator	NUMBER[10]	Free call flag. The options are as follows: • **0**: normal call • **1**: free call • **2**: directly connected call This field cannot be left empty.
42	NumFormatOfC	NUMBER[1	Calling number type. The options are as follows:

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	alling	0]	• **0**: unknown • **1**: national number • **2**: international number This field can be left empty.
43	NumFormatOfCalled	NUMBER[10]	Called number type. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number This field can be left empty.
44	NumFormatOfRoute	NUMBER[10]	Routing number type. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number This field can be left empty.
45	NumFormatOfOVLR	NUMBER[10]	VLR number type corresponding to the visited area of the calling party. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number This field can be left empty.
46	NumFormatOfTVLR	NUMBER[10]	VLR number type corresponding to the visited area of the called party. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number This field can be left empty.
47	NumFormatOfOCalled	NUMBER[10]	VLR number type corresponding to the visited area of the original called party. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number This field can be left empty.
48	CalledPartyBCDNu	VARCHAR2[32]	Original called number reported in an IDP message. The original called number reported in IDP messages by the MSC is recorded and can be in any format.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field can be left empty.
49	OriginalRedirectPartyId	VARCHAR2[32]	Original number reported in an IDP message in the MF process. The original number reported in IDP messages is recorded and can be in any format. This field is left empty in other processes. This field can be left empty.
50	Service-Code-Type	NUMBER[10]	Service code type. The options are as follows: • **0**: bearer service code • **1**: telecommunications service code This field can be left empty.
51	Service-Code	NUMBER[10]	Service code. This field can be left empty. This field is reserved.
52	OFFLINEFILENAME	VARCHAR2[64]	Name of the original offline CDR file. This field specifies the original offline CDR file name generated by the MSC. This field is left empty for offline CDRs generated by the OCG.
53	OFFLINEFILELineNo	NUMBER[10]	Line number of the original offline CDR. When the value of the field is 0 or null, this field is invalid. This field can be left empty.
54	TenantID	NUMBER[10]	Home BE ID of the charged party. This field can be left empty.
55	Brand	NUMBER[10]	Brand of the charged party. This field can be left empty.
56	CallType	NUMBER[10]	Call type. The options are as follows: • **1**: international toll call • **2**: toll call between charging areas • **3**: toll call within a charging area • **4**: local call • **5**: call within the group • **6**: emergency number • **7**: international roaming and calling the home country number • **8**: international roaming and calling the visited country number • **9**: international roaming and calling the other country number This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
57	OnNetFlag	VARCHAR 2[1]	Analyzed call type according to the network. The options are as follows: • **0**: inter-network • **1**: intra-network This field can be left empty.
58	Reserved.	VARCHAR 2[20]	This field is left empty.
59	Reserved.	VARCHAR 2[255]	This field is left empty.
60	Reserved.	VARCHAR 2[255]	This field is left empty.
61	Reserved.	VARCHAR 2[12]	This field is left empty.

2.2 w_smo CDR

This topic describes the format of offline SMS CDR files sent from a third-party system (for example, SMSC or MSC) and normalized by the Mediation.

CDR File Name Format

w_smo_YYYYMMDD_Seqno.unl

Example: w_smo_20071012_0001.unl

CDR File Format

Table 2-2 describes the fields in the w_smo CDR.

Table 2-2 Fields in the w_smo CDR file

SN	Field Name	Field Type	Description
1	SmsType	VARCHAR 2[1]	SMS message type. The options are as follows: • **1**: SMPP+ or MAP3 SMS message • **3**: CAP2 or CAP3 SMS message • **4**: Nokia-Siemens CAMEL1 SMS message This field can be left empty.
2	MessageType	VARCHAR 2[1]	Message type. The options are as follows: • **1**: fee deduction request • **2**: confirmation message This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
3	SMSCAddress	VARCHAR2[8]	SMSC address. This field can be left empty.
4	SMID	VARCHAR2[64]	SMS message ID. The value is a unique SMS message ID generated by the SMSC. The CBS uses this message ID to deduct or refund fees. This field can be left empty.
5	SMLength	NUMBER[10]	Length of the SMS message content. This field is valid to sites that charge for SMS messages based on the SMS message length. If the SMS message length is not used as a charging factor, this field can be left empty or set to **0**.
6	MoMSCAddr	VARCHAR2[32]	MSC address of the roaming area of the SMS message sender. Format: Country code + NDC + LSP This field cannot be left empty.
7	MtMSCAddr	VARCHAR2[32]	MSC address of the roaming area of the SMS message recipient. Format: Country code + NDC + LSP This field can be left empty if the charging function is not involved in the MT process or this field is not used as a charging factor.
8	SourceAddr	VARCHAR2[32]	Number of the SMS message sender. The number formats are as follows: • Country code + MSISDN • International prefix of the home country in the CBS + Country code + MSISDN This field cannot be left empty.
9	DestAddr	VARCHAR2[32]	Number of the SMS message recipient. The number formats are as follows: • Country code + MSISDN • International prefix of the home country in the CBS + Country code + MSISDN • NP RN prefix + Country code + MSISDN • Special number This field cannot be left empty.
10	FeeAddr	VARCHAR2[32]	Charged number. The number formats are as follows: • Country code + MSISDN • International prefix of the home country in

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			the CBS + Country code + MSISDN This field can be left empty.
11	FeeFlag	NUMBER[10]	Fee deduction flag. The options are as follows: • **1**: Charge the sender. • **2**: Charge the recipient. This field cannot be left empty.
12	FeeType	NUMBER[10]	Charging type. The options are as follows: • **0**: default charging type (Common point-to-point SMS messages are charged based on the charge rate configured on the CBS. In other situations, SMS messages are charged based on the charge rate transferred from the SMSC.) • **1**: charging by piece (The SP charges SMS messages based on the message pieces.) • **2**: charging by month (fee deduction) • **3**: charging by month (check) • **4**: charging by the number of SMS messages without exceeding the upper limit • **5**: charging by month with a limited number of SMS messages (fee deduction) • **6**: charging by month with a limited number of SMS messages (check) This field can be left empty.
13	FeeItdMsgNum	NUMBER[10]	Total number of SMS messages in a monthly package. This field is currently not supported. This field can be left empty. This field is reserved.
14	FeeSingle	NUMBER[10]	Tariff of a single SMS message when the messages are charged by piece. This field can be left empty. This field is reserved.
15	FeeFixed	NUMBER[10]	Charge rate of a single SMS message when the limited number of messages are charged by month. The excess SMS messages are charged based on the charge rate specified by **FeeSingle**. The **FeeFixed** field is used only when SMS messages are charged by month. This field can be left empty. This field is reserved.
16	MessagePID	NUMBER[1	SMS message PID.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
		0]	This field can be left empty. This field is reserved.
17	StatusReportRequest	NUMBER[10]	Indicates whether a message status report is required. The options are as follows: • **0**: no • **1**: yes This field can be left empty. The default value is **0**.
18	OriginalNetType	NUMBER[10]	Source network type. The options are as follows: • **0**: GSM • **1**: CDMA • **2**: TDMA • **3**: SMPP This field can be left empty. The default value is **0**. The system considers that the value is **0** if this field is left empty.
19	SMSReceiveTime	VARCHAR2[14]	Time when an SMS message is received. When receiving a refund message, the CBS performs rating and refund based on the time. This field is applicable only to fee deduction requests and is left empty for confirmation messages.
20	CallingService	VARCHAR2[32]	Identifier of an MO service, which is an array with a fixed length of 16 bytes. Each byte specifies a service. The value **0** indicates that the corresponding service is not used. The value **1** indicates that the corresponding service is used in the current message. The service types are as follows: • **Calling_Service[0]**: SMS signature service • **Calling_Service[1]**: MO SMS enhanced receipt service • **Calling_Service[2]**: power-on notification service This field can be left empty.
21	CalledService	VARCHAR2[32]	Identifier of an MT service, which is an array with a fixed length of 16 bytes. Each byte specifies a service. The value **0** indicates that the corresponding service is not used. The value **1** indicates that the corresponding service is used in the current message.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			The service types are as follows: • **Called_Service[0]**: SMS forwarding service • **Called_Service[1]**: automatic reply service This field can be left empty.
22	OriginalMsgID	VARCHAR2[32]	ID of the original SMS message that is associated with the current message. The value is recorded in refund messages. This field can be left empty.
23	SMDSendResult	NUMBER[10]	SMS message sending result. This field is set based on the corresponding value in the SMPP+ message. Value **0** indicates that an SMS message is sent successfully. The other values indicate that the SMS message fails to be sent. This field cannot be left empty.
24	MsgID	VARCHAR2[32]	SMS message ID generated by the gateway. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. This field can be left empty. This field is reserved.
25	GWID	VARCHAR2[32]	ID of the gateway that sends an SMS message. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. This field can be left empty. This field is reserved.
26	MsgSeq	VARCHAR2[32]	SMS message ID generated by the SMSC. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. This field can be left empty. This field is reserved.
27	SPID	VARCHAR2[32]	SP ID. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. This field can be left empty. This field is reserved.
28	ServiceCode	VARCHAR2[32]	Service type code. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field can be left empty. This field is reserved.
29	SourceGWID	VARCHAR2[32]	ID of the source gateway that forwards an SMS message. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. This field can be left empty. This field is reserved.
30	PriorityFlag	NUMBER[10]	Priority of an SMS message. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. This field can be left empty. This field is reserved.
31	ChargingRate	NUMBER[10]	Charge rate. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. This field can be left empty. This field is reserved.
32	ChargingType	NUMBER[10]	Charge rate type. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. The options are as follows: • **0**: not charged, applicable only to the SP channel fee reduction scenario • **1**: free • **2**: charging by piece • **3**: charging by month • **4**: charging within an upper limit For inter-network SMS messages, this field is set to **2**. This field can be left empty. This field is reserved.
33	CDRType	NUMBER[10]	CDR type. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. For Monternet SMS messages, the options are as follows:

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **1**: upstream • **2**: downstream • **3**: monthly SMS service control For inter-network SMS messages, the options are as follows: • **11**: MO CDR generated for SMS messages sent to China Unicom • **12**: MT CDR generated for SMS messages sent to China Unicom For inter-network SMS messages, this field is set to **11**. This field can be left empty. This field is reserved.
34	Discount	NUMBER[10]	Percentage-based discount. The value **100** indicates that no discount is provided. This field is applicable only to inter-network and Monternet SMS messages, but left empty for intra-network SMS messages. This field can be left empty. This field is reserved.
35	GiftResult	NUMBER[10]	This field is reserved. Generally, this field can be left empty.
36	Subscription-Id-Data	VARCHAR2[32]	Charged number. For E.164 numbers, the number formats are as follows: • International prefix + Country code + MSISDN • Country code + MSISDN The value is in the calling number in the MO process and called number in the MT process. This field cannot be left empty.
37	DiameterSessionID	VARCHAR2[128]	Diameter session ID. This field specifies the session ID that external systems send to the CBS through DCC messages and is used for audit. This field can be left empty.
38	NPPrefix	VARCHAR2[32]	NP or RN prefix of the recipient. This field can be left empty. This field is reserved.
39	CalledHomeNet	VARCHAR	This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	Work	2[32]	This field is reserved.
40	OpposeTenantID	NUMBER[10]	Home tenant ID of the peer party. This field can be left empty. This field is reserved.
41	DCS	NUMBER[10]	Encoding mode of an SMS message that is sent. The options are as follows: • **-1**: not distinguished • **0**: 7-bit (English) • **8**: UCS-2 (Farsi/Other) • **4**: binary This field can be left empty. The system considers that the value is **0** if this field is left empty.
42	NumFormatOfCalling	NUMBER[10]	Number type of the sender. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number The default value is **0**.
43	NumFormatOfCalled	NUMBER[10]	Number type of the recipient. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number The default value is **0**.
44	NumFormatOfOMSC	NUMBER[10]	Type of the sender number processed by the MSC of the roaming area. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number The default value is **0**.
45	NumFormatOfTMSC	NUMBER[10]	Type of the recipient number processed by the MSC of the roaming area. The options are as follows: • **0**: unknown • **1**: national number • **2**: international number The default value is **0**.
46	CalledPartyBC	VARCHAR	Original recipient number reported in an IDP

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	DNu	2[32]	message. The value is reported by the MSC and can be in any format. This field cannot be left empty.
47	OFFLINEFILE NAME	VARCHAR 2[64]	Name of the original offline CDR file. The value is the name of the original offline CDR file collected by the MSC or SMSC and is used as the input for subscriber audit. This field can be left empty.
48	OFFLINEFILE LineNo	NUMBER[10]	Line number of the original offline CDR. The value is the line number of the original offline CDR collected by the MSC or SMSC and is used as the input for subscriber audit. This field can be left empty.
49	TenantID	NUMBER[10]	Home BE ID of the charged party. This field can be left empty. This field is reserved.
50	Brand	NUMBER[10]	Brand of the charged party. This field can be left empty. This field is reserved.
51	CallType	NUMBER[10]	SMS message type. The options are as follows: • **1**: national SMS message • **2**: international toll SMS message • **3**: international roaming SMS message This field can be left empty.
52	OnNetFlag	VARCHAR 2[1]	Analyzed SMS message type according to the network. The options are as follows: • **0**: inter-network • **1**: intra-network This field can be left empty.
53	reserve	VARCHAR 2[12]	This field is reserved. This field can be left empty.

2.3 GPRS CDR

This topic describes the format of offline data service CDR files sent from a third-party system (for example, GGSN) and normalized by the Mediation.

 Copyright © Huawei Technologies Co., Ltd.

CDR File Name Format

GPRS_YYYYMMDD_Seqno.unl

Example: GPRS_20091012_0001.unl

CDR File Format

Table 2-3 describes the fields in the GPRS CDR.

Table 2-3 Fields in the GPRS CDR file

SN	Field Name	Field Type	Description
1	Session-Id	VARCHAR2[128]	Diameter session ID. The format is as follows: <DiameterIdentity>;<high 32 bits>;<low 32 bits>[;<optional value>] • <DiameterIdentity>: The value is the same as that in the **Origin-Host** AVP. • <high 32 bits>: The current system time is recorded. • <low 32 bits>: The value increases cyclically. The initial value is **0**. When the system restarts, the value is set to **0**. • <optional value>: This field is reserved. Separate each two fields with a semicolon (;). Example: OCG001.huawei.com;1876543210;523 This field can be left empty.
2	Origin-Host	VARCHAR2[64]	Host that sends the Diameter message. This field can be left empty.
3	Origin-Realm	VARCHAR2[32]	Domain of the host that sends the Diameter message. This field can be left empty.
4	Destination-Host	VARCHAR2[64]	Destination host, namely, the CBS. This field can be left empty.
5	Destination-Realm	VARCHAR2[32]	Domain of the destination host, namely, domain of the CBS. This field can be left empty.
6	Auth-Application-Id	NUMBER[10]	Unique ID of the application used for re-authentication and re-authorization. The options are as follows: • **0**: Diameter common message

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **1**: NASREQ [NASREQ] • **2**: Mobile-IP • **3**: Diameter Base Accounting [DIAMMIP] • **4**: DCCA • **0xffffffff**: Relay The default value is **0**.
7	Service-Context-Id	VARCHAR2[64]	Unique ID of a Diameter service. Example: in@huawei.com Currently, the values include **in@huawei.com**, **manage@huawei.com**, and **mdsp@huawei.com**. This field can be left empty.
8	CC-Request-Type	NUMBER[10]	Request type. The options are as follows: • **1**: initial request • **2**: update request • **3**: terminate request • **4**: event request The default value is **3**.
9	CC-Request-Number	NUMBER[10]	Request sequence number. This field uniquely identifies a request in a Diameter session where multiple requests are initiated. The default value is **1**.
10	CC-Subsession-Id	VARCHAR2[64]	ID of a subsession. This field can be left empty.
11	User-Name	VARCHAR2[128]	Subscriber name in the NAI format. This field can be left empty.
12	Origin-State-Id	NUMBER[10]	Status ID of the host that sends a Diameter message. This field can be left empty.
13	Event-Timestamp	VARCHAR2[16]	Time when an event occurs. Format: YYYYMMDDHHMMSS This field cannot be left empty.
14	Subscription-Id-Type	NUMBER[10]	Subscriber type. The options are as follows: • **0**: E.164 • **1**: IMSI • **2**: SIP URI

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **3**: NAI • **4**: private This field cannot be left empty.
15	Subscription-Id-Data	VARCHAR2[128]	Subscriber ID. For E.164 numbers, the number formats are as follows: • MSISDN • International prefix + Country code + MSISDN This field cannot be left empty.
16	Service-Identifier1	NUMBER[10]	Service identifier. The combination of **Service-Context-ID** and **Service-Identifier** can uniquely identify the service corresponding to a request. This field can be left empty.
17	Termination-Cause	NUMBER[10]	Cause for the termination of a Diameter client session. The options are as follows: • **1**: DIAMETER_LOGOUT (A subscriber ends the session.) • **2**: DIAMETER_SERVICE_NOT_PROVIDED (The session is terminated before a subscriber receives an authorization response.) • **3**: DIAMETER_BAD_ANSWER (The authorization response received by the Diameter client is not successfully processed.) • **4**: DIAMETER_ADMINISTRATIVE (A subscriber is not granted the access authority or the connection is disconnected due to a management problem, for example, the Abort-Session-Request message is received.) • **5**: DIAMETER_LINK_BROKEN (The communication with a subscriber is interrupted unexpectedly.) • **6**: DIAMETER_AUTH_EXPIRED (A subscriber's access ends because the validity period of the authorized session ends.) • **7**: DIAMETER_USER_MOVED (A subscriber is receiving the service of another Diameter client.)

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **8**: DIAMETER_SESSION_TIMEOUT (The Diameter session times out.) This field can be left empty.
18	Route-Record	VARCHAR2[64]	Routing record, which can be entered only by the Diameter proxy. A relay or proxy must add this field to all messages forwarded by the relay or the proxy. This field can be left empty.
19	Requested-Action	NUMBER[10]	If **CC-Request-Type** in a CCR message is set to **4**, this field specifies the requested action. The options are as follows: • **0**: direct debiting • **1**: refund • **2**: balance check • **3**: price query This field can be left empty.
20	CC-Time1	NUMBER[10]	Requested, allocated, or used duration, in seconds. This field can be left empty.
21	Value-Digits1	NUMBER[20]	Value, which is used together with the **Exponent1** field. For example, to represent 0.05, set this field to **5** and **Exponent1** to **-2**. This field can be left empty.
22	Exponent1	NUMBER[10]	Exponent, which is used together with the **Value-Digits1** field. This field can be left empty.
23	Currency-Code1	NUMBER[10]	Currency code that is defined in ISO4217. This field can be left empty. If this field is left empty, the default currency code of the main fund account book is used.
24	CC-Total-Octets1	NUMBER[20]	Requested, allocated, or used traffic, in bytes. This field can be left empty.
25	CC-Input-Octets1	NUMBER[20]	Number of requested, authorized, or used bytes received from a subscriber. This field can be left empty.
26	CC-Output-Octe	NUMBER[20]	Number of requested, authorized, or used

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	ts1		bytes sent to a subscriber. This field can be left empty.
27	CC-Service-Specific-Units1	NUMBER[10]	Number of special service units. The special service is specified by **Service-Identifier** or **Rating-Group** in the **Multiple-Services-Credit-Control** AVP. This field can be left empty.
28	Reporting-Reason1	NUMBER[10]	Reason for reporting the usage of one or more types of quota. This field is extended based on the 3GPP specification. The options are as follows: • **0**: THRESHOLD (The quota usage is reported in the **Used-Service-Units** AVP because the threshold is reached.) • **1**: QHT (The quota usage is reported in the **Multiple-Services-Credit-Control** AVP because the QHT specified in the previous CCA message is reached. For example, the quota is not used during a specified period.) • **2**: FINAL (The quota usage is reported in the **Multiple-Services-Credit-Control** AVP because a common access ends in the PS service or a subscriber ends the session in the IN service.) • **3**: QUOTA_EXHAUSTED (The quota usage is reported in the **Used-Service-Units** AVP because the quota is used up.) • **4**: VALIDITY_TIME (The quota usage is reported in the **Multiple-Services-Credit-Control** AVP because the life cycle of the authorized credit ends. The life cycle of the authorized credit is specified by the **Validity-Time**.) • **5**: OTHER_QUOTA_TYPE (The quota is reported the **Used-Service-Units** AVP because other quotas meet the conditions for triggering the report in the case of multiple quotas.) • **6**: RATING_CONDITION_CHANGE (The quota usage is reported in the

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			Multiple-Services-Credit-Control AVP because the rating conditions are changed. The changed rating conditions are specified by the corresponding **Trigger-Type**.) • **7**: FORCED_REAUTHORISATION (The quota usage is reported in the **Multiple-Services-Credit-Control** AVP because the server initiates a re-authorization request, for example, when the server receives an RAR request.) Values **1**, **2**, **4**, **6**, and **7** apply to all quota types and used in the **Multiple-Services-Credit-Control** AVP. The other values apply to a specified quota type and are used only in **Used-Service-Units**. If this field is set to **6**, the event that causes the re-authorization request must be specified by the **Trigger-Type** AVP. This field can be left empty.
29	Tariff-Change-Usage1	NUMBER[10]	Indicates whether to charge the service usage using the tariff before or after tariff switch or both tariffs before and after tariff switch. If this field is omitted, the charge rate is unchanged. This field can be left empty.
30	CC-Time2	NUMBER[10]	Requested, allocated, or used duration, in seconds. This field can be left empty.
31	Value-Digits2	NUMBER[20]	Value, which is used together with the **Exponent2** field. For example, to represent 0.05, set this field to **5** and **Exponent2** to **-2**. This field can be left empty.
32	Exponent2	NUMBER[10]	Exponent, which is used together with the **Value-Digits2** field. This field can be left empty.
33	Currency-Code2	NUMBER[10]	Currency code that is defined in ISO4217. This field can be left empty.
34	CC-Total-Octets2	NUMBER[20]	Requested, allocated, or used traffic, in bytes.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field can be left empty.
35	CC-Input-Octets2	NUMBER[20]	Number of requested, authorized, or used bytes received from a subscriber. This field can be left empty.
36	CC-Output-Octets2	NUMBER[20]	Number of requested, authorized, or used bytes sent to a subscriber. This field can be left empty.
37	CC-Service-Specific-Units2	NUMBER[10]	Number of special service units. The special service is specified by **Service-Identifier** or **Rating-Group** in the **Multiple-Services-Credit-Control** AVP. This field can be left empty.
38	Multiple-Services-Indicator	NUMBER[10]	Multi-service flag. This field can be left empty.
39	Reporting-Reason2	NUMBER[10]	Reason for reporting the usage of one or more types of quota. This field is extended based on the 3GPP specification. This field can be left empty.
40	Trigger-Type	NUMBER[10]	Single re-authorization event type. This field is extended based on the 3GPP specification. This field can be left empty.
41	CC-Time3	NUMBER[10]	Requested, allocated, or used duration, in seconds. This field can be left empty.
42	Value-Digits3	NUMBER[20]	Value, which is used together with the **Exponent3** field. For example, to represent 0.05, set this field to **5** and **Exponent3** to **-2**. This field can be left empty.
43	Exponent 3	NUMBER[10]	Exponent, which is used together with the **Value-Digits3** field. This field can be left empty.
44	Currency-Code3	NUMBER[10]	Currency code that is defined in ISO4217. This field can be left empty.
45	CC-Total-Octets3	NUMBER[20]	Requested, allocated, or used traffic, in bytes. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
46	CC-Input-Octets3	NUMBER[20]	Number of requested, authorized, or used bytes received from a subscriber. This field can be left empty.
47	CC-Output-Octets3	NUMBER[20]	Number of requested, authorized, or used bytes sent to a subscriber. This field can be left empty.
48	CC-Service-Specific-Units3	NUMBER[10]	Number of special service units. The special service is specified by **Service-Identifier** or **Rating-Group** in the **Multiple-Services-Credit-Control** AVP. This field can be left empty.
49	Reporting-Reason3	NUMBER[10]	Reason for reporting the usage of one or more types of quota. This field is extended based on the 3GPP specification. This field can be left empty.
50	Tariff-Change-Usage2	NUMBER[10]	Indicates whether to charge the service usage using the tariff before or after tariff switch or both tariffs before and after tariff switch. If this field is omitted, the charge rate is unchanged. This field can be left empty.
51	CC-Time4	NUMBER[10]	Requested, allocated, or used duration, in seconds. This field can be left empty.
52	Value-Digits4	NUMBER[20]	Value, which is used together with the **Exponent4** field. For example, to represent 0.05, set this field to **5** and **Exponent4** to **-2**. This field can be left empty.
53	Exponent4	NUMBER[10]	Exponent, which is used together with the **Value-Digits4** field. This field can be left empty.
54	Currency-Code4	NUMBER[10]	Currency code that is defined in ISO4217. This field can be left empty.
55	CC-Total-Octets4	NUMBER[20]	Requested, allocated, or used traffic, in bytes. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
56	CC-Input-Octets4	NUMBER[20]	Number of requested, authorized, or used bytes received from a subscriber. This field can be left empty.
57	CC-Output-Octets4	NUMBER[20]	Number of requested, authorized, or used bytes sent to a subscriber. This field can be left empty.
58	CC-Service-Specific-Units4	NUMBER[10]	Number of special service units. The special service is specified by **Service-Identifier** or **Rating-Group** in the **Multiple-Services-Credit-Control** AVP. This field can be left empty.
59	Service-Identifier2	NUMBER[10]	Service identifier. This field can be left empty.
60	Rating-Group	NUMBER[10]	Rating group ID. All the services of the same rating type belong to the same rating group. This field can be left empty for sites that do not differentiate rating groups.
61	CC-Correlation-Id	VARCHAR2[128]	Information used to associate credit control requests generated by different components involved in a service. For example, this field must be set when **Service-Context-Id** is assigned on the transmission or service layer. This field can be left empty.
62	Validity-Time	NUMBER[10]	Session timeout interval reported by an external NE. The CBS determines the session timeout interval based on this field value and the internal configuration. This field can be left empty.
63	3GPP-Charging-Id1	VARCHAR2[64]	Charging ID. This field can be left empty.
64	3GPP-PDP-Type	VARCHAR2[64]	PDP context type. This field can be left empty.
65	PDP-Address	VARCHAR2[64]	PDP context address. This field can be left empty.
66	QOS	VARCHAR2[64]	Service quality. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
67	SGSN-Address	VARCHAR2[64]	SGSN address. This field can be left empty.
68	GGSN-Address	VARCHAR2[64]	GGSN address. This field can be left empty.
69	CG-Address	VARCHAR2[64]	CG address. This field can be left empty.
70	3GPP-IMSI-MCC-MNC	VARCHAR2[64]	MCC and MNC extracted from the IMSI. This field can be left empty.
71	3GPP-GGSN-MCC-MNC	VARCHAR2[64]	MCC and MNC of the network to which the GGSN belongs. This field can be left empty.
72	3GPP-NSAPI	VARCHAR2[64]	Network service access point identifier (NSAPI). This field can be left empty.
73	Called-Station-Id	VARCHAR2[64]	APN address. If charging is implemented based on the APN address, this field cannot be left empty.
74	3GPP-Session-Stop-Indicator	VARCHAR2[64]	Session termination flag. This field can be left empty.
75	3GPP-Selection-Mode	VARCHAR2[64]	Selection mode. This field can be left empty.
76	3GPP-Charging-Characteristics	VARCHAR2[64]	Charging attribute. This field can be left empty.
77	3GPP-SGSN-MCC-MNC	VARCHAR2[64]	MCC and MNC of the calling party. If the CBS uses this field to analyze the roaming area, this field cannot be left empty. If the CBS does not use this field to analyze the roaming area, this field can be left empty.
78	3GPP-MS-Time Zone	VARCHAR2[64]	Time zone where a subscriber locates. This field can be left empty.
79	3GPP-CAMEL-Charging-Info	VARCHAR2[64]	CAMEL-based charging information. This field can be left empty.
80	Charging-Rule-Base-Name	VARCHAR2[64]	Charging rule name. This field can be left empty.
81	3GPP-User-Location-Info	VARCHAR2[64]	Roam-in area information. If the CBS uses this field to analyze the

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			roaming area, this field cannot be left empty. If the CBS does not use this field to analyze the roaming area, this field can be left empty.
82	3GPP-RAT-Type	VARCHAR2[64]	Parameter transferred from the wireless network. This field can be left empty.
83	3GPP-Charging-Id2	VARCHAR2[64]	Charging ID. This field can be left empty.
84	PS-Free-Format-Data	VARCHAR2[64]	Data of the PS format. This field can be left empty.
85	PS-Append-Free-Format-Data	NUMBER[10]	Additional data of the PS format. This field can be left empty.
86	PDP-Context-Type	NUMBER[10]	PDP context type. This field can be left empty.
87	SP-Id	VARCHAR2[28]	SP ID. This field can be left empty.
88	Service-Id	VARCHAR2[28]	Service ID. This field can be left empty.
89	Service-Type	NUMBER[10]	Service type. This field can be left empty.
90	Content-Id	VARCHAR2[28]	Content ID. This field can be left empty.
91	BearerType	NUMBER[10]	Message bearer type. This field can be left empty.
92	StartTime	VARCHAR2[14]	Charging start time. This field can be left empty.
93	StopTime	VARCHAR2[14]	Charging end time. This field can be left empty.
94	BearerProtocolType	NUMBER[10]	Message protocol. This field can be left empty.
95	ChargingID	VARCHAR2[28]	ID of the charged party. This field can be left empty.
96	ServiceLevel	NUMBER[10]	Service level. This field can be left empty.
97	Transaction-Id	VARCHAR2[28	Transaction ID.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
		]	This field can be left empty.
98	TotalVolume	NUMBER[20]	Total traffic used in a session, in bytes This field cannot be left empty.
99	TotalDuration	NUMBER[10]	Total duration used in a session, in seconds. This field cannot be left empty.
100	UnchargedVolume	NUMBER[20]	Traffic used in the period from the last time when a session is updated successfully to the end of the session. If the CBP is disconnected when the session starts, value of this field is the same as that of **TotalVolume**. This field cannot be left empty.
101	UnchargedDuration	NUMBER[10]	Duration used in the period from the last time when a session is updated successfully to the end of the session, in seconds. If the CBP is disconnected when the session starts, value of this field is the same as that of **TotalDuration**. This field cannot be left empty.
102	LastUpdateTime	VARCHAR2[14]	Last time when a session is updated successfully. This field can be left empty.
103	OFFLINEFILENAME	VARCHAR2[64]	Name of the original offline CDR file. This field is used to audit original CDRs. If original CDRs do not need to be audited, this field can be left empty.
104	OFFLINEFILELineNo	NUMBER[10]	Line number of the original offline CDR. This field is used to audit original CDRs. If original CDRs do not need to be audited, this field can be left empty.
105	Tariff Class	VARCHAR2[12]	This field contains the tariff class according to your originated main charging zone. This field can be left empty.

2.4 TAPIN_VOICE CDR

This topic describes the format of offline roam-out voice CDR files sent from a third-party system and normalized by the Mediation.

 Copyright © Huawei Technologies Co., Ltd.

CDR File Name Format

TAPIN_VOICE_YYYYMMDD_SEQUENCE.unl

Example: TAPIN_VOICE_20130204_0001.unl

CDR File Format

Table 2-4 describes the fields in the TAPIN_VOICE CDR.

Table 2-4 Fields in the TAPIN_VOICE CDR

SN	Field Name	Field Type	Description
1	CDR_type	VARCHAR 2[2]	CDR type. The options are as follows: • **00**: MO • **01**: MT • **02**: MF This field cannot be left empty.
2	Fraud_Monitor_ Indicator	VARCHAR 2[2]	ID of a charged subscriber who is monitored due to the possibility of fraud. This field can be left empty.
3	IDType	NUMBER[1 0]	Terminal ID type. **0**: international mobile subscriber identity (IMSI) This field has a fixed value of **0**. This field cannot be left empty.
4	MSISDN	VARCHAR 2[30]	Number of the charged party. The number formats are as follows: • MSISDN • International prefix + Country code + MSISDN
5	IMSI	VARCHAR 2[15]	IMSI of the charged party. This field cannot be left empty.
6	IMEI	VARCHAR 2[15]	International mobile equipment identity (IMEI) or electronic serial number (ESN) of the charged party. This field can be left empty.
7	Network_Type	VARCHAR 2[2]	Network type of the charged party number. This field can be left empty.
8	START_TIME	VARCHAR 2[14]	Charging start time. Format: YYYYMMDDHHMMSS This field cannot be left empty.
9	DURATION	NUMBER[1 0]	Call duration, in seconds. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
10	END_TIME	VARCHAR 2[14]	Charging end time. This field is left empty. An external system needs to convert the value to the subscriber's home time zone.
11	END_CAUSE	VARCHAR 2[4]	Cause for call interruption. This field can be left empty.
12	Recording_Entity_Type	VARCHAR 2[2]	Entity type. The options are as follows: • **1**: mobile switching center (MSC) • **2**: short message service center (SMSC) • **3**: gateway GPRS support node (GGSN) • **4**: serving GPRS support node (SGSN) • **5**: gateway mobile location center (GMLC) This field can be left empty.
13	LAC	VARCHAR 2[8]	Area code of a mobile device that processes calls. This field can be left empty.
14	CELL_ID	VARCHAR 2[8]	ID of a cell or base station. This field can be left empty.
15	charged_Item1	VARCHAR 2[2]	Type of the first charging item group in the charging information list. The options are as follows: • **A**: call attempt • **C**: content-based charging • **D**: duration-based charging • **E**: event-based charging • **F**: one-off charging • **I**: cross-network charging • **N**: no charging • **V**: charging by upstream traffic • **W**: charging by downstream traffic • **X**: charging by total traffic This field cannot be left empty.
16	Called_Country_Code	VARCHAR 2[10]	Country code of the called party. This field can be left empty.
17	Call_Type_Level1	VARCHAR 2[2]	Level-1 call type. The options are as follows: • **1**: national • **2**: international This field can be left empty.
18	Call_Type_Level2	VARCHAR 2[2]	Level-2 call type. The options are as follows:

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **0**: unknown • **1**: mobile • **2**: fixed-line network • **3**: irrelevant to location • **4**: premium rate This field can be left empty.
19	Call_Type_Level3	VARCHAR2[2]	Level-3 call type. The items in this category are sub-items of the level-2 category. Value **1** is restricted for local calls and shall not be used for any other category within the virtual private mobile network (VPMN)'s Internet of Things (IOT). All other values are as defined within the VPMN's IOT. This field can be left empty.
20	charge_Type11	VARCHAR2[4]	Charge code of the first charging item in the first charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period The service usage fee for a charged party is calculated based on the values of **charGE1***X* (such as **charGE11**, **charGE12**, and **charGE13**), **charGE2***X* (such as **charGE21**, **charGE22**, and **charGE23**), and **charge_Type**. The calculation methods are as follows: • If none of the values of **charge_Type1***X* and **charge_Type2***X* is **00**, the calculation

SN	Field Name	Field Type	Description
			formula is as follows: Total fee = **charGE11** + **charGE12** + **charGE13** + **charGE21** + **charGE22** + **charGE23** • If one of the values of **charge_Type1***X* and **charge_Type2***X* is **00**, for example, when the value of **charge_Type12** is **00**, the calculation formula is as follows: Total fee = **charGE12** + **charGE21** + **charGE22** + **charGE23** • If multiple values of **charge_Type1***X* and **charge_Type2***X* are **00**, the total fee is the sum of the **charGE** values corresponding to the first **charge_Type1***X* and **charge_Type2***X* whose values are **00**. For example, when the value of **charge_Type11** is **00**, **charge_Type12** is **04**, **charge_Type13** is **00**, **charge_Type21** is **05**, **charge_Type22** is **00**, and **charge_Type23** is **00**, the calculation formula is as follows: Total fee = **charGE11** + **charGE22**. This field can be left empty.
21	charGE11	NUMBER[20]	Charged amount of the first charging item in the first charging item group. This field can be left empty.
22	charge_Units11	NUMBER[10]	Unit of the first charging item in the first charging item group. This field can be left empty.
23	charge_Type12	VARCHAR2[4]	Charge code of the second charging item in the first charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
24	charGE12	NUMBER[20]	Charged amount of the second charging item in the first charging item group. This field can be left empty.
25	charge_Units12	NUMBER[10]	Unit of the second charging item in the first charging item group. This field can be left empty.
26	charge_Type13	VARCHAR2[4]	Charge code of the third charging item in the first charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
27	charGE13	NUMBER[20]	Charged amount of the third charging item in the first charging item group. This field can be left empty.
28	charge_Units13	NUMBER[10]	Unit of the third charging item in the first charging item group. This field can be left empty.
29	charged_Item2	VARCHAR	Type of the second charging item group in the

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
		2[2]	charging information list. The options are as follows: • **A**: call attempt • **C**: content-based charging • **D**: duration-based charging • **E**: event-based charging • **F**: one-off charging • **I**: cross-network charging • **N**: no charging • **V**: charging by upstream traffic • **W**: charging by downstream traffic • **X**: charging by total traffic This field can be left empty.
30	charge_Type21	VARCHAR 2[4]	Charge code of the first charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
31	charGE21	NUMBER[20]	Charged amount of the first charging item in the second charging item group. This field can be left empty.
32	charged_Units21	NUMBER[10]	Unit of the first charging item in the second charging item group. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
33	charge_Type22	VARCHAR2[4]	Charge code of the second charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
34	charGE22	NUMBER[20]	Charged amount of the second charging item in the second charging item group. This field can be left empty.
35	charged_Units22	NUMBER[10]	Unit of the second charging item in the second charging item group. This field can be left empty.
36	charge_Type23	VARCHAR2[4]	Charge code of the third charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
37	charGE23	NUMBER[20]	Charged amount of the third charging item in the second charging item group. This field can be left empty.
38	charged_Units23	NUMBER[10]	Unit of the third charging item in the second charging item group. This field can be left empty.
39	Day_Category	VARCHAR2[4]	Preferential day type. The options are as follows: • **N**: workday • **I**: national independence day • **P**: public holiday • **R**: weekend This field can be left empty.
40	Category_Subtype	VARCHAR2[4]	Subtype associated with **Day Category**. This field is defined by the carrier corresponding to the visited area of a roaming subscriber. This field can be left empty.
41	Time_Band	VARCHAR2[4]	Charging time segment associated with **Charge Detail** and **Charge Detail Timestamp**. This field is defined by the carrier corresponding to the visited area of a roaming subscriber. If **Charge Detail Timestamp** is not provided, this field indicates the time segment corresponding to **Charging Timestamp** associated with **Charging Information**. The carrier corresponding to the visited area can set **Time_Band_Subtype** to further specify the charging time segment. This field can be left empty.
42	Time_Band_Subtype	VARCHAR2[4]	Charging time segment subtype. This field is defined by the carrier corresponding to the visited area of a roaming subscriber. This field can be left empty.
43	Multiate_Indica	VARCHAR	Indicates whether the type of the preferential day

SN	Field Name	Field Type	Description
	tor	2[2]	or preferential time segment changes during charging. A flag indicating that a Charge Detail began during the related Day Category and Time Band and spanned a change of either of those items. This field can be left empty.
44	Tax_Type	VARCHAR 2[4]	Tax type. Tax type associated with Tax Rate Code and Tax Rate. The options are as follows: • **01**: national tax • **02**: regional tax • **03**: county tax • **04**: local or city tax • **05**: provincial tax. • **06**: dominion tax • **07**: gross receipts tax • **08**: absolute or fixed tax (no tax rate specified) • **09**: public utility tax • **10**: sales and use tax • **11**: excise tax • **12**: communications tax • **13**: value added tax (VAT) • **14**: harmonized sales tax This field can be left empty.
45	Tax_Rate	NUMBER[10]	Tax rate for a specific tax type and code. According to some national laws and regulations, taxes must be collected based on the tax rate corresponding to the invoice date. If invoice generation is postponed, the tax rate in the invoice may be different from the tax rate that is transferred. However, the occurrence rate of this situation is extremely low. This field is mandatory unless the fixed tax rate is used. The value is precise to five decimal places and ranges from 00.00000 to 99.99999. This field can be left empty.
46	Tax_Value	NUMBER[20]	Actual tax amount. The value must be equal to or greater than 0 and the number of decimal places is specified by **TAP Decimal Places**. The value is in SDRs. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
47	Discount_Type	NUMBER[10]	Discount type. The options are as follows: • **0**: discount rate • **1**: fixed discount value This field can be left empty.
48	Discount_Rate	NUMBER[10]	Discount rate. This field can be left empty.
49	Discount_Value	NUMBER[20]	Discount amount. This field can be left empty.
50	CAMEL_Service_Address	VARCHAR2[8]	IP address of the Customized Applications for Mobile Network Enhanced Logic (CAMEL) server. This field can be left empty.
51	CAMEL_Service_Level	VARCHAR2[4]	CAMEL service level. This field can be left empty.
52	CAMEL_Service_Key	VARCHAR2[4]	CAMEL service key value. This field can be left empty.
53	Default_Call_Handling_Indicator	VARCHAR2[2]	Default call processing ID of the CAMEL. This field can be left empty.
54	CAMEL_MSC_Address	VARCHAR2[15]	MSC address of the CAMEL. This field can be left empty.
55	CAMEL_Reference_Num	NUMBER[20]	CAMEL activation flag. This field can be left empty.
56	CAMEL_Initiated_Indicator	VARCHAR2[2]	Indicates whether the call is a forwarded call initiated by the CAMEL server. This field can be left empty.
57	CAMEL_Modification	VARCHAR2[2]	Indicates whether a call is initiated when the CAMEL protocol is used. This field can be left empty.
58	CSE_Info	VARCHAR2[40]	Information downloaded from the CAMEL server. This field can be left empty.
59	Caller_number	VARCHAR2[30]	Calling number, in the format *Country code* + *MSISDN*. The value consists of digits, asterisks (*), and number signs (#). This field cannot be left empty.
60	Dialed_Digits	VARCHAR	Dialed number.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
		2[30]	This field cannot be left empty.
61	Called_number	VARCHAR 2[30]	Called number, in the format *Country code + MSISDN*. The value consists of digits, asterisks (*), and number signs (#). This field cannot be left empty.
62	third_number	VARCHAR 2[30]	Third-party number, which is valid only in the MF process. This field can be left empty.
63	Called_Place	VARCHAR 2[10]	Home city of the called party, which is valid only in the CDRs generated in the MO process. This field can be left empty.
64	Called_Region	VARCHAR 2[10]	Home area of the called party, which is valid only in the CDRs generated in the MO process. This field can be left empty.
65	MSC	VARCHAR 2[15]	MSC ID. This field can be left empty.
66	Service_Type	VARCHAR 2[4]	Service type. This field can be left empty.
67	SERVICE_CODE	VARCHAR 2[4]	Service code. This field can be left empty.
68	Radio_Channel_Req	NUMBER[10]	Radio channel type requested by the terminal during call connection. This field can be left empty.
69	Radio_Channel_Used	NUMBER[10]	Allocated radio channel type during call connection. This field can be left empty.
70	Speech_Version_Req	NUMBER[10]	Preferred voice version that the terminal requests the mobile station to deliver when a call is established. This field can be left empty.
71	Speech_Version_Used	NUMBER[10]	Voice version delivered by the mobile station during call connection. This field can be left empty.
72	Transparency_Indicator	VARCHAR 2[2]	Indicates whether used services are transparent. This field can be left empty.
73	Fixed_Network_User_Rate	VARCHAR 2[2]	Rate on the fixed-line network. The options are as follows: • **1**: 9.6 kbit/s

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **2**: 14.4 kbit/s • **3**: 19.2 kbit/s • **4**: 28.8 kbit/s • **5**: 38.4 kbit/s • **6**: 48 kbit/s • **7**: 56 kbit/s • **8**: 64 kbit/s This field can be left empty.
74	Air_Interface_User_Rate_Req	VARCHAR2[2]	Rate at which subscribers request air interfaces. This field can be left empty.
75	User_Protocol_Indicator	VARCHAR2[2]	High-end subscriber protocol between the mobile station and network. This field can be left empty.
76	reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
77	reserve	VARCHAR2[2]	This field is reserved. This field can be left empty.
78	reserve	VARCHAR2[2]	This field is reserved. This field can be left empty.
79	reserve	VARCHAR2[2]	This field is reserved. This field can be left empty.
80	reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
81	reserve	VARCHAR2[5]	This field is reserved. This field can be left empty.
82	reserve	VARCHAR2[10]	This field is reserved. This field can be left empty.
83	reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
84	reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
85	reserve	VARCHAR2[24]	This field is reserved. This field can be left empty.
86	TAPFILENAME	VARCHAR2[64]	CDR file name, containing the international roaming PMN code that indicates the country code and carrier information. The CDR file name is in the format CD*XXXXXXYYYYYSequence*

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			number.suffix. • **CD**: CDR file name prefix. The first two digits have a fixed value of **CD**. • *XXXXX*: PMN code of the carrier corresponding to the visited area of a roaming-out subscriber • *YYYYY*: PMN code of the carrier corresponding to the home area of a roaming-out subscriber This field cannot be left empty.
87	reserve	VARCHAR2[10]	This field is reserved. This field can be left empty.
88	reserve	VARCHAR2[5]	This field is reserved. This field can be left empty.
89	ExchangeRate	NUMBER[10]	Exchange rate between the local currency and standard currency. This field can be left empty.
90	chargeable_unit1	NUMBER[10]	Rounding unit for the first type of service usage generated during charging. This field can be left empty.
91	chargeable_unit2	NUMBER[10]	Rounding unit for the second type of service usage generated during charging. This field can be left empty.
92	chargeable_unit3	NUMBER[10]	Rounding unit for the third type of service usage generated during charging. This field can be left empty.
93	reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
94	reserve	VARCHAR2[60]	This field is reserved. This field can be left empty.
95	CALL_START_TIME_TIMEZONE	NUMBER[10]	Time zone of the visited area. The information is transparently transferred and recorded in CDRs, but it does not affect rating. This field can be left empty.
96	TAPFILELineNo	NUMBER[10]	Line number of a CDR in a TAPIN CDR file. The file header and tail are not counted as lines. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

2.5 TAPIN_SMS CDR

This topic describes the format of offline roam-out SMS CDR files sent from a third-party system and normalized by the Mediation.

CDR File Name Format

TAPIN_SMS_YYYYMMDD_SEQUENCE.unl

Example: TAPIN_SMS_20130204_0001.unl

CDR File Format

Table 2-5 describes the fields in the TAPIN_SMS CDR.

Table 2-5 Fields in the TAPIN_SMS CDR

SN	Field Name	Field Type	Description
1	CDR_type	VARCHAR 2[2]	CDR type. The options are as follows: • **10**: SMS message sender • **11**: SMS message recipient This field cannot be left empty.
2	Fraud_Monitor_ Indicator	VARCHAR 2[2]	ID of a charged subscriber who is monitored due to the possibility of fraud. This field can be left empty.
3	IDType	NUMBER[1 0]	Terminal ID type. **0**: international mobile subscriber identity (IMSI) This field has a fixed value of **0**. This field cannot be left empty.
4	MSISDN	VARCHAR 2[30]	Number of the charged party. The number formats are as follows: • MSISDN • International prefix + Country code + MSISDN This field can be left empty.
5	IMSI	VARCHAR 2[15]	IMSI of the charged party. This field cannot be left empty.
6	IMEI	VARCHAR 2[15]	International mobile equipment identity (IMEI) or electronic serial number (ESN) of the charged party. This field can be left empty.
7	Network_Type	VARCHAR 2[2]	Network type. This field can be left empty.
8	START_TIME	VARCHAR	Charging start time.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
		2[14]	An external system needs to convert the value to the subscriber's home time zone. This field cannot be left empty.
9	DURATION	NUMBER[10]	Duration for sending an SMS message, in seconds. This field cannot be left empty.
10	END_TIME	VARCHAR2[14]	Charging end time. This field is left empty. An external system converts the value to the CBS system time zone.
11	END_CAUSE	VARCHAR2[4]	Cause for SMS message sending interruption. This field can be left empty.
12	Recording_Entity_Type	VARCHAR2[2]	Entity type. The options are as follows: • **1**: mobile switching center (MSC) • **2**: short message service center (SMSC) • **3**: gateway GPRS support node (GGSN) • **4**: serving GPRS support node (SGSN) • **5**: gateway mobile location center (GMLC) This field can be left empty.
13	LAC	VARCHAR2[8]	Area code of a mobile device that processes SMS messages. This field can be left empty.
14	CELL_ID	VARCHAR2[8]	ID of a cell or base station. This field can be left empty.
15	charged_Item1	VARCHAR2[2]	Type of the first charging item group in the charging information list. The options are as follows: • **A**: call attempt • **C**: content-based charging • **D**: duration-based charging • **E**: event-based charging • **F**: one-off charging • **I**: cross-network charging • **N**: no charging • **V**: charging by upstream traffic • **W**: charging by downstream traffic • **X**: charging by total traffic This field cannot be left empty.
16	Called_Country_Code	VARCHAR2[10]	Country code of the recipient. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
17	Call_Type_Level1	VARCHAR2[2]	SMS message level 1. The options are as follows: • **1**: national • **2**: international This field can be left empty.
18	Call_Type_Level2	VARCHAR2[2]	SMS message level 2. The options are as follows: • **0**: unknown • **1**: mobile • **2**: fixed-line network • **3**: irrelevant to location • **4**: premium rate This field can be left empty.
19	Call_Type_Level3	VARCHAR2[2]	SMS message level 3. The items in this category are sub-items of the level-2 category. Value **1** is restricted for local calls and shall not be used for any other category within the VPMN's IOT. All other values are as defined within the VPMN's IOT. This field can be left empty.
20	charge_Type11	VARCHAR2[4]	Charge code of the first charging item in the first charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			The service usage fee for a charged party is calculated based on the values of **charGE1***X* (such as **charGE11**, **charGE12**, and **charGE13**), **charGE2***X* (such as **charGE21**, **charGE22**, and **charGE23**), and **charge_Type**. The calculation methods are as follows: • If none of the values of **charge_Type1***X* and **charge_Type2***X* is **00**, the calculation formula is as follows: Total fee = **charGE11** + **charGE12** + **charGE13** + **charGE21** + **charGE22** + **charGE23** • If one of the values of **charge_Type1***X* and **charge_Type2***X* is **00**, for example, when the value of **charge_Type12** is **00**, the calculation formula is as follows: Total fee = **charGE12** + **charGE21** + **charGE22** + **charGE23** • If multiple values of **charge_Type1***X* and **charge_Type2***X* are **00**, the total fee is the sum of the **charGE** values corresponding to the first **charge_Type1***X* and **charge_Type2***X* whose values are **00**. For example, when the value of **charge_Type11** is **00**, **charge_Type12** is **04**, **charge_Type13** is **00**, **charge_Type21** is **05**, **charge_Type22** is **00**, and **charge_Type23** is **00**, the calculation formula is as follows: Total fee = **charGE11** + **charGE22**. This field can be left empty.
21	charGE11	NUMBER[20]	Charged amount of the first charging item in the first charging item group. This field can be left empty.
22	charge_Units11	NUMBER[10]	Unit of the first charging item in the first charging item group. This field can be left empty.
23	charge_Type12	VARCHAR2[4]	Charge code of the second charging item in the first charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
24	charGE12	NUMBER[20]	Charged amount of the second charging item in the first charging item group. This field can be left empty.
25	charge_Units12	NUMBER[10]	Unit of the second charging item in the first charging item group. This field can be left empty.
26	charge_Type13	VARCHAR2[4]	Charge code of the third charging item in the first charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
27	charGE13	NUMBER[2	Charged amount of the third charging item in the

SN	Field Name	Field Type	Description
		0]	first charging item group. This field can be left empty.
28	charge_Units13	NUMBER[10]	Unit of the third charging item in the first charging item group. This field can be left empty.
29	charged_Item2	VARCHAR2[2]	Type of the second charging item group in the charging information list. The options are as follows: • **A**: call attempt • **C**: content-based charging • **D**: duration-based charging • **E**: event-based charging • **F**: one-off charging • **I**: cross-network charging • **N**: no charging • **V**: charging by upstream traffic • **W**: charging by downstream traffic • **X**: charging by total traffic This field can be left empty.
30	charge_Type21	VARCHAR2[4]	Charge code of the first charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
31	charGE21	NUMBER[20]	Charged amount of the first charging item in the second charging item group. This field can be left empty.
32	charged_Units21	NUMBER[10]	Unit of the first charging item in the second charging item group. This field can be left empty.
33	charge_Type22	VARCHAR2[4]	Charge code of the second charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
34	charGE22	NUMBER[20]	Charged amount of the second charging item in the second charging item group. This field can be left empty.
35	charged_Units22	NUMBER[10]	Unit of the second charging item in the second charging item group. This field can be left empty.
36	charge_Type23	VARCHAR2[4]	Charge code of the third charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
37	charGE23	NUMBER[20]	Charged amount of the third charging item in the second charging item group. This field can be left empty.
38	charged_Units23	NUMBER[10]	Unit of the third charging item in the second charging item group. This field can be left empty.
39	Day_Category	VARCHAR2[4]	Preferential day type. The options are as follows: • **N**: workday • **I**: national independence day • **P**: public holiday • **R**: weekend This field can be left empty.
40	Category_Subtype	VARCHAR2[4]	Subtype associated with **Day Category**. This field is defined by the carrier corresponding to the visited area of a roaming subscriber. This field can be left empty.
41	Time_Band	VARCHAR2[4]	Charging time segment associated with **Charge Detail** and **Charge Detail Timestamp**. This field is defined by the carrier corresponding to the visited area of a roaming subscriber. If **Charge Detail Timestamp** is not provided, this field indicates the time segment corresponding to **Charging Timestamp** associated with **Charging Information**. The carrier corresponding to the visited area can set **Time_Band_Subtype** to further specify the charging time segment.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field can be left empty.
42	Time_Band_Subtype	VARCHAR2[4]	Charging time segment subtype. This field is defined by the carrier corresponding to the visited area of a roaming subscriber. This field can be left empty.
43	Multiate_Indicator	VARCHAR2[2]	Indicates whether the type of the preferential day or preferential time segment changes during charging. A flag indicating that a Charge Detail began during the related Day Category and Time Band and spanned a change of either of those items. This field can be left empty.
44	Tax_Type	VARCHAR2[4]	Tax type. Tax type associated with Tax Rate Code and Tax Rate. The options are as follows: • **01**: national tax • **02**: regional tax • **03**: county tax • **04**: local or city tax • **05**: provincial tax. • **06**: dominion tax • **07**: gross receipts tax • **08**: absolute or fixed tax (no tax rate specified) • **09**: public utility tax • **10**: sales and use tax • **11**: excise tax • **12**: communications tax • **13**: value added tax (VAT) • **14**: harmonized sales tax This field can be left empty.
45	Tax_Rate	NUMBER[10]	Tax rate for a specific tax type and code. According to some national laws and regulations, taxes must be collected based on the tax rate corresponding to the invoice date. If invoice generation is postponed, the tax rate in the invoice may be different from the tax rate that is transferred. However, the occurrence rate of this situation is extremely low. This field is mandatory unless the fixed tax rate is used. The value is precise to five decimal places and

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			ranges from 00.00000 to 99.99999. This field can be left empty.
46	Tax_Value	NUMBER[20]	Actual tax amount. The value must be equal to or greater than 0 and the number of decimal places is specified by **TAP Decimal Places**. The value is in SDRs. This field can be left empty.
47	Discount_Type	NUMBER[10]	Discount type. The options are as follows: • **0**: discount rate • **1**: fixed discount value This field can be left empty.
48	Discount_Rate	NUMBER[10]	Discount rate. This field can be left empty.
49	Discount_Value	NUMBER[20]	Discount amount. This field can be left empty.
50	CAMEL_Service_Address	VARCHAR2[8]	IP address of the Customized Applications for Mobile Network Enhanced Logic (CAMEL) server. This field can be left empty.
51	CAMEL_Service_Level	VARCHAR2[4]	CAMEL service level. This field can be left empty.
52	CAMEL_Service_Key	VARCHAR2[4]	CAMEL service key value. This field can be left empty.
53	Default_Call_Handling_Indicator	VARCHAR2[2]	Default call processing ID of the CAMEL. This field can be left empty.
54	CAMEL_MSC_Address	VARCHAR2[15]	MSC address of the CAMEL. This field can be left empty.
55	CAMEL_Reference_Num	NUMBER[20]	CAMEL activation flag. This field can be left empty.
56	CAMEL_Initiated_Indicator	VARCHAR2[2]	Indicates whether the call is a forwarded call initiated by the CAMEL server. This field can be left empty.
57	CAMEL_Modification	VARCHAR2[2]	Indicates whether a call is initiated when the CAMEL protocol is used. This field can be left empty.
58	CSE_Info	VARCHAR2[40]	Information downloaded from the CAMEL server. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
59	Caller_number	VARCHAR 2[30]	Calling number, in the format *Country code* + *MSISDN*. The value consists of digits, asterisks (*), and number signs (#). This field cannot be left empty.
60	Dialed_Digits	VARCHAR 2[30]	Dialed number. This field cannot be left empty.
61	Called_number	VARCHAR 2[30]	Called number, in the format *Country code* + *MSISDN*. The value consists of digits, asterisks (*), and number signs (#). This field cannot be left empty.
62	third_number	VARCHAR 2[30]	Third-party number, which is valid only in the MF process. This field can be left empty.
63	Called_Place	VARCHAR 2[10]	Home city of the called party, which is valid only in the CDRs generated in the MO process. This field can be left empty.
64	Called_Region	VARCHAR 2[10]	Home area of the called party, which is valid only in the CDRs generated in the MO process. This field can be left empty.
65	MSC	VARCHAR 2[15]	MSC ID. This field can be left empty.
66	Service_Type	VARCHAR 2[4]	Service type. This field can be left empty.
67	SERVICE_CODE	VARCHAR 2[4]	Service code. This field can be left empty.
68	Radio_Channel_Req	NUMBER[10]	Radio channel type requested by the terminal during call connection. This field can be left empty.
69	Radio_Channel_Used	NUMBER[10]	Allocated radio channel type during call connection. This field can be left empty.
70	Speech_Version_Req	NUMBER[10]	Preferred voice version that the terminal requests the mobile station to deliver when a call is established. This field can be left empty.
71	Speech_Version	NUMBER[1	Voice version delivered by the mobile station

SN	Field Name	Field Type	Description
	_Used	0]	during call connection. This field can be left empty.
72	Transparency_Indicator	VARCHAR2[2]	Indicates whether used services are transparent. This field can be left empty.
73	Fixed_Network_User_Rate	VARCHAR2[2]	Rate on the fixed-line network. The options are as follows: • **1**: 9.6 kbit/s • **2**: 14.4 kbit/s • **3**: 19.2 kbit/s • **4**: 28.8 kbit/s • **5**: 38.4 kbit/s • **6**: 48 kbit/s • **7**: 56 kbit/s • **8**: 64 kbit/s This field can be left empty.
74	Air_Interface_User_Rate_Req	VARCHAR2[2]	Rate at which subscribers request air interfaces. This field can be left empty.
75	User_Protocol_Indicator	VARCHAR2[2]	High-end subscriber protocol between the mobile station and network. This field can be left empty.
76	reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
77	reserve	VARCHAR2[2]	This field is reserved. This field can be left empty.
78	reserve	VARCHAR2[2]	This field is reserved. This field can be left empty.
79	reserve	VARCHAR2[2]	This field is reserved. This field can be left empty.
80	reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
81	reserve	VARCHAR2[5]	This field is reserved. This field can be left empty.
82	reserve	VARCHAR2[10]	This field is reserved. This field can be left empty.
83	reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
84	reserve	VARCHAR	This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
		2[1]	This field can be left empty.
85	reserve	VARCHAR 2[24]	This field is reserved. This field can be left empty.
86	TAPFILENAME	VARCHAR 2[64]	CDR file name, containing the international roaming PMN code that indicates the country code and carrier information. The CDR file name is in the format CD*XXXXXYYYYYSequence number*.suffix. • **CD**: CDR file name prefix. The first two digits have a fixed value of **CD**. • *XXXXX*: PMN code of the carrier corresponding to the visited area of a roaming-out subscriber • *YYYYY*: PMN code of the carrier corresponding to the home area of a roaming-out subscriber This field cannot be left empty.
87	reserve	VARCHAR 2[10]	This field is reserved. This field can be left empty.
88	reserve	VARCHAR 2[5]	This field is reserved. This field can be left empty.
89	ExchangeRate	NUMBER[10]	Exchange rate between the local currency and standard currency. This field can be left empty.
90	chargeable_unit1	NUMBER[10]	Rounding unit for the first type of service usage generated during charging. This field can be left empty.
91	chargeable_unit2	NUMBER[10]	Rounding unit for the second type of service usage generated during charging. This field can be left empty.
92	chargeable_unit3	NUMBER[10]	Rounding unit for the third type of service usage generated during charging. This field can be left empty.
93	reserve	VARCHAR 2[1]	This field is reserved. This field can be left empty.
94	reserve	VARCHAR 2[60]	This field is reserved. This field can be left empty.
95	CALL_START_TIME_TIMEZONE	NUMBER[10]	Time zone of the visited area. The information is transparently transferred and recorded in CDRs, but it does not affect rating.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field can be left empty.
96	TAPFILELineNo	NUMBER[10]	Line number of a CDR in a TAPIN CDR file. The file header and tail are not counted as lines. This field cannot be left empty.

2.6 TAPIN_GPRS CDR

This topic describes the format of offline roam-out data CDR files sent from a third-party system and normalized by the Mediation.

CDR File Name Format

TAPIN_GPRS_YYYYMMDD_SEQUENCE.unl

Example: TAPIN_GPRS_20130204_0001.unl

CDR File Format

Table 2-6 describes the fields in the TAPIN_GPRS CDR.

Table 2-6 Fields in the TAPIN_GPRS CDR

SN	Field Name	Field Type	Description
1	CDR_type	VARCHAR2[2]	CDR type. **15**: GPRS This field cannot be left empty.
2	Fraud_Monitor_Indicator	VARCHAR2[2]	ID of a charged subscriber who is monitored due to the possibility of fraud. This field can be left empty.
3	IDType	NUMBER[10]	Terminal ID type. **0**: international mobile subscriber identity (IMSI) This field has a fixed value of **0**. This field can be left empty.
4	MSISDN	VARCHAR2[30]	Number of the charged party. The number formats are as follows: • MSISDN • International prefix + Country code + MSISDN This field can be left empty.
5	IMSI	VARCHAR2[15]	IMSI of the charged party.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field cannot be left empty.
6	IMEI	VARCHAR2[15]	International mobile equipment identity (IMEI) or electronic serial number (ESN) of the charged party. This field can be left empty.
7	Network_Type	VARCHAR2[2]	Network type. This field can be left empty.
8	START_TIME	VARCHAR2[14]	Data service start time. An external system converts the value to the CBS system time zone. This field cannot be left empty.
9	DURATION	NUMBER[10]	Data service duration, in seconds. This field can be left empty.
10	END_TIME	VARCHAR2[14]	Data service end time. This field is left empty. An external system converts the value to the home BE time zone in the CBS. This field can be left empty.
11	END_CAUSE	VARCHAR2[4]	Cause for service termination. This field can be left empty.
12	Recording_Entity_Type	VARCHAR2[2]	Entity type. The options are as follows: • **1**: mobile switching center (MSC) • **2**: short message service center (SMSC) • **3**: gateway GPRS support node (GGSN) • **4**: serving GPRS support node (SGSN) • **5**: gateway mobile location center (GMLC) This field can be left empty.
13	LAC	VARCHAR2[8]	Area code of a mobile device that processes the data service. This field can be left empty.
14	CELL_ID	VARCHAR2[8]	ID of a cell or base station. This field can be left empty.
15	charged_Item1	VARCHAR2[2]	Type of the first charging item group in the charging information list. The options are as follows: • **A**: call attempt • **C**: content-based charging • **D**: duration-based charging • **E**: event-based charging • **F**: one-off charging

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **I**: cross-network charging • **N**: no charging • **V**: charging by upstream traffic • **W**: charging by downstream traffic • **X**: charging by total traffic This field cannot be left empty.
16	Called_Country_Code	VARCHAR2[10]	Country code of the called party. This field can be left empty.
17	Call_Type_Level1	VARCHAR2[2]	Level-1 call type. The options are as follows: • **1**: national • **2**: international This field can be left empty.
18	Call_Type_Level2	VARCHAR2[2]	Level-2 call type. The options are as follows: • **0**: unknown • **1**: mobile • **2**: fixed-line network • **3**: irrelevant to location • **4**: premium rate This field can be left empty.
19	Call_Type_Level3	VARCHAR2[2]	Level-3 call type. The items in this category are sub-items of the level-2 category. • Value **1** is restricted for local calls and shall not be used for any other category within the VPMN's IOT. • All other values are as defined within the VPMN's IOT. This field can be left empty.
20	charge_Type11	VARCHAR2[4]	Charge code of the first charging item in the first charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period The service usage fee for a charged party is calculated based on the values of **charGE1***X* (such as **charGE11**, **charGE12**, and **charGE13**), **charGE2***X* (such as **charGE21**, **charGE22**, and **charGE23**), and **charge_Type**. Each charging item group (**charge_Type**) corresponds to a charGE value, for example, **charge_Type12** corresponds to **charGE12**. The calculation methods are as follows: • If none of the values of **charge_Type1***X* and **charge_Type2***X* is **00**, the calculation formula is as follows: Total fee = **charGE11** + **charGE12** + **charGE13** + **charGE21** + **charGE22** + **charGE23**. • If one of the values of **charge_Type1***X* and **charge_Type2***X* is **00**, for example, when the value of **charge_Type12** is **00**, the calculation formula is as follows: Total fee = **charGE12** + **charGE21** + **charGE22** + **charGE23**. • If multiple values of **charge_Type1***X* and **charge_Type2***X* are **00**, the total fee is the sum of the **charGE** values corresponding to the first **charge_Type1***X* and **charge_Type2***X* whose values are **00**. For example, when the value of **charge_Type11** is **00**, **charge_Type12** is **04**, **charge_Type13** is **00**, **charge_Type21** is **05**, **charge_Type22** is **00**, and **charge_Type23** is **00**, the calculation formula is as follows: Total fee = **charGE11** + **charGE22**. This field can be left empty.
21	charGE11	NUMBER[20]	Charged amount of the first charging item in the first charging item group. This field can be left empty.
22	charge_Units11	NUMBER[10]	Unit of the first charging item in the first charging item group. This field can be left empty.
23	charge_Type12	VARCHAR2[4]	Charge code of the second charging item in the first charging item group. The options are as

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
24	charGE12	NUMBER[20]	Charged amount of the second charging item in the first charging item group. This field can be left empty.
25	charge_Units12	NUMBER[10]	Unit of the second charging item in the first charging item group. This field can be left empty.
26	charge_Type13	VARCHAR2[4]	Charge code of the third charging item in the first charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
27	charGE13	NUMBER[20]	Charged amount of the third charging item in the first charging item group. This field can be left empty.
28	charge_Units13	NUMBER[10]	Unit of the third charging item in the first charging item group. This field can be left empty.
29	charged_Item2	VARCHAR2[2]	Type of the second charging item group in the charging information list. The options are as follows: • **A**: call attempt • **C**: content-based charging • **D**: duration-based charging • **E**: event-based charging • **F**: one-off charging • **I**: cross-network charging • **N**: no charging • **V**: charging by upstream traffic • **W**: charging by downstream traffic • **X**: charging by total traffic This field can be left empty.
30	charge_Type21	VARCHAR2[4]	Charge code of the first charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
31	charGE21	NUMBER[20]	Charged amount of the first charging item in the second charging item group. This field can be left empty.
32	charged_Units21	NUMBER[10]	Unit of the first charging item in the second charging item group. This field can be left empty.
33	charge_Type22	VARCHAR2[4]	Charge code of the second charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
34	charGE22	NUMBER[20]	Charged amount of the second charging item in the second charging item group. This field can be left empty.
35	charged_Units22	NUMBER[10]	Unit of the second charging item in the second charging item group. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
36	charge_Type23	VARCHAR2[4]	Charge code of the third charging item in the second charging item group. The options are as follows: • **00**: total fee that can be invoiced • **01**: total call fee • **02**: reserved • **03**: toll call fee • **04**: directory assistance service • **05**: directory assistance after a call • **06-13**: reserved • **14**: voice mailbox deposits • **15**: voice mailbox compensation • **16-20**: reserved • **21**: additional fee of the VPMN • **69-99**: reserved • **100**: total fee generated during the charging detail rating period • **101**: total call fee generated during the charging detail rating period • **102**: toll call fee generated during the charging detail rating period This field can be left empty.
37	charGE23	NUMBER[20]	Charged amount of the third charging item in the second charging item group. This field can be left empty.
38	charged_Units23	NUMBER[10]	Unit of the third charging item in the second charging item group. This field can be left empty.
39	Day_Category	VARCHAR2[4]	Preferential day type. The options are as follows: • **N**: workday • **I**: national independence day • **P**: public holiday • **R**: weekend This field can be left empty.
40	Category_Subtype	VARCHAR2[4]	Subtype associated with **Day Category**. This field is defined by the carrier corresponding to the visited area of a roaming subscriber. This field can be left empty.
41	Time_Band	VARCHAR2[4]	Charging time segment associated with **Charge Detail** and **Charge Detail Timestamp**. This field is defined by the carrier corresponding to the

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			visited area of a roaming subscriber. If **Charge Detail Timestamp** is not provided, this field indicates the time segment corresponding to **Charging Timestamp** associated with **Charging Information**. The carrier corresponding to the visited area can set **Time_Band_Subtype** to further specify the charging time segment. This field can be left empty.
42	Time_Band_Subtype	VARCHAR2[4]	Charging time segment subtype. This field is defined by the carrier corresponding to the visited area of a roaming subscriber. This field can be left empty.
43	Multiate_Indicator	VARCHAR2[2]	Indicates whether the type of the preferential day or preferential time segment changes during charging. A flag indicating that a Charge Detail began during the related Day Category and Time Band and spanned a change of either of those items. This field can be left empty.
44	Tax_Type	VARCHAR2[4]	Tax type. Tax type associated with Tax Rate Code and Tax Rate. The options are as follows: • **01**: national tax • **02**: regional tax • **03**: county tax • **04**: local or city tax • **05**: provincial tax. • **06**: dominion tax • **07**: gross receipts tax • **08**: absolute or fixed tax (no tax rate specified) • **09**: public utility tax • **10**: sales and use tax • **11**: excise tax • **12**: communications tax • **13**: value added tax (VAT) • **14**: harmonized sales tax This field can be left empty.
45	Tax_Rate	NUMBER[10]	Tax rate for a specific tax type and code. According to some national laws and regulations, taxes must be collected based on the tax rate corresponding to the invoice date. If invoice

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			generation is postponed, the tax rate in the invoice may be different from the tax rate that is transferred. However, the occurrence rate of this situation is extremely low. This field is mandatory unless the fixed tax rate is used. The value is precise to five decimal places and ranges from 00.00000 to 99.99999. This field can be left empty.
46	Tax_Value	NUMBER[20]	Actual tax amount. The value must be equal to or greater than 0 and the number of decimal places is specified by TAP Decimal Places. The value is in SDRs. This field can be left empty.
47	Discount_Type	NUMBER[10]	Discount type. The options are as follows: • **0**: discount rate • **1**: fixed discount value This field can be left empty.
48	Discount_Rate	NUMBER[10]	Discount rate. This field can be left empty.
49	Discount_Value	NUMBER[20]	Discount amount. This field can be left empty.
50	CAMEL_Service_Address	VARCHAR2[8]	Customized Applications for Mobile Network Enhanced Logic (CAMEL) server address. This field can be left empty.
51	CAMEL_Service_Level	VARCHAR2[4]	CAMEL service level. This field can be left empty.
52	CAMEL_Service_Key	VARCHAR2[4]	CAMEL service key value. This field can be left empty.
53	Default_Call_Handling_Indicator	VARCHAR2[2]	Default call processing ID of the CAMEL. This field can be left empty.
54	CAMEL_MSC_Address	VARCHAR2[15]	MSC address of the CAMEL. This field can be left empty.
55	CAMEL_Reference_Num	NUMBER[20]	CAMEL activation flag. This field can be left empty.
56	CAMEL_Initiated_Indicator	VARCHAR2[2]	Indicates whether the call is a forwarded call initiated by the CAMEL server. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
57	CAMEL_Modification	VARCHAR2[2]	Indicates whether a call is initiated when the CAMEL protocol is used. This field can be left empty.
58	CSE_Info	VARCHAR2[40]	Information downloaded from the CAMEL server. This field can be left empty.
59	SGSN	VARCHAR2[15]	Address of the serving GPRS support node (SGSN). This field can be left empty.
60	GGSN	VARCHAR2[15]	Address of the gateway GPRS support node (GGSN). This field can be left empty.
61	GPRS_Conn_Type	NUMBER[10]	GPRS connection type. • **0**: Global System for Mobile Communications (GSM) • **1**: Universal Mobile Telecommunications System (UMTS) This field can be left empty.
62	Ctrl_Node	NUMBER[10]	Control node type. The options are as follows: • **0**: combination of the SGSN and GGSN nodes • **1**: SGSN • **2**: GGSN This field can be left empty.
63	PDP_Type	NUMBER[10]	Packet Data Protocol (PDP) session type. This field can be left empty.
64	PDP_Address	VARCHAR2[20]	PDP address. This field can be left empty.
65	APNNI	VARCHAR2[63]	Network ID of an access point. This field can be left empty.
66	APNOI	VARCHAR2[37]	Carrier ID of an access point. This field can be left empty.
67	Partial_Type	VARCHAR2[1]	ID of a partial CDR. This field can be left empty.
68	PDP_Start_Time	VARCHAR2[14]	PDP session start time. This field can be left empty.
69	Network_Init_PDP	NUMBER[10]	Type of the network created by a PDP session. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
70	charging_ID	NUMBER[10]	Charging ID. This field can be left empty.
71	Data_Volume_Incoming	NUMBER[10]	Received traffic. This field can be left empty.
72	Data_Volume_Outgoing	NUMBER[10]	Sent traffic. This field can be left empty.
73	QOS_REQ_Alloc_Reten_Prior	NUMBER[10]	Allocation or retention priority of the wireless access during GPRS connection in the Universal Mobil Telecommunications System (UMTS). This field can be left empty.
74	QOS_USED_Alloc_Reten_Prior	NUMBER[10]	Indicates whether the allocation or retention priority of the wireless access is used during GPRS connection in the UMTS. This field can be left empty.
75	QOS_REQ_Guar_Dlink	VARCHAR2[10]	Request bit rate that must be provided by the UMTS bearer service for customers or applications to use in the download service. This field can be left empty.
76	QOS_USED_Guar_Dlink	VARCHAR2[10]	Actual bit rate that must be provided by the UMTS bearer service for customers or applications to use in the download service. This field can be left empty.
77	QOS_REQ_Guar_Ulink	VARCHAR2[10]	Request bit rate that must be provided by the UMTS bearer service for customers or applications to use in the upload service. This field can be left empty.
78	QOS_USED_Guar_Ulink	VARCHAR2[10]	Actual bit rate that must be provided by the UMTS bearer service for customers or applications to use in the upload service. This field can be left empty.
79	QOS_REQ_Max_Dlink	VARCHAR2[10]	Maximum download request bit rate during GPRS connection in the UMTS. This field can be left empty.
80	QOS_USED_Max_Dlink	VARCHAR2[10]	Actual maximum download bit rate during GPRS connection in the UMTS. This field can be left empty.
81	QOS_REQ_Max_Ulink	VARCHAR2[10]	Maximum upload request bit rate during GPRS connection in the UMTS. This field can be left empty.
82	QOS_USED_M	VARCHAR	Actual maximum upload bit rate during GPRS

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	ax_Ulink	2[10]	connection in the UMTS. This field can be left empty.
83	QOS_REQ_Traff_Class	NUMBER[10]	Request application type during GPRS connection in the UMTS. This field can be left empty.
84	QOS_USED_Traff_Class	NUMBER[10]	Actual application type during GPRS connection in the UMTS. This field can be left empty.
85	QOS_REQ_Delay	NUMBER[10]	Request transmission delay during GPRS connection. This field can be left empty.
86	QOS_USED_Delay	NUMBER[10]	Actual transmission delay during GPRS connection. This field can be left empty.
87	QOS_REQ_Mean Throughput	NUMBER[10]	Minimum request throughput during GPRS connection. This field can be left empty.
88	QOS_USED_Mean Throughput	NUMBER[10]	Actual minimum throughput during GPRS connection. This field can be left empty.
89	QOS_REQ_peak Throughput	NUMBER[10]	Maximum request throughput during GPRS connection. This field can be left empty.
90	QOS_USED_peak Throughput	NUMBER[10]	Actual maximum throughput during GPRS connection. This field can be left empty.
91	QOS_REQ_precedence	NUMBER[10]	Request priority during GPRS connection. • **0**: not specified • **1**: high • **2**: medium • **3**: low This field can be left empty.
92	QOS_USED_precedence	NUMBER[10]	Actual priority during GPRS connection. • **0**: not specified • **1**: high • **2**: medium • **3**: low This field can be left empty.
93	QOS_REQ_reli	NUMBER[1	Request reliability during GPRS connection.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	ability	0]	This field can be left empty.
94	QOS_USED_reliability	NUMBER[10]	Actual reliability during GPRS connection. This field can be left empty.
95	Reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
96	Reserve	VARCHAR2[1]	This field is reserved. This field can be left empty.
97	Reserve	VARCHAR2[24]	This field is reserved. This field can be left empty.
98	TAPFILENAME	VARCHAR2[64]	CDR file name, containing the international roaming PMN code that indicates the country code and carrier information. The CDR file name is in the format CD*XXXXXYYYYYSequence number*.suffix. • **CD**: CDR file name prefix. The first two digits have a fixed value of **CD**. • XXXXX: PMN code of the carrier corresponding to the visited area of a roaming-out subscriber • YYYYY: PMN code of the carrier corresponding to the home area of a roaming-out subscriber This field cannot be left empty.
99	reserve	VARCHAR2[10]	This field is reserved. This field can be left empty.
100	Service_Type	VARCHAR2[5]	Service type. This field can be left empty.
101	ExchangeRate	NUMBER[10]	Exchange rate between the local currency and standard currency. This field can be left empty.
102	chargeable_unit1	NUMBER[10]	Rounding unit for the first type of service usage generated during charging. This field can be left empty.
103	chargeable_unit2	NUMBER[10]	Rounding unit for the second type of service usage generated during charging. This field can be left empty.
104	chargeable_unit3	NUMBER[10]	Rounding unit for the third type of service usage generated during charging. This field can be left empty.
105	reserve	VARCHAR	This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
		2[1]	This field can be left empty.
106	CALL_START_TIME_TIMEZONE	NUMBER[10]	Time zone of the visited area. The information is transparently transferred and recorded in CDRs, but it does not affect rating. This field can be left empty.
107	TAPFILELineNo	NUMBER[10]	Line number of a CDR in a TAPIN CDR file. The file header and tail are not counted as lines. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

3 CDR Files Generated in the OCG

About This Chapter

This topic describes the file storage directories, file name formats, CDR fields, and field sequences of different types of CDRs generated in the OCG.

3.1 Basic Information About OCG CDR Files

This topic describes basic information such as the file name formats and file storage directories of CDRs generated in the OCG.

3.1.1 CDR Storage Directories in OCG

CDR Storage Directories

The CDR files are stored in the following directories:

- Destination directory: **${ENIP_HOME}/record/w_vou/send**

  It is the destination directory for storing CDR files after the CDR files meet the switching conditions.
- Temporary directory: **${ENIP_HOME}/record/w_vou/buffer**

  It is the directory for storing temporary CDR files before the CDR files meet the switching conditions.
- Backup directory: **${ENIP_HOME}/record/w_vou/bak**

  It is the directory for backing up CDRs obtained from the destination directory. CDRs can be used to locate problems.

In the preceding directories, **${ENIP_HOME}** refers to the installation directory of the OCG. The directories are just an example.

NOTE

w_vou is the prefix of CDR file name.

 Copyright © Huawei Technologies Co., Ltd.

Set the directory for storing CDR files.

To set the directory for storing CDR files, you can perform the following operations: In the service view of the iCnfg, choose **Service Related Configuration** > **CDR Configuration** > **CDR Charging Data Configuration**. In the window that is displayed, set **Directory name**.

Set the number of CDR events and CDR event interval for triggering CDR file writing

To set the number of CDR events and CDR event interval for triggering CDR file writing, do as follows: In the service view of the iCnfg, choose **Service Related Configuration** > **CDR Configuration** > **CDR Basic Configuration**. In the window that is displayed, set **Number of triggering records for writing cdr file** (indicating the number of records for triggering CDR file writing) and **Interval for triggering writing cdr file (s)** (indicating the CDR event interval for triggering CDR file writing).

3.1.2 Process of Generating offline CDRs in the OCG

This topic describes the process of generating offline CDR files in the OCG.

Figure 3-1 shows the OCG offline CDR processing process.

Figure 3-1 OCG offline CDR processing process

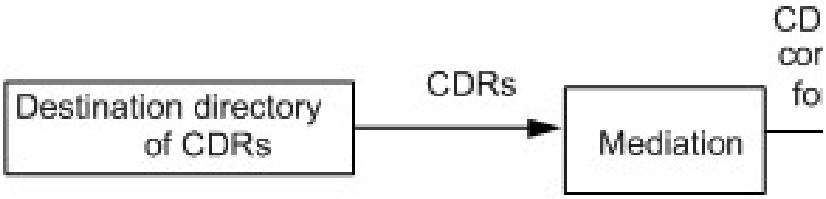

OCG offline CDRs are processed as follows:

1. The Mediation obtains CDRs periodically from the destination directory according to configurations, and then transfers them to the CBP.
2. The CBP generates a CDR after charging.
3. The Mediation preprocesses the CDR files and uploads them to the EDRDB system for CDR sorting, storage, accumulation, and collection.

3.1.3 File Name Format of OCG-Generated CDRs

In the Online Mediation service, CDRs generated by the service can be regarded as CDR logs. The OCG CDR file name is in the following format:

{CDR prefix}{xxxxx}.{YYYYMMDD}.{NEID}.{Index number}{CDR file name extension}

Table 3-1 describes fields in a OCG-generated CDR file name.

Table 3-1 Description of fields in an OCG-generated CDR file name

Field	Description
CDR prefix	Indicates the prefix of a CDR file name and refers to the CDR type. CDRs can be distinguished based on CDR file name prefixes.
xxxxx	*xxxxx* indicates five-digit charging node ID. The system prefixes zeros if the node ID is less than five digits. If this field is set to **0**, it can be omitted.
YYYYMMDD	Indicates the date when a CDR file is generated.
NEID	Indicates the SEE node ID that generates a CDR file. The serial number is a numeric string of five digits. The system prefixes zeros if the node ID is less than five digits. Whether the CDR file name contains the field is configurable.
Index number	Indicates the serial number of a CDR file in a day. The serial number is a string of six characters. Value range: 000000 to 999999.
CDR file name extension	Indicates the extension of a CDR file name. The extension is **.unl** by default.

Example of OCG CDRs file name

- w_abr10101.20180510.01001.000001.unl

  It indicates that the CDR with the serial number 000001, and charging node id 10101 in the Service generated the w_abr CDR file on May 10, 2018.
- w_rec10101.20150315.01001.000018.unl

  It indicates that the CDR with the serial number 000018, SEE node ID 01001, and charging node id 10101 in the Service generated the w_rec CDR file on May 15, 2015.
- w_vou10101.20150724.01001.000034.unl

  It indicates that the CDR with the serial number 000034, and charging node id 10101 in the Service generated the w_vou CDR file on July 24, 2015.

Related Configuration

- Set the time type in the CDR file name

  To set the time type in the CDR file name, you can perform the following operations: In the service view of the iCnfg, choose **Service Related Configuration** > **CDR Configuration** > **CDR Charging Data Configuration**. In the window that appears, set **Format of time in CDR file name**.
- Set whether CDR file name carries the SEE node ID

  On the iCnfg Service view, select **Generate NodeID in file name** after choosing **Service Related Configuration** > **CDR Configuration** > **CDR Charging Data Configuration**. You can configure whether CDR file name carries the node ID.

 Copyright © Huawei Technologies Co., Ltd.

3.1.4 Requirements on OCG-Generated CDR Files

OCG will generate a new record file, when the size, duration, and record count of current file matches this configuration value.

OCG will generate a new record file, when matching one of these three conditions:

- 1. The file size matches the configuration value of "Max. size of a CDR file".
- 2. The file generation matches the configuration value of "Max. duration of a CDR file".
- 3. The file records count matches the configuration value of "Max. record count of a CDR file".

Set the Max. size of a CDR file

To set the Max. size of a CDR file, you can perform the following operations: In the service view of the iCnfg, choose **Service Related Configuration** > **CDR Configuration** > **CDR Charging Data Configuration**. In the window that is displayed, set **Max. size of a CDR file**.

Set the Max. duration of a CDR file

To set the Max. duration of a CDR file, you can perform the following operations: In the service view of the iCnfg, choose **Service Related Configuration** > **CDR Configuration** > **CDR Charging Data Configuration**. In the window that is displayed, set **Max. duration of a CDR file**.

Set the Max. record count of a CDR file

To set the Max. record count of a CDR file, you can perform the following operations: In the service view of the iCnfg, choose **Service Related Configuration** > **CDR Configuration** > **CDR Charging Data Configuration**. In the window that is displayed, set **Max. record count of a CDR file**.

3.1.5 Configuring the Function of Automatically Deleting CDRs by the OCG

If the system does not automatically obtain CDRs, the OCG needs to automatically delete the CDRs to prevent the system memory from being occupied. This topic describes how to configure the function of automatically deleting CDRs by the OCG.

Procedure

Step 1 Log in to the iCnfg.

Step 2 Choose **Service Related Configuration** > **CDR Configuration** > **CDR Basic Configuration** and configure the table.

Parameter	Setting
Threshold time when report alarm	Threshold time of non-moved cdr files in **send** directory. Unit: Day. Value range: an integer ranging from 1 to 30. For example: 7.
Is auto backup	Indicates whether to back up the CDR file automatic. For example: backup.
Threshold time when backup	Threshold time of auto backup of non-moved cdr files in **send** directory. Unit: Day. Value range: an integer ranging from 1 to 30. For example: 3.

----End

3.2 OCG-Generated CDR Files

This topic describes the file name format, CDR fields, field sequence, and service scenarios of different types of CDRs generated in the OCG.

NOTE

Offline CDRs can be customized in the OCG. To customize an offline CDR, configure information such as the CDR generation component and CDR type under **NGOCG** > **Basic** > **CDR** > **CDR Type Info**, and then configure information such as output CDR fields under **NGOCG** > **Basic** > **CDR** > **CDR Output Field Control**.

Alternatively, you can configure the information in the **ocg_cdrtype** and **ocg_cdroutinfo** tables in the background.

3.2.1 w_abr CDR

When an error occurs during the interaction between the Routing and the CBP, w_abr CDR records the information if the system allows a subscriber to go on using the call service. The CBE rates and deducts fees based on the CDR after the CBE recovers.

Generation Scenario

In the MO, MT, or MF process, the Routing generates a w_abr CDR if the system allows a subscriber to go on using the call service when an error occurs during the interaction between the Routing and the CBP.

CDR File Name Format

{w_abr}.{YYYYMMDD}.{NEID}.{Index number}.unl

CDR Instance

Example of a w_abr CDR file name: w_abr.20130515.10002.000001.unl

91|1147732910|00861360000001|00861360000002|||20130620144700|0|00861360000002|00861360000002|0||0086133|0000000000000000||||||2|||0|460070360000012|20160818100227404 01116050020|86133|8|20160818100227|260|0|260|0|2001|0||||||-1|0|2|2|0|2|0|0|00861360000002||1|0||0|101|1|4|1|||||||

CDR File Format

Table 3-2 Format of w_abr CDR

SN	Field Name	Field Type	Description
1	ServiceKey	Integer	Indicates the service key. The options are as follows: • GSM network: The value of the field is **91**. • CDMA network: The value of the field is **13100**. • SIP network: The value of the field is **103**. • SINAP network: The value of the field is **104**. • INAPCS1+ network: The value of the field is **105**. Not null.
2	SubCosID	Integer/Char[20]	Indicates the main product of a subscriber. **NOTE** In CBS 5.5, the data type for this field is **Char[20]**. In other CBS versions, the data type for this field is **Integer**. Not null.
3	CallingPartyNumber	Char[32]	Indicates the calling number. **NOTE** The value of this parameter is the IDP original reported value. Can be null.
4	CalledPartyNumber	Char[32]	Indicates the called number. **NOTE** The value of this field is an original number reported by the IDP and is not converted. Can be null.
5	Calling-Party-NP	Char[16]	Indicates the number portability prefix of the calling number. It refers to the routing prefix of the

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			calling number after the calling party transfers from one network to another. Can be null.
6	Called-Party-NP	Char[16]	Indicates the number portability prefix of the called number. It refers to the routing prefix of the called number after the called party transfers from one network to another. Can be null.
7	SSP-Time	Char[14]	Indicates the time reported by the SSP. Format: YYYYMMDDhhmmss **NOTE** This field value in all versions is GMT time. In SIP and CDMA network, the field can be null. Can be null.
8	MF-Indicator	Integer	Indicates the indicator of called forwarding. The options are as follows: • 0: Not forward • 1: Forward Not null.
9	Real-Called-Number	Char[32]	Indicates the real called number. Format: • CC+MSISDN • CC+AREACODE+PSTN • International prefix+CC+MSISDN **NOTE** In CBS5.5, the field can be empty. In other CBS versions, the field can not be empty. Can be null.
10	Connect-Called-Number	Char[32]	Indicates the called number for connection. For example, when an IP address is preset, the value of **Connect-Called-Number** is in the format *IP prefix + called number*.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			Not null.
11	Charge-Flow-Type	Integer	Indicates the charge process type. The options are as follows: • 0: The calling process • 1: The called process • 3: The forwarding process Not null.
12	Calling-Partys-Category	Char[]	Indicates the category of the calling party. Example: a carrier, a public call office, or a user. The value of the field **Calling-Partys-Category** depends on the value of the variable **CAP_InitialDP_callingPartysCategory**. Can be null.
13	Calling-Vlr-Number	Char[32]	Indicates the VLR number of the visitor location of the calling party. The field can be null in the called process and forwarding process. In the MO, MF flow, when the site uses **location number** for analysis, this parameter is recorded as **location number**.
14	CallingCellID	Char[32]	Indicates the cell ID of the calling party. The field can be null in the called process and forwarding process. **NOTE** Choose **NG OCG** > **Basic** > **System Configuration** > **System Control**. Click to display the **Settings** page. Click next to **System Flag** and view the value of **Record Subscribe Location Info**. • If **Record Subscribe Location Info** is set to **Yes**, this field records location information. • If **Record Subscribe Location Info** is set to **No**, this field is recorded as a string of asterisks (*).

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
15	Called-Vlr-Number	Char[32]	Indicates the VLR number of the visitor location of the called party. The field can be null in the calling process and forwarding process. Can be null. In the MT flow, when the site uses **location number** for analysis, this parameter is recorded as **location number**.
16	CalledCellID	Char[32]	Indicates the cell ID of the called party. The field can be null in the calling process and forwarding process. **NOTE** Choose **NG OCG** > **Basic System Configuration** > **System Control**. Click to display the **Settings** page. Click next to **System Flag** and view the value of **Record Subscribe Location Info**. • If **Record Subscribe Location Info** is set to **Yes**, this field records location information. • If **Record Subscribe Location Info** is set to **No**, this field is recorded as a string of asterisks (*).
17	Original-Called-Party-Id	Char[32]	Indicates the original called number. • In the forwarding process, the MSC reports the original called number. • In the calling process, the MSC does not report the original called number. Therefore, the field is null. Can be null.
18	Additional-Calling-Party-Number	Char[64]	Indicates the additional calling number. Can be null.
19	Bearer-Capability	Char[32]	Indicates the bearer capacity of subscriber connection. For example, 8000080006. • If the octet3 (characters 5 and 6) is not 08, the call type is

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			Voice. • If Octect3 is 8 and Octect5 (characters 9 and 10) is 6, the call type is Video. • The other type is Data. Can be null.
20	EventType-BCSM	Integer	Indicates the event report. • 2: MO/MF • 12: MT • 101: Initial • 102: Update • 103: Termination • 104: Direct debit Not null.
21	Redirecting-Party-Id	Char[32]	Indicates the redirection number in the forwarding process. It is the calling number in the forwarding process. • In the forwarding process, the MSC reports the redirection number. • In the calling process, the MSC does not report the redirection number. Therefore, the field is null. Can be null.
22	Redirection-Information	Char[36]	Indicates the redirection information. It is used in the forwarding process. Can be null.
23	Redirection-Reason	Integer	Indicates the forwarding reason. The options are as follows: CDMA: • 0: Not forward • 1: Forward unconditionally • 2: Forward on the busy mobile • 3: Forward on no reply • 4: Other • 22: Forward unreachable GSM: • 0: Not forward • 1: Forward on the busy mobile

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• 2: Forward on no reply • 3: Forward unconditionally • 4: Other • 6: Forward unreachable Not null.
24	UE-IMSI	Char[64]	Indicates the IMSI of the calling party. Can be null.
25	CallReferenceNumber	Char[128]	Indicates the reference number of a call. It is used to uniquely identify a call. The options are as follows: • For the CDMA network, obtain the value of **BillID** in the ORREQ message for this field. • For the GSM network, obtain the value of **CallReferenceNumber** that is reported in the IDP signaling for this field. • For the NGN and IMS networks, obtain the value of **Call-ID** that is reported in the SIP signaling for this field. • If the system cannot obtain the required information (excluding the preceding conditions), the value of this field is in the format *YYYYMMDDhhmmss* (14 digits) + *NE ID* (6-8 digits) + *hostid* + *container ID* + *Index* (4 digits). **NOTE** If the length of the automation number is less than four digits, prefix 0 to the automation number. If the length of the automation number is more than four digits, obtain the last four digits from the automation number. In the UK VDF voice process, this field records the value of **Chargeable-Event-Id**. Not null.
26	MSC-Address	Char[32]	Indicates the MSC address.

SN	Field Name	Field Type	Description
			Can be null.
27	Time-Zone	Integer	Indicates the time zone of the area where a subscriber is. Not null.
28	CallBeginTime	Char[14]	Indicates the time of the calling beginning. Format: YYYYMMDDhhmmss **NOTE** This field value is system local time.
29	CallDuration	Integer	Indicates the call duration. Unit: second. **NOTE** If the system supports charging by 100 milliseconds, the value of this field is in 100 milliseconds. Not null.
30	SuccessACDuration	Integer	Indicates the duration of which the fee has been deducted. Unit: second. Not null.
31	FailACDuration	Integer	Indicates the AC duration during which an error occurs. Unit: second. Not null.
32	VPMNCallFlag	Integer	Indicates the flag of calls in a community group. Not null.
33	CBEResultCode	Integer	Indicates that registers the result code return from CBE. The Diameter protocol provides the following types of error codes. The error type is judged based on the first digit of an error code. • 1xxx: Informational • 2xxx: Success • 3xxx: Protocol errors • 4xxx: Transient failure • 5xxx: Permanent failure An error type that cannot be identified, that is, the first digit of an error type is not in the preceding definition, is regarded

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			as a permanent failure. OM gets the resultcode from CBPAdapter. Not Null.
34	DDS-Discount	Integer	Indicates the discount value of the MTN zone service. If there is no discount, enter **0**. Not Null.
35	DiameterSessionID	Char[128]	Format: <DiameterIdentity>;<high 32 bits>;<low 32 bits>[;<optional value>] • <DiameterIdentity>: The value of this field is the same as the value of **Origin-Host**. • <high>: Indicates the current system time. • <low>: The value increases cyclically. The initial value is **0**. When the system is restarted, the value is set to **0**. • <optional value="">: Reserved. Separate each two fields with a semicolon (;). Example: SCP001.huawei.com;1876543210;523 Can be null.
36	NPPrefix	Char[10]	Indicates the NP of called number. It is also called RN prefix. Can be null.
37	CalledHomeNetWork	Char[10]	Indicates the home area network code of the called party after NP. Can be null.
38	CallingPartyLRN	Char[20]	Indicates the location routing number (LRN) of the calling party. This field is recorded in the MT process. Can be null.
39	CalledPartyLRN	Char[20]	Indicates the location routing number (LRN) of the called party. This field is recorded in the MO process. Can be null.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
40	OpposeTenantID	Integer	Indicates the home tenant ID of the peer number. Not Null.
41	Service-Free-Indicator	Integer4	Free service flag. • 0: Normal • 1: Free • 2: DirectConnect Not Null.
42	NumFormatOfCalling	Integer4	Calling number type. • 0: Unknown • 1: National • 2: International Not Null.
43	NumFormatOfCalled	Integer4	Called number type. • 0: Unknown • 1: National • 2: International Not Null.
44	NumFormatOfRoute	Integer4	Route number type. • 0: Unknown • 1: National • 2: International Not Null.
45	NumFormatOfOVLR	Integer4	Calling number type of VLR. • 0: Unknown • 1: National • 2: International Not Null.
46	NumFormatOfTVLR	Integer4	Called number type of VLR. • 0: Unknown • 1: National • 2: International Not Null.
47	NumFormatOfOCalled	Integer4	Original called number type of VLR. • 0: Unknown • 1: National • 2: International

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			Not Null.
48	CalledPartyBCDNu	Char[32]	Original number from IDP. **NOTE** Can be null while IDP contains this parameter in case of charged party is roaming.
49	OriginalRedirectPartyId	Char[32]	Original number from IDP for MF, otherwise, put null. Can be null.
50	Service-Code-Type	Integer4	Service code type. • 0: BearerService • 1: Teleservice Not Null.
51	Service-Code	Integer4	Service code. Not Null.
52	OFFLINEFILENAME	Char[32]	Reserved. Can be null.
53	OFFLINEFILELineNo	Integer4	Reserved. Not Null.
54	TenantID	Integer4	Home BE ID of the charged party. Not Null.
55	Brand	Integer/Char[20]	Brand of the charged party. **NOTE** In CBS 5.5, the data type for this field is **Char[20]**. In other CBS versions, the data type for this field is **Integer**. Not Null.
56	CallType	Integer4	Call type. The options are as follows: • 1: international toll call • 2: toll call between charging areas • 3: toll call within a charging area • 4: local call • 7: call made to the home country during international roaming • 8: call made to the roam-in country during international roaming

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• 9: call made to other countries during international roaming Not Null.
57	OnNetFlag	Char[1]	• 0: inter-network • 1: intra-network Not null.
58	NonChgMainofferId	Char[]	Primary offering ID of the non-charged party. **NOTE** If the primary offering ID fails to be obtained, this field is left empty. Can be null.
59	Subscription-Id-Data	Char[255]	Charged number. Set this field to the value of **subscriber-id-data** in the group where **subscriber-id-type** is set to **0**. Can be null.
60	Calling-locationnumber	VARCHAR2[255]	Calling location number. Can be null.
61	called-locationnumber	VARCHAR2[12]	Called location number. Can be null.
62	Reserved.	VARCHAR2[12]	This field is left empty.
63	IMEI	VARCHAR2[15]	IMEI of a phone. The value is reported by an external system. If no value is reported, this parameter can be left empty. This parameter indicates the IMEI of the calling party's device in the MO process, the IMEI of the call forwarding party's device in the MF process, and IMEI of the called party's device in the MT process. **NOTE** This parameter is reported only in the CAMEL4 specification. In the CAP4 definition, CDRs are reported and recorded only in the MO process. Can be null.

 Copyright © Huawei Technologies Co., Ltd.

3.2.2 w_smo CDR

A w_smo CDR is generated in the following case: In the CBS service, when a subscriber succeeds in sending SMS Messages, but the CBP fails to deduct fees due to system error, the Routing generates a w_smo CDR. The CBE rates and deducts fees based on the CDR after the CBE recovers.

Generation Scenario

In the Online Mediation service, when a subscriber sends a short message successfully, but the CBP fails to deduct fees due to system errors, the Routing generates a w_smo CDR. The CBP rates and deducts fees based on the CDR after the CBP recovers. The fields contained in the w_smo CDR are the same as the fields contained in the DCC interface between the Routing and the CBP. If some field values cannot be obtained, the fields are set to blank.

CDR File Name Format

{w_smo}.{YYYYMMDD}.{NEID}.{Index number}.unl

CDR Instance

Example of a w_smo CDR file name: w_smo.20131225.10002.000002.unl

3|1|27829129|||27829108137||27829804793|27712829118|27829804793|1|0|||||0|0|20160528070126||||0||||||||||||27829804793||||0|0|2|1|0|0|0712829118||0|101|4|4|1|||||||||

CDR File Format

Table 3-3 Format of w_smo CDR

SN	Field Name	Field Type	Description
1	SmsType	String	Indicates the type of a SMS Message. The options are as follows: • 1: SMPP+, MAP3 SMS Message • 3: CAP3, CAP2, CAP1 SMS Message • 101: Diameter direct debit Can be null.
2	MessageType	Char[1]	Indicates the message type. The options are as follows: • 1: A fee deduction request message • 2: A confirmation message Can be null.
3	SMSCAddress	Char[20]	Indicates the SMSC address. Can be null.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
4	SMID	Char[64]	Indicates the short message ID. **NOTE** Currently, the length of an SMS message cannot exceed 24 characters. In the UK VDF DCC-based SMS process, this field records **charge-event-id** and the length can exceed 24 characters. Can be null.
5	SMLength	Char[]	Indicates the length of the short message, which is used for charging traffic. Can be null.
6	MoMSCAddr	Char[20]	Indicates the MSC address of the roaming location of the sender. Can be null. In the SMS interface at Turkey Vodafone, the value maps the value of the **Originating-SCCP-Address** AVP. **NOTE** The field contains the country code but does not contain the international prefix.
7	MtMSCAddr	Char[20]	Indicates the MSC address of the roaming location of the receiver. Can be null. **NOTE** The field contains the country code but does not contain the international prefix.
8	SourceAddr	Char[64]	Indicates the sender number. The number is normalized in the OCG and it contains the country code. Not null.
9	DestAddr	Char[64]	Indicates the receiver number. Not null. The **NG OCG > Basic > BE Control > BE System Control > System Flag > Called Number Format Sent to Rating in CAP3 SMS Flow** field in CBS GUI determines the number format normalized by the OCG. The values of this field are as follows: 0: Country code + MSISDN; 1: International prefix 00 + Country code + MSISDN

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
10	FeeAddr	Char[64]	Indicates the charged number. The number is a normalized number containing the country code. Can be null.
11	FeeFlag	Integer	Indicates the charge flag. The options are as follows: • 0: To charge by using the original method. The value **0** indicates an exception. • 1: To charge the calling number. • 2: To charge the called number. • 3: To charge the charge number. Not null.
12	FeeType	Integer	Indicates the fee deduction type. The options are as follows: • 0: To charge in the default mode. **NOTE** For the common point-to-point short messages, the fee is configured on the CBS. For other short messages, fees must be charged based on the charging policy sent by the SMSC. • 1: To charge by the number of short messages by the SP. • 2: To charge by months (deducting fees) by the SP. • 3: To charge by months (checking). • 4: To charge by upper limit based on the number of short messages. • 5: To charge the fee of monthly SMS package with the limited number of short messages (deducting fees). • 6: To charge the fee of monthly SMS package with the limited number of short messages (checking). Not null.
13	FeeItdMsgNum	Integer	Reserved. Not null. The default value is **0**.
14	FeeSingle	Char[]	Indicates the charge rate of a single short message. Can be null.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
15	FeeFixed	Char[]	Indicates the charge rate of each short message in a monthly SMS package. If the number of short messages exceeds the limited number, the charge rate of the excess short messages is specified by the **FeeSingle** field. Can be null
16	MessagePID	Char[]	Indicates the message PID such as a picture and voice. Can be null.
17	StatusReportRequest	Integer	Whether a status report is needed after a request message is sent. The options are as follows: • 0: No • 1: Yes Not null.
18	OriginalNetType	Integer	Indicates the type of the source network. The options are as follows: • 0: GSM • 1: CDMA • 2: TDMA • 3: SMPP Not null.
19	SMSReceiveTime	Char[14]	Indicates the time when a short message is received. The value is in the format *YYYYMMDDHHMMSS*. **NOTE** • In baseline version, the field value is system local time. • In the UK and SFR versions: For the CAP-based access, the local system time is converted to the UTC time, and this field value is the UTC time (GMT = 0). For the DCC-based access, the **Event-Timestamp** in UTC format in DCC messages is converted to time in the format YYYYMMDDHHMMSS, and this field value is in the format YYYYMMDDHHMMSS. Not null.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
20	CallingService	Char[16]	Indicates the calling service, an array of 16 bytes with each byte representing a type of service. If the value of a byte is **0**, it indicates no service. If the value of a byte is **1**, it indicates that the current message contains the service. The format is as follows: • CallingServcie[0]: Short message signature • CallingServcie[1]: Enhanced return notification of MO short message • CallingServcie[2]: Power-on notification Can be null.
21	CalledService	Char[16]	Indicates the called service, an array of 16 bytes with each byte representing a type of services. If the value of a byte is **0**, it indicates no service. If the value of a byte is **1**, it indicates that the current message contains the service. The options are as follows: • CallingServcie[0]: Short message transfer • CallingServcie[1]: Automatic reply Can be null.
22	OriginalMsgID	Char[64]	Indicates the ID of the original SMS Message that is associated with the current message. Can be null.
23	SMDSendResult	Char[]	Whether sending an intra-network short message succeeds or fails and how to dispose. The options are as follows: • 0: Confirm the successful sending of a message • 1: Refund the fee if sending a message fails Not null.
24	MsgID	Char[20]	Indicates the message ID that the gateway generates.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			The field **MsgID** is valid to inter-network short messages and Monternet short messages. For intra-network short messages, the value is blank. Can be null.
25	GWID	Char[10]	Indicates the ID of the gateway that sends the message. The field **GWID** is valid to inter-network short messages and Monternet short messages. For intra-network short messages, the value is blank. Can be null.
26	MsgSeq	Char[10]	Indicates the short message sequence number generated by the SMSC. The field **MsgSeq** is valid to inter-network short messages and Monternet short messages. For intra-network short messages, the value is blank. Can be null.
27	SPID	Char[10]	Indicates the ID of service provider. The field **SPID** is valid to inter-network short messages and Monternet short messages. For intra-network short messages, the value is blank. Can be null.
28	ServiceCode	Char[10]	Indicates the code of the service type. The field **ServiceCode** is valid to inter-network short messages and Monternet short messages. For intra-network short messages, the value is blank. Can be null.
29	SourceGWID	Char[10]	Indicates the ID of the gateway that forwards short messages. The field **SourceGWID** is valid to inter-network short messages and Monternet short messages. For intra-network short messages, the value is blank.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			Can be null.
30	PriorityFlag	Char[]	Indicates the priority level of a short message. A small value indicates a high priority. The field **PriorityFlag** is valid to inter-network short messages and Monternet short messages. For intra-network short messages, the value is blank. Can be null.
31	ChargingRate	Char[]	Indicates the charge rate. The field **ChargingRate** is valid to inter-network short messages and Monternet short messages. For intra-network short messages, the value is blank. Can be null.
32	ChargingType	Char[]	Indicates the charging type, used in Monternet short messages and inter-network short messages. The options are as follows: • 0: No charge. Only the channel fee of the SP is deducted. • 1: free of charge. • 2: To charge by the number of SMS Messages. • 3: To charge by months. • 4: To charge by upper limit. For inter-network short messages, the value is **2**. For intra-network short messages, the value is blank. This field is reserved in the CBS and is left blank.
33	CDRType	Char[]	Indicates the CDR type, used in Monternet short messages and inter-network short messages. For inter-network short messages, the options are as follows: • 11: The MO CDR that an inter-network short message interconnects with a short message of China Unicom. • 12: The MT CDR that an

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			inter-network short message interconnects with a short message of China Unicom For inter-network short messages, the value is **11**. For Monternet short messages, the options are as follows: • 1: An MO CDR • 2: An MT CDR • 3: Monthly SMS control For intra-network short messages, the value is blank. Can be null.
34	Discount	Char[]	Indicates the discount and unit is percent. The value **100** indicates no discount. The field **Discount** is valid to inter-network short messages and Monternet SMS Messages. For intra-network short messages, the value is blank. Can be null.
35	GiftResult	Char[]	Indicates the presentation result. The field **GiftResult** indicates the result of sending an inter-network short message or Monternet short message. For Monternet SMS Messages, the options are as follows: • 0: Failure • 1: Success For intra-network short messages, the value is blank. Can be null.
36	Subscription-Id-Data	Char[64]	Indicates the end subscriber number. The number is a normalized number containing the country code. Not null.
37	DiameterSession ID	Char[128]	Format: <DiameterIdentity>;<high>;<low>[;<optional value="">]</optional></low></high></DiameterIdentity> • <DiameterIdentity>: The value of

SN	Field Name	Field Type	Description
			this field is the same as the value of Origin-Host. • <high>: Indicates the current system time. • <low>: The value increases cyclically. The initial value is **0**. When the system is restarted, the value is set to **0**. • <optional value="">: Reserved. Separate each two fields with a semicolon (;). Example: SCP001.huawei.com;1876543210;523 Can be null.
38	NPPrefix	Char[10]	Indicates the NP of called number. It is also called RN prefix. In the SMS interface at Turkey Vodafone, the value maps the value of the **3GPP-IMSI-MCC-MNC** AVP. Can be null.
39	CalledHomeNetWork	Char[10]	Indicates the home area network code of the called party after NP. Can be null.
40	OpposeTenantID	Integer	Indicates the home tenant ID of the peer number. Not null.
41	DCS	Integer	Indicates the mode for encoding the SMS messages to be sent. The options are as follows: • -1: The encoding modes do not need to be differentiated. • 0: 7 bit (English) • 8: UCS2 (Farsi/Other) • 4: Binary code Not null.
42	NumFormatOfCalling	Integer4	Calling number type. • 0: Unknown • 1: National • 2: International This field corresponds to the format of **SourceAddr**. The format is

SN	Field Name	Field Type	Description
			normalized by the OCG. Therefore, this field has the fixed value of **2**. Not null.
43	NumFormatOfCalled	Integer4	Called number type. • 0: Unknown • 1: National • 2: International This field corresponds to the format of **CalledPartyBCDNu**, which indicates the original target number reported by the MSC. Not null.
44	NumFormatOfOMSC	Integer4	Calling number type of roaming MSC. • 0: Unknown • 1: National • 2: International Not null.
45	NumFormatOfTMSC	Integer4	Called number type of roaming MSC. • 0: Unknown • 1: National • 2: International Not null.
46	CalledPartyBCDNu	Char[32]	Original number. The value is the original target number reported by the MSC. Can be null.
47	OFFLINEFILENAME	Char[32]	Reserved. The field is null.
48	OFFLINEFILELineNo	Integer4	Reserved. **NOTE** The type of the field is integer, so the default value is **0**. Not null.
49	TenantID	Integer	Home BE ID of the charged party. Not null.
50	Brand	Integer/Char[20]	Brand of the charged party.
51	CallType	Integer	SMS type. The options are as follows:

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• 1: national SMS message • 2: international toll SMS message • 3: international roaming SMS message Not null.
52	OnNetFlag	Char[1]	Network flag. • 0: inter-network • 1: intra-network Not null.
53	Reserved	VARCHAR2[12]	Reserved. Can be null.
54	Reserved	VARCHAR2[1024]	Reserved. Can be null.
55	BYPASS_RESULT_CODE	VARCHAR2[10]	Error code for bypass. Can be null.
56	Calling-Vlr-Number	VARCHAR2[20]	Indicates the VLR number of the visitor location of the calling party. Format: CC + NDC + LSP Can be null.
57	calling-Cellid	VARCHAR2[36]	Indicates the cell ID of the calling party. Can be null.
58	Called-Vlr-Number	VARCHAR2[20]	Indicates the VLR number of the visitor location of the called party. Format: CC + NDC + LSP Can be null.
59	called-Cellid	VARCHAR2[36]	Indicates the cell ID of the called party. Can be null.
60	IMEI	Char[32]	Mobile phone serial number. This field is reported by the external system, it can be null if not reported. This field is reported only in the CAP4 flow.

 Copyright © Huawei Technologies Co., Ltd.

4 Charging Output CDRs

About This Chapter

This topic describes the file storage directories, file name formats, CDR fields, and field sequences of different types of charging output CDRs.

4.1 Basic Information About Charging Output CDRs

This topic describes basic information such as the file name formats and file storage directories of charging output CDRs.

4.2 Charging Output CDR Files

This topic describes charging output CDR files consisting of fixed-length arrays. In these CDR files, field lengths are fixed and the number of complex fields remains unchanged in different service scenarios. This type of CDR file is provided only for the report system.

4.3 Prepaid Transaction CDR Files

This topic describes the CDR file template provided in the baseline version for management flow services. Each site can customize CDR files based on the template.

4.4 BM CDR Files

This topic describes the CDR file template provided in the baseline version for BM. Each site can customize CDR files based on the template.

4.5 Daily Dump Files

This section describes the dump files contents for loan.

4.1 Basic Information About Charging Output CDRs

This topic describes basic information such as the file name formats and file storage directories of charging output CDRs.

4.1.1 Charging Output CDR Storage Directories

This topic describes the directories for storing CDR files to be imported on the application node CDR2DB in the EDRDB and CDR files generated after CDR sorting. CDR sorting

 Copyright © Huawei Technologies Co., Ltd.

refers to a process of converting original CDR files generated by the CBP to the format required by an external system based on the service requirements.

Directory for Storing CDR Files to Be Imported

The Mediation collects CDR files generated by the CBP and sends them to the CDR2DB in the EDRDB. You can configure the directory for storing CDR files to be imported by the CDR2DB on the **Invoicing** > **Bill Run Rule** > **Input File Management** page. For example, set the directory to ***$CBP_CDRPATH*/dispatchin/in**.

Directories for Storing CDR Files Generated After Sorting

- You can configure the directories for storing CDR files generated after successful sorting on the CDR2DB on the **Invoicing** > **Bill Run Rule** > **Output File Management** page. Example:
  - Directory for storing CDR files generated after successful sorting for prepaid subscribers: ***$CBP_CDRPATH*/output/pps/normal**
  - Directory for storing CDR files generated after successful sorting for postpaid subscribers: ***$CBP_CDRPATH*/output/pos/normal**
- You can configure the directories for storing error CDR files generated after sorting on the CDR2DB on the **Invoicing** > **Bill Run Rule** > **Output File Management** page. Example:
  - Directory for storing error CDR files generated after sorting for prepaid subscribers: ***$CBP_CDRPATH*/output/pps/fail**
  - Directory for storing error CDR files generated after sorting for postpaid subscribers: ***$CBP_CDRPATH*/output/pos/fail**

NOTE

If CDR files that have been read are sent to the directory for storing CDR files to be sorted, they are not processed again and are moved to the ignored CDR file directory. You can configure the directory for storing CDR files that can be ignored on the **Invoicing** > **Bill Run Rule** > **Input File Management** page, for example, ***$CBP_CDRPATH*/dispatchin/ignore**.

Directory for Backing Up Input CDR Files for Sorting

You can configure the directory for backing up input CDR files for sorting on the CDR2DB on the **Invoicing** > **Bill Run Rule** > **Input File Management** page. For example, set the directory to **$CBP_CDRPATH/dispatchin/bak**.

4.1.2 Process of Generating Charging Output CDRs

The Mediation periodically obtains CDR files from the CBP and uses SFTP to send them to the application node CDR2DB in the EDRDB for importing and sorting.

The detailed process is described as follows:

1. The Mediation periodically collects CDR files from the CBP and uses SFTP to send them to the directory for storing CDR files to be imported on the application node CDR2DB in the EDRDB. The directory is ***$CBP_CDRPATH*/dispatchin/in**.
2. The CDR2DB sorts the CDR files as follows:
   a. The TSM invokes the scheduled task for sorting CDRs. The controller Cdr2DBAdapter periodically scans **$CBP_CDRPATH/dispatchin/in**. When any CDR files are found, the CDR2DB continues the process.

b. The sorting service invokes the BOExchange to execute the TXT2BO conversion rule and convert the CDR files to BOs.

c. The BOExchange sorts and converts the source BOs to target BOs.

d. The BOExchange executes the BO2TXT rule to convert the CDR BOs to CDR files and saves the CDRs generated after successful sorting to **$CBP_CDRPATH/dispatchout/out**.

4.1.3 Content Format of a Charging Output CDR File

This topic describes the content format and recording rules of a charging output CDR file.

- A charging output CDR file is stored as a text file.
- CDR fields are separated by vertical bars (|). If a field is empty, no value exists between two consecutive vertical bars, for example, ||.
- To ensure the CDR parsing success, the system escapes some special characters in the CDR file. The escaped special characters are described as follows:
  - **\0x1d**: carriage return (\r)
  - **\0x1e**: line feed (\n)
  - \|: vertical bar (|)
  - \\: backslash (\)
  - \{: left brace ({)
  - \}: right brace (})

4.1.4 File Name Format of Charging Output CDRs

This topic describes the file name format of sorted charging output CDRs.

Description

Charging output CDR files are named in the format **{File Name Prefix}+{File Name Pattern}+{File Name Suffix}**. You can configure the file names using **File Name Prefix**, **File Name Pattern**, and **File Name Postfix** on the **Invoicing** > **Bill Run Rule** > **Output File Management** page.

If **File Name Pattern** is set to ***CDR type abbreviation*_$<DATE8>_$<NODEID>_$<BEID>_$<SNO6>**, the CDR file is named in the following format: {File Name Prefix}+{CDR type abbreviation}+{YYYYMMDD}+{_}+{NODEID}+{_}+{BEID}+{_}+{Six-digit sequence number}+{File Name Suffix}.

Table 4-1 describes the fields in the file name format for charging output CDRs.

Table 4-1 Fields in the file name format for charging output CDRs

Field	Description
File Name Prefix	Prefix of the CDR file name, for example, **rec_**.
SNO6	Six-digit sequence number assigned to a CDR file on a certain day.
SNO3	Three-digit sequence number assigned to a CDR file on a certain day.

Field	Description
DATE6	Month in which a CDR file is generated, in the format *YYYYMM*.
DATE8	Date on which a CDR file is generated, in the format *YYYYMMDD*.
TIME6	CDR file generation time, in the format *HHMMSS*.
TIMEE	CDR file generation time, in the format *YYYYMMDDHHMMSS*.
_	Underscore.
NODEID	Data node to which the charged object belongs.
CPID	Customer partition ID.
SRCNAME	Name of the source CDR file corresponding to the charging output CDR file.
BEID	BE ID.
File Name Suffix	Suffix of the CDR file name, for example, **.unl** or **.add**.

4.1.5 Charging Output CDR Types

This topic describes the types of sorted charging output CDRs and the CDR generation scenarios.

Table 4-2 lists the charging output CDR types.

Table 4-2 Charging output CDR types

CDR Type	CDR Generation Scenario	Default CDR File Name
Voice CDR	The voice CDR records rating and charging information generated by the charging module in a voice call process, in addition to service scenario information reported by the call control component.	cbs_cdr_voice_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
SMS CDR	The SMS CDR records rating and charging information generated by the charging module in an SMS service process, in addition to service scenario information reported by an external NE.	cbs_cdr_sms_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
MMS CDR	The MMS CDR records	cbs_cdr_mms_YYYYMMD

CDR Type	CDR Generation Scenario	Default CDR File Name
	rating and charging information generated by the charging module in an MMS service process, in addition to service scenario information reported by an external NE.	D_$<NodeID>_$<BEID>_$<SNO6>.add
GPRS CDR	The GPRS CDR records rating and charging information generated by the charging module in a GPRS service process, in addition to service scenario information reported by an external NE.	cbs_cdr_data_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
Recurring charging CDR	The recurring charging CDR records recurring charges, including the rental, package fee, and subsequent installment rebates.	cbs_cdr_mon_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
Management CDR	The management CDR records one-off fees deducted in the management flow.	cbs_cdr_cm_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
Content CDR	The content CDR records content-based charging information (rated by the CBS or an external system) and one-off fees reported by external systems.	cbs_cdr_com_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
CLR CDR	The CLR CDR is generated during resource clearance for deregistered subscribers.	cbs_cdr_clr_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
Activation CDR	The activation CDR is generated when a prepaid subscriber is activated the first time.	cbs_cdr_first_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
Recharge CDR	The recharge CDR records the cash or voucher recharge information such as the information about the voucher, and change of the validity period and account after the recharge. The information about the rewards that are obtained immediately after the	cbs_cdr_vou_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add

 Copyright © Huawei Technologies Co., Ltd.

CDR Type	CDR Generation Scenario	Default CDR File Name
	recharge is recorded in the recharge CDR. Other cycles of the installment rebate are recorded in the periodic fee CDRs.	
Transfer CDR	The transfer CDR is generated upon transfer transactions.	cbs_cdr_transfer_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
Adjustment CDR	The adjustment CDR is generated upon adjustment transactions.	cbs_cdr_adj_YYYYMMDD_$<NodeID>_$<BEID>_$<SNO6>.add
Switch Primary Offering CDR	Switch Primary Offering CDR is generated when primary offering is switched.	SwitchPO_$<BEID>_YYYYMMDDHHMMSS_$<SNO6>.unl
Loan CDR	The loan CDR records the information about the loan information of a subscriber.	cbs_cdr_loan_$<AppNodeID>_$<DataNodeID>_$<BEID>_YYYYMMDDHHMMSS_$<SNO5>.add

4.2 Charging Output CDR Files

This topic describes charging output CDR files consisting of fixed-length arrays. In these CDR files, field lengths are fixed and the number of complex fields remains unchanged in different service scenarios. This type of CDR file is provided only for the report system.

4.2.1 Common Fields in a Charging Output CDR File

This topic describes common fields in sorted charging output CDRs of various services in the baseline version. The number and meanings of these CDR fields are almost fixed. Fields that sites can expand are marked in this topic.

The last field **CHARGE_SERVICE_INFO** in charging output CDR files is provided for sites to expand. Sites can expand fields of a specific number for different services. The expanded fields can be added only to the **CHARGE_SERVICE_INFO** field. Generally, each CDR file has only one group of **CHARGE_SERVICE_INFO**. In baseline CDR files, basic extended fields are provided for **CHARGE_SERVICE_INFO** if services need to be differentiated. For details, see the 4.2.2 Extended Charging Service Information.

Table 4-3 describes common fields in a charging output CDR file.

 Copyright © Huawei Technologies Co., Ltd.

CDR File Format

Table 4-3 Common fields in a charging output CDR file

SN	Field Name	Field Type	Description	Field Category
1	CDR_ID	NUMBER[20]	CDR ID. The ID is automatically generated by the sequencer. This field cannot be left empty.	The first 32 fields record basic information in CDR files. The length of these fields is fixed. The 24th, 25th, and 32nd fields can be customized based on the site requirements. Other fields are inextensible.
2	CDR_SUB_ID	NUMBER[20]	ID of a sub CDR generated after CDR splitting. If a CDR is not split, the field is set to **0**. If a CDR is split, the sub CDRs are sequentially identified by numbers 1, 2, and so on. The default value is **0**. This field cannot be left empty.	
3	CDR_TYPE	VARCHAR2[1]	CDR type. The options are as follows: • **N**: normal CDR • **E**: error CDR • **R**: recycling CDR This field cannot be left empty.	
4	SPLIT_CDR_REASON	VARCHAR2[1]	Reason to split a CDR. The options are as follows: • **N**: A CDR is not split. This is the default value. • **L**: The call duration reaches the CDR splitting threshold. The CDR will be split into several CDRs with different CDR IDs. • **B**: The current call straddles two bill cycles. The CDR will be split into two CDRs with different CDR IDs. • **D**: The current call straddles two days. The CDR is split into two independent CDR IDs. • **A**: The number of AC messages reaches the threshold. • **V**: The traffic usage reaches the threshold, in bytes. This field cannot be left empty.	
5	CDR_BATCH_ID	NUMBER[20]	Batch ID of a CDR. For offline charging, set the field to	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			the offline charging task ID. For online charging, set the field in the *YYYYMMDDHHmm* format. The default value is **0**. This field cannot be left empty.	
6	SRC_REC_LINE_NO	NUMBER[10]	Original record line number. Set this field to **0** for online charging or the CDR line number for offline charging. This field cannot be left empty.	
7	SRC_CDR_ID	NUMBER[20]	Original ID of a CDR to be rerated. The default value is **0**. This field cannot be left empty.	
8	SRC_CDR_NO	NUMBER[20]	Sequence number of the original CDR. The value starts from **0** and the default value is **0**, indicating that the CDR is not split. If the CDR is split into sub CDRs with different CDR IDs, the field is set to the **CDR_ID** value of the original CDR, indicating that the split sub CDRs belong to the same session. This field cannot be left empty. This field is reserved.	
9	STATUS	VARCHAR2[1]	CDR status. The options are as follows: • **A**: valid • **D**: invalid, reserved This field has a fixed value of **A**. This field cannot be left empty.	
10	RE_RATING_TIMES	NUMBER[3]	Number of times that a CDR is rerated. If a CDR is not rerated, set the field to **0**. This field cannot be left empty.	
11	CREATE_DATE	DATE[14]	UTC time in the system when a CDR is created. This field cannot be left empty.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
12	START_DATE	DATE[14]	UTC time when a service starts. This field cannot be left empty.	
13	END_DATE	DATE[14]	UTC time when a service ends. This field cannot be left empty.	
14	CUST_LOCAL_START_DATE	DATE[14]	Local time when a service starts. This field cannot be left empty.	
15	CUST_LOCAL_END_DATE	DATE[14]	Local time when a service ends. This field cannot be left empty.	
16	STD_EVT_TYPE_ID	NUMBER[10]	Standard charging event type ID. For example, value **11000** indicates the voice online charging event. The options can be expanded. For details, see configurations on the CBS GUI. The default value is **0**. This field cannot be left empty.	
17	EVT_SOURCE_CATEGORY	VARCHAR2[1]	Event source type. The options are as follows: • **C**: offline charging request • **D**: Diameter charging request • **M**: management charging request • **S**: system-triggered charging request, for example, recurring charging This field cannot be left empty.	
18	OBJ_TYPE	VARCHAR2[1]	Type of the charged party. The options are as follows: • **A**: account • **C**: customer • **S**: subscriber • **G**: subscriber group This field cannot be left empty.	
19	OBJ_ID	NUMBER[20]	ID of the charged party. Set this field based on the **OBJ_TYPE** value. The default value is **0**. This field cannot be left empty.	
20	OWNER_CU	NUMBER[20]	Registrant ID of the charged party.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	ST_ID		The default value is **0**. This field cannot be left empty.	
21	DEFAULT_ACCT_ID	NUMBER[20]	Default account ID of the charged party. The default value is **0**. This field cannot be left empty.	
22	PRI_IDENTITY	VARCHAR2[64]	Subscriber primary identifier. In rental events where the subscriber number does not exist, for example, account, customer, and subscriber group rental events, this field can be left empty. • If a primary identifier is an MSISDN or a PSTN, this field is set in the format **Country code + MSISDN** or **Country code + Area code + PSTN**. • If a primary identifier is of other types, the value is the number that is transferred.	
23	BILL_CYCLE_ID	VARCHAR2[20]	Bill cycle ID of the default account corresponding to the charged party when a charging event occurs.	
24	SERVICE_CATEGORY	VARCHAR2[10]	Service type. The field can be customized. The example options are as follows: • **1**: voice • **2**: SMS • **3**: MMS • **4**: one-off fee deduction • **5**: GPRS charging • **6**: content-based charging • **7**: recurring fee • **8**: service processed on the management foreground This field can be left empty.	
25	USAGE_SERVICE_TYPE	VARCHAR2[10]	Service subtype. The field can be customized. The subtypes vary according to site, and the value is obtained from the charging event attribute. The example options are as follows:	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			• **10**: local intra-network call • **11**: local inter-network call • **12**: national toll call • **13**: international toll call • **14**: national roaming call • **15**: international roaming call • **21**: intra-network SMS • **22**: inter-network SMS • **23**: special number SMS • **24**: international SMS • **25**: intra-network MMS • **26**: inter-network MMS • **27**: international MMS • **31**: local data service • **33**: roaming data service • **4**: rental • **5**: content-based charging This field can be left empty.	
26	SESSION_ID	VARCHAR2[128]	Session ID. In events such as rental events, this field can be left empty. • For sessions in online charging, set the field to the session ID reported in a DCC message. • For sessions in offline charging, set the field to the combination of the batch ID, original CDR file ID specified by **SRC_CDR_ID**, and source event ID. • For sessions generated in other service management systems (such as the Billing Configurator and AR), set the field to the service sequence number.	
27	RESULT_CODE	NUMBER[10]	Internal result code. • **0**: success • Others: failure This field cannot be left empty.	
28	RESULT_REASON	VARCHAR2[256]	Reason why a service ends. This field is reserved.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
29	BE_ID	NUMBER[10]	ID of the lowest-level home BE of the charged object. The default value is **0**. This field cannot be left empty.	
30	HOT_SEQ	NUMBER[10]	Sequence number of a CDR generated in bill on demand. This field is set to the sequence number of the task for bill on demand in recurring charging CDRs and is set to **0** in other scenarios. This field cannot be left empty.	
31	CP_ID	NUMBER[10]	Customer partition ID. The default value is **0**. This field cannot be left empty.	
32	RECIPIENT_NUMBER	VARCHAR2[64]	Recipient number, which can be customized by a carrier. For account, customer, and subscriber group rental events and GPRS events, this field can be left empty. The number formats are as follows: • If the recipient number is an MSISDN or a PSTN, this field is set in the format **Country code + MSISDN** or **Country code + Area code + PSTN**. • When the recipient number is of other types, the value is the number that is transferred.	
33	USAGE_MEASURE_ID	NUMBER[10]	Service usage measurement unit ID. For example, value **1003** indicates second. The options can be expanded. For details, see configurations on the CBS GUI.	The 33rd to 36th fields record the service usage of the first type in the charging
34	ACTUAL_USAGE	NUMBER[20]	Actual service usage.	
35	RATE_USAGE	NUMBER[20]	Rated service usage.	
36	SERVICE_UNIT_TYPE	NUMBER[10]	Service usage type. • **1**: duration • **2**: traffic	

SN	Field Name	Field Type	Description	Field Category
			• **3**: item • **4**: currency • **5**: times • **6**: page • **7**: special service type	process. If no service usage is triggered in a service, such as rental collection and activation, these fields are set to **0** by default.
37	USAGE_MEASURE_ID2	NUMBER[10]	Service usage measurement unit ID. The default value is **0**.	The 37th to 40th fields record the service usage of the second type in the charging process. These fields are reserved
38	ACTUAL_USAGE2	NUMBER[20]	Actual service usage. The default value is **0**.	
39	RATE_USAGE2	NUMBER[20]	Rated service usage. The default value is **0**.	
40	SERVICE_UNIT_TYPE2	NUMBER[10]	Service usage type. The default value is **0**.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				currently and have a fixed value of **0**.
41	DEBIT_AMOUNT	NUMBER[20]	Actual amount that is deducted, which includes the amount deducted from prepaid main funds, bonuses, postpaid credits, and prepayments of all accounts (including payment accounts) used in a transaction but excludes the undebited amount.	The 41st to 48th fields record total funds (excluding bonuses) used in the charging process.
42	UN_DEBIT_AMOUNT	NUMBER[20]	Undebited amount. This field indicates the fee that is not debited when the balance is deducted to zero (that is, when the account balance is insufficient) in the case of prorated charging.	
43	DEBIT_FROM_PREPAID	NUMBER[20]	Total amount deducted from prepaid main funds and bonuses of all prepaid accounts, including payment accounts.	
44	DEBIT_FROM_ADVANCE_PREPAID	NUMBER[20]	Total amount deducted from prepaid main funds of all prepaid accounts, including payment accounts.	
45	DEBIT_FROM_POSTPAID	NUMBER[20]	Total amount deducted from credits, bonuses, deposits, and prepayments of all postpaid accounts, including payment accounts.	
46	DEBIT_FROM_ADVANCE_POSTPAID	NUMBER[20]	Total amount deducted from prepayments of all postpaid accounts, including payment accounts.	
47	DEBIT_FROM_CREDIT_POSTPAID	NUMBER[20]	Total amount deducted from credits of all postpaid accounts, including payment accounts.	
48	TOTAL_TAX	NUMBER[20]	Total tax amount.	
49	FREE_UNIT_AMOUNT_OF_TIMES	NUMBER[20]	Usage of free units that are charged by times.	The 49th to 51st fields record
50	FREE_UNIT_AMOUNT_O	NUMBER[20]	Usage of free units that are charged by duration.	

SN	Field Name	Field Type	Description	Field Category
	F_DURATION		The duration unit is defined by the system. Generally, the unit is second.	total free units used in the charging process, excluding the rewarded free units.
51	FREE_UNIT_AMOUNT_OF_FLUX	NUMBER[20]	Usage of free units that are charged by traffic. The traffic unit is defined by the system. Generally, the unit is byte.	
52	ACCT_ID	NUMBER[20]	Payment account ID.	The 52nd to 121st fields record 10 groups of balance change in the charging process, excluding the rewarded balance change. The 52nd to 58th fields record the
53	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
54	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
55	CUR_BALANCE	NUMBER[20]	Current balance.	
56	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
57	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
58	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				first group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
59	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of balance chang
60	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
61	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
62	CUR_BALANCE	NUMBER[20]	Current balance.	
63	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	

SN	Field Name	Field Type	Description	Field Category
64	CURRENCY_ID	NUMBER[10]	Currency type ID.	e in the charging process, excluding the rewarded balance change. The 59th to 65th fields record the second group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded
65	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				and other groups of fields are left empty.
66	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of balance change in the charging process, excluding the rewarded balance change. The 66th to 72nd fields record the third group of balance change infor
67	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
68	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
69	CUR_BALANCE	NUMBER[20]	Current balance.	
70	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
71	CURRENCY_ID	NUMBER[10]	Currency type ID.	
72	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				mation. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
73	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of balance change in the charging process, excluding
74	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
75	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
76	CUR_BALANCE	NUMBER[20]	Current balance.	
77	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
78	CURRENCY_ID	NUMBER[10]	Currency type ID.	
79	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is,	

SN	Field Name	Field Type	Description	Field Category
			settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	the rewarded balance change. The 73rd to 79th fields record the fourth group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.

SN	Field Name	Field Type	Description	Field Category
80	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of balance change in the charging process, excluding the rewarded balance change. The 80th to 86th fields record the fifth group of balance change information. If *N* balance changes are involved, the
81	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
82	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
83	CUR_BALANCE	NUMBER[20]	Current balance.	
84	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
85	CURRENCY_ID	NUMBER[10]	Currency type ID.	
86	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				first *N* groups of balance change fields are recorded and other groups of fields are left empty.
87	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of balance change in the charging process, excluding the rewarded balance change. The 87th to 93rd
88	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
89	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
90	CUR_BALANCE	NUMBER[20]	Current balance.	
91	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
92	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
93	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				fields record the sixth group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
94	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of
95	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
96	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
97	CUR_BALANCE	NUMBER[20]	Current balance.	

SN	Field Name	Field Type	Description	Field Category
98	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	balance change in the charging process, excluding the rewarded balance change. The 94th to 100th fields record the seventh group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields
99	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
100	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				are recorded and other groups of fields are left empty.
101	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of balance change in the charging process, excluding the rewarded balance change. The 101st to 107th fields record the eighth group of balance
102	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
103	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
104	CUR_BALANCE	NUMBER[20]	Current balance.	
105	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
106	CURRENCY_ID	NUMBER[10]	Currency type ID.	
107	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
108	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of balance change in the charging proce
109	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
110	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
111	CUR_BALANCE	NUMBER[20]	Current balance.	
112	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
113	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
114	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows:	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			• **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	ss, excluding the rewarded balance change. The 108th to 114th fields record the ninth group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are

SN	Field Name	Field Type	Description	Field Category
				left empty.
115	ACCT_ID	NUMBER[20]	Account ID.	The 52nd to 121st fields record 10 groups of balance change in the charging process, excluding the rewarded balance change. The 115th to 121st fields record the tenth group of balance change information. If *N* balance chang
116	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
117	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
118	CUR_BALANCE	NUMBER[20]	Current balance.	
119	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
120	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
121	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				es are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
122	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the change of free units that
123	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
124	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
125	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
126	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
127	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
128	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
129	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows:	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			• **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	are rewarded and rolled over. The 122nd to 129th fields record the first group of free unit change information. If *N* free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.

SN	Field Name	Field Type	Description	Field Category
130	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the change of free units that are rewarded and rolled over. The 130th to 137th fields record the second group of free unit change information. If *N* free
131	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
132	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
133	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
134	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
135	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
136	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
137	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
138	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the change of free
139	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
140	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
141	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
142	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
143	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
144	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
145	OPER_TYPE	NUMBER[10]	Operation type. The options are as	

SN	Field Name	Field Type	Description	Field Category
			follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	units that are rewarded and rolled over. The 138th to 145th fields record the third group of free unit change information. If *N* free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty

SN	Field Name	Field Type	Description	Field Category
				.
146	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the change of free units that are rewarded and rolled over. The 146th to 153rd fields record the fourth group of free unit change information. If
147	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
148	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
149	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
150	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
151	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
152	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
153	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				N free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
154	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the change of
155	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
156	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
157	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
158	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
159	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
160	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
161	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	free units that are rewarded and rolled over. The 154th to 161st fields record the fifth group of free unit change information. If *N* free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields are left

SN	Field Name	Field Type	Description	Field Category
				empty.
162	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the change of free units that are rewarded and rolled over. The 162nd to 169th fields record the sixth group of free unit change information
163	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
164	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
165	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
166	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
167	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
168	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
169	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				n. If *N* free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
170	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the chang
171	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
172	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
173	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
174	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
175	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
176	FU_MEASUR	NUMBER[10]	Free unit measurement unit ID.	

SN	Field Name	Field Type	Description	Field Category
	E_ID			e of free units that are rewarded and rolled over. The 170th to 177th fields record the seventh group of free unit change information. If *N* free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields
177	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	

SN	Field Name	Field Type	Description	Field Category
				are left empty.
178	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the change of free units that are rewarded and rolled over. The 178th to 185th fields record the eighth group of free unit change
179	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
180	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
181	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
182	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
183	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
184	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
185	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				information. If *N* free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
186	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding
187	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
188	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
189	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
190	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
191	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	

SN	Field Name	Field Type	Description	Field Category
192	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	the change of free units that are rewarded and rolled over. The 186th to 193rd fields record the ninth group of free unit change information. If *N* free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of
193	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	

SN	Field Name	Field Type	Description	Field Category
				fields are left empty.
194	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. • **S**: subscriber • **G**: subscriber group • **C**: customer	The 122nd to 201st fields record 10 groups of free unit change in the charging process, excluding the change of free units that are rewarded and rolled over. The 194th to 201st fields record the tenth group of free unit chang
195	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
196	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
197	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
198	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
199	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
200	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
201	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				e information. If *N* free unit changes are involved, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
202	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record 10 groups of bonus details in the charging process, excluding
203	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
204	BALANCE_TYPE	NUMBER[20]	Balance type.	
205	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
206	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
207	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
208	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses.	

SN	Field Name	Field Type	Description	Field Category
			• **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	the bonus that is rewarded or rolled over. The 202nd to 208th fields record the first group of bonus details. If *N* bonuses are involved, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
209	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record
210	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
211	BALANCE_TYPE	NUMBER[20]	ID of a balance account.	

SN	Field Name	Field Type	Description	Field Category
212	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	10 groups of bonus details in the charging process, excluding the bonus that is rewarded or rolled over. The 209th to 215th fields record the second group of bonus details. If *N* bonuses are involved, the first *N* groups of bonus details fields are recorded and other
213	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
214	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
215	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				groups of fields are left empty.
216	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record 10 groups of bonus details in the charging process, excluding the bonus that is rewarded or rolled over. The 216th to 222nd fields record the third group of bonus details. If *N* bonuses are involved,
217	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
218	BALANCE_TYPE	NUMBER[20]	Balance type.	
219	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
220	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
221	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
222	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
223	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record 10 groups of bonus details in the charging process, excluding the bonus that is rewarded or rolled over. The 223rd to 229th
224	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
225	BALANCE_TYPE	NUMBER[20]	Balance type.	
226	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
227	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
228	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
229	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				fields record the fourth group of bonus details. If *N* bonuses are involved, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
230	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record 10 groups of bonus details in the charging process,
231	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
232	BALANCE_TYPE	NUMBER[20]	Balance type.	
233	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
234	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
235	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
236	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows:	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			• **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	excluding the bonus that is rewarded or rolled over. The 230th to 236th fields record the fifth group of bonus details. If *N* bonuses are involved, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
237	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st
238	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	

SN	Field Name	Field Type	Description	Field Category
239	BALANCE_TYPE	NUMBER[20]	Balance type.	fields record 10 groups of bonus details sixth group of granted bonus in the charging process, excluding the bonus that is rewarded or rolled over. The 237th to 243rd fields record the sixth group of bonus details. If *N* bonuses are involved, the first *N* groups of bonus detail
240	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
241	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
242	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
243	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				s fields are recorded and other groups of fields are left empty.
244	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record 10 groups of bonus details in the charging process, excluding the bonus that is rewarded or rolled over. The 244th to 250th fields record the seventh group
245	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
246	BALANCE_TYPE	NUMBER[20]	Balance type.	
247	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
248	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
249	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
250	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				of bonus details. If *N* bonuses are involved, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
251	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record 10 groups of bonus details in the charging process, excluding the bonus that is
252	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
253	BALANCE_TYPE	NUMBER[20]	Balance type.	
254	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
255	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
256	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
257	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				rewarded or rolled over. The 251st to 257th fields record the eighth group of bonus details. If *N* bonuses are involved, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
258	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record 10 groups of
259	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
260	BALANCE_TYPE	NUMBER[20]	ID of a balance account.	
261	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	

SN	Field Name	Field Type	Description	Field Category
262	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	bonus details in the charging process, excluding the bonus that is rewarded or rolled over. The 258th to 264th fields record the ninth group of bonus details. If *N* bonuses are involved, the first *N* groups of bonus details fields are recorded and other groups of fields are
263	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
264	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				left empty.
265	ACCT_ID	NUMBER[20]	Account ID.	The 202nd to 271st fields record 10 groups of bonus details in the charging process, excluding the bonus that is rewarded or rolled over. The 265th to 271st fields record the tenth group of bonus details. If *N* bonuses are involved, the first *N* groups of
266	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
267	BALANCE_TYPE	NUMBER[20]	ID of a balance account.	
268	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
269	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
270	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
271	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				bonus details fields are recorded and other groups of fields are left empty.
272	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 272nd to 351st fields record 10 groups of free unit reward details in the charging process, including the free unit that is rewarded and rolled over. The 272nd to
273	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
274	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
275	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
276	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
277	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
278	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
279	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

SN	Field Name	Field Type	Description	Field Category
				279th fields record the first group of free unit reward details. If *N* free unit rewards are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
280	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 272nd to 351st fields record 10 group
281	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
282	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	s of free unit reward details in the charging process, including the free unit that is rewarded and rolled over. The 280th to 287th fields record the second group of free unit reward details. If *N* free unit rewards are involved, the first *N* groups of free
283	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
284	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
285	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
286	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
287	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				unit reward details fields are recorded and other groups of fields are left empty.
288	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 272nd to 351st fields record 10 groups of free unit reward details in the charging process, including the free unit that is rewarded and rolled over. The
289	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
290	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
291	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
292	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
293	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
294	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
295	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				288th to 295th fields record the third group of free unit reward details. If *N* free unit rewards are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
296	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 272nd to 351st fields record

SN	Field Name	Field Type	Description	Field Category
297	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	10 groups of free unit reward details in the charging process, including the free unit that is rewarded and rolled over. The 296th to 303rd fields record the fourth group of free unit reward details. If *N* free unit rewards are involved, the first *N* groups of
298	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
299	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
300	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
301	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
302	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
303	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

SN	Field Name	Field Type	Description	Field Category
				free unit reward details fields are recorded and other groups of fields are left empty.
304	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 272nd to 351st fields record 10 groups of free unit reward details in the charging process, including the free unit that is rewarded and rolled over.
305	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
306	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
307	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
308	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
309	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
310	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
311	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				The 304th to 311st fields record the fifth group of free unit reward details. If *N* free unit rewards are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
312	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group	The 272nd to 351st

SN	Field Name	Field Type	Description	Field Category
			• **C**: customer	fields record 10 groups of free unit reward details in the charging process, including the free unit that is rewarded and rolled over. The 312nd to 319th fields record the sixth group of free unit reward details. If *N* free unit rewards are involved, the first *N*
313	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
314	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
315	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
316	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
317	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
318	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
319	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				groups of free unit reward details fields are recorded and other groups of fields are left empty.
320	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 272nd to 351st fields record 10 groups of free unit reward details in the charging process, including the free unit that is rewarded and
321	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
322	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
323	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
324	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
325	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
326	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
327	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				rolled over. The 320th to 327th fields record the seventh group of free unit reward details. If *N* free unit rewards are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
328	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows:	The 272nd

SN	Field Name	Field Type	Description	Field Category
			• **S**: subscriber • **G**: subscriber group • **C**: customer	to 351st fields record 10 groups of free unit reward details in the charging process, including the free unit that is rewarded and rolled over. The 328th to 335th fields record the eighth group of free unit reward details. If *N* free unit rewards are involved,
329	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
330	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
331	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
332	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
333	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
334	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
335	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
336	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 272nd to 351st fields record 10 groups of free unit reward details in the charging process, including the free unit that is rewar
337	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
338	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
339	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
340	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
341	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
342	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
343	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance.	

SN	Field Name	Field Type	Description	Field Category
			• **5**: Add free units to an existing free unit instance.	ded and rolled over. The 336th to 343rd fields record the ninth group of free unit reward details. If *N* free unit rewards are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
344	FU_OWN_TY	VARCHAR2[	Free unit owner type. The options are	The

SN	Field Name	Field Type	Description	Field Category
	PE	1]	as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	272nd to 351st fields record 10 groups of free unit reward details in the charging process, including the free unit that is rewarded and rolled over. The 344th to 351st fields record the tenth group of free unit reward details. If *N* free unit rewards are involv
345	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
346	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
347	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
348	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
349	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
350	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
351	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				ed, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
-	CHARGE_SERVICE_INFO	STRING[2048]	Charging service information.	The **CHARGE_SERVICE_INFO** field is a complex field recording charging service information. This field can be exten

SN	Field Name	Field Type	Description	Field Category
				ded for each service to meet site requirements. For the basic extended information in baseline CDR files, see 4.2.2 Extended Charging Service Information.

4.2.2 Extended Charging Service Information

This topic describes the charging service fields extended in baseline CDR files. Each site can customize more extended fields based on the site requirements.

4.2.2.1 Extended Charging Service Information in a Voice CDR

This topic describes extended fields in the charging service information in a voice CDR.

Table 4-4 describes extended fields in the charging service information in a voice CDR.

Table 4-4 Extended charging service information in a voice CDR

SN	Field Name	Field Type	Description
352	CallingPartyNu	VARCHAR2[64	Calling number.

SN	Field Name	Field Type	Description
	mber	]	The number formats are as follows: • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN • URI format: number reported by the network side Generally, this field cannot be left empty. This field is left empty in scenarios where the calling number is not differentiated in the MT process. In these scenarios, the network side may not report the calling number.
353	CalledPartyNumber	VARCHAR2[64]	Called number. The number formats are as follows: • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN • URI format: number reported by the network side This field cannot be left empty.
354	CallingPartyIMSI	VARCHAR2[64]	IMSI of the calling party. The value is reported by the network side. If no value is reported, this field is left empty. If the value comes in DCC message that value will be stored in CDR. If no value was sent, then the DB value will be stored in CDR. This field can be left empty.
355	CalledPartyIMSI	VARCHAR2[64]	IMSI of the called party. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
356	DialedNumber	VARCHAR2[64]	Number that is dialed. The value is reported by the network side in the MO process. If no value is reported, this field is left empty. The value can be in any format. This field can be left empty.
357	OriginalCalledParty	VARCHAR2[64]	Original called number in the MF process. The number formats are as follows: • Fixed-line number: Country code + Area code + PSTN

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• Mobile number: Country code + MSISDN • URI format: number reported by the network side This field can be left empty.
358	ServiceFlow	VARCHAR2[1]	Call process ID. The options are as follows: • **1**: MO • **2**: MT • **3**: MF This field cannot be left empty.
359	CallForwardIndicator	VARCHAR2[2]	Call forwarding flag. The options are as follows: • **00**: no call forwarding • **10**: call forwarding conditional due to an unknown reason • **11**: call forwarding busy • **12**: call forwarding no reply • **13**: call forwarding unreachable • **14**: call forwarding power-off • **20**: call forwarding unconditional • **21**: call forwarded to a voice mailbox • **22**: international call forwarding This field cannot be left empty.
360	CallingRoamInfo	VARCHAR2[20]	Roaming information about the calling party. This field is used to analyze the calling party's roaming status and can be set to the value of fields such as **LocationNumber**, **MSCAddress**, or **VLRNumber**. The value depends on the control parameter specifying the roaming analysis method. This field can be left empty.
361	CallingCellID	VARCHAR2[20]	Cell ID of the calling party, which is reported in an IDP message. If the CBS does not need to analyze the visited area based on the cell ID, this field can be left empty. The format is Three-digit MCC + Two-digit MNC + Five-digit LAC + Five-digit cell ID, for example, **460002230320412**.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
362	CalledRoamInfo	VARCHAR2[20]	Roaming information about the called party. This field is used to analyze the called party's roaming status and can be set to the value of fields such as **LocationNumber**, **MSCAddress**, or **VLRNumber**. The value depends on the control parameter specifying the roaming analysis method. This field can be left empty.
363	CalledCellID	VARCHAR2[20]	Cell ID of the called party. If the CBS does not need to analyze the visited area based on the cell ID, this field can be left empty. The format is Three-digit MCC + Two-digit MNC + Five-digit LAC + Five-digit cell ID, for example, **460002230320412**.
364	TimeStampOfSSP	VARCHAR2[14]	Timestamp reported by the SSP. Format: YYYYMMDDhhmmss This field can be left empty.
365	TimeZoneOfSSP	NUMBER[10]	Time zone where the SSP locates. • Empty: default time zone • Non-empty: reported time zone This field can be left empty.
366	BearerCapability	VARCHAR2[32]	Bearer capability reported by the OCG. The options are as follows: • **8**: video call • **9**: voice data • **10**: voice fax • **0**: normal call The value is reported by external systems. If no value is reported, this field is left empty. The system considers that the value is **0** if this field is left empty.
367	ChargingTime	VARCHAR2[14]	Charging start time. Format: YYYYMMDDhhmmss This field cannot be left empty.
368	WaitDuration	NUMBER[10]	Waiting duration. This field is reserved and has a fixed value of **0**.
369	TerminationReas	NUMBER[10]	Call termination reason. The options are

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	on		as follows: • **0**: Unknown. • **1**: A subscriber hangs up the phone. • **2**: The account balance is insufficient. • **3**: The call duration reaches the maximum. The default value is **0**. This field cannot be left empty.
370	CallReferenceNumber	VARCHAR2[128]	Call reference number. • On the GSM network, this field records the **CallReferenceNumber** value reported in an IDP message. • On the CDMA network, this field records the **BillID** value reported in an ORREQ message. • For a SIP call, this field records the **Call-ID** value reported in a SIP message. • If an external system does not report the call reference number, the CBS generates one in the format YYYYMMDDhhmmss + Three-digit OCG ID + Four-digit automaton number. **NOTE** If the automaton number contains less than four digits, prefix the number with 0. If the automaton number contains more than four digits, obtain the last four digits. The value is reported by external systems. If no value is reported, this field is left empty.
371	IMEI	VARCHAR2[24]	International mobile equipment identity. The value is reported by external systems. If no value is reported, this field is left empty.
372	AccessPrefix	VARCHAR2[20]	Special prefix that a subscriber dials, for example, IP prefix, international gateway prefix, or a carrier's access code prefix. This field can be left empty for non-special numbers.
373	RoutingPrefix	VARCHAR2[20]	Routing prefix for rerouting a call. This field can be left empty.
374	RedirectingPartyID	VARCHAR2[64]	Redirected-to number in the MF process. This field can be left empty in non-MF

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			processes.
375	MSCAddress	VARCHAR2[24]	MSC address. If the CBS uses this field to analyze the visited area for the charged party, this field cannot be left empty. If the CBS does not use this field to analyze the visited area, this field can be left empty. Format: Country code + NDC + LSP
376	BrandID	NUMBER[20]	Brand ID. This field cannot be left empty. The default value is **0**.
377	MainOfferingID	NUMBER[20]	Primary offering ID. This field cannot be left empty. The default value is **0**.
378	ChargingPartyNumber	VARCHAR2[64]	Charged number. The number formats are as follows: • Fixed-line number: Area code + PSTN • Mobile number: MSISDN • URI format This field cannot be left empty.
379	ChargePartyIndicator	VARCHAR2[1]	Charged party. The options are as follows: • **1**: calling party • **2**: called party • **3**: third party • **4**: parent or child card subscriber • **5**: calling party and corporate This field cannot be left empty.
380	PayType	VARCHAR2[1]	Payment type of a subscriber. The options are as follows: • **0**: prepaid • **1**: postpaid • **2**: hybrid This field cannot be left empty.
381	ChargingType	VARCHAR2[1]	Charging type. The options are as follows: • **0**: V-H • **1**: H-H • **2**: V-V

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **3**: H-V **NOTE** In the option descriptions, V indicates the visited area and H indicates the home area. For example, value **0** indicates that the visited location of the calling party and the home location of the called party are used for number analysis. This field cannot be left empty.
382	CallType	VARCHAR2[1]	Call type. The options are as follows: • **0**: local call • **1**: toll call within a charging area • **2**: toll call between charging areas • **3**: international toll call This field cannot be left empty.
383	RoamState	VARCHAR2[1]	Roaming status of the charged party. The options are as follows: • **0**: non-roaming • **1**: roaming within a charging area • **2**: roaming out of a charging area • **3**: international roaming This field cannot be left empty.
384	CallingHomeCountryCode	NUMBER[10]	Home country code of the calling party. Generally, the 384th to 395th fields cannot be left empty. This field can be left empty in scenarios where the process of charging the calling or called party is irrelevant to the home area or visited area of the peer end. In these scenarios, the network side may not report the visited area or number information about the peer end.
385	CallingHomeAreaNumber	NUMBER[10]	Home area code of the calling party. This field can be left empty.
386	CallingHomeNetworkCode	NUMBER[10]	Home network code of the calling party. This field can be left empty.
387	CallingRoamCountryCode	NUMBER[10]	Roam-in country code of the calling party. This field can be left empty.
388	CallingRoamAreaNumber	NUMBER[10]	Roam-in area code of the calling party. This field can be left empty.
389	CallingRoamNet	NUMBER[10]	Roam-in network code of the calling

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	workCode		party. This field can be left empty.
390	CalledHomeCountryCode	NUMBER[10]	Home country code of the called party. This field can be left empty.
391	CalledHomeAreaNumber	NUMBER[10]	Home area code of the called party. This field can be left empty.
392	CalledHomeNetworkCode	NUMBER[10]	Home network code of the called party. This field can be left empty.
393	CalledRoamCountryCode	NUMBER[10]	Roam-in country code of the called party. This field can be left empty.
394	CalledRoamAreaNumber	NUMBER[10]	Roam-in area code of the called party. This field can be left empty.
395	CalledRoamNetworkCode	NUMBER[10]	Roam-in network code of the called party. This field can be left empty.
396	ServiceType	VARCHAR2[128]	List of product codes used to charge the charged party. Multiple product codes are separated with a colon (:). This field can be left empty.
397	HotLineIndicator	NUMBER[10]	Special number type. The options are as follows: • **0**: common number • **1**: barred number • **2**: free number • **3**: Special-tariff number • **9**: voice mail The default value is **0**. This field cannot be left empty.
398	HomeZoneID	NUMBER[10]	ID of the home zone where the subscriber enjoys a discount. The default value is **0**. This field cannot be left empty.
399	SpecialZoneID	NUMBER[10]	ID of the special zone where the subscriber enjoys a discount. The default value is **0**. This field cannot be left empty.
400	NPFlag	VARCHAR2[1]	NP flag. The options are as follows: • **0**: not NP • **1**: NP out

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			The default value is **0**. This field cannot be left empty.
401	NPPrefix	VARCHAR2[6]	NP prefix. • Set this field to the NP prefix of the called party in the MO process. • Set this field to the NP prefix of the calling party in the MT process. This field is left empty if NP is not executed.
402	CallingCUGNo	NUMBER[20]	CUG number of the calling party. The default value is **0**. This field cannot be left empty.
403	CalledCUGNo	NUMBER[20]	CUG number of the called party. The default value is **0**. This field cannot be left empty.
404	OpposeNumber Type	NUMBER[10]	Peer network type. The options are as follows: • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty.
405	CallingNetwork Type	VARCHAR2[10]	Access network type of the calling party. The options are as follows: • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty.
406	CalledNetworkT ype	VARCHAR2[10]	Access network type of the called party. The options are as follows: • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• Others: unknown This field cannot be left empty.
407	CallingVPNTopGroupNumber	VARCHAR2[64]	Number of the top-level corporation to which the calling party belongs. This field is valid only in the MO and MF processes where the calling party is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
408	CallingVPNGroupNumber	VARCHAR2[64]	Number of the corporation to which the calling party belongs. This field is valid only in the MO and MF processes where the calling party is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
409	CallingVPNShortNumber	VARCHAR2[10]	Short number of the calling party. This field is valid only in the MO and MF processes where the calling party is a corporate member. This field can be left empty.
410	CalledVPNTopGroupNumber	VARCHAR2[64]	Number of the top-level corporation to which the called party belongs. This field is valid only in the MT process where the called party is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
411	CalledVPNGroupNumber	VARCHAR2[64]	Number of the corporation to which the called party belongs. This field is valid only in the MT process where the called party is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
412	CalledVPNShortNumber	VARCHAR2[10]	Short number of the called party. This field is valid only in the MT process where the called party is a corporate member.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field can be left empty.
413	GroupCallType	NUMBER[10]	Corporate call type. This field is valid only when the charged party is a corporate subscriber. The options are as follows: • **0**: non-corporate call • **1**: corporate intra-network call • **2**: corporate inter-network call The default value is **0**. This field cannot be left empty.
414	OnlineChargingFlag	VARCHAR2[1]	Online charging flag. The options are as follows: • **0**: online charging • **1**: offline charging This field cannot be left empty.
415	StartTimeOfBillCycle	VARCHAR2[14]	Bill cycle start time of the charged subscriber when a charging event occurs. Format: YYYYMMDDhhmmss This field cannot be left empty.
416	LastEffectOffering	NUMBER[20]	ID of the last offering that takes effect. The default value is **0**. This field cannot be left empty.
417	DTDiscount	NUMBER[10]	DT discount rate. The default value is **0**. This field cannot be left empty.
418	OpposeMainOfferingID	NUMBER[20]	Primary offering ID of the peer party's number. The default value is **0**. This field cannot be left empty.
419	MainBalanceInfo	VARCHAR2[255]	This field is reserved.
420	ChgBalanceInfo	VARCHAR2[255]	This field is reserved.
421	ChgFreeUnitInfo	VARCHAR2[255]	This field is reserved.
422	UserState	VARCHAR2[10]	Life cycle state and the management state of a subscriber. The **UserState** parameter is a numeric string of seven digits, in the format *CCMMMMM*.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			The first and second digits C indicate the life cycle state of a subscriber. The first digit C indicates the state of a prepaid subscriber, and the second digit C indicates the state of a postpaid subscriber. The options are as follows: • 0: Idle • 1: Active • 2: Suspended • 3: Disable • 4: Pool • 5: Pool without activation The next five digits *MMMMM* indicate the management state of a subscriber. The options are as follows: • The third digit indicates whether a subscriber claims missing. **0**: no **1**: yes • The fourth digit indicates whether a subscriber is barred or suspended upon subscriber request. **0**: no **1**: barred or suspended on subscriber request **2**: barred on subscriber request **3**: suspended on subscriber request • The fifth digit indicates whether a subscriber is barred or suspended on arrears. **0**: no **1**: yes • The sixth digit indicates whether a subscriber is barred or suspended on credit control. This digit is reserved. **0**: no **1**: yes • The seventh digit indicates the blacklist flag. **0**: not blacklisted **1**: blacklisted This field cannot be left empty.
423	GroupPayFlag	NUMBER[10]	Payment mode of the corporate member. The options are as follows:

SN	Field Name	Field Type	Description
			• **0**: personal payment • **1**: group payment • **2**: corporate and personal payment The default value is **0**. This field cannot be left empty.
424	RoamingZoneID	VARCHAR2[20]	Roaming zone ID. This field can be left empty.
425	PrimaryOfferChgAmt	NUMBER[20]	Primary offering rating amount. The default value is 0. This field cannot be left empty
426	OriginatingIOI	VARCHAR2[128]	ID of the network from which a service is initiated. For the VoLTE call, this field cannot be left empty. For other voice services, this field is left empty. This field can be left empty.
427	TerminatingIOI	VARCHAR2[128]	ID of the network to which a service is triggered. For the VoLTE call, this field cannot be left empty. For other voice services, this field is left empty. This field can be left empty.
428	IMSChargingIdentifier	NUMBER[20]	IMS charging ID For the VoLTE call, this field cannot be left empty. For other voice services, this field is left empty. This field can be left empty.
429	ACCT_BAL_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus account balance in the group from 202nd to 271st fields.
430	ACCT_BAL_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus account balance in the group from 202nd to 271st fields.
431	ACCT_BAL_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus account balance in the group from 202nd to 271st fields.
432	ACCT_BAL_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus account balance in the group from 202nd to 271st fields.
433	ACCT_BAL_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus account balance in the group from 202nd to 271st

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			fields.
434	ACCT_BAL_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus account balance in the group from 202nd to 271st fields.
435	ACCT_BAL_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus account balance in the group from 202nd to 271st fields.
436	ACCT_BAL_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus account balance in the group from 202nd to 271st fields.
437	ACCT_BAL_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus account balance in the group from 202nd to 271st fields.
438	ACCT_BAL_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus account balance in the group from 202nd to 271st fields.
439	BONUS_FU_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus free unit in the group from 272nd to 351st fields.
440	BONUS_FU_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus free unit in the group from 272nd to 351st fields.
441	BONUS_FU_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus free unit in the group from 272nd to 351st fields.
442	BONUS_FU_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus free unit in the group from 272nd to 351st fields.
443	BONUS_FU_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus free unit in the group from 272nd to 351st fields.
444	BONUS_FU_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus free unit in the group from 272nd to 351st fields.
445	BONUS_FU_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus free unit in the group from 272nd to 351st fields.
446	BONUS_FU_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus free unit in the group from 272nd to 351st fields.
447	BONUS_FU_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus free unit in the group from 272nd to 351st fields.
448	BONUS_FU_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus free unit in the group from 272nd to 351st fields.

 Copyright © Huawei Technologies Co., Ltd.

4.2.2.2 Extended Charging Service Information in an SMS CDR

This topic describes extended fields in the charging service information in an SMS CDR.

Table 4-5 describes extended fields in the charging service information in an SMS CDR.

Table 4-5 Extended charging service information in an SMS CDR

SN	Field Name	Field Type	Description
352	CallingPartyNumber	VARCHAR2[64]	Sender number. For numbers of the E.164 type, the number formats are as follows: • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN For SP IDs, the reported number is used directly. This field can be left empty.
353	CalledPartyNumber	VARCHAR2[64]	Recipient number. For numbers of the E.164 type, the international number format is used. • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN For SP IDs, the reported number is used directly. This field can be left empty.
354	CallingPartyIMSI	VARCHAR2[64]	IMSI of the sender. The value is reported by the network side. If no value is reported, this field is left empty. If the value comes in DCC message that value will be stored in CDR. If no value was sent, then the DB value will be stored in CDR. This field can be left empty.
355	CalledPartyIMSI	VARCHAR2[64]	IMSI of the recipient. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
356	DialedNumber	VARCHAR2[64]	Number that is dialed. The value is reported by the network side in the MO process. If no value is

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			reported, this field is left empty. The value can be in any format.
357	OriginalCalledParty	VARCHAR2[64]	Original called number in a forwarding process or special number reroute process. International number form in call forwarding, actual call number in special number reroute, filling in original called number when dialed through an international gateway office. (be valid in MF flow). This field can be left empty.
358	ServiceFlow	VARCHAR2[1]	Call process ID. The options are as follows: • **1**: MO • **2**: MT • **5**: delivery report This field cannot be left empty.
359	CallForwardIndicator	VARCHAR2[1]	Call forwarding flag. The options are as follows: • **0**: no call forwarding • **1**: call forwarding conditional • **2**: call forwarding unconditional The default value is **0**. This field cannot be left empty.
360	CallingRoamInfo	VARCHAR2[20]	Roaming information about the calling party. This field is used to analyze the calling party's roaming status and can be set to the value of fields such as **LocationNumber**, **MSCAddress**, or **VLRNumber**. The value depends on the control parameter specifying the roaming analysis method. For the calling number, it is recorded in the international number format by default. For other information, the reported one is recorded directly. This field can be left empty.
361	CallingCellID	VARCHAR2[20]	Cell ID of the calling party. If the CBS does not need to analyze the visited area based on the cell ID, this field can be left empty. The format is Three-digit MCC + Two-digit MNC + Five-digit LAC + Five-digit cell ID, for example,

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			460002230320412. This field can be left empty.
362	CalledRoamInfo	VARCHAR2[20]	Roaming information about the called party. This field is used to analyze the called party's roaming status and can be set to the value of fields such as **LocationNumber**, **MSCAddress**, or **VLRNumber**. The value depends on the control parameter specifying the roaming analysis method. This field can be left empty.
363	CalledCellID	VARCHAR2[20]	Cell ID of the called party. If the CBS does not need to analyze the visited area based on the cell ID, this field can be left empty. The format is Three-digit MCC + Two-digit MNC + Five-digit LAC + Five-digit cell ID, for example, **460002230320412**. This field can be left empty.
364	TimeStampOfSSP	VARCHAR2[14]	Timestamp reported by the SSP. Format: YYYYMMDDhhmmss This field can be left empty.
365	TimeZoneOfSSP	NUMBER[10]	Time zone where the SSP locates. • Empty: default time zone • Non-empty: reported time zone This field can be left empty.
366	BearerCapability	VARCHAR2[32]	This field is reserved.
367	ChargingTime	VARCHAR2[14]	Charging start time. Format: YYYYMMDDhhmmss This field cannot be left empty.
368	SendResult	NUMBER[10]	SMS message sending result. The options are as follows: • **0**: successful • Others: Enter the value transferred from the interface, for example, SMPP+ interface. The default value is **0**. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
369	SMSID	VARCHAR2[20]	SMS message ID. Set this field to the SMS message ID or request sequence number transferred from the SMPP+ interface. The value is reported by external systems. This field cannot be left empty.
370	IMEI	VARCHAR2[24]	International mobile equipment identity. This field can be left empty.
371	SMLength	NUMBER[10]	SMS message length. This field is valid to sites that charge for SMS messages based on the SMS message length. If the SMS message length is not used as a charging factor, this field can be left empty or set to **0**. This field can be left empty.
372	SMSCAddress	VARCHAR2[20]	SMSC address reported by external systems. This field can be left empty.
373	RefundIndicator	VARCHAR2[20]	Fee deduction flag. The options are as follows: • **0**: fee deduction • **1**: refund The default value is **0**. This field cannot be left empty.
374	BrandID	NUMBER[20]	Brand ID. The default value is **0**. This field cannot be left empty.
375	MainOfferingID	NUMBER[20]	Primary offering ID. The default value is **0**. This field cannot be left empty.
376	ChargingPartyNumber	VARCHAR2[64]	Charged number. The number formats are as follows: • Fixed-line number: Area code + PSTN • Mobile number: MSISDN This field cannot be left empty.
377	ChargePartyIndicator	VARCHAR2[1]	Charged party. The options are as follows: • **1**: calling party • **2**: called party

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **3**: third party • **4**: parent or child card subscriber • **5**: calling party and corporate This field cannot be left empty.
378	PayType	VARCHAR2[1]	Payment type of a subscriber. The options are as follows: • **0**: prepaid • **1**: postpaid • **2**: hybrid This field cannot be left empty.
379	ChargingType	VARCHAR2[1]	Charging type. The options are as follows: • **0**: V-H • **1**: H-H • **2**: V-V • **3**: H-V **NOTE** In the option descriptions, V indicates the visited area and H indicates the home area. For example, value **0** indicates that the visited location of the calling party and the home location of the called party are used for number analysis. This field cannot be left empty.
380	SMSType	NUMBER[10]	SMS message type. The options are as follows: • **0**: local SMS message • **1**: intra-province toll SMS message • **2**: inter-province toll SMS message • **3**: international toll SMS message This field cannot be left empty.
381	OnNetIndicator	VARCHAR2[1]	Analyzed SMS message type according to the network. The options are as follows: • **0**: intra-network • **1**: inter-network • **2**: unknown (This value is used when the CBS cannot determine the intra-network or inter-network type, for example, when a subscriber is roaming internationally.) This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
382	RoamState	VARCHAR2[1]	Roaming status of the charged party. The options are as follows: • **0**: non-roaming • **1**: roaming within a charging area • **2**: roaming out of a charging area • **3**: international roaming This field cannot be left empty.
383	CallingHomeCountryCode	NUMBER[10]	Home country code of the calling party. Generally, the 383rd to 394th fields cannot be left empty. This field can be left empty in scenarios where the process of charging the calling or called party is irrelevant to the home area or visited area of the peer end. In these scenarios, the network side may not report the visited area or number information about the peer end. This field can be left empty.
384	CallingHomeAreaNumber	NUMBER[10]	Home area code of the calling party. This field can be left empty.
385	CallingHomeNetworkCode	NUMBER[10]	Home network code of the calling party. This field can be left empty.
386	CallingRoamCountryCode	NUMBER[10]	Roam-in country code of the calling party. This field can be left empty.
387	CallingRoamAreaNumber	NUMBER[10]	Roam-in area code of the calling party. This field can be left empty.
388	CallingRoamNetworkCode	NUMBER[10]	Roam-in network code of the calling party. This field can be left empty.
389	CalledHomeCountryCode	NUMBER[10]	Home country code of the called party. This field can be left empty.
390	CalledHomeAreaNumber	NUMBER[10]	Home area code of the called party. This field can be left empty.
391	CalledHomeNetworkCode	NUMBER[10]	Home network code of the called party. This field can be left empty.
392	CalledRoamCountryCode	NUMBER[10]	Roam-in country code of the called party. This field can be left empty.
393	CalledRoamAre	NUMBER[10]	Roam-in area code of the called party.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	aNumber		This field can be left empty.
394	CalledRoamNetworkCode	NUMBER[10]	Roam-in network code of the called party. This field can be left empty.
395	ServiceType	VARCHAR2[128]	List of product codes used to charge the charged party. Multiple product codes are separated with a colon (:). This field can be left empty.
396	SpecialNumberIndicator	NUMBER[10]	Special number type. The options are as follows: • **0**: common number • **1**: barred number • **2**: free number • **3**: Special-tariff number • **9**: voice mail The default value is **0**. This field cannot be left empty.
397	NPFlag	VARCHAR2[1]	NP flag. The options are as follows: • **0**: not NP • **1**: NP out The default value is **0**. This field cannot be left empty.
398	NPPrefix	VARCHAR2[6]	NP prefix. • Set this field to the NP prefix of the called party in the MO process. • Set this field to the NP prefix of the calling party in the MT process. This field is left empty if NP is not executed.
399	CallingCUGNo	NUMBER[20]	CUG number of the calling party. If the calling party does not join a CUG, this field is set to **0**. This field cannot be left empty.
400	CalledCUGNo	NUMBER[20]	CUG number of the called party. If the called party does not join a CUG, this field is set to **0**. This field cannot be left empty.
401	OpposeNetworkType	NUMBER[10]	Peer network type. The options are as follows: • **1**: GSM

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty. This field is reserved.
402	OpposeNumberType	NUMBER[10]	Peer network type. The options are as follows: • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty.
403	CallingNetworkType	VARCHAR2[10]	Access network type of the calling party. • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field can be left empty.
404	CalledNetworkType	VARCHAR2[10]	Access network type of the called party. • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty.
405	CallingVPNTopGroupNumber	VARCHAR2[64]	Number of the top-level corporation to which the sender belongs. This field is valid only in the MO process where the sender is a corporate member. This field is empty when no corporation information exists. This field can be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
406	CallingVPNGroupNumber	VARCHAR2[64]	Number of the corporation to which the sender belongs. This field is valid only in the MO process where the sender is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
407	CallingVPNShortNumber	VARCHAR2[10]	Short number of the sender. This field is valid only in the MO process where the sender is a corporate member. This field can be left empty.
408	CalledVPNTopGroupNumber	VARCHAR2[64]	Number of the top-level corporation to which the recipient belongs. This field is valid only in the MT process where the recipient is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
409	CalledVPNGroupNumber	VARCHAR2[64]	Number of the corporation to which the recipient belongs. This field is valid only in the MT process where the recipient is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
410	CalledVPNShortNumber	VARCHAR2[10]	Short number of the recipient. This field is valid only in the MT process where the recipient is a corporate member. This field can be left empty.
411	GroupCallType	VARCHAR2[10]	Corporate call type. This field is valid only when the charged party is a corporate subscriber. The options are as follows: • **0**: non-corporate call • **1**: corporate intra-network call • **2**: corporate inter-network call The default value is **0**. This field cannot be left empty.
412	OnlineCharging	VARCHAR2[1]	Online charging flag. The options are as

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	Flag		follows: • **0**: online charging • **1**: offline charging This field cannot be left empty.
413	StartTimeOfBillCycle	VARCHAR2[14]	Bill cycle start time of the charged subscriber when a charging event occurs. Format: YYYYMMDDhhmmss This field cannot be left empty.
414	LastEffectOffering	NUMBER[20]	ID of the last offering that takes effect. The default value is **0**. This field cannot be left empty.
415	DTDiscount	NUMBER[10]	DT discount rate. This field can be left empty.
416	OpposeMainOfferingID	NUMBER[20]	Primary offering ID of the peer party's number. The default value is **0**. This field cannot be left empty.
417	HomeZoneID	NUMBER[10]	Home zone ID. When a subscriber enjoys the home zone discount, the value of this field is the home zone ID of the area where the subscriber currently locates. The default value is **0**. This field cannot be left empty.
418	SpecialZoneID	NUMBER[10]	Special zone ID. When a subscriber enjoys the special zone discount, the value of this field is the special zone ID of the area where the subscriber currently locates. The default value is **0**. This field cannot be left empty.
419	MainBalanceInfo	VARCHAR2[255]	This field is reserved.
420	ChgBalanceInfo	VARCHAR2[255]	This field is reserved.
421	ChgFreeUnitInfo	VARCHAR2[255]	This field is reserved.
422	UserState	VARCHAR2[10]	This field is reserved.
423	GroupPayFlag	NUMBER[10]	This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
424	RoamingZoneID	VARCHAR2[20]	Roaming zone ID. This field can be left empty.
425	PrimaryOfferChgAmt	NUMBER[20]	Primary offering rating amount. The default value is 0. This field cannot be left empty
426	ACCT_BAL_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus account balance in the group from 202nd to 271st fields.
427	ACCT_BAL_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus account balance in the group from 202nd to 271st fields.
428	ACCT_BAL_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus account balance in the group from 202nd to 271st fields.
429	ACCT_BAL_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus account balance in the group from 202nd to 271st fields.
430	ACCT_BAL_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus account balance in the group from 202nd to 271st fields.
431	ACCT_BAL_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus account balance in the group from 202nd to 271st fields.
432	ACCT_BAL_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus account balance in the group from 202nd to 271st fields.
433	ACCT_BAL_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus account balance in the group from 202nd to 271st fields.
434	ACCT_BAL_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus account balance in the group from 202nd to 271st fields.
435	ACCT_BAL_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus account balance in the group from 202nd to 271st fields.
436	BONUS_FU_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus free unit in the group from 272nd to 351st fields.
437	BONUS_FU_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus free unit in the group from 272nd to 351st fields.
438	BONUS_FU_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus free unit in the group from 272nd to 351st fields.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
439	BONUS_FU_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus free unit in the group from 272nd to 351st fields.
440	BONUS_FU_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus free unit in the group from 272nd to 351st fields.
441	BONUS_FU_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus free unit in the group from 272nd to 351st fields.
442	BONUS_FU_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus free unit in the group from 272nd to 351st fields.
443	BONUS_FU_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus free unit in the group from 272nd to 351st fields.
444	BONUS_FU_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus free unit in the group from 272nd to 351st fields.
445	BONUS_FU_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus free unit in the group from 272nd to 351st fields.

4.2.2.3 Extended Charging Service Information in an MMS CDR

This topic describes extended fields in the charging service information in an MMS CDR.

Table 4-6 describes extended fields in the charging service information in an MMS CDR.

Table 4-6 Extended charging service information in an MMS CDR

SN	Field Name	Field Type	Description
352	CallingPartyNumber	VARCHAR2[64]	Sender number. For numbers of the E.164 type, the number formats are as follows: • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN For SP IDs, the reported number is used directly. This field can be left empty.
353	CalledPartyNumber	VARCHAR2[64]	Recipient number. For numbers of the E.164 type. • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN For SP IDs, the reported number is used

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			directly. This field can be left empty.
354	CallingPartyIMSI	VARCHAR2[64]	IMSI of the sender. The value is reported by the network side. If no value is reported, this field is left empty. If the value comes in DCC message that value will be stored in CDR. If no value was sent, then the DB value will be stored in CDR. This field can be left empty.
355	CalledPartyIMSI	VARCHAR2[64]	IMSI of the recipient. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
356	DialedNumber	VARCHAR2[64]	Number that is dialed. The value is reported by the network side and can be in any format. This field can be left empty.
357	ServiceFlow	VARCHAR2[1]	MMS process type. The options are as follows: • **1**: MO • **2**: MT • **3**: MF (reserved) • **4**: read-reply report • **5**: delivery report • **6**: reply report This field cannot be left empty.
358	CallingRoamInfo	VARCHAR2[20]	Roaming information about the sender. This field is used to analyze the calling party's roaming status and can be set to the value of fields such as **LocationNumber**, **MSCAddress**, or **VLRNumber**. For the calling number, it is recorded in the international number format by default. For other information, the reported one is recorded directly. This field can be left empty.
359	CallingCellID	VARCHAR2[20]	Cell ID of the sender. The value is reported in IDP messages.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			If the CBS does not need to analyze the visited area based on the cell ID, this field can be left empty. The format is Three-digit MCC + Two-digit MNC + Five-digit LAC + Five-digit cell ID, for example, **460002230320412**.
360	CalledRoamInfo	VARCHAR2[20]	Roaming information about the recipient. This field is used to analyze the called party's roaming status and can be set to the value of fields such as **LocationNumber**, **MSCAddress**, or **VLRNumber**. This field can be left empty.
361	CalledCellID	VARCHAR2[20]	Cell ID of the recipient. If the CBS does not need to analyze the visited area based on the cell ID, this field can be left empty. The format is Three-digit MCC + Two-digit MNC + Five-digit LAC + Five-digit cell ID, for example, **460002230320412**.
362	TimeStampOfSSP	VARCHAR2[14]	Timestamp reported by the SSP. Format: YYYYMMDDhhmmss This field can be left empty.
363	TimeZoneOfSSP	NUMBER[10]	Time zone where the SSP locates. This field can be left empty. If this field is left empty, the time zone in the MSC is the same as that of the home server.
364	ChargingTime	VARCHAR2[14]	Charging start time. Format: YYYYMMDDhhmmss This field cannot be left empty.
365	SendResult	NUMBER[10]	MMS message sending result. The options are as follows: • **0**: failure • **1**: successful The default value is **1**. This field cannot be left empty.
366	MMSID	VARCHAR2[24]	MMS message ID or sequence number, which uniquely identifies a fee deduction request. The value is reported by the network side. If no value is reported, this field is left

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			empty. This field can be left empty.
367	IMEI	VARCHAR2[24]	International mobile equipment identity. This field can be left empty.
368	MMSLength	NUMBER[10]	MMS message size reported by external systems. If MMS messages are charged based on their sizes, this field cannot be left empty. The default value is **0**. This field cannot be left empty.
369	RefundIndicator	VARCHAR2[20]	Fee deduction flag. The options are as follows: • **0**: fee deduction • **1**: refund This field cannot be left empty.
370	BrandID	NUMBER[20]	Brand ID. The default value is **0**. This field cannot be left empty.
371	MainOfferingID	NUMBER[20]	Primary offering ID. The default value is **0**. This field cannot be left empty.
372	ChargingPartyNumber	VARCHAR2[64]	Charged number. The number formats are as follows: • Fixed-line number: Area code + PSTN • Mobile number: MSISDN This field cannot be left empty.
373	ChargePartyIndicator	VARCHAR2[1]	Charged party. The options are as follows: • **1**: calling party • **2**: called party • **3**: third party • **4**: parent or child card subscriber • **5**: calling party and corporate This field cannot be left empty.
374	PayType	VARCHAR2[1]	Payment type of a subscriber. The options are as follows: • **0**: prepaid • **1**: postpaid

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **2**: hybrid This field cannot be left empty.
375	ChargingType	VARCHAR2[1]	Charging type. The options are as follows: • **0**: V-H • **1**: H-H • **2**: V-V • **3**: H-V **NOTE** In the option descriptions, V indicates the visited area and H indicates the home area. For example, value **0** indicates that the visited location of the calling party and the home location of the called party are used for number analysis. This field cannot be left empty.
376	OnNetIndicator	VARCHAR2[1]	Analyzed MMS message type according to the network. The options are as follows: • **0**: intra-network • **1**: inter-network • **2**: unknown (This value is used when the CBS cannot determine the intra-network or inter-network type, for example, when a subscriber is roaming internationally.) This field cannot be left empty.
377	RoamState	VARCHAR2[1]	Roaming status of the charged party. The options are as follows: • **0**: non-roaming • **1**: roaming within a charging area • **2**: roaming out of a charging area • **3**: international roaming This field cannot be left empty.
378	CallingHomeCountryCode	NUMBER[10]	Home country code of the MMS message sender. Generally, the 378th to 389th fields cannot be left empty. This field can be left empty in scenarios where the process of charging the calling or called party is irrelevant to the home area or visited area of the peer end. In these scenarios, the network side may not report the visited area or number information about the peer end.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
379	CallingHomeAreaNumber	NUMBER[10]	Home area code of the MMS message sender. This field can be left empty.
380	CallingHomeNetworkCode	NUMBER[10]	Home network code of the MMS message sender. This field can be left empty.
381	CallingRoamCountryCode	NUMBER[10]	Roaming country code of the MMS message sender. This field can be left empty.
382	CallingRoamAreaNumber	NUMBER[10]	Roaming area code of the MMS message sender.
383	CallingRoamNetworkCode	NUMBER[10]	Roaming network code of the MMS message sender. This field can be left empty.
384	CalledHomeCountryCode	NUMBER[10]	Home country code of the MMS message recipient. This field can be left empty.
385	CalledHomeAreaNumber	NUMBER[10]	Home area code of the MMS message recipient. This field can be left empty.
386	CalledHomeNetworkCode	NUMBER[10]	Home network code of the MMS message recipient. This field can be left empty.
387	CalledRoamCountryCode	NUMBER[10]	Roaming country code of the MMS message recipient. This field can be left empty.
388	CalledRoamAreaNumber	NUMBER[10]	Roaming area code of the MMS message recipient. This field can be left empty.
389	CalledRoamNetworkCode	NUMBER[10]	Roaming network code of the MMS message recipient. This field can be left empty.
390	ServiceType	VARCHAR2[128]	List of product codes used to charge the charged party. Multiple product codes are separated with a colon (:). This field can be left empty.
391	SpecialNumberIndicator	NUMBER[10]	Special number type. The options are as follows: • **0**: common number • **1**: barred number

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **2**: free number • **3**: Special-tariff number • **9**: voice mail The default value is **0**. This field cannot be left empty.
392	NPFlag	VARCHAR2[1]	NP flag. The options are as follows: • **0**: not NP • **1**: NP out The default value is **0**. This field cannot be left empty.
393	NPPrefix	VARCHAR2[6]	NP prefix. This field is set to the recipient's NP prefix for the MMS message sender and the sender's NP prefix for the MMS message recipient. This field is left empty if NP is not executed.
394	CallingCUGNo	NUMBER[20]	CUG ID of the MMS message sender. The default value is **0**. This field cannot be left empty.
395	CalledCUGNo	NUMBER[20]	CUG ID of the MMS message recipient. The default value is **0**. This field cannot be left empty.
396	OpposeNumber Type	NUMBER[10]	Peer network type. The options are as follows: • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty.
397	CallingNetwork Type	VARCHAR2[10]	Access network type of the calling party. • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
398	CalledNetworkType	VARCHAR2[10]	Access network type of the MMS message recipient. The options are as follows: • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty.
399	CallingVPNTopGroupNumber	VARCHAR2[64]	Number of the top-level corporation to which the sender belongs. This field is valid only in the MO process where the sender is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
400	CallingVPNGroupNumber	VARCHAR2[64]	Number of the corporation to which the sender belongs. This field is valid only in the MO process where the sender is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
401	CallingVPNShortNumber	VARCHAR2[10]	Short number of the sender. This field is valid only in the MO process where the sender is a corporate member. This field can be left empty.
402	CalledVPNTopGroupNumber	VARCHAR2[64]	Number of the top-level corporation to which the recipient belongs. This field is valid only in the MT process where the recipient is a corporate member. This field is empty when no corporation information exists. This field can be left empty.
403	CalledVPNGroupNumber	VARCHAR2[64]	Number of the corporation to which the recipient belongs. This field is valid only in the MT process where the recipient is a corporate member. This field is empty when no corporation

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			information exists. This field can be left empty.
404	CalledVPNShortNumber	VARCHAR2[10]	Short number of the recipient. This field is valid only in the MT process where the recipient is a corporate member. This field can be left empty.
405	GroupCallType	VARCHAR2[10]	Corporate call type. This field is valid only when the charged party is a corporate subscriber. The options are as follows: • **0**: non-corporate call • **1**: corporate intra-network call • **2**: corporate inter-network call The default value is **0**. This field cannot be left empty.
406	OnlineChargingFlag	VARCHAR2[1]	Online charging flag. The options are as follows: • **0**: online charging • **1**: offline charging This field cannot be left empty.
407	StartTimeOfBillCycle	VARCHAR2[14]	Bill cycle start time of the charged subscriber when a charging event occurs. Format: YYYYMMDDhhmmss This field cannot be left empty.
408	LastEffectOffering	NUMBER[20]	ID of the last offering that takes effect. The default value is **0**. This field cannot be left empty.
409	OriginAddressType	NUMBER[10]	Original sender address type. • **0**: email address • **1**: MSISDN • **2**: IPv4 address • **3**: IPv6 address • **4**: digital short code • **5**: alphabetical and digital short code • **6**: others The value is reported by external systems. This field cannot be left empty.
410	DestAddressType	NUMBER[10]	Destination address type.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **0**: email address • **1**: MSISDN • **2**: IPv4 address • **3**: IPv6 address • **4**: digital short code • **5**: alphabetical and digital short code • **6**: others The value is reported by external systems. This field cannot be left empty.
411	Message-Type	NUMBER[10]	MMS message type. • **1**: m-send-req • **2**: m-send-conf • **3**: m-notification-ind • **4**: m-notifyresp-ind • **5**: m-retrieve-conf • **6**: m-acknowledge-ind • **7**: m-delivery-ind • **8**: m-read-rec-ind • **9**: m-read-orig-ind • **10**: m-forward-req • **11**: m-forward-conf • **12**: m-mbox-store-conf • **13**: m-mbox-view-conf • **14**: m-mbox-upl • **101**: MOAT • **102**: AOMT • **103**: MOMT • **104**: MOET • **105**: EOMT • **106**: DlvRpt • **107**: RdRpt • **108**: Reply • **109**: reserved The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
412	VASP-Id	VARCHAR2[20]	Service provider ID. The value is reported by the network side. If no value is reported, this field is left

SN	Field Name	Field Type	Description
			empty. This field can be left empty.
413	VAS-Id	VARCHAR2[20]	Service ID. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
414	Service-Id	VARCHAR2[20]	Value-added service ID. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
415	DTDiscount	NUMBER[10]	DT discount rate. This field can be left empty.
416	OpposeMainOfferingID	NUMBER[20]	Primary offering ID of the peer party's number. The default value is **0**. This field cannot be left empty.
417	MainBalanceInfo	VARCHAR2[255]	This field is reserved.
418	ChgBalanceInfo	VARCHAR2[255]	This field is reserved.
419	ChgFreeUnitInfo	VARCHAR2[255]	This field is reserved.
420	UserState	VARCHAR2[10]	This field is reserved.
421	GroupPayFlag	NUMBER[10]	This field is reserved.
422	RoamingZoneID	VARCHAR2[20]	Roaming zone ID. This field can be left empty.
423	PrimaryOfferChgAmt	NUMBER[20]	Primary offering rating amount. The default value is 0. This field cannot be left empty

4.2.2.4 Extended Charging Service Information in a GPRS CDR

This topic describes extended fields in the charging service information in a GPRS CDR.

Table 4-7 describes extended fields in the charging service information in a GPRS CDR.

Table 4-7 Extended charging service information in a GPRS CDR

SN	Field Name	Field Type	Description
352	CallingPartyNumber	VARCHAR2[64]	Calling number. The number formats are as follows: • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN • URI format This field cannot be left empty.
353	APN	VARCHAR2[22]	Access point. The value is reported by the network side. If no value is reported, this field is left empty. If charging is implemented based on the access point, this field cannot be left empty.
354	URL	VARCHAR2[22]	Visited URL. The value is reported by the network side. If no value is reported, this field is left empty.
355	CallingPartyIMSI	VARCHAR2[64]	International mobile subscriber identity (IMSI) of the calling party. This field can be left empty. The value is reported by the network side. If no value is reported, this field is left empty. If the value comes in DCC message that value will be stored in CDR. If no value was sent, then the DB value will be stored in CDR.
356	AccessNetworkAddress	VARCHAR2[22]	Address for accessing the network. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
357	GGSNAddress	VARCHAR2[22]	GGSN address. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
358	CallingRoamInfo	VARCHAR2[20]	Roaming information about the calling party. This field is used to analyze the calling party's roaming status. The field depends

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			on the information reported by the network and can be set to the value of fields such as **MSCAddress** or **IPAddress**. The value depends on the control parameter specifying the roaming analysis method. This field can be left empty.
359	CallingCellID	VARCHAR2[20]	Cell ID of the calling party. If the CBS does not need to analyze the visited area based on the cell ID, this field can be left empty. The format is Three-digit mobile country code (MCC) + Two-digit mobile network code (MNC) + Five-digit location area code (LAC) + Five-digit cell ID, for example, **460002230320412**.
360	TimeStampOfSGSN	VARCHAR2[14]	Service start time reported by the SGSN or an external NE. Format: YYYYMMDDhhmmss This field can be left empty.
361	TimeZoneOfSGSN	NUMBER[10]	Time zone where the SGSN or an external NE locates. • Empty: default time zone • Non-empty: reported time zone This field can be left empty.
362	BearerCapability	VARCHAR2[32]	Bearer capability. This field is left empty. This field is reserved.
363	ChargingTime	VARCHAR2[14]	Charging start time. Format: YYYYMMDDhhmmss This field can be left empty.
364	TotalFlux	NUMBER[20]	Total traffic, in bytes. The default value is **0**. This field cannot be left empty.
365	UpFlux	NUMBER[20]	Upstream traffic, in bytes. The default value is **0**. This field cannot be left empty.
366	DownFlux	NUMBER[20]	Downstream traffic, in bytes. The default value is **0**. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
367	ElapseDuration	NUMBER[10]	Service duration, in seconds. The default value is **0**. This field cannot be left empty.
368	IMEI	VARCHAR2[24]	International mobile equipment identity. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
369	ServiceID	VARCHAR2[20]	Service ID. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
370	SPID	VARCHAR2[20]	SP ID. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
371	CategoryID	VARCHAR2[20]	Category ID. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
372	ContentID	VARCHAR2[20]	Content ID. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
373	QoS	VARCHAR2[30]	Service quality. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
374	BearerProtocolType	NUMBER[10]	Protocol type used by an SP to provide bearer services. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
375	StartTime	VARCHAR2[14]	Data connection start time. The value is reported by the network side.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			If no value is reported, this field is left empty. This field can be left empty.
376	StopTime	VARCHAR2[14]	Data connection end time. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
377	ChargingID	VARCHAR2[20]	Charging ID. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
378	TransitionID	VARCHAR2[32]	Transition ID. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
379	ServiceLevel	NUMBER[10]	Service level. The value is reported by the network side. If no value is reported, this field is left empty. This field can be left empty.
380	BrandID	NUMBER[20]	Brand ID. The default value is **0**. This field cannot be left empty.
381	MainOfferingID	NUMBER[20]	Primary offering ID. The default value is **0**. This field cannot be left empty.
382	ChargingPartyNumber	VARCHAR2[64]	Charged number. The number formats are as follows: • Fixed-line number: Area code + PSTN • Mobile number: MSISDN • URI format This field cannot be left empty.
383	PayType	VARCHAR2[1]	Payment type of a subscriber. The options are as follows: • **0**: prepaid • **1**: postpaid

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **2**: hybrid This field cannot be left empty.
384	ChargingType	VARCHAR2[1]	Charging type. The options are as follows: • **0**: by duration • **1**: by traffic This field cannot be left empty.
385	RoamState	VARCHAR2[1]	Roaming status of the charged party. The options are as follows: • **0**: non-roaming • **1**: roaming within a charging area • **2**: roaming out of a charging area • **3**: international roaming The default value is **0**. This field cannot be left empty.
386	CallingHomeCountryCode	NUMBER[10]	Home country code of the calling party. The default value is **0**. This field can be left empty.
387	CallingHomeAreaNumber	NUMBER[10]	Home area code of the calling party. The default value is **0**. This field can be left empty.
388	CallingHomeNetworkCode	NUMBER[10]	Home network code of the calling party. The default value is **0**. This field can be left empty.
389	CallingRoamCountryCode	NUMBER[10]	Roam-in country code of the calling party. The default value is **0**. This field can be left empty.
390	CallingRoamAreaNumber	NUMBER[10]	Roam-in area code of the calling party. The default value is **0**. This field can be left empty.
391	CallingRoamNetworkCode	NUMBER[10]	Roam-in network code of the calling party. The default value is **0**. This field can be left empty.
392	ServiceType	VARCHAR2[128]	List of product codes used to charge the charged party. Multiple product codes are separated with a colon (:).

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field can be left empty.
393	CallingNetwork Type	VARCHAR2[10]	Local network type. The options are as follows: • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field can be left empty.
394	CallingVPNTop GroupNumber	VARCHAR2[64]	Number of the top-level corporation to which the calling party belongs. This field is empty when no corporation information exists. This field can be left empty.
395	CallingVPNGro upNumber	VARCHAR2[64]	Number of the corporation to which the calling party belongs. This field is empty when no corporation information exists. This field can be left empty.
396	OnlineCharging Flag	VARCHAR2[1]	Online charging flag. The options are as follows: • **0**: online charging • **1**: offline charging This field cannot be left empty.
397	StartTimeOfBill Cycle	VARCHAR2[14]	Bill cycle start time of the charged subscriber when a charging event occurs. Format: YYYYMMDDhhmmss This field cannot be left empty.
398	LastEffectOfferi ng	NUMBER[20]	ID of the last offering that takes effect. The default value is **0**. This field cannot be left empty.
399	DTDiscount	NUMBER[10]	DT discount rate. The default value is **0**. This field cannot be left empty.
400	RatingGroup	NUMBER[10]	Rating group ID. This field is set to **0** if there is only one MSCC and is set to the actual rating group ID if there are multiple MSCCs. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
401	HomeZoneID	NUMBER[10]	Indicates the home zone ID. When a subscriber enjoys the home zone discount, the value of this field is the home zone ID of the area where the subscriber currently locates. The default value is **0**. This field cannot be left empty.
402	SpecialZoneID	NUMBER[10]	Indicates the special zone ID. When a subscriber enjoys the special zone discount, the value of this field is the special zone ID of the area where the subscriber currently locates. The default value is **0**. This field cannot be left empty.
403	DataZoneID	NUMBER[10]	Indicates the data zone ID. When a subscriber enjoys the data zone discount, the value of this field is the data zone ID of the area where the subscriber currently locates. The default value is **0**. This field cannot be left empty.
404	MainBalanceInfo	VARCHAR2[255]	This field is reserved.
405	ChgBalanceInfo	VARCHAR2[255]	This field is reserved.
406	ChgFreeUnitInfo	VARCHAR2[255]	This field is reserved.
407	UserState	VARCHAR2[10]	This field is reserved.
408	GroupPayFlag	NUMBER[10]	This field is reserved.
409	RATType	Number[10]	This field is reserved.
410	ChargePartyIndicator	VARCHAR2[255]	This field is reserved.
411	RoamingZoneID	VARCHAR2[20]	Roaming zone ID. This field can be left empty.
412	PrimaryOfferChgAmt	NUMBER[20]	Primary offering rating amount. The default value is 0. This field cannot be left empty
413	ACCT_BAL_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus account balance in the group from 202nd to 271st

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			fields.
414	ACCT_BAL_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus account balance in the group from 202nd to 271st fields.
415	ACCT_BAL_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus account balance in the group from 202nd to 271st fields.
416	ACCT_BAL_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus account balance in the group from 202nd to 271st fields.
417	ACCT_BAL_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus account balance in the group from 202nd to 271st fields.
418	ACCT_BAL_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus account balance in the group from 202nd to 271st fields.
419	ACCT_BAL_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus account balance in the group from 202nd to 271st fields.
420	ACCT_BAL_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus account balance in the group from 202nd to 271st fields.
421	ACCT_BAL_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus account balance in the group from 202nd to 271st fields.
422	ACCT_BAL_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus account balance in the group from 202nd to 271st fields.
423	BONUS_FU_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus free unit in the group from 272nd to 351st fields.
424	BONUS_FU_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus free unit in the group from 272nd to 351st fields.
425	BONUS_FU_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus free unit in the group from 272nd to 351st fields.
426	BONUS_FU_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus free unit in the group from 272nd to 351st fields.
427	BONUS_FU_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus free unit in the group from 272nd to 351st fields.
428	BONUS_FU_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus free unit in the group from 272nd to 351st fields.
429	BONUS_FU_E	DATE[14]	Expiration time of the 7th bonus free unit

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	XPIRE_TIME7		in the group from 272nd to 351st fields.
430	BONUS_FU_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus free unit in the group from 272nd to 351st fields.
431	BONUS_FU_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus free unit in the group from 272nd to 351st fields.
432	BONUS_FU_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus free unit in the group from 272nd to 351st fields.

4.2.2.5 Extended Charging Service Information in a Recurring Charging CDR

This topic describes extended fields in the charging service information in a recurring charging CDR.

Table 4-8 describes extended fields in the charging service information in a recurring charging CDR.

Table 4-8 Extended charging service information in a recurring charging CDR

SN	Field Name	Field Type	Description
352	BrandID	NUMBER[20]	Brand ID. This field can be left empty for account-level rentals. This field can be left empty.
353	MainOfferingID	NUMBER[20]	Primary offering ID. This field can be left empty for account-level rentals. This field can be left empty.
354	PayType	VARCHAR2[1]	Payment type of a subscriber. The options are as follows: • **0**: prepaid • **1**: postpaid • **2**: hybrid This field can be left empty for account-level rentals. This field can be left empty.
355	ChargingPartyNumber	VARCHAR2[64]	Charged number. The number formats are as follows: • Fixed-line number: Area code + PSTN • Mobile number: MSISDN

SN	Field Name	Field Type	Description
			• URI format When **ChargingPartyType** is set to **1** or **2**, this field can be left empty.
356	ChargingPartyType	VARCHAR2[1]	Type of the charged party. The options are as follows: • **0**: subscriber • **1**: customer • **2**: subscriber group This field cannot be left empty.
357	CycleBeginTime	VARCHAR2[14]	Cycle start time of a rental product. Format: YYYYMMDDHHMMSS This field cannot be left empty.
358	CycleEndTime	VARCHAR2[14]	Cycle end time of a rental product. Format: YYYYMMDDHHMMSS This field cannot be left empty.
359	CycleType	NUMBER[10]	Recurring charging cycle type. • **1**: bill cycle • **2**: days • **3**: weeks • **4**: months • **5**: natural months • **6**: years • **7**: hours • **8**: calendar day • **9**: calendar week • **10**: calendar year The options can be customized. This field cannot be left empty.
360	CycleLength	NUMBER[10]	Cycle length. The default value is **0**. This field cannot be left empty.
361	ElapseCycles	NUMBER[10]	Sequence number of a cycle. The value can be the sequence number of a cycle in which the rental fails to be collected. The default value is **0**. This field cannot be left empty.
362	InnerCycleBeginTime	VARCHAR2[14]	Start time of a subcycle. The value may be different from that of the **CycleBeginTime** field if rentals are prorated upon subscription or the

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			recurring charges are collected by day. For example, if a subscriber subscribes to a monthly offering on October 15, the cycle ranges from 00:00 on October 1 to 23:59 on October 31, and the subcycle start time is the subscription time on October 15. Format: YYYYMMDDhhmmss This field cannot be left empty.
363	InnerCycleEndTime	VARCHAR2[14]	End time of a subcycle. The value may be different from that of the **CycleEndTime** field if rentals are prorated upon unsubscription or the recurring charges are collected by day. Format: YYYYMMDDhhmmss This field cannot be left empty.
364	ProductID	VARCHAR2[20]	ID of a product or product package corresponding to a rental or package. This field is reserved.
365	OfferingID	NUMBER[20]	Key of the offering to which a rental product belongs. The default value is **0**. This field cannot be left empty.
366	OfferingInstID	NUMBER[20]	Subscription key of the offering to which a rental product belongs. The default value is **0**. This field cannot be left empty.
367	OrderStatus	VARCHAR2[1]	Status of a subscription relationship. The options are as follows: • **0**: normal • **1**: suspended • **2**: initial • **3**: expired This field can be left empty.
368	ProrateFlag	VARCHAR2[1]	Indicates whether to prorate the rental. The options are as follows: • **0**: no • **1**: yes This field is reserved.
369	StartTimeOfBillCycle	VARCHAR2[14]	Start time of a bill cycle. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
370	ChargePartyIndicator	VARCHAR2[1]	Charged party. The options are as follows: • **1**: calling party • **2**: called party • **3**: third party • **4**: parent or child card subscriber • **5**: calling party and corporate This field has a fixed value of **1**. This field cannot be left empty.
371	PosRentMode	VARCHAR2[1]	Rental deduction mode for postpaid subscribers. The options are as follows: • A: The rental is collected at the beginning of a bill cycle. • P: The rental is collected at the end of a bill cycle. This field cannot be left empty for postpaid and hybrid subscribers. For prepaid subscribers, the fix value is **A**.
372	TriggerMode	VARCHAR2[1]	Trigger mode. • **0**: recurring rental collection • **1**: rental collection upon offering subscription • **2**: rental collection upon offering unsubscription • **3**: rental re-deduction upon recharge, transfer, or adjustment • **4**: advance triggering of the real-time charging process (For example, there are five million subscribers at a site and a subscriber triggers real-time charging requests at 00:00 when the subscriber makes a call or goes online. If the recurring charge collection task has not been executed for the subscriber in this scenario, real-time rental collection is triggered to ensure that the recurring charge is collected in a timely manner.) • **5**: rental collection triggered by WebService requests sent from third-party systems (This option is available only to specific sites.) • **6**: rental collection triggered by advance rental collection task (This option is available only to specific sites.)

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **7**: real-time rental collection triggered by recharge, transfer, or adjustment • **8**: rental collection triggered by first time activation This field cannot be left empty.
373	ExecuteFlag	VARCHAR2[1]	Indicates whether a rental is collected at the beginning or end of a cycle. The options are as follows: • At the beginning of a cycle • At the end of a cycle This field is reserved.
374	ProductCode	VARCHAR2[64]	This field is reserved.
375	ExtTransactionId	VARCHAR2[131]	The external transaction Id from interface transfer.
376	Remark1	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.
377	Remark2	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.
378	Remark3	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.
379	Remark4	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.
380	CallingVPNGroupNumber	VARCHAR2[64]	This field is reserved.
381	GroupPayFlag	NUMBER[10]	This field is reserved.
382	OperatorID	VARCHAR2[255]	The external system operator id.
383	FAF Indicator	Varchar2[20]	This parameter is the FN offer id. If it is not FN Operation then this field can be NULL.
384	ACCT_BAL_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus account balance in the group from 202nd to 271st fields.
385	ACCT_BAL_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus account balance in the group from 202nd to 271st fields.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
386	ACCT_BAL_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus account balance in the group from 202nd to 271st fields.
387	ACCT_BAL_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus account balance in the group from 202nd to 271st fields.
388	ACCT_BAL_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus account balance in the group from 202nd to 271st fields.
389	ACCT_BAL_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus account balance in the group from 202nd to 271st fields.
390	ACCT_BAL_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus account balance in the group from 202nd to 271st fields.
391	ACCT_BAL_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus account balance in the group from 202nd to 271st fields.
392	ACCT_BAL_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus account balance in the group from 202nd to 271st fields.
393	ACCT_BAL_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus account balance in the group from 202nd to 271st fields.
394	BONUS_FU_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus free unit in the group from 272nd to 351st fields.
395	BONUS_FU_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus free unit in the group from 272nd to 351st fields.
396	BONUS_FU_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus free unit in the group from 272nd to 351st fields.
397	BONUS_FU_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus free unit in the group from 272nd to 351st fields.
398	BONUS_FU_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus free unit in the group from 272nd to 351st fields.
399	BONUS_FU_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus free unit in the group from 272nd to 351st fields.
400	BONUS_FU_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus free unit in the group from 272nd to 351st fields.
401	BONUS_FU_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus free unit in the group from 272nd to 351st fields.
402	BONUS_FU_E	DATE[14]	Expiration time of the 9th bonus free unit

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	XPIRE_TIME9		in the group from 272nd to 351st fields.
403	BONUS_FU_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus free unit in the group from 272nd to 351st fields.

4.2.2.6 Extended Charging Service Information in a Management Flow CDR

This topic describes extended fields in the charging service information in a management flow CDR.

Table 4-9 describes extended fields in the charging service information in a management flow CDR.

Table 4-9 Extended charging service information in a management flow CDR

SN	Field Name	Field Type	Description
352	CallingPartyNumber	VARCHAR2[64]	Calling number. The number formats are as follows: • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN • URI format This field cannot be left empty.
353	OperationID	NUMBER[10]	Operation ID. The values are defined by the BM. For example, value **4057010** indicates the operation of changing offerings for subscribers. The options can be customized based on site requirements. This field cannot be left empty.
354	OperationType	NUMBER[10]	Operation type. The options are as follows for the FN and Home Zone management services: • **1**: add • **2**: modify • **3**: delete • **0**: unspecified The options can be customized based on operation IDs. This field cannot be left empty.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
355	BrandID	NUMBER[20]	Brand ID. The default value is **0**. This field cannot be left empty.
356	MainOfferingID	NUMBER[20]	Primary offering ID. The default value is **0**. This field cannot be left empty.
357	PayType	VARCHAR2[4]	Payment type of a subscriber. The options are as follows: • **0**: prepaid • **1**: postpaid • **2**: hybrid This field cannot be left empty.
358	StartTimeOfBillCycle	VARCHAR2[14]	Start time of a bill cycle. Format: YYYYMMDDhhmmss This field cannot be left empty.
359	Reserve	VARCHAR2[20]	This field is reserved. This field can be left empty.
360	Merchant	VARCHAR2[20]	This field is reserved. This field can be left empty.
361	Service	VARCHAR2[20]	This field is reserved. This field can be left empty.
362	MainBalanceInfo	VARCHAR2[255]	This field is reserved.
363	ChgBalanceInfo	VARCHAR2[255]	This field is reserved.
364	ChgFreeUnitInfo	VARCHAR2[255]	This field is reserved.
365	UserState	VARCHAR2[10]	This field is reserved.
366	OldUserState	VARCHAR2[10]	This field is reserved.
367	ValidDayAdded	NUMBER[10]	This field is reserved.
368	Oper_ID	NUMBER[20]	This field is reserved.
369	SPID	VARCHAR2[20]	This field is reserved.
370	ServiceID	VARCHAR2[20]	This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
371	ServiceType	NUMBER[10]	This field is reserved.
372	ContentID	VARCHAR2[20]	This field is reserved.
373	url	VARCHAR2[23]	This field is reserved.
374	ExtTransactionId	VARCHAR2[131]	The external transaction Id from interface transfer.
375	OldMainOfferingID	NUMBER[10]	This field is reserved.
376	AdditionalInfo	VARCHAR2[256]	Service additional infomation. Records service additional information and redundant information. In most scenarios, the information is useful for specified carriers. This field can be left empty.
377	NewOfferingID	NUMBER[10]	This field is reserved.
378	ExpireTimeofNewOffering	VARCHAR2[14]	This field is reserved.
379	ChargePartyIndicator	VARCHAR2[255]	This field is reserved.
380	AccessMethod	NUMBER[10]	This field is reserved.
381	OperatorID	VARCHAR2[255]	The external system operator id.
382	FAF Indicator	Varchar2[20]	This parameter is the FN offer id. If it is not FN Operation then this field can be NULL.
383	FAF Number	Varchar2[255]	This parameter is the FN number which is modified/added/deleted in the FN operation. If it is not FN Operation then this field can be NULL.
384	ACCT_BAL_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus account balance in the group from 202nd to 271st fields.
385	ACCT_BAL_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus account balance in the group from 202nd to 271st fields.
386	ACCT_BAL_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus account balance in the group from 202nd to 271st fields.
387	ACCT_BAL_E	DATE[14]	Expiration time of the 4th bonus account balance in the group from 202nd to 271st

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	XPIRE_TIME4		fields.
388	ACCT_BAL_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus account balance in the group from 202nd to 271st fields.
389	ACCT_BAL_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus account balance in the group from 202nd to 271st fields.
390	ACCT_BAL_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus account balance in the group from 202nd to 271st fields.
391	ACCT_BAL_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus account balance in the group from 202nd to 271st fields.
392	ACCT_BAL_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus account balance in the group from 202nd to 271st fields.
393	ACCT_BAL_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus account balance in the group from 202nd to 271st fields.
394	BONUS_FU_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus free unit in the group from 272nd to 351st fields.
395	BONUS_FU_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus free unit in the group from 272nd to 351st fields.
396	BONUS_FU_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus free unit in the group from 272nd to 351st fields.
397	BONUS_FU_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus free unit in the group from 272nd to 351st fields.
398	BONUS_FU_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus free unit in the group from 272nd to 351st fields.
399	BONUS_FU_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus free unit in the group from 272nd to 351st fields.
400	BONUS_FU_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus free unit in the group from 272nd to 351st fields.
401	BONUS_FU_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus free unit in the group from 272nd to 351st fields.
402	BONUS_FU_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus free unit in the group from 272nd to 351st fields.
403	BONUS_FU_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus free unit in the group from 272nd to 351st fields.

 Copyright © Huawei Technologies Co., Ltd.

4.2.2.7 Extended Charging Service Information in the Content-based Charging Process

This topic describes extended fields in the charging service information in the content-based charging process.

Table 4-10 describes extended fields in the charging service information in the content-based charging process.

Table 4-10 Extended charging service information in the content-based charging process

SN	Field Name	Field Type	Description
352	CallingPartyNumber	VARCHAR2[64]	Calling number. The number formats are as follows: • Fixed-line number: Country code + Area code + PSTN • Mobile number: Country code + MSISDN • URI format This field cannot be left empty.
353	CallingPartyIMSI	VARCHAR2[64]	IMSI of the calling party. The value is reported by the network side. If no value is reported, this field is left empty. If the value comes in DCC message that value will be stored in CDR. If no value was sent, then the DB value will be stored in CDR. This field can be left empty.
354	ChargingType	VARCHAR2[2]	Charging type. The value is reported by external systems. If no value is reported, this field is left empty. Reserved.
355	ChargingUsageType	VARCHAR2[4]	Usage type. The options are as follows: • **0**: by times • **1**: by traffic • **2**: by duration The value is reported by external systems. If no value is reported, this field is left empty.
356	ChargeCode	VARCHAR2[16]	External charge code. The value is recorded if external systems transfer this field. This field is reserved.
357	FreeIndicator	VARCHAR2[1]	Exemption flag. This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
358	SPID	VARCHAR2[32]	SP ID. The value is reported by external systems. If no value is reported, this field is left empty.
359	CPID	VARCHAR2[32]	CP ID. The value is reported by external systems. If no value is reported, this field is left empty.
360	ServiceID	VARCHAR2[32]	Service ID. The value is reported by external systems. If this field is used for charging, it must be reported and recorded.
361	ContentID	VARCHAR2[32]	Content ID. The value is reported by external systems. If this field is used for charging, it must be reported and recorded.
362	ServiceType	VARCHAR2[32]	Service type, for example, news or weather broadcast. The value is reported by external systems. If this field is used for charging, it must be reported and recorded.
363	ContentType	NUMBER[10]	Content type, for example, image, music, or movie. The value is reported by external systems. If this field is used for charging, it must be reported and recorded.
364	ServiceCapability	NUMBER[10]	Service capability. The options are as follows: • **0**: general • **1**: SMS • **2**: MSM • **3**: WAP • **4**: LCS • **5**: streaming • **6**: download The value is defined and reported by external systems. The CBS records the value and uses it for charging. This field is reserved and has a fixed value of **0**.
365	ProvisionType	NUMBER[10]	Content presentation type. The options are as follows: • **104**: movie series • **105**: album

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **111**: RingBox • **117**: TV series This field is reserved and has a fixed value of **0**.
366	CategoryType	VARCHAR2[24]	Node type. If no value is reported, this field is left empty. This field is reserved.
367	ProductCode	VARCHAR2[32]	Product code. The value is defined and reported by external systems. The CBS records the value.
368	Times	NUMBER[20]	Number of use times. The value is reported by external systems. If no value is reported, this field is left empty.
369	Duration	NUMBER[20]	Usage duration, in seconds. The value is reported by external systems. If no value is reported, this field is left empty.
370	InputOctets	NUMBER[20]	Upstream traffic, in bytes. The value is reported by external systems. If no value is reported, this field is left empty.
371	OutputOctets	NUMBER[20]	Downstream traffic, in bytes. The value is reported by external systems. If no value is reported, this field is left empty.
372	TotalOctets	NUMBER[20]	Total traffic, in bytes. The value is reported by external systems. If no value is reported, this field is left empty.
373	ServiceDelivery Status	NUMBER[10]	Service delivery status. This field is reserved.
374	Remark	VARCHAR2[256]	Remarks. This field is reserved.
375	BrandID	NUMBER[20]	Subscriber brand ID. The default value is **0**. This field cannot be left empty.
376	MainOfferingID	NUMBER[20]	Primary offering ID. The default value is **0**.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			This field cannot be left empty.
377	ChargingPartyNumber	VARCHAR2[64]	Charged number. The number formats are as follows: • Fixed-line number: Area code + PSTN • Mobile number: MSISDN • URI format This field cannot be left empty.
378	CallingNetworkType	VARCHAR2[10]	Type of the access network. The options are as follows: • **1**: GSM • **2**: CDMA • **3**: ADSL • **4**: PSTN • **5**: WiMAX • Others: unknown This field cannot be left empty.
379	CallingVPNTopGroupNumber	VARCHAR2[64]	Number of the top-level corporation to which the calling party belongs. This field is empty when no corporation information exists. This field can be left empty.
380	CallingVPNGroupNumber	VARCHAR2[64]	Number of the corporation to which the calling party belongs. This field is empty when no corporation information exists. This field can be left empty.
381	OnlineChargingFlag	NUMBER[10]	Online charging flag. The options are as follows: • **0**: online charging • **1**: offline charging This field cannot be left empty.
382	StartTimeOfBillCycle	VARCHAR2[14]	Start time of a bill cycle. Format: YYYYMMDDhhmmss This field cannot be left empty.
383	LastEffectOffering	NUMBER[20]	ID of the last offering that takes effect. The default value is **0**. This field cannot be left empty.
384	RequestAction	NUMBER[10]	Request type. The options are as follows:

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			• **0**: fee deduction • **1**: refund This field cannot be left empty.
385	MainBalanceInfo	VARCHAR2[255]	This field is reserved.
386	ChgBalanceInfo	VARCHAR2[255]	This field is reserved.
387	ChgFreeUnitInfo	VARCHAR2[255]	This field is reserved.
388	UserState	VARCHAR2[10]	This field is reserved.
389	GroupPayFlag	NUMBER[10]	This field is reserved.
390	PayType	VARCHAR2[1]	This field is reserved.
391	TransactionID	VARCHAR2[32]	This field is reserved.
392	AdditionalInfo	VARCHAR2[255]	This field is reserved.
393	ChargeMode	NUMBER[10]	This field is reserved.
394	CDRProductID	VARCHAR2[20]	This field is reserved.
395	CDRChargeMode	NUMBER[10]	This field is reserved.
396	CDRTimes	NUMBER[10]	This field is reserved.
397	CDRDuration	NUMBER[10]	This field is reserved.
398	CDRVolume	NUMBER[10]	This field is reserved.
399	CDRCDRType	NUMBER[10]	This field is reserved.
400	CDRServiceType	NUMBER[10]	This field is reserved.
401	CDRBeginTime	VARCHAR2[14]	This field is reserved.
402	CDREndTime	VARCHAR2[14]	This field is reserved.
403	CDRPkgSpid	VARCHAR2[20]	This field is reserved.
404	CDRPkgServiceid	VARCHAR2[20]	This field is reserved.
405	CDRPkgProduct	VARCHAR2[20	This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
	id	]	
406	CDRSPName	VARCHAR2[20]	This field is reserved.
407	CDRServiceName	VARCHAR2[20]	This field is reserved.
408	ChargePartyIndicator	VARCHAR2[255]	This field is reserved.
409	Merchant	VARCHAR2[20]	This field is reserved.
410	Service	VARCHAR2[20]	This field is reserved.
411	ACCT_BAL_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus account balance in the group from 202nd to 271st fields.
412	ACCT_BAL_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus account balance in the group from 202nd to 271st fields.
413	ACCT_BAL_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus account balance in the group from 202nd to 271st fields.
414	ACCT_BAL_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus account balance in the group from 202nd to 271st fields.
415	ACCT_BAL_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus account balance in the group from 202nd to 271st fields.
416	ACCT_BAL_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus account balance in the group from 202nd to 271st fields.
417	ACCT_BAL_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus account balance in the group from 202nd to 271st fields.
418	ACCT_BAL_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus account balance in the group from 202nd to 271st fields.
419	ACCT_BAL_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus account balance in the group from 202nd to 271st fields.
420	ACCT_BAL_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus account balance in the group from 202nd to 271st fields.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
421	BONUS_FU_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus free unit in the group from 272nd to 351st fields.
422	BONUS_FU_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus free unit in the group from 272nd to 351st fields.
423	BONUS_FU_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus free unit in the group from 272nd to 351st fields.
424	BONUS_FU_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus free unit in the group from 272nd to 351st fields.
425	BONUS_FU_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus free unit in the group from 272nd to 351st fields.
426	BONUS_FU_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus free unit in the group from 272nd to 351st fields.
427	BONUS_FU_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus free unit in the group from 272nd to 351st fields.
428	BONUS_FU_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus free unit in the group from 272nd to 351st fields.
429	BONUS_FU_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus free unit in the group from 272nd to 351st fields.
430	BONUS_FU_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus free unit in the group from 272nd to 351st fields.

4.2.2.8 Extended Charging Service Information in a Resource Clearance CDR

This topic describes extended fields in the charging service information in a resource clearance CDR.

Table 4-11 describes extended fields in the charging service information in a resource clearance CDR.

Table 4-11 Extended charging service information in a resource clearance CDR

SN	Field Name	Field Type	Description
352	BrandID	NUMBER[10]	This field is reserved.
353	PrimaryOfferingID	NUMBER[10]	This field is reserved.
354	PaymentType	VARCHAR2[1]	This field is reserved.
355	UserState	VARCHAR2[10]	This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
356	DisconnectionReason	Varchar2[1]	0: LifeCycle change 1: Subscriber deletion
357	InitialAmount	NUMBER[20]	Initial loan amount.
358	InitialLoanPoundage	NUMBER[20]	Initial service charges to be paid by the end customer.
359	PaidAmount	NUMBER[20]	Paid amount (LoanAmt + LoanPoundage).
360	RemainingAmount	NUMBER[20]	Remaining amount to be paid (LoanAmt + LoanPoundage).
361	ACCT_BAL_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus account balance in the group from 202nd to 271st fields.
362	ACCT_BAL_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus account balance in the group from 202nd to 271st fields.
363	ACCT_BAL_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus account balance in the group from 202nd to 271st fields.
364	ACCT_BAL_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus account balance in the group from 202nd to 271st fields.
365	ACCT_BAL_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus account balance in the group from 202nd to 271st fields.
366	ACCT_BAL_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus account balance in the group from 202nd to 271st fields.
367	ACCT_BAL_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus account balance in the group from 202nd to 271st fields.
368	ACCT_BAL_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus account balance in the group from 202nd to 271st fields.
369	ACCT_BAL_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus account balance in the group from 202nd to 271st fields.
370	ACCT_BAL_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus account balance in the group from 202nd to 271st fields.
371	BONUS_FU_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus free unit in the group from 272nd to 351st fields.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
372	BONUS_FU_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus free unit in the group from 272nd to 351st fields.
373	BONUS_FU_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus free unit in the group from 272nd to 351st fields.
374	BONUS_FU_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus free unit in the group from 272nd to 351st fields.
375	BONUS_FU_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus free unit in the group from 272nd to 351st fields.
376	BONUS_FU_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus free unit in the group from 272nd to 351st fields.
377	BONUS_FU_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus free unit in the group from 272nd to 351st fields.
378	BONUS_FU_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus free unit in the group from 272nd to 351st fields.
379	BONUS_FU_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus free unit in the group from 272nd to 351st fields.
380	BONUS_FU_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus free unit in the group from 272nd to 351st fields.

4.2.2.9 Extended Charging Service Information in a First Time Activation CDR

An activation CDR is generated during activation. This topic describes extended fields in the charging service information in an activation CDR.

Table 4-12 describes extended fields in the charging service information in an activation CDR.

Table 4-12 Extended charging service information in an activation CDR

SN	Field Name	Field Type	Description
352	BrandID	NUMBER[10]	Brand ID. The default value is **0**. This field cannot be left empty.
353	PrimaryOfferingID	NUMBER[10]	Primary offering ID. The default value is **0**. This field cannot be left empty.
354	PaymentType	VARCHAR2[1]	Payment type of a subscriber. By default, the value is the payment type in the subscriber attribute table. The options are

SN	Field Name	Field Type	Description
			as follows: • **0**: prepaid • **1**: postpaid • **2**: hybrid This field cannot be left empty.
355	OldUserStat	VARCHAR2[1]	Original subscriber status. • **1**: idle • **2**: active • **3**: barred • **4**: suspended • **8**: pre-deregistered • **9**: deregistered Options 1 and 2 are fixed, and options 3 to 9 can be customized based on the site requirements. This field cannot be left empty.
356	CurrUserStat	VARCHAR2[1]	Current subscriber status. • **1**: inactive • **2**: active • **3**: barred • **4**: suspended • **8**: pre-deregistered • **9**: deregistered Options 1 and 2 are fixed, and options 3 to 9 can be customized based on the site requirements. This field cannot be left empty.
357	BillCycleID	VARCHAR2[10]	Bill cycle ID. This field cannot be left empty.
358	ChgBalanceInfo	VARCHAR2[1024]	This field is reserved.
359	ChgFreeUnitInfo	VARCHAR2[1024]	This field is reserved.
360	MainBalanceInfo	VARCHAR2[255]	This field is reserved.
361	UserState	VARCHAR2[10]	This field is reserved.
362	OldUserState	VARCHAR2[10]	This field is reserved.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
363	Oper_ID	NUMBER[20]	This field is reserved.
364	THIRD_PARTY_NUMBER	VARCHAR2[32]	This field is reserved.
365	EXT_TRANS_ID	VARCHAR2[32]	This field is reserved.
366	EXT_TRANS_TYPE	VARCHAR2[32]	This field is reserved.
367	ACCESS_METHOD	NUMBER[10]	This field is reserved.
368	RechargeCellID	VARCHAR2[20]	This field is reserved.
369	AgentName	VARCHAR2[64]	This field is reserved.
370	AdditionalInfo	VARCHAR2[256]	This field is reserved.
371	SubIdentityType	NUMBER[10]	This field is reserved.
372	ACCT_BAL_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus account balance in the group from 202nd to 271st fields.
373	ACCT_BAL_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus account balance in the group from 202nd to 271st fields.
374	ACCT_BAL_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus account balance in the group from 202nd to 271st fields.
375	ACCT_BAL_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus account balance in the group from 202nd to 271st fields.
376	ACCT_BAL_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus account balance in the group from 202nd to 271st fields.
377	ACCT_BAL_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus account balance in the group from 202nd to 271st fields.
378	ACCT_BAL_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus account balance in the group from 202nd to 271st fields.
379	ACCT_BAL_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus account balance in the group from 202nd to 271st fields.

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
380	ACCT_BAL_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus account balance in the group from 202nd to 271st fields.
381	ACCT_BAL_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus account balance in the group from 202nd to 271st fields.
382	BONUS_FU_EXPIRE_TIME1	DATE[14]	Expiration time of the 1st bonus free unit in the group from 272nd to 351st fields.
383	BONUS_FU_EXPIRE_TIME2	DATE[14]	Expiration time of the 2nd bonus free unit in the group from 272nd to 351st fields.
384	BONUS_FU_EXPIRE_TIME3	DATE[14]	Expiration time of the 3rd bonus free unit in the group from 272nd to 351st fields.
385	BONUS_FU_EXPIRE_TIME4	DATE[14]	Expiration time of the 4th bonus free unit in the group from 272nd to 351st fields.
386	BONUS_FU_EXPIRE_TIME5	DATE[14]	Expiration time of the 5th bonus free unit in the group from 272nd to 351st fields.
387	BONUS_FU_EXPIRE_TIME6	DATE[14]	Expiration time of the 6th bonus free unit in the group from 272nd to 351st fields.
388	BONUS_FU_EXPIRE_TIME7	DATE[14]	Expiration time of the 7th bonus free unit in the group from 272nd to 351st fields.
389	BONUS_FU_EXPIRE_TIME8	DATE[14]	Expiration time of the 8th bonus free unit in the group from 272nd to 351st fields.
389	BONUS_FU_EXPIRE_TIME9	DATE[14]	Expiration time of the 9th bonus free unit in the group from 272nd to 351st fields.
391	BONUS_FU_EXPIRE_TIME10	DATE[14]	Expiration time of the 10th bonus free unit in the group from 272nd to 351st fields.

4.3 Prepaid Transaction CDR Files

This topic describes the CDR file template provided in the baseline version for management flow services. Each site can customize CDR files based on the template.

4.3.1 Recharge CDR

This topic describes fields in recharge CDRs.

Table 4-13 describes fields in recharge CDRs.

Table 4-13 Recharge CDR fields

SN	Field Name	Field Type	Description	Field Category
1	RECHARGE_LOG_ID	NUMBER [20]	Recharge log ID. The ID is automatically generated by the sequencer. The default value is **0**. This field cannot be left empty.	The first 42 fields record basic recharge information. The meaning and length of these fields are fixed.
2	RECHARGE_CODE	NUMBER [10]	Recharge code, which uniquely identifies a recharge type. This field has a fixed value of **0**. This field is reserved.	
3	RECHARGE_AMT	NUMBER [20]	Actual recharge amount. If a foreign currency is used for recharge, this field specifies the recharge amount after conversion. The recharge amount is saved in the minimum precision of the local currency, which is the default currency type of a subscriber's home BE. The default value is **0**. This field cannot be left empty.	
4	ACCT_ID	NUMBER [20]	Recharge account ID. The default value is **0**. This field cannot be left empty.	
5	SUB_ID	NUMBER [20]	ID of the subscriber whose account is recharged. If no subscriber number is transferred in the process of recharging a specified account, this field is set to **0**. The default value is **0**. This field cannot be left empty.	
6	PRI_IDENTITY	VARCHAR2[64]	Subscriber primary identifier. If no subscriber number is transferred in the process of recharging a specified account, this field is left empty. If a primary identifier is an MSISDN or a PSTN, the formats are as follows: • Country code + MSISDN • Country code + Area code + PSTN If a primary identifier is of other types, the value is the number that is transferred. This field can be left empty.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
7	THIRD_PARTY_NUMBER	VARCHAR2[32]	Subscriber who recharges another subscriber's account. This field can be left empty. This field is reserved.	
8	CURRENCY_ID	NUMBER[5]	Currency type ID. This field is recorded when a foreign currency is used for recharge. If this field is set to **0** or the default currency type of the home BE, the local currency is used for recharge. The default value is **0**. This field cannot be left empty.	
9	ORIGINAL_AMT	NUMBER[20]	Original recharge amount when a foreign currency is used for recharge. If the local currency is used for recharge, the value is the same as that of **RECHARGE_AMT**. The default value is **0**. This field cannot be left empty.	
10	CURRENCY_RATE	NUMBER[20,6]	Exchange rate between a foreign currency and the local currency. The default value is **0**, indicating that the local currency is used for recharge. This field cannot be left empty.	
11	CONVERSION_AMT	NUMBER[20,6]	Recharge amount converted from a foreign currency to the local currency based on the exchange rate. The value can contain decimal places. If the local currency is used for recharge, this field is set to **0**. For example, if a subscriber recharges the account in US dollar while the local currency is pound, this field records the amount converted based on the exchange rate between dollar and pound, which is precise to penny. The default value is **0**. This field cannot be left empty.	
12	RECHARGE_TRANS_ID	NUMBER[20]	Recharge transaction ID. This field is recorded in the recharge log. If a recharge needs to be reversed, the system queries the corresponding recharge record based on this	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			field. The default value is **0**. This field cannot be left empty.	
13	EXT_TRANS_TYPE	VARCHAR2[32]	External transaction type, which is transferred from an external interface and is the same as the value of **BUSI_TYPE**. This field is left empty if it is not transferred from an external interface. This field can be left empty.	
14	EXT_TRANS_ID	VARCHAR2[32]	External sequence number of a transaction. This field is left empty if it is not transferred from an external interface. This field can be left empty.	
15	ACCESS_METHOD	NUMBER[10]	Recharge access mode. The options are as follows: • **0**: IVR • **1**: USSD • **2**: SMS • **3:** WebService • **4**: GUI • **5**: task (batch recharge triggered in the system) • **6**: automatic (automatic recharge triggered in the system) • **7**: reserved • Other values can be extended based on the site requirements. This field cannot be left empty.	
16	BATCH_NO	NUMBER[20]	Recharge batch number. The default value is **0**. This field cannot be left empty.	
17	OFFERING_ID	VARCHAR2[32]	Recharge offering ID. This field is reserved.	
18	PAYMENT_TYPE	VARCHAR2[1]	Payment type. • **A**: cash • **D**: debit card • **C**: credit card • **E**: check • **V**: voucher	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			• **L**: e-voucher This field cannot be left empty.	
19	RECHARGE_TAX	NUMBER[20]	Recharge tax. If no tax needs to be collected, this field is set to **0**. This field cannot be left empty.	
20	RECHARGE_PENALTY	NUMBER[20]	Recharge penalty. If no penalty needs to be collected, this field is set to **0**. Reserved	
21	RECHARGE_TYPE	VARCHAR2[24]	Recharge type. The options are as follows: • **0**: voucher recharge • **1**: cash recharge • **2**: e-voucher recharge • **3**: cash recharge reversal This field cannot be left empty.	
22	CHANNEL_ID	VARCHAR2[8]	Recharge channel ID. • **0**: IVR • **1**: USSD • **2**: SMS • **3**: WebService • **4**: GUI • **5**: task (batch recharge triggered in the system) • **6**: automatic (automatic recharge triggered in the system) • **7**: IVRSM • **9**: e-care • **10**: IPCC IVR • **11**: IPCC USSD • **12**: IPCC SMS • **99**: others Other values can be extended based on the site requirements. This field is reserved.	
23	RECHARGE_REASON	VARCHAR2[24]	Recharge reason. This field is left empty if it is not transferred from an external interface or entered on the GUI.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			This field can be left empty.	
24	RESULT_CODE	NUMBER[10]	Internal recharge result code. • **0**: The operation is successful. • Others: The operation is unsuccessful. This field cannot be left empty.	
25	ERROR_TYPE	VARCHAR2[16]	Error type. The options are as follows: • **-1**: Default error type. • **0**: The operation is successful. • **1**: The operation cannot be performed repeatedly. • **2**: No record is found. • **3**: The balance or free unit has been used and the transaction cannot be reversed. • **4**: No available resource is found. • **5**: Invalid data. • **6**: The specified operation is not allowed. • **7**: Authentication failed. This field can be left empty.	
26	VALID_DAY_ADDED	NUMBER[10]	Number of validity days extended after a recharge. The default value is **0**. This field cannot be left empty.	
27	DIAMETER_SESSIONID	VARCHAR2[128]	ID of the Diameter session initiated in a recharge. If a recharge is not performed based on Diameter, this field is left empty. This field can be left empty.	
28	OPER_ID	NUMBER[20]	ID of the operator who performs the recharge operation. If this field is not transferred, it is set to **0** by default. This field cannot be left empty.	
29	DEPT_ID	NUMBER[20]	Department ID of the operator who performs the recharge operation. If this field is not transferred, it is set to **0** by default. This field cannot be left empty.	
30	ENTRY_DA	DATE[14]	Time when a recharge record is created.	

SN	Field Name	Field Type	Description	Field Category
	TE		This field cannot be left empty.	
31	RECON_DATE	DATE[14]	Recharge reconciliation date. This field can be left empty. This field is reserved.	
32	RECON_STATUS	VARCHAR2[1]	Recharge reconciliation status. This field can be left empty. This field is reserved.	
33	REVERSAL_TRANS_ID	NUMBER[20]	Recharge reversal transaction ID. For a non-recharge reversal transaction, this field is set to **0**. This field cannot be left empty.	
34	REVERSAL_REASON_CODE	VARCHAR2[16]	Recharge reversal reason code. For a non-recharge reversal transaction, this field is left empty.	
35	REVERSAL_OPER_ID	VARCHAR2[24]	ID of the operator who reverses the recharge. For a non-recharge reversal transaction, this field is left empty.	
36	REVERSAL_DEPT_ID	VARCHAR2[24]	Department ID of the operator who reverses the recharge. For a non-recharge reversal transaction, this field is left empty.	
37	REVERSAL_DATE	DATE[14]	Time when a recharge is reversed. For a non-recharge reversal transaction, this field is left empty.	
38	STATUS	VARCHAR2[1]	Status of a recharge record. • **F**: finish (This value is recorded in a recharge CDR.) • **R**: reversal (This value is recorded in a recharge reversal CDR.) This field cannot be left empty.	
39	REMARK	VARCHAR2[128]	Remarks. This field is left empty if it is not transferred from an external interface or entered on the GUI.	
40	BE_ID	NUMBER[10]	ID of the lowest-level home BE. The default value is **0**. This field cannot be left empty.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
41	BE_CODE	VARCHAR2[256]	Code of the lowest-level home BE. This field is reserved.	
42	REGION_ID	NUMBER[10]	ID of the home management region. The default value is **0**. This field cannot be left empty.	
43	REGION_CODE	VARCHAR2[256]	Code of the home management region. This field can be left empty.	
44	CARD_SEQUENCE	VARCHAR2[20]	Voucher serial number consisting of 17 or 20 digits. If a recharge is not performed by using a voucher, this field is left empty.	The 44th to 52nd fields record extended voucher information. These fields are provided in the baseline version and can be extended based on the site requirements.
45	CARD_PIN_NUMBER	VARCHAR2[20]	This field is reserved.	
46	CARD_BATCH_NO	VARCHAR2[20]	Voucher batch number. If a recharge is not performed by using a voucher, this field is left empty.	
47	CARD_STATUS	VARCHAR2[1]	Voucher status. • **0**: invalid (A voucher is invalidated after successful recharge.) • **1**: valid (A voucher is valid after a recharge is reversed upon failure.) This field is reserved.	
48	CARD_COS_ID	NUMBER[4]	Voucher type, which is defined in the UVC and reported through an interface. If a recharge is not performed by using a voucher, this field is set to **0**.	
49	CARD_SP_ID	VARCHAR2[20]	Dealer ID, which is defined in the UVC and reported through an interface. If a recharge is not performed by using a voucher, this field is set to **0**.	
50	CARD_AMOUNT	NUMBER[20]	Recharge amount, in the minimum currency unit. If a recharge is not performed by using a voucher, this field is set to **0**.	
51	CARD_VALIDITY	NUMBER[10]	Validity period extended after voucher recharge. If a recharge is not performed by using a voucher, this field is set to **0**.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
52	VOUCHER_ENCRYPT_NUMBER	VARCHAR2[22]	This field is reserved.	
53	CHECK_NO	VARCHAR2[64]	Check number. This field can be left empty. This field is reserved.	The 53rd to 63rd fields record bank information.
54	CHECK_DATE	DATE[14]	Check date. This field can be left empty. This field is reserved.	
55	CREDIT_CARD_NO	VARCHAR2[64]	This field is reserved.	
56	CREDIT_CARD_NAME	VARCHAR2[64]	Credit card name. This field can be left empty. This field is reserved.	
57	CREDIT_CARD_TYPE_ID	NUMBER[8]	Credit card type. This field can be left empty. This field is reserved.	
58	CC_EXPIRY_DATE	VARCHAR2[32]	Expiration date of a credit card. This field can be left empty. This field is reserved.	
59	CC_AUTHORIZATION_CODE	VARCHAR2[16]	This field is reserved.	
60	BANK_CODE	VARCHAR2[32]	Bank code. This field can be left empty. This field is reserved.	
61	BANK_BRANCH_CODE	VARCHAR2[32]	Branch code. This field can be left empty. This field is reserved.	
62	ACCT_NO	VARCHAR2[192]	Bank account code. This field can be left empty. This field is reserved.	
63	BANK_ACCT_NAME	VARCHAR2[192]	Bank account name. This field can be left empty. This field is reserved.	
64	LOAN_AMO	NUMBER	Paid-off loan amount.	The

SN	Field Name	Field Type	Description	Field Category
	UNT	[20]	The default value is **0**. This field cannot be left empty.	64th to 65th fields record loan information.
65	LOAN_POUNDATE	NUMBER [20]	Loan payment handling fee. The default value is **0**. This field cannot be left empty.	
66	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 66th to 75th fields record the first group of balance change information. If *N* balance changes are involved in a recharge, the first *N* groups of balance change fields
67	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
68	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
69	CUR_BALANCE	NUMBER [20]	Current balance.	
70	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
71	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
72	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
73	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
74	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
75	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				are recorded and other groups of fields are left empty.
76	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 76th to 85th fields record the second group of balance change information. If *N* balance changes are involved in a recharge, the first *N* groups of balance
77	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
78	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
79	CUR_BALANCE	NUMBER [20]	Current balance.	
80	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
81	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
82	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
83	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
84	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
85	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				change fields are recorded and other groups of fields are left empty.
86	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 86th to 95th fields record the third group of balance change information. If *N* balance changes are involved in a recharge, the first *N* groups of
87	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
88	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
89	CUR_BALANCE	NUMBER [20]	Current balance.	
90	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
91	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
92	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
93	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
94	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
95	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				balance change fields are recorded and other groups of fields are left empty.
96	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 96th to 105th fields record the fourth group of balance change information. If *N* balance changes are involved in a recharge, the first *N*
97	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
98	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
99	CUR_BALANCE	NUMBER [20]	Current balance.	
100	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
101	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
102	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
103	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
104	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
105	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				groups of balance change fields are recorded and other groups of fields are left empty.
106	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 106th to 115th fields record the fifth group of balance change information. If *N* balance changes are involved in a
107	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
108	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
109	CUR_BALANCE	NUMBER [20]	Current balance.	
110	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
111	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
112	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
113	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
114	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
115	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				recharge, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
116	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 116th to 125th fields record the sixth group of balance change information. If *N* balance change
117	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
118	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
119	CUR_BALANCE	NUMBER [20]	Current balance.	
120	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
121	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
122	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
123	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
124	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
125	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a	

SN	Field Name	Field Type	Description	Field Category
			balance account.	s are involved in a recharge, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
126	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 126th to 135th fields record the seventh group of balance change information.
127	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
128	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
129	CUR_BALANCE	NUMBER [20]	Current balance.	
130	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
131	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
132	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
133	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
134	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
135	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			• **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	If *N* balance changes are involved in a recharge, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
136	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 136th to 145th fields record the eighth group of balance
137	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
138	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
139	CUR_BALANCE	NUMBER [20]	Current balance.	
140	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
141	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
142	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
143	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
144	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
145	OPER_TYPE	NUMBER	Operation type. The options are as follows:	

SN	Field Name	Field Type	Description	Field Category
		[10]	• **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	change information. If *N* balance changes are involved in a recharge, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
146	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 146th to 155th fields record the ninth
147	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
148	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
149	CUR_BALANCE	NUMBER [20]	Current balance.	
150	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
151	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
152	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
153	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
154	CURRENCYE_ID	NUMBER [10]	Currency type ID.	group of balance change information. If *N* balance changes are involved in a recharge, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
155	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	
156	ACCT_ID	NUMBER [20]	Account ID.	The 66th to 165th fields record 10 groups of balance change information. The 156th to 165th fields
157	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
158	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
159	CUR_BALANCE	NUMBER [20]	Current balance.	
160	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
161	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
162	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
163	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	record the tenth group of balance change information. If *N* balance changes are involved in a recharge, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
164	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
165	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	
166	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 166th to 275th fields record 10 groups of free unit change information. The 166th
167	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
168	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
169	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
170	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	to 176th fields record the first group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
171	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
172	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
173	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
174	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
175	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
176	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
177	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 166th to 275th fields record 10 groups of free unit change information. The
178	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
179	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
180	FREE_UNIT	NUMBER	Free unit type.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	_TYPE	[20]		177th to 187th fields record the second group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
181	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
182	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
183	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
184	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
185	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
186	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
187	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
188	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 166th to 275th fields record 10 groups of free unit change information.
189	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
190	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
191	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	The 188th to 198th fields record the third group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
192	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
193	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
194	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
195	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
196	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
197	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
198	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
199	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 166th to 275th fields record 10 groups of free unit change inform
200	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
201	FREE_UNIT	NUMBER	Free unit ID.	

SN	Field Name	Field Type	Description	Field Category
	_ID	[20]		ation. The 199th to 209th fields record the fourth group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
202	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
203	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
204	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
205	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
206	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
207	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
208	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
209	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
210	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 166th to 275th fields record 10 groups of free unit
211	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	

SN	Field Name	Field Type	Description	Field Category
212	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	change information. The 210th to 220th fields record the fifth group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
213	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
214	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
215	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
216	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
217	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
218	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
219	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
220	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
221	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 166th to 275th fields record 10 groups of free
222	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the	

SN	Field Name	Field Type	Description	Field Category
			FU_OWN_TYPE value.	unit change information. The 221st to 231st fields record the sixth group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
223	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
224	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
225	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
226	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
227	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
228	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
229	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
230	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
231	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
232	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 166th to 275th fields record 10 groups
233	FU_OWN_ID	NUMBER	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
		[20]	Set this field based on the **FU_OWN_TYPE** value.	of free unit change information. The 232nd to 242nd fields record the seventh group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
234	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
235	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
236	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
237	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
238	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
239	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
240	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
241	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
242	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
243	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 166th to 275th fields record

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
244	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	10 groups of free unit change information. The 243rd to 253rd fields record the eighth group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
245	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
246	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
247	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
248	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
249	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
250	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
251	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
252	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
253	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
254	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group	The 166th to 275th

SN	Field Name	Field Type	Description	Field Category
			• **C**: customer	fields record 10 groups of free unit change information. The 254th to 264th fields record the ninth group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
255	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
256	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
257	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
258	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
259	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
260	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
261	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
262	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
263	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
264	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
265	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber	The 166th to

SN	Field Name	Field Type	Description	Field Category
			• **G**: subscriber group • **C**: customer	275th fields record 10 groups of free unit change information. The 265th to 275th fields record the tenth group of free unit change information. If *N* free unit changes are involved in a recharge, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
266	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
267	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
268	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
269	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
270	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
271	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
272	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
273	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
274	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
275	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
276	ACCT_ID	NUMBER [20]	Account ID.	The 276th

SN	Field Name	Field Type	Description	Field Category
277	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	to 375th fields record 10 groups of bonus details. The 276th to 285th fields record the first group of bonus details. If *N* bonuses are involved in a recharge, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
278	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
279	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
280	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
281	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
282	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
283	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
284	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
285	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
286	ACCT_ID	NUMBER[20]	Account ID.	The 276th to 375th fields record 10
287	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
288	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
289	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	groups of bonus details. The 286th to 295th fields record the second group of bonus details. If *N* bonuses are involved in a recharge, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
290	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
291	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
292	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
293	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
294	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
295	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
296	ACCT_ID	NUMBER[20]	Account ID.	The 276th to 375th fields record 10 groups of bonus details. The
297	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
298	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
299	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
300	CURRENT_	NUMBER	Current fund balance.	

SN	Field Name	Field Type	Description	Field Category
	BALANCE	[20]		296th to 305th fields record the third group of bonus details. If *N* bonuses are involved in a recharge, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
301	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
302	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
303	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
304	CURRENCY_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
305	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
306	ACCT_ID	NUMBER [20]	Account ID.	The 276th to 375th fields record 10 groups of bonus details. The 306th to 315th fields record
307	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
308	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
309	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
310	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
311	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
312	PRE_EXPIR	DATE[14]	Original expiration time of the account	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	E_TIME		book.	the fourth group of bonus details. If *N* bonuses are involved in a recharge, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
313	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
314	CURRENCY_ID	NUMBER[10]	Currency type ID, which can be customized by a carrier.	
315	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
316	ACCT_ID	NUMBER[20]	Account ID.	The 276th to 375th fields record 10 groups of bonus details. The 316th to 325th fields record the fifth group of
317	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
318	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
319	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
320	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
321	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
322	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
323	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
324	CURRENCY_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	bonus details. If *N* bonuses are involved in a recharge, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
325	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
326	ACCT_ID	NUMBER [20]	Account ID.	The 276th to 375th fields record 10 groups of bonus details. The 326th to 335th fields record the sixth group of bonus details. If *N* bonuses are
327	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
328	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
329	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
330	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
331	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
332	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
333	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
334	CURRENCY_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
335	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows:	

SN	Field Name	Field Type	Description	Field Category
			• **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	involved in a recharge, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
336	ACCT_ID	NUMBER [20]	Account ID.	The 276th to 375th fields record 10 groups of bonus details. The 336th to 345th fields record the seventh group of bonus details. If *N* bonuses are involved in a recharge, the
337	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
338	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
339	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
340	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
341	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
342	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
343	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
344	CURRENCY_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
345	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
346	ACCT_ID	NUMBER [20]	Account ID.	The 276th to 375th fields record 10 groups of bonus details. The 346th to 355th fields record the eighth group of bonus details. If *N* bonuses are involved in a recharge, the first *N* groups of bonus details
347	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
348	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
349	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
350	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
351	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
352	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
353	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
354	CURRENCY_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
355	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				fields are recorded and other groups of fields are left empty.
356	ACCT_ID	NUMBER [20]	Account ID.	The 276th to 375th fields record 10 groups of bonus details. The 356th to 365th fields record the ninth group of bonus details. If *N* bonuses are involved in a recharge, the first *N* groups of bonus details fields are recorded and other
357	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
358	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
359	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
360	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
361	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
362	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
363	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
364	CURRENCY_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
365	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				groups of fields are left empty.
366	ACCT_ID	NUMBER [20]	Account ID.	The 276th to 375th fields record 10 groups of bonus details. The 366th to 375th fields record the tenth group of bonus details. If *N* bonuses are involved in a recharge, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
367	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
368	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
369	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
370	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
371	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
372	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
373	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
374	CURRENCY_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
375	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
376	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 376th to 386th fields record the first group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
377	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
378	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
379	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
380	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
381	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
382	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
383	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
384	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
385	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
386	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
387	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 387th to 397th fields record the second group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
388	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
389	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
390	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
391	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
392	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
393	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
394	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
395	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
396	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
397	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
398	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 398th to 408th fields record the third group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
399	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
400	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
401	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
402	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
403	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
404	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
405	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
406	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
407	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
408	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
409	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 409th to 419th fields record the fourth group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
410	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
411	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
412	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
413	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
414	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
415	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
416	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
417	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
418	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
419	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
420	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 420th to 430th fields record the fifth group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
421	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
422	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
423	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
424	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
425	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
426	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
427	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
428	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
429	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
430	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
431	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 431st to 441st fields record the sixth group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
432	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
433	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
434	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
435	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
436	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
437	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
438	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
439	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
440	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
441	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
442	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 442nd to 452nd fields record the seventh group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left
443	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
444	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
445	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
446	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
447	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
448	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
449	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
450	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
451	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
452	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				empty.
453	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 453rd to 463rd fields record the eighth group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left
454	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
455	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
456	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
457	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
458	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
459	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
460	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
461	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
462	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
463	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

SN	Field Name	Field Type	Description	Field Category
				empty.
464	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 464th to 474th fields record the ninth group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left
465	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
466	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
467	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
468	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
469	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
470	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
471	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
472	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
473	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
474	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				empty.
475	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 376th to 485th fields record 10 groups of free unit reward details. The 475th to 485th fields record the tenth group of free unit reward details. If *N* free unit rewards are involved in a recharge, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left
476	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
477	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
478	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
479	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
480	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
481	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
482	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
483	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
484	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
485	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				empty.
486	RechargeAreaCode	VARCHAR2[10]	Code of the area where a recharge request is initiated. If this field is not transferred through an interface, value **0** is used, indicating an unknown area. The default value is **0**.	The 486th to 505th fields record additional recharge information. These fields are provided in the baseline version and can be extended based on the site requirements.
487	RechargeCellID	VARCHAR2[20]	Visited cell ID of the subscriber who initiates a recharge request. This field can be left empty.	
488	BrandID	NUMBER[10]	Subscriber brand ID. In the process of recharging a specified account, this field can be left empty.	
489	MainOfferingID	NUMBER[10]	Primary offering ID. In the process of recharging a specified account, this field can be left empty.	
490	PayType	VARCHAR2[1]	Payment type of a subscriber. The options are as follows: • **0**: prepaid • **1**: postpaid • **2**: hybrid In the process of recharging a specified account, this field can be left empty.	
491	StartTimeOfBillCycle	VARCHAR2[14]	Bill cycle start time, in the format *YYYYMMDDHHMMSS*.	
492	Remark1	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
493	Remark2	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
494	Remark3	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
495	Remark4	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
496	UserState	VARCHAR2[10]	This field is reserved.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
497	OldUserState	VARCHAR2[10]	This field is reserved.	
498	CardValueAdded	NUMBER[20]	This field is reserved.	
499	ValidityAdded	NUMBER[10]	This field is reserved.	
500	RefillCounter	NUMBER[10]	Accumulated recharge times.	
501	Retailer	VARCHAR2[64]	Retailer/Agent number. The value is transferred to the CBS through the recharge interface.	
502	AdditionalInfo	VARCHAR2[256]	This field is reserved.	
503	RetailerGeography	VARCHAR2[64]	Retailer geography. The value is transferred to the CBS through the recharge interface.	
504	RetailerType	VARCHAR2[64]	Retailer type. The value is transferred to the CBS through the recharge interface.	
505	OriginOperatorID	VARCHAR2[32]	From DCC/IDL, this parameter will come in the request of Recharge, same need to pass from BM to RB in the Recharge IDL in the Additional Property and same to be recorded in CDR. Simple Property = C_ORIGINOPERATORID This parameter will come in case of external recharge cases. Can be null	
506	CARDGROUP	VARCHAR2[8]	From DCC/IDL , this parameter will come in the request of recharge, same need to pass from BM to RB in the Recharge IDL in the Additional Property and same to be recorded in CDR. This is the cardtype field in DCC or IDL Can be null	
507	NodeId	NUMBER[10]	CBP Node ID	
508	ExternalAcctID1	NUMBER[10]	The Mapped Account ID1 of the account which is mapped to external system.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. This applies to all the below ExternalAcctID fields. Can be null	
509	ExternalAcctID2	NUMBER [10]	The Mapped Account ID2 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	
510	ExternalAcctID3	NUMBER [10]	The Mapped Account ID3 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	
511	ExternalAcctID4	NUMBER [10]	The Mapped Account ID4 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
512	ExternalAcctID5	NUMBER [10]	The Mapped Account ID5 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	
513	ExternalAcctID6	NUMBER [10]	The Mapped Account ID6 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	
514	ExternalAcctID7	NUMBER [10]	The Mapped Account ID7 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	
515	ExternalAcctID8	NUMBER [10]	The Mapped Account ID8 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
516	ExternalAcctID9	NUMBER[10]	The Mapped Account ID9 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	
517	ExternalAcctID10	NUMBER[10]	The Mapped Account ID10 of the account which is mapped to external system. This field can be collected from the mapped table "CB_EXIN_TYPE_ID_MAPPIN" for the account which is used in the charging process. For those existing Accounts which are not mapped in CB_EXIN_TYPE_ID_MAPPING , their Internal type ID will be displayed. Can be null	
518	External Data1	VARCHAR2[255]	From IDL, this parameter will come in the request of recharge, same need to pass from BM to RB in the Recharge IDL in the Additional Property and same to be recorded in CDR. Simple Property = C_EXTARNALDATA1 Can be null	
519	External Data2	VARCHAR2[255]	From IDL , this parameter will come in the request of recharge, same need to pass from BM to RB in the Recharge IDL in the Additional Property and same to be recorded in CDR. Simple Property = C_EXTARNALDATA2 Can be null	
520	BarringEndDateBefore	DATE[8]	Barring End Date before the operation.	
521	BarringEndDateAfter	DATE[8]	Barring End Date After the operation.	
522	ActiveEndDateBefore	DATE[8]	Active End date before the operation	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
523	ActiveEndDateAfter	DATE[8]	Active End date After the operation	
524	ActivationDate	DATE[14]	The First Activation Date of the subscriber. This field value can be taken from the field ACTIVE_TIME of BC_SUBSCRIBER table and keep in the CDR. Cannot be null	
525	CUGID1Before	NUMBER [10]	If subscriber have subscribed to any CUG then CUG Group ID1 before the operation need to be recorded in this Field. Can be null	
526	CUGID2Before	NUMBER [10]	If subscriber have subscribed to any CUG then CUG Group ID2 before the operation need to be recorded in this Field. Can be null	
527	CUGID3Before	NUMBER [10]	If subscriber have subscribed to any CUG then CUG Group ID3 before the operation need to be recorded in this Field. Can be null	
528	CUGID1After	NUMBER [10]	If subscriber have subscribed to any CUG then CUG Group ID1 after the operation need to be recorded in this Field. Can be null	
529	CUGID2After	NUMBER [10]	If subscriber have subscribed to any CUG then CUG Group ID2 after the operation need to be recorded in this Field. Can be null	
530	CUGID3After	NUMBER [10]	If subscriber have subscribed to any CUG then CUG Group ID1 after the operation need to be recorded in this Field.	
531	OriginNodeID	NUMBER [10]	From IDL , this parameter will come in the request of recharge, same need to pass from BM to RB in the Recharge IDL in the Additional Property and same to be recorded in CDR. Can be null	
532	LocationNumber	VARCHAR[20]	The Location Number of the subscriber. If RB can get the location number in the request then write the information in this field. The parameter can be passed only in IDL	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			and not in DCC request. Can be null	
533	ErrorCode	NUMBER [10]	If there is some issue with the Voucher, then UVC/BM sends the error code to RB and RB will write this information in this field. Can be null	
534	ErrorDesc	VARCHAR[255]	If there is some issue with the Voucher, then UVC/BM sends the error description to RB and RB will write this information in this field. Can be null	

4.3.2 Transfer CDR

This topic describes fields in transfer CDRs.

Table 4-14 describes fields in transfer CDRs.

Table 4-14 Transfer CDR fields

SN	Field Name	Field Type	Description	Field Category
1	TRANSFER_LOG_ID	NUMBER [20]	Transfer log ID. The default value is **0**. This field cannot be left empty.	The first 36 fields record basic transfer information. The meaning and length of these fields are fixed.
2	PAY_TYPE	VARCHAR2[1]	Payment type of an account. • **0**: prepaid • **1**: postpaid If the transferor or transferee is an external subscriber, this field is left empty.	
3	ACCT_ID	NUMBER [20]	Transfer account ID. In transfer-out CDRs, this field is set to the transferor account ID. In transfer-in CDRs, this field is set to the transferee account ID. This field cannot be left empty.	
4	CUST_ID	NUMBER	Customer ID.	

SN	Field Name	Field Type	Description	Field Category
		[20]	In transfer-out CDRs, this field is set to the transferor customer ID. In transfer-in CDRs, this field is set to the transferee customer ID. If the transferor or transferee is an external subscriber, this field is left empty.	
5	SUB_ID	NUMBER [20]	Subscriber ID. In transfer-out CDRs, this field is set to the transferor subscriber ID. In transfer-in CDRs, this field is set to the transferee subscriber ID. If the transferor or transferee is an external subscriber, this field is left empty.	
6	PRI_IDENTITY	VARCHAR2[64]	Primary identifier. In transfer-out CDRs, this field is set to the transferor primary identifier. In transfer-in CDRs, this field is set to the transferee primary identifier. If the transferor or transferee is an external subscriber, this field is left empty. If a primary identifier is an MSISDN or a PSTN, the formats are as follows: • Country code + MSISDN • Country code + Area code + PSTN If a primary identifier is of other types, the value is the number that is transferred.	
7	BATCH_NO	NUMBER [20]	Transfer batch number. The default value is **0**. This field cannot be left empty.	
8	CHANNEL_ID	VARCHAR2[8]	Transfer channel ID. This field can be left empty. This field is reserved.	
9	REASON_CODE	VARCHAR2[16]	Transfer reason code. This field is left empty if it is not transferred from an external interface or entered on the GUI. This field can be left empty.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
10	RESULT_CODE	NUMBER[10]	Internal transfer result code. • **0**: The operation is successful. • Others: The operation failed. This field cannot be left empty.	
11	ERROR_TYPE	VARCHAR2[32]	Error type. The options are as follows: • **-1**: Default error type. • **0**: The operation is successful. • **1**: The operation cannot be performed repeatedly. • **2**: No record is found. • **4**: No available resource is found. • **5**: Invalid data. • **6**: The specified operation is not allowed. • **7**: Authentication failed. This field cannot be left empty.	
12	REQUEST_ACCT_BALANCE_ID	NUMBER[20]	Instance ID of the transfer-out balance account. If the transferor or transferee is an external subscriber or a transfer is not performed for a specified account book, this field is set to **0**. This field cannot be left empty.	
13	DEST_ACCT_ID	NUMBER[20]	Transfer-in account ID. If the transferor or transferee is an external subscriber, this field is set to **0**. This field cannot be left empty.	
14	DEST_ACCT_BALANCE_ID	NUMBER[20]	Instance ID of the transfer-in balance account. If the transferor or transferee is an external subscriber, this field is set to **0**. This field cannot be left empty.	
15	TRANSFER_TYPE	NUMBER[10]	Transfer type. The options are as follows: • **0**: transfer-in • **1**: transfer-out This field cannot be left empty.	
16	TRANSFER_AMT	NUMBER[20]	Transfer amount. The default value is **0**. This field cannot be left empty.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
17	TRANSFER_DATE	DATE[14]	Time when a transfer transaction is executed. This field cannot be left empty.	
18	TRANSFER_TRANS_ID	NUMBER[20]	Transfer transaction ID. The default value is **0**. This field cannot be left empty.	
19	EXT_TRANS_TYPE	VARCHAR2[32]	External transaction type, which is transferred from an external interface and is the same as the value of **BUSI_TYPE**. This field is left empty if it is not transferred from an external interface.	
20	EXT_TRANS_ID	VARCHAR2[32]	External sequence number of a transaction. This field is left empty if it is not transferred from an external interface. This field can be left empty.	
21	ACCESS_METHOD	NUMBER[10]	Transfer access method. The options are as follows: • **0**: IVR • **1**: USSD • **2**: SMS • **3**: WebService • **4**: GUI Other values can be extended based on the site requirements. This field cannot be left empty.	
22	DIAMETER_SESSIONID	VARCHAR2[128]	ID of the Diameter session initiated in a transfer. If a transfer is not performed based on Diameter, this field is left empty.	
23	HANDLING_CHARGE	NUMBER[20]	Transfer handling fee. If no handling fee needs to be collected, this field is set to **0**. This field cannot be left empty.	
24	REVERSAL_TRANS_ID	NUMBER[20]	Transfer reversal transaction ID. For a non-transfer reversal transaction, this field is set to **0**. This field cannot be left empty.	
25	REVERSAL_REASON_C	VARCHAR2[16]	Transfer reversal reason code. For a non-transfer reversal transaction, this	

SN	Field Name	Field Type	Description	Field Category
	ODE		field is left empty.	
26	REVERSAL_DATE	DATE[14]	Time when a transfer is reversed. For a non-transfer reversal transaction, this field is left empty.	
27	EXT_REF_ID	VARCHAR2[64]	External reference ID. This field is left empty if it is not transferred from an external interface.	
28	STATUS	VARCHAR2[1]	Transfer request status. The options are as follows: • **F**: Finished • **R**: Reversed The default value is **F**. This field cannot be left empty.	
29	ENTRY_DATE	DATE[14]	Time when a transfer record is created. This field cannot be left empty.	
30	REMARK	VARCHAR2[128]	Remarks. This field is left empty if it is not transferred from an external interface.	
31	OPER_ID	NUMBER[20]	ID of the operator who performs the transfer operation. The default value is **0**. This field cannot be left empty.	
32	DEPT_ID	NUMBER[20]	Department ID of the operator who performs the transfer operation. The default value is **0**. This field cannot be left empty.	
33	BE_ID	NUMBER[10]	ID of the lowest-level home BE. The default value is **0**. This field cannot be left empty.	
34	BE_CODE	VARCHAR2[256]	Code of the lowest-level home BE. This field is reserved.	
35	REGION_ID	NUMBER[10]	ID of the home management region. The default value is **0**. This field cannot be left empty.	
36	REGION_CODE	VARCHAR2[256]	Code of the home management region. This field can be left empty.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
37	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 37th to 46th fields record the first group of balance change information. If *N* balance changes are involved in a transfer, the first *N* groups of balance change fields are recorded and other groups of fields are left
38	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
39	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
40	CUR_BALANCE	NUMBER [20]	Current balance.	
41	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
42	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
43	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
44	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
45	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
46	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				empty.
47	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 47th to 56th fields record the second group of balance change information. If *N* balance changes are involved in a transfer, the first *N* groups of balance change fields are recorded and other groups of
48	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
49	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
50	CUR_BALANCE	NUMBER [20]	Current balance.	
51	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
52	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
53	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
54	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
55	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
56	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				fields are left empty.
57	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 57th to 66th fields record the third group of balance change information. If *N* balance changes are involved in a transfer, the first *N* groups of balance change fields are recorded and other
58	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
59	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
60	CUR_BALANCE	NUMBER [20]	Current balance.	
61	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
62	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
63	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
64	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
65	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
66	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				groups of fields are left empty.
67	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 67th to 76th fields record the fourth group of balance change information. If *N* balance changes are involved in a transfer, the first *N* groups of balance change fields are record
68	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
69	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
70	CUR_BALANCE	NUMBER [20]	Current balance.	
71	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
72	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
73	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
74	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
75	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
76	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				ed and other groups of fields are left empty.
77	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 77th to 86th fields record the fifth group of balance change information. If *N* balance changes are involved in a transfer, the first *N* groups of balance change fields
78	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
79	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
80	CUR_BALANCE	NUMBER [20]	Current balance.	
81	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
82	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
83	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
84	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
85	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
86	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				are recorded and other groups of fields are left empty.
87	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 87th to 96th fields record the sixth group of balance change information. If *N* balance changes are involved in a transfer, the first *N* groups of balance
88	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
89	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
90	CUR_BALANCE	NUMBER [20]	Current balance.	
91	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
92	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
93	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
94	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
95	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
96	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				change fields are recorded and other groups of fields are left empty.
97	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 97th to 106th fields record the seventh group of balance change information. If *N* balance changes are involved in a transfer, the first *N* groups
98	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
99	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
100	CUR_BALANCE	NUMBER [20]	Current balance.	
101	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
102	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
103	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
104	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
105	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
106	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				of balance change fields are recorded and other groups of fields are left empty.
107	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 107th to 116th fields record the eighth group of balance change information. If *N* balance changes are involved in a transfe
108	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
109	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
110	CUR_BALANCE	NUMBER [20]	Current balance.	
111	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
112	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
113	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
114	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
115	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
116	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				r, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
117	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 117th to 126th fields record the ninth group of balance change information. If *N* balance changes are
118	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
119	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
120	CUR_BALANCE	NUMBER [20]	Current balance.	
121	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
122	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
123	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
124	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
125	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
126	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a	

SN	Field Name	Field Type	Description	Field Category
			balance account.	involved in a transfer, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
127	ACCT_ID	NUMBER [20]	Account ID.	The 37th to 136th fields record 10 groups of balance change information. The 127th to 136th fields record the tenth group of balance change information. If *N* balanc
128	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
129	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
130	CUR_BALANCE	NUMBER [20]	Current balance.	
131	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
132	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
133	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
134	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
135	CURRENCYE_ID	NUMBER [10]	Currency type ID, which can be customized by a carrier.	
136	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an	

SN	Field Name	Field Type	Description	Field Category
			amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	e changes are involved in a transfer, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
137	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The 137th to 147th fields record the first group of free unit change inform
138	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
139	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
140	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
141	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
142	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
143	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
144	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
145	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	ation. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
146	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
147	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
148	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The 148th to 158th fields record the second group of free unit change
149	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
150	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
151	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
152	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
153	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
154	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
155	PRE_EXPIR	DATE[14]	Original expiration time of free units.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	E_TIME			information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
156	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
157	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
158	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
159	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The 159th to 169th fields record the third group of free unit
160	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
161	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
162	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
163	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
164	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
165	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	

SN	Field Name	Field Type	Description	Field Category
166	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	change information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
167	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
168	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
169	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
170	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The 170th to 180th fields record the fourth group of free
171	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
172	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
173	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
174	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
175	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
176	PRE_APPLY	DATE[14]	Original effective time of free units.	

SN	Field Name	Field Type	Description	Field Category
	_TIME			unit change information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
177	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
178	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
179	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
180	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
181	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The 181st to 191st fields record the fifth
182	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
183	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
184	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
185	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
186	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
187	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	group of free unit change information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
188	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
189	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
190	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
191	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
192	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The 192nd to 202nd fields record the
193	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
194	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
195	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
196	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
197	CHG_AMOU	NUMBER	Free unit change amount.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	NT	[20]		sixth group of free unit change information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
198	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
199	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
200	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
201	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
202	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
203	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The 203rd to 213rd fields
204	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
205	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
206	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
207	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
208	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	record the seventh group of free unit change information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
209	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
210	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
211	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
212	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
213	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
214	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The 214th
215	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
216	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
217	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
218	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	to 224th fields record the eighth group of free unit change information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
219	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
220	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
221	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
222	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
223	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
224	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
225	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information. The
226	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
227	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
228	FREE_UNIT	NUMBER	Free unit type.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	_TYPE	[20]		225th to 235th fields record the ninth group of free unit change information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
229	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
230	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
231	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
232	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
233	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
234	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
235	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
236	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 137th to 246th fields record 10 groups of free unit change information.
237	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
238	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
239	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	The 236th to 246th fields record the tenth group of free unit change information. If *N* free unit changes are involved in a transfer, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
240	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
241	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
242	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
243	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
244	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
245	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
246	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
247	ACCT_ID	NUMBER[20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The
248	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
249	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
250	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
251	CURRENT_	NUMBER	Current fund balance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	BALANCE	[20]		247th to 256th fields record the first group of bonus details. If *N* bonuses are involved in a transfer, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
252	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
253	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
254	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
255	CURRENCY_ID	NUMBER [10]	Currency type ID.	
256	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
257	ACCT_ID	NUMBER [20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The 257th to 266th
258	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
259	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
260	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
261	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
262	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
263	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	fields record the second group of bonus details. If *N* bonuses are involved in a transfer, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
264	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
265	CURRENCY_ID	NUMBER[10]	Currency type ID.	
266	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
267	ACCT_ID	NUMBER[20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The 267th to 276th fields record the third group
268	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
269	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
270	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
271	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
272	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
273	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
274	CUR_EXPIR	DATE[14]	Current expiration time of the account	

SN	Field Name	Field Type	Description	Field Category
	E_TIME		book.	of bonus details. If *N* bonuses are involved in a transfer, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
275	CURRENCY_ID	NUMBER[10]	Currency type ID.	
276	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
277	ACCT_ID	NUMBER[20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The 277th to 286th fields record the fourth group of bonus details. If *N* bonuse
278	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
279	BALANCE_TYPE	NUMBER[20]	ID of the balance account type, which can be customized by a carrier.	
280	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
281	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
282	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
283	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
284	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
285	CURRENCY_ID	NUMBER[10]	Currency type ID.	
286	OPER_TYPE	NUMBER	Operation type. The options are as follows:	

SN	Field Name	Field Type	Description	Field Category
		[10]	• **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	s are involved in a transfer, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
287	ACCT_ID	NUMBER [20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The 287th to 296th fields record the fifth group of bonus details. If *N* bonuses are involved in a transfer, the
288	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
289	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
290	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
291	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
292	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
293	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
294	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
295	CURRENCY_ID	NUMBER [10]	Currency type ID.	
296	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
297	ACCT_ID	NUMBER [20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The 297th to 306th fields record the sixth group of bonus details. If *N* bonuses are involved in a transfer, the first *N* groups of bonus details
298	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
299	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
300	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
301	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
302	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
303	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
304	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
305	CURRENCY_ID	NUMBER [10]	Currency type ID.	
306	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
				fields are recorded and other groups of fields are left empty.
307	ACCT_ID	NUMBER [20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The 307th to 316th fields record the seventh group of bonus details. If *N* bonuses are involved in a transfer, the first *N* groups of bonus details fields are recorded and
308	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
309	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
310	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
311	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
312	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
313	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
314	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
315	CURRENCY_ID	NUMBER [10]	Currency type ID.	
316	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				other groups of fields are left empty.
317	ACCT_ID	NUMBER [20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The 317th to 326th fields record the eighth group of bonus details. If *N* bonuses are involved in a transfer, the first *N* groups of bonus details fields are recorded and other groups of fields are left
318	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
319	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
320	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
321	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
322	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
323	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
324	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
325	CURRENCY_ID	NUMBER [10]	Currency type ID.	
326	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	

SN	Field Name	Field Type	Description	Field Category
				empty.
327	ACCT_ID	NUMBER [20]	Account ID.	The 247th to 346th fields record 10 groups of bonus details. The 327th to 336th fields record the ninth group of bonus details. If *N* bonuses are involved in a transfer, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
328	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
329	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
330	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
331	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
332	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
333	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
334	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
335	CURRENCY_ID	NUMBER [10]	Currency type ID.	
336	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
337	ACCT_ID	NUMBER [20]	Account ID.	The 247th to 346th
338	ACCT_BAL	NUMBER	Account book ID.	

SN	Field Name	Field Type	Description	Field Category
	ANCE_ID	[20]		fields record 10 groups of bonus details. The 337th to 346th fields record the tenth group of bonus details. If *N* bonuses are involved in a transfer, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
339	BALANCE_TYPE	NUMBER [20]	ID of the balance account type, which can be customized by a carrier.	
340	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
341	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
342	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
343	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
344	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
345	CURRENCY_ID	NUMBER [10]	Currency type ID.	
346	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
347	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups of free
348	FU_OWN_ID	NUMBER [20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
349	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	unit reward details. The 347th to 357th fields record the first group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
350	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
351	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
352	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
353	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
354	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
355	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
356	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
357	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
358	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups of free
359	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
360	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	unit reward details. The 358th to 368th fields record the second group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
361	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
362	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
363	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
364	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
365	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
366	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
367	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
368	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
369	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups of free
370	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
371	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	unit reward details. The 369th to 379th fields record the third group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
372	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
373	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
374	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
375	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
376	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
377	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
378	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
379	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
380	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups of free
381	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
382	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	unit reward details. The 380th to 390th fields record the fourth group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
383	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
384	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
385	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
386	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
387	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
388	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
389	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
390	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
391	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups of free
392	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
393	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	unit reward details. The 391st to 401st fields record the fifth group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
394	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
395	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
396	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
397	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
398	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
399	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
400	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
401	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
402	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups of free
403	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
404	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	unit reward details. The 402nd to 412nd fields record the sixth group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
405	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
406	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
407	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
408	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
409	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
410	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
411	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
412	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
413	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups of free
414	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
415	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	unit reward details. The 413rd to 423rd fields record the seventh group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
416	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
417	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
418	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
419	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
420	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
421	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
422	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
423	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
424	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups
425	FU_OWN_ID	NUMBER	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
		[20]		of free unit reward details. The 424th to 434th fields record the eighth group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
426	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
427	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
428	BONUS_AMOUNT	NUMBER [20]	Rewarded free unit amount.	
429	CURRENT_AMOUNT	NUMBER [20]	Current free unit amount.	
430	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
431	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
432	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
433	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
434	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
435	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups
436	FU_OWN_ID	NUMBER	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
		[20]		of free unit reward details. The 435th to 445th fields record the ninth group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
437	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
438	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
439	BONUS_AMOUNT	NUMBER [20]	Rewarded free unit amount.	
440	CURRENT_AMOUNT	NUMBER [20]	Current free unit amount.	
441	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
442	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
443	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
444	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
445	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
446	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 347th to 456th fields record 10 groups
447	FU_OWN_ID	NUMBER	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
		[20]		of free unit reward details. The 446th to 456th fields record the tenth group of free unit reward details. If *N* free unit rewards are involved in a transfer, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
448	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
449	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
450	BONUS_AMOUNT	NUMBER [20]	Rewarded free unit amount.	
451	CURRENT_AMOUNT	NUMBER [20]	Current free unit amount.	
452	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
453	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
454	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
455	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
456	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
457	BrandID	NUMBER [10]	Brand ID. In the process of transferring an amount for a specified account, this field can be left empty. This field can be left empty.	The 457th to 474th fields record additional
458	MainOfferingID	NUMBER [10]	Primary offering ID. In the process of transferring an amount for	

SN	Field Name	Field Type	Description	Field Category
			a specified account, this field can be left empty. This field can be left empty.	transfer information. These fields are provided in the baseline version and can be extended based on the site requirements.
459	PayType	VARCHAR2[1]	Payment type of a subscriber. • **0**: prepaid • **1**: postpaid • **2**: Hybrid In the process of transferring an amount for a specified account, this field can be left empty. This field can be left empty.	
460	StartTimeOfBillCycle	VARCHAR2[14]	Bill cycle start time, in the format *YYYYMMDDHHMMSS*. This field cannot be left empty.	
461	Remark1	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
462	Remark2	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
463	Remark3	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
464	Remark4	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
465	ChgFreeUnitInfo	VARCHAR2[1024]	This field is reserved.	
466	UserState	VARCHAR2[10]	This field is reserved.	
467	oldUserState	VARCHAR2[10]	This field is reserved.	
468	TransferType	NUMBER[10]	This field is reserved.	
469	Dest_Pri_Identity	VARCHAR2[36]	This field is reserved.	
470	SPID	VARCHAR2[20]	This field is reserved.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
471	AdditionalInfo	VARCHAR2[256]	This field is reserved.	
472	Merchant	VARCHAR2[20]	This field is reserved.	
473	Service	VARCHAR2[20]	This field is reserved.	

4.3.3 Adjustment CDR

This topic describes fields in adjustment CDRs.

Table 4-15 describes fields in adjustment CDRs.

Table 4-15 Adjustment CDR fields

SN	Field Name	Field Type	Description	Field Category
1	ADJUST_LOG_ID	NUMBER[20]	Adjustment log ID. The default value is **0**. This field cannot be left empty.	The first 29 fields record basic adjustment information. The meaning and length of these fields are fixed.
2	ACCT_ID	NUMBER[20]	ID of the adjustment account. The default value is **0**. This field cannot be left empty.	
3	CUST_ID	NUMBER[20]	ID of the customer whose account is adjusted. The default value is **0**. This field cannot be left empty.	
4	SUB_ID	NUMBER[20]	ID of the subscriber whose account is adjusted. This field is used for account-level adjustments. If no subscriber is transferred in an account-level adjustment, this field is set to **0**. This field cannot be left empty.	
5	PRI_IDENTITY	VARCHAR2[64]	Subscriber primary identifier. This field is used for account-level adjustments. If no subscriber is transferred in an account-level adjustment, this field is left empty.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			If a primary identifier is an MSISDN or a PSTN, the formats are as follows: • Country code + MSISDN • Country code + Area code + PSTN If a primary identifier is of other types, the value is the number that is transferred. This field can be left empty.	
6	PAY_TYPE	VARCHAR2[1]	Payment type of an account. The options are as follows: • **0**: prepaid • **1**: postpaid This field cannot be left empty.	
7	BATCH_NO	NUMBER[20]	Adjustment batch number. For a single adjustment, this field is set to **0**. This field cannot be left empty.	
8	CHANNEL_ID	VARCHAR2[8]	Adjustment channel ID. This field is left empty if it is not transferred from an external interface or entered on the GUI. • **0**: IVR • **1**: USSD • **2**: SMS • **3**: WebService • **4**: GUI Other values can be extended based on the site requirements. This field can be left empty.	
9	REASON_CODE	VARCHAR2[16]	Adjustment reason code. This field is left empty if it is not transferred from an external interface or entered on the GUI.	
10	RESULT_CODE	NUMBER[10]	Internal adjustment result code. • **0**: The operation is successful. • Others: The operation failed. This field cannot be left empty.	
11	ERROR_TYPE	VARCHAR2[32]	Error type. The options are as follows: • **-1**: Default error type. • **0**: The operation is successful.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			• **1**: The operation cannot be performed repeatedly. • **2**: No record is found. • **4**: No available resource is found. • **5**: Invalid data. • **6**: The specified operation is not allowed. • **7**: Authentication failed. This field can be left empty.	
12	ACCT_BALANCE_ID	NUMBER[20]	Instance ID of the adjusted balance account. For an account-level adjustment transaction, this field is set to **0**. This field cannot be left empty.	
13	ADJUST_AMT	NUMBER[20]	Adjusted amount. The default value is **0**. This field cannot be left empty.	
14	ADJUST_TRANS_ID	NUMBER[20]	Adjustment transaction ID. The default value is **0**. This field cannot be left empty.	
15	EXT_TRANS_TYPE	VARCHAR2[32]	External transaction type, which is transferred from an external interface and is the same as the value of **BUSI_TYPE**. This field is left empty if it is not transferred from an external interface.	
16	EXT_TRANS_ID	VARCHAR2[32]	External sequence number of a transaction. This field is left empty if it is not transferred from an external interface.	
17	ACCESS_METHOD	NUMBER[10]	Adjustment access method. The options are as follows: • **0**: IVR • **1**: USSD • **2**: SMS • **3**: WebService • **4**: GUI Other values can be extended based on the site requirements. This field is reserved.	
18	REVERSAL_TRANS_ID	NUMBER[20]	Adjustment reversal transaction ID. For a non-adjustment reversal transaction,	

SN	Field Name	Field Type	Description	Field Category
			this field is set to **0**. This field cannot be left empty.	
19	REVERSAL_REASON_CODE	VARCHAR2[16]	Adjustment reversal reason code. In the non-adjustment reversal process or in the scenario where this field is not transferred from an external interface or entered on the GUI, this field is left empty.	
20	REVERSAL_DATE	DATE[14]	Time when an adjustment is reversed. For a non-adjustment reversal transaction, this field is left empty.	
21	STATUS	VARCHAR2[1]	Adjustment request status. The options are as follows: • **F**: Finished • **R**: Reversed The default value is **F**. This field cannot be left empty.	
22	ENTRY_DATE	DATE[14]	Time when an adjustment record is created. This field cannot be left empty.	
23	OPER_ID	NUMBER[20]	ID of the operator who performs the adjustment operation. The default value is **0**. This field cannot be left empty.	
24	DEPT_ID	NUMBER[20]	Department ID of the operator who performs the adjustment operation. The default value is **0**. This field cannot be left empty.	
25	REMARK	VARCHAR2[128]	Remarks. This field is left empty if it is not transferred from an external interface or entered on the GUI. This field can be left empty.	
26	BE_ID	NUMBER[10]	ID of the lowest-level home BE. The default value is **0**. This field cannot be left empty.	
27	BE_CODE	VARCHAR2[256]	Code of the lowest-level home BE. This field is reserved.	
28	REGION_ID	NUMBER[10]	ID of the home management region. The default value is **0**.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			This field cannot be left empty.	
29	REGION_CODE	VARCHAR2[256]	Code of the home management region. This field can be left empty.	
30	DEBIT_AMOUNT	NUMBER[20]	Actual amount that is deducted, which includes the amount deducted from prepaid main funds, bonuses, postpaid credits, and prepayments of all accounts (including payment accounts) used in a transaction but excludes the undebited amount.	The 30th to 37th fields record total fund information.
31	UN_DEBIT_AMOUNT	NUMBER[20]	Undebited amount. This field indicates the fee that is not debited when the balance is deducted to zero (that is, when the account balance is insufficient) in the case of prorated charging.	
32	DEBIT_FROM_PREPAID	NUMBER[20]	Total amount deducted from prepaid main funds and bonuses of all prepaid accounts, including payment accounts.	
33	DEBIT_FROM_ADVANCE_PREPAID	NUMBER[20]	Total amount deducted from prepaid main funds of all prepaid accounts, including payment accounts.	
34	DEBIT_FROM_POSTPAID	NUMBER[20]	Total amount deducted from credits, bonuses, deposits, and prepayments of all postpaid accounts, including payment accounts.	
35	DEBIT_FROM_ADVANCE_POSTPAID	NUMBER[20]	Total amount deducted from prepayments of all postpaid accounts, including payment accounts.	
36	DEBIT_FROM_CREDIT_POSTPAID	NUMBER[20]	Total amount deducted from credits of all postpaid accounts, including payment accounts.	
37	TOTAL_TAX	NUMBER[20]	Total tax amount.	
38	FREE_UNIT_AMOUNT_OF_TIMES	NUMBER[20]	Number of free units charged per use.	The 38th to 40th fields record free unit inform
39	FREE_UNIT_AMOUNT_OF_DURATION	NUMBER[20]	Usage of free units that are charged by duration. The duration unit is defined by the system. Generally, the unit is second.	

SN	Field Name	Field Type	Description	Field Category
40	FREE_UNIT_AMOUNT_OF_FLUX	NUMBER[20]	Usage of free units that are charged by traffic. The traffic unit is defined by the system. Generally, the unit is byte.	ation. There can be zero or one group of free unit information based on the service requirements.
41	ACCT_ID	NUMBER[20]	Account ID.	The 41st to 140th fields record 10 groups of balance change information. The 41st to 50th fields record the first group of balance change information. If *N* balance changes are involved in an
42	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
43	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
44	CUR_BALANCE	NUMBER[20]	Current balance.	
45	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
46	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
47	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
48	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
49	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
50	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				adjustment, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
51	ACCT_ID	NUMBER [20]	Account ID.	The 41st to 140th fields record 10 groups of balance change information. The 51st to 60th fields record the second group of balance change information. If *N* balance change
52	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
53	BALANCE_TYPE	NUMBER [20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
54	CUR_BALANCE	NUMBER [20]	Current balance.	
55	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
56	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
57	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
58	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
59	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
60	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account.	

SN	Field Name	Field Type	Description	Field Category
			• **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	s are involved in an adjustment, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
61	ACCT_ID	NUMBER [20]	Account ID.	The 41st to 140th fields record 10 groups of balance change information. The 61st to 70th fields record the third group of balance change information.
62	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
63	BALANCE_TYPE	NUMBER [20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
64	CUR_BALANCE	NUMBER [20]	Current balance.	
65	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
66	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
67	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
68	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
69	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
70	OPER_TYPE	NUMBER	Operation type. The options are as follows:	

SN	Field Name	Field Type	Description	Field Category
		[10]	• **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	If *N* balance changes are involved in an adjustment, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
71	ACCT_ID	NUMBER [20]	Account ID.	The 41st to 140th fields record 10 groups of balance change information. The 71st to 80th fields record the fourth group of
72	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
73	BALANCE_TYPE	NUMBER [20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
74	CUR_BALANCE	NUMBER [20]	Current balance.	
75	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
76	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
77	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
78	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	

SN	Field Name	Field Type	Description	Field Category
79	CURRENCYE_ID	NUMBER[10]	Currency type ID.	balance change information. If *N* balance changes are involved in an adjustment, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
80	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	
81	ACCT_ID	NUMBER[20]	Account ID.	The 41st to 140th fields record 10 groups of balance change information. The 81st to 90th fields
82	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
83	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
84	CUR_BALANCE	NUMBER[20]	Current balance.	
85	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
86	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
87	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	record the fifth group of balance change information. If *N* balance changes are involved in an adjustment, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
88	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
89	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
90	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	
91	ACCT_ID	NUMBER[20]	Account ID.	The 41st to 140th fields record 10 groups of balance change information.
92	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
93	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
94	CUR_BALANCE	NUMBER[20]	Current balance.	
95	CHG_BALA	NUMBER	Change amount of the balance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	NCE	[20]		The 91st to 100th fields record the sixth group of balance change information. If *N* balance changes are involved in an adjustment, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
96	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
97	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
98	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
99	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
100	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	
101	ACCT_ID	NUMBER[20]	Account ID.	The 41st to 140th fields record 10 groups of balanc
102	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
103	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	

SN	Field Name	Field Type	Description	Field Category
104	CUR_BALANCE	NUMBER[20]	Current balance.	e change information. The 101st to 110th fields record the seventh group of balance change information. If *N* balance changes are involved in an adjustment, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
105	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
106	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
107	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
108	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
109	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
110	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	
111	ACCT_ID	NUMBER[20]	Account ID.	The 41st to

SN	Field Name	Field Type	Description	Field Category
112	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	140th fields record 10 groups of balance change information. The 111st to 120th fields record the eighth group of balance change information. If *N* balance changes are involved in an adjustment, the first *N* groups of balance change fields are recorded and other groups of fields
113	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
114	CUR_BALANCE	NUMBER[20]	Current balance.	
115	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
116	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
117	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
118	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
119	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
120	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				are left empty.
121	ACCT_ID	NUMBER [20]	Account ID.	The 41st to 140th fields record 10 groups of balance change information. The 121st to 130th fields record the ninth group of balance change information. If *N* balance changes are involved in an adjustment, the first *N* groups of balance change fields are record
122	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
123	BALANCE_TYPE	NUMBER [20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
124	CUR_BALANCE	NUMBER [20]	Current balance.	
125	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
126	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
127	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
128	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
129	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
130	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				ed and other groups of fields are left empty.
131	ACCT_ID	NUMBER [20]	Account ID.	The 41st to 140th fields record 10 groups of balance change information. The 131st to 140th fields record the tenth group of balance change information. If *N* balance changes are involved in an adjustment, the first *N* groups of balanc
132	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
133	BALANCE_TYPE	NUMBER [20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
134	CUR_BALANCE	NUMBER [20]	Current balance.	
135	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
136	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
137	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
138	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
139	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
140	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend an amount. • **1**: Perform accounting. That is, settle a postpaid account. • **2**: Update the income. That is, add an amount to an existing balance account. • **3**: Increase the income. That is, add a balance account.	

SN	Field Name	Field Type	Description	Field Category
				e change fields are recorded and other groups of fields are left empty.
141	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change information. The 141st to 151st fields record the first group of free unit change information. If *N* free unit changes are involved in an adjustment, the
142	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
143	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
144	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
145	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
146	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
147	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
148	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
149	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
150	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
151	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a	

SN	Field Name	Field Type	Description	Field Category
			free unit instance.	first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
152	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change information. The 152nd to 162nd fields record the second group of free unit change information. If *N* free unit changes are involved in an
153	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
154	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
155	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
156	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
157	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
158	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
159	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
160	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
161	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
162	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit.	

SN	Field Name	Field Type	Description	Field Category
			• **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
163	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change information. The 163rd to 173rd fields record the third group of free unit change information. If *N* free unit changes are
164	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
165	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
166	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
167	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
168	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
169	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
170	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
171	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
172	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
173	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	involved in an adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
174	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change information. The 174th to 184th fields record the fourth group of free unit change information. If *N* free
175	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
176	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
177	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
178	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
179	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
180	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
181	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
182	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
183	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	unit changes are involved in an adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
184	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
185	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change information. The 185th to 195th fields record the fifth group of free unit change inform
186	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
187	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
188	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
189	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
190	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
191	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
192	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
193	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	ation. If *N* free unit changes are involved in an adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
194	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
195	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
196	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change information. The 196th to 206th fields record the sixth group of free
197	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
198	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
199	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
200	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
201	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
202	PRE_APPLY	DATE[14]	Original effective time of free units.	

SN	Field Name	Field Type	Description	Field Category
	_TIME			unit change information. If *N* free unit changes are involved in an adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
203	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
204	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
205	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
206	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
207	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change information. The 207th to 217th fields record the
208	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
209	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
210	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
211	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
212	CHG_AMOU	NUMBER	Free unit change amount.	

SN	Field Name	Field Type	Description	Field Category
	NT	[20]		seventh group of free unit change information. If *N* free unit changes are involved in an adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
213	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
214	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
215	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
216	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
217	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
218	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change information. The 218th
219	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
220	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
221	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
222	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	to 228th fields record the eighth group of free unit change information. If *N* free unit changes are involved in an adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
223	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
224	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
225	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
226	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
227	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
228	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
229	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free unit change inform
230	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
231	FREE_UNIT	NUMBER	Free unit ID.	

SN	Field Name	Field Type	Description	Field Category
	_ID	[20]		ation. The 229th to 239th fields record the ninth group of free unit change information. If *N* free unit changes are involved in an adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
232	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
233	CUR_AMOUNT	NUMBER [20]	Current free unit amount.	
234	CHG_AMOUNT	NUMBER [20]	Free unit change amount.	
235	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
236	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
237	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
238	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	
239	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
240	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 141st to 250th fields record 10 groups of free
241	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the	

SN	Field Name	Field Type	Description	Field Category
			FU_OWN_TYPE value.	unit change information. The 240th to 250th fields record the tenth group of free unit change information. If *N* free unit changes are involved in an adjustment, the first *N* groups of free unit change fields are recorded and other groups of fields are left empty.
242	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
243	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
244	CUR_AMOUNT	NUMBER[20]	Current free unit amount.	
245	CHG_AMOUNT	NUMBER[20]	Free unit change amount.	
246	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
247	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
248	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
249	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
250	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: Expend a free unit. • **1**: Update the income. That is, add free units to an existing free unit instance. • **2**: Increase the income. That is, add a free unit instance.	
251	ACCT_ID	NUMBER[20]	Account ID.	The 251st to 350th fields record
252	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
253	BALANCE_	NUMBER	Balance type.	

SN	Field Name	Field Type	Description	Field Category
	TYPE	[20]		10 groups of bonus details. The 251st to 260th fields record the first group of bonus details. If *N* bonuses are involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
254	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
255	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
256	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
257	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
258	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
259	CURRENCY_ID	NUMBER [10]	Currency type ID.	
260	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
261	ACCT_ID	NUMBER [20]	Account ID.	The 251st to 350th fields record 10
262	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
263	BALANCE_TYPE	NUMBER [20]	Balance type.	

SN	Field Name	Field Type	Description	Field Category
264	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	groups of bonus details. The 261st to 270th fields record the second group of bonus details. If *N* bonuses are involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
265	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
266	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
267	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
268	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
269	CURRENCY_ID	NUMBER[10]	Currency type ID.	
270	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
271	ACCT_ID	NUMBER[20]	Account ID.	The 251st to 350th fields record 10 groups of bonus
272	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
273	BALANCE_TYPE	NUMBER[20]	Balance type.	
274	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
275	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	details. The 271st to 280th fields record the third group of bonus details. If *N* bonuses are involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
276	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
277	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
278	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
279	CURRENCY_ID	NUMBER[10]	Currency type ID.	
280	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
281	ACCT_ID	NUMBER[20]	Account ID.	The 251st to 350th fields record 10 groups of bonus details. The 281st
282	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
283	BALANCE_TYPE	NUMBER[20]	Balance type.	
284	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
285	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
286	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	to 290th fields record the fourth group of bonus details. If *N* bonuses are involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
287	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
288	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
289	CURRENCY_ID	NUMBER[10]	Currency type ID.	
290	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
291	ACCT_ID	NUMBER[20]	Account ID.	The 251st to 350th fields record 10 groups of bonus details. The 291st to 300th
292	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
293	BALANCE_TYPE	NUMBER[20]	Balance type.	
294	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
295	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
296	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	

SN	Field Name	Field Type	Description	Field Category
297	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	fields record the fifth group of bonus details. If *N* bonuses are involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
298	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
299	CURRENCY_ID	NUMBER[10]	Currency type ID.	
300	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
301	ACCT_ID	NUMBER[20]	Account ID.	The 251st to 350th fields record 10 groups of bonus details. The 301st to 310th fields record the
302	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
303	BALANCE_TYPE	NUMBER[20]	Balance type.	
304	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
305	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
306	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
307	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
308	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	sixth group of bonus details. If *N* bonuses are involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
309	CURRENCY_ID	NUMBER[10]	Currency type ID.	
310	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
311	ACCT_ID	NUMBER[20]	Account ID.	The 251st to 350th fields record 10 groups of bonus details. The 311st to 320th fields record the seventh group
312	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
313	BALANCE_TYPE	NUMBER[20]	Balance type.	
314	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
315	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
316	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
317	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
318	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
319	CURRENCY_ID	NUMBER[10]	Currency type ID.	of bonus details. If *N* bonuses are involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
320	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
321	ACCT_ID	NUMBER[20]	Account ID.	The 251st to 350th fields record 10 groups of bonus details. The 321st to 330th fields record the eighth group of bonus details.
322	ACCT_BALANCE_ID	NUMBER[20]	Account book ID.	
323	BALANCE_TYPE	NUMBER[20]	Balance type.	
324	BONUS_AMOUNT	NUMBER[20]	Bonus amount.	
325	CURRENT_BALANCE	NUMBER[20]	Current fund balance.	
326	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
327	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
328	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
329	CURRENCY	NUMBER	Currency type ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	_ID	[10]		If *N* bonuses are involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
330	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	
331	ACCT_ID	NUMBER [20]	Account ID.	The 251st to 350th fields record 10 groups of bonus details. The 331st to 340th fields record the ninth group of bonus details. If *N* bonuses are
332	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
333	BALANCE_TYPE	NUMBER [20]	Balance type.	
334	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
335	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
336	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
337	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
338	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
339	CURRENCY_ID	NUMBER [10]	Currency type ID.	
340	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows:	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
			• **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus account book.	involved in an adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
341	ACCT_ID	NUMBER [20]	Account ID.	The 251st to 350th fields record 10 groups of bonus details. The 341st to 350th fields record the tenth group of bonus details. If *N* bonuses are involved in an
342	ACCT_BALANCE_ID	NUMBER [20]	Account book ID.	
343	BALANCE_TYPE	NUMBER [20]	Balance type.	
344	BONUS_AMOUNT	NUMBER [20]	Bonus amount.	
345	CURRENT_BALANCE	NUMBER [20]	Current fund balance.	
346	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
347	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
348	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
349	CURRENCY_ID	NUMBER [10]	Currency type ID.	
350	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **4**: Roll over bonuses. • **5**: Add a bonus account book. • **6**: Add bonuses to an existing bonus	

SN	Field Name	Field Type	Description	Field Category
			account book.	adjustment, the first *N* groups of bonus details fields are recorded and other groups of fields are left empty.
351	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward details. The 351st to 361st fields record the first group of free unit reward details. If *N* free unit rewards are involved in
352	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
353	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
354	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
355	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
356	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
357	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
358	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
359	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
360	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
361	OPER_TYPE	NUMBER	Operation type. The options are as follows:	

SN	Field Name	Field Type	Description	Field Category
		[10]	• **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
362	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward details. The 362nd to 372nd fields record the second group of free unit reward details. If *N* free unit rewards are
363	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
364	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
365	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
366	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
367	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
368	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
369	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
370	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
371	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
372	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
373	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward details. The 373rd to 383rd fields record the third group of free unit reward details. If *N* free unit
374	FU_OWN_ID	NUMBER [20]	Free unit owner ID.	
375	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
376	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	
377	BONUS_AMOUNT	NUMBER [20]	Rewarded free unit amount.	
378	CURRENT_AMOUNT	NUMBER [20]	Current free unit amount.	
379	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
380	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
381	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
382	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	rewards are involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
383	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
384	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward details. The 384th to 394th fields record the fourth group of free unit reward details.
385	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
386	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
387	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
388	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
389	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
390	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
391	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
392	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	If *N* free unit rewards are involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
393	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
394	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
395	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward details. The 395th to 405th fields record the fifth group of free
396	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
397	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
398	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
399	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
400	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
401	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
402	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	unit reward details. If *N* free unit rewards are involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
403	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
404	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
405	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
406	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward details. The 406th to 416th fields record the
407	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
408	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
409	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
410	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
411	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
412	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	sixth group of free unit reward details. If *N* free unit rewards are involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
413	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
414	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
415	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
416	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
417	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward details. The 417th to 427th fields
418	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
419	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
420	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
421	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
422	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	record the seventh group of free unit reward details. If *N* free unit rewards are involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
423	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
424	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
425	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
426	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
427	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
428	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward details. The 428th
429	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
430	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
431	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
432	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	to 438th fields record the eighth group of free unit reward details. If *N* free unit rewards are involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
433	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
434	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
435	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
436	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
437	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
438	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
439	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free unit reward
440	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	
441	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
442	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	details. The 439th to 449th fields record the ninth group of free unit reward details. If *N* free unit rewards are involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
443	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
444	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
445	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
446	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
447	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
448	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
449	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
450	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	The 351st to 460th fields record 10 groups of free
451	FU_OWN_ID	NUMBER[20]	Free unit owner ID.	

SN	Field Name	Field Type	Description	Field Category
452	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	unit reward details. The 450th to 460th fields record the tenth group of free unit reward details. If *N* free unit rewards are involved in an adjustment, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
453	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	
454	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
455	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
456	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
457	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
458	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
459	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
460	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
461	BrandID	NUMBER[10]	Brand ID. In the process of adjusting a specified account, this field can be left empty. This field can be left empty.	The 461st to 475th fields record additio
462	MainOfferingID	NUMBER[10]	Primary offering ID. In the process of adjusting a specified	

SN	Field Name	Field Type	Description	Field Category
			account, this field can be left empty. This field can be left empty.	nal adjustment information. These fields are provided in the baseline version and can be extended based on the site requirements.
463	PayType	VARCHAR2[1]	Payment type of a subscriber. The options are as follows: • **0**: prepaid • **1**: postpaid • **2**: hybrid In the process of adjusting a specified account, this field can be left empty. This field can be left empty.	
464	StartTimeOfBillCycle	VARCHAR2[14]	Bill cycle start time, in the format *YYYYMMDDHHMMSS*. This field cannot be left empty.	
465	Account	VARCHAR2[1024]	This field is reserved.	
466	ExtTransactionId	VARCHAR2[131]	The external transaction Id from interface transfer.	
467	Remark1	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
468	Remark2	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
469	Remark3	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
470	Remark4	VARCHAR2[64]	Remarks. This field is left empty if it is not transferred from an external interface.	
471	SPID	VARCHAR2[20]	This field is reserved.	
472	AdditionalInfo	VARCHAR2[256]	This field is reserved.	
473	Merchant	VARCHAR2[20]	This field is reserved.	
474	Service	VARCHAR2[20]	This field is reserved.	

 Copyright © Huawei Technologies Co., Ltd.

4.3.4 Switch Primary Offering CDR

This topic describes fields in Switch Primary Offering CDR.

Table 4-16 describes the fields in Switch Primary Offering CDR.

Table 4-16 Switch Primary Offering CDR

SN	Field Name	Field Type	Description
1	SubscriberNo	Char(32)	Indicates the subscriber number. The calling number with an international number prefix. The number format is as follows: Country code + area number + PSTN The number format is the format of the fixed-line phone number. MSISDN The number format is the format of the mobile phone number. Value range: numerals within 0-9 It is the Primary Identity of the subscriber. Not null Value Range: Digitals within [0,9],*,# For URI format, it should be [a,z],[A,Z],[0,9],@
2	OriginalPrimaryOfferingIDAfter	Integer(4)	Indicates the ID number of the permanent Primary Offering ID after the switch. Can be null Value Range: >0
3	OriginalPrimaryOfferingIDBefore	Integer(4)	Indicates the ID number of the permanent Primary Offering ID before the switch. Can be null Value Range: >0
4	TempPrimaryOfferingIDAfter	Integer(4)	Reserved Can be null Value Range: >0
5	TempPrimaryOfferingIDBefore	Integer(4)	Reserved Can be null Value Range: >0
6	TempOfferingIDExpiryDate	Char(14)	Reserved Can be null Value Range: Sting of 14 numerical digits [0-9]
7	Balance	Integer(8)	Indicates the balance of the subscriber. Main Balance Account (BalanceType =

SN	Field Name	Field Type	Description
			2000) Can be null Reserved Value Range: >=0
8	OriginNodeType	Char(8)	Record the value of OriginalNodeType, If OriginalNodeType parameter is coming in the WS request. Can be null
9	OriginTransactionID	Char(32)	Record the value of OriginalTransactionID, If OriginalTransactionID parameter is coming in the WS request. Can be null Value Range: [A-Z, 0-9]
10	OriginHostName	Char(32)	Record the value of OriginHostName, if OriginHostName parameter is coming in the WS request. Can be null Value Range: [A-Z, 0-9]
11	OriginTimeStamp	Char(14)	Indicates the external system time stamp at the time of operation. Format: YYYYMMDDhhmmss Not null Value Range: Sting of 14 numerical digits [0-9]
12	OriginOperatorID	Char(32)	Record the value of OriginOperatorID, If OriginOperatorID parameter is coming in the WS request Can be null Value Range: [A-Z, 0-9]
13	Status	Integer(8)	Indicates the lifecycle status of the subscriber. • 1: Idle • 2: Active • 3: Barring • 4: Suspend • 8: Pool • 9: Disconnect Can be null Value Range: [A-Z, 0-9]
14	ExternalData1	Char(32)	Record the value of ExternalData1, If

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
			ExternalData1parameter is coming in the WS request. Can be null Value Range: [A-Z, 0-9]
15	ExternalData2	Char(32)	Record the value of ExternalData2, If ExternalData2 parameter is coming in the WS request. Can be null Value Range: [A-Z, 0-9]
16	OldStatus	Integer(8)	Indicates the old subscriber life cycle status of the subscriber before the operation. Value Range: [A-Z, 0-9] Can be null
17	OldBalance	Integer(8)	Indicates the main account balance before operation. Can be null Value Range: >=0 Reserved
18	Fee	Integer(8)	Indicates the fee for the operation. Can be null Value Range: >=0
19	OperationMode	Integer(8)	Indicates the mode of operation. Can be null Value Range: 0: IVR, 1: USSD, 2: SMS, 3: WebService, 4: GUI, 8 - System
20	OldTempOfferingIDExpiryDate	Char(14)	Reserved Can be null Value range: Sting of 14 numerical digits [0-9]
21	OperationResult	Char(9)	Indicates the status of the operation. Not Null Value Range: 0- Success or BMP Error Codes
22	TransactionType	Char(32)	Indicates the transaction type that is received from external system. For example: ADMIN WEBSER BONUS Can be null Value Range: [0-9] and

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description
23	TransactionCode	Char(32)	Indicates the transaction code that is received from external system. Can be null Value Range: [0-9] and
24	BEID	Integer(4)	Indicates the MVNOID of subscriber Can be null Value Range: >0
25	UserNetType	Integer(4)	Indicates the Network type of subscriber. Recode the network type of a product , it can be taken from BC_SUB_IDEN : • 0:Not Specify • 1:GSM • 2:CDMA • 3:ADSL • 4:FIX • 5:Wimax • 6:VOIP • 7:OTTO VOIP Can be null Value Range: >0

4.3.5 Loan CDR

This topic describes fields in loan CDRs generated on the CBP.

Table 4-17 describes fields in loan CDRs.

Table 4-17 Loan CDR

SN	Field Name	Field Type	Description	Field Category
1	SUB_ID	NUMBER [20]	Subscriber ID. The default value is **0**. This field cannot be left empty.	The first 19 fields record the first part of basic information in CDR files. The
2	PRI_IDENTITY	VARCHAR2[64]	Subscriber primary identifier. If a primary identifier is an MSISDN or a PSTN, the formats are as follows: • Country code + MSISDN • Country code + Area code + PSTN If a primary identifier is of other types,	

SN	Field Name	Field Type	Description	Field Category
			the value is the number that is transferred.	meaning and length of these fields are fixed.
3	OPER_DATE	DATE[14]	Operation time. This field cannot be left empty.	
4	OPER_TYPE	VARCHAR2[1]	Operation type. The options are as follows: • **L**: loan • **R**: loan payment by recharge • **T**: loan payment by transfer • **A**: loan payment by adjustment • **F**: forcible loan payment • **C**: loan payment cancellation due to recharge reversal When the loan and handling fee payment is canceled due to recharge reversal, the system needs to update the loan information table and record the historical loan log table. This field cannot be left empty.	
5	LOAN_BALANCE_TYPE	NUMBER[20]	Loan account book type. The default value is **0**. This field cannot be left empty.	
6	INIT_LOAN_AMT	NUMBER[20]	Initial loan amount. The default value is **0**. This field cannot be left empty.	
7	INIT_LOAN_POUNDAGE	NUMBER[20]	Initial loan handling fee. The default value is **0**. This field cannot be left empty.	
8	LOAN_AMT	NUMBER[20]	Unpaid loan amount. The default value is **0**. This field cannot be left empty.	
9	LOAN_POUNDAGE	NUMBER[20]	Unpaid loan handling fee. The default value is **0**. This field cannot be left empty.	
10	REPAY_AMT	NUMBER[20]	Loan payment amount. The default value is **0**. This field cannot be left empty.	
11	REPAY_POUNDAG	NUMBER	Payment amount of the loan handling fee.	

SN	Field Name	Field Type	Description	Field Category
	E	[20]	The default value is **0**. This field cannot be left empty.	
12	ETU_GRACE_DATE	DATE[14]	Loan payment deadline. This field can be left empty.	
13	FORCE_REPAY_DATE	DATE[14]	Forcible payment date. This field can be left empty.	
14	TRANS_ID	VARCHAR2[64]	Sequence number of a transaction. The default value is **0**. This field cannot be left empty.	
15	ENTRY_DATE	DATE[14]	Time when a record is created. This field cannot be left empty.	
16	PRI_OFFERING	NUMBER[20]	Primary offering. The default value is **0**. This field cannot be left empty.	
17	LOAN_PENALTY	NUMBER[20]	Loan penalty that is paid currently. The default value is **0**. This field cannot be left empty.	
18	LOAN_PENALTY_LEFT	NUMBER[20]	Remaining loan penalty. The default value is **0**. This field cannot be left empty.	
19	LOAN_OCCUR_DATE	DATE[14]	Time when a loan is applied. This field can be left empty.	
20	ACCT_ID	NUMBER[20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 20th to 32nd fields record the first
21	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
22	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
23	CUR_BALANCE	NUMBER[20]	Current balance.	
24	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
25	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	

SN	Field Name	Field Type	Description	Field Category
26	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
27	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
28	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	
29	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	
30	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
31	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
32	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
33	ACCT_ID	NUMBER[20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 33rd to 45nd fields record the second group of balance change information. If *N* balance changes are
34	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
35	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
36	CUR_BALANCE	NUMBER[20]	Current balance.	
37	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
38	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
39	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
40	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
41	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
42	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
43	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
44	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
45	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
46	ACCT_ID	NUMBER[20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 46th to 58th fields record the third group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and
47	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
48	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
49	CUR_BALANCE	NUMBER[20]	Current balance.	
50	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
51	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
52	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
53	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
54	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	
55	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
56	CURRENCYE_ID	NUMBER[10]	Currency type ID.	other groups of fields are left empty.
57	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
58	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
59	ACCT_ID	NUMBER[20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 59th to 71st fields record the fourth group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
60	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
61	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
62	CUR_BALANCE	NUMBER[20]	Current balance.	
63	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
64	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
65	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
66	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
67	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	
68	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	
69	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
70	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
71	RESERVED_FLAG	VARCHAR2[4]	Reserved.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
72	ACCT_ID	NUMBER [20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 72nd to 84th fields record the fifth group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
73	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
74	BALANCE_TYPE	NUMBER [20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
75	CUR_BALANCE	NUMBER [20]	Current balance.	
76	CHG_BALANCE	NUMBER [20]	Change amount of the balance.	
77	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
78	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
79	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
80	BAL_PAY_PLAN_ID	NUMBER [20]	Balance payment plan ID.	
81	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	
82	CURRENCYE_ID	NUMBER [10]	Currency type ID.	
83	CONTENT_PROD_ID	NUMBER [20]	Content type ID.	
84	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
85	ACCT_ID	NUMBER [20]	Account ID.	The 20th to 149th fields record 10 groups of balance change
86	ACCT_BALANCE_ID	NUMBER [20]	ID of a balance account.	
87	BALANCE_TYPE	NUMBER [20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	

SN	Field Name	Field Type	Description	Field Category
88	CUR_BALANCE	NUMBER[20]	Current balance.	information. The 85th to 97th fields record the sixth group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
89	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
90	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
91	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
92	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
93	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	
94	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	
95	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
96	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
97	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
98	ACCT_ID	NUMBER[20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 98th to 110th fields record the
99	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
100	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
101	CUR_BALANCE	NUMBER[20]	Current balance.	
102	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
103	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
104	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	seventh group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
105	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
106	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	
107	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	
108	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
109	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
110	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
111	ACCT_ID	NUMBER[20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 111st to 123rd fields record the eighth group of balance change information. If *N* balance changes
112	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
113	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
114	CUR_BALANCE	NUMBER[20]	Current balance.	
115	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
116	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
117	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
118	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
119	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
120	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
121	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
122	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
123	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
124	ACCT_ID	NUMBER[20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 124th to 136th fields record the ninth group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded
125	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
126	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
127	CUR_BALANCE	NUMBER[20]	Current balance.	
128	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
129	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
130	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
131	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
132	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	
133	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
134	CURRENCYE_ID	NUMBER[10]	Currency type ID.	and other groups of fields are left empty.
135	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
136	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
137	ACCT_ID	NUMBER[20]	Account ID.	The 20th to 149th fields record 10 groups of balance change information. The 137th to 149th fields record the tenth group of balance change information. If *N* balance changes are involved, the first *N* groups of balance change fields are recorded and other groups of fields are left empty.
138	ACCT_BALANCE_ID	NUMBER[20]	ID of a balance account.	
139	BALANCE_TYPE	NUMBER[20]	ID of the balance type. Set this field based on the **ACCT_BALANCE_ID** value.	
140	CUR_BALANCE	NUMBER[20]	Current balance.	
141	CHG_BALANCE	NUMBER[20]	Change amount of the balance.	
142	PRE_APPLY_TIME	DATE[14]	Original effective time of the account book.	
143	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of the account book.	
144	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of the account book.	
145	BAL_PAY_PLAN_ID	NUMBER[20]	Balance payment plan ID.	
146	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **0**: expend • **1**: perform accounting • **2**: update the income • **3**: increase the income	
147	CURRENCYE_ID	NUMBER[10]	Currency type ID.	
148	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
149	RESERVED_FLAG	VARCHAR2[4]	Reserved.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
150	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 150th to 164th fields record the first group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
151	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
152	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
153	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
154	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
155	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
156	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
157	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
158	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
159	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
160	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
161	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
162	EXCHANGE_SRV_AMT	NUMBER[20]	Traffic length.	
163	SRV_TYPE	NUMBER[10]	Traffic type.	
164	RESERVE	VARCHA	Reserved.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	D_FLAG	R2[4]		
165	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 165th to 179th fields record the second group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
166	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
167	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
168	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
169	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
170	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
171	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
172	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
173	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
174	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
175	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
176	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
177	EXCHANGE_SRV_AMT	NUMBER[20]	Traffic length.	
178	SRV_TYPE	NUMBER[10]	Traffic type.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
179	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
180	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 180th to 194th fields record the third group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
181	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
182	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
183	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
184	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
185	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
186	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
187	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
188	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
189	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
190	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
191	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
192	EXCHANGE_SRV_AMT	NUMBER[20]	Traffic length.	
193	SRV_TYP	NUMBER	Traffic type.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	E	[10]		
194	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
195	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 195th to 209th fields record the fourth group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
196	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
197	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
198	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
199	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
200	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
201	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
202	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
203	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
204	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
205	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
206	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
207	EXCHANGE_SRV_AMT	NUMBER[20]	Traffic length.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
208	SRV_TYPE	NUMBER[10]	Traffic type.	
209	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
210	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 210th to 224th fields record the fifth group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
211	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
212	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
213	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
214	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
215	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
216	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
217	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
218	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
219	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
220	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
221	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
222	EXCHANGE_SRV_A	NUMBER[20]	Traffic length.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	MT			
223	SRV_TYPE	NUMBER[10]	Traffic type.	
224	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
225	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 225th to 239th fields record the sixth group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left empty.
226	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
227	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
228	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
229	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
230	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
231	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
232	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
233	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
234	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
235	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
236	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	
237	EXCHANG	NUMBER	Traffic length.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	E_SRV_AMT	[20]		
238	SRV_TYPE	NUMBER[10]	Traffic type.	
239	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
240	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 240th to 254th fields record the seventh group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left
241	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
242	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
243	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
244	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
245	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
246	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
247	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
248	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
249	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
250	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
251	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
252	EXCHANGE_SRV_AMT	NUMBER[20]	Traffic length.	empty.
253	SRV_TYPE	NUMBER[10]	Traffic type.	
254	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
255	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 255th to 269th fields record the eighth group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields are left
256	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
257	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
258	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
259	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
260	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
261	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
262	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
263	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
264	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
265	FU_MEASURE_ID	NUMBER[10]	Free unit measurement unit ID.	
266	CONTENT	NUMBER	Content type ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	_PROD_ID	[20]		empty.
267	EXCHANGE_SRV_AMT	NUMBER [20]	Traffic length.	
268	SRV_TYPE	NUMBER [10]	Traffic type.	
269	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
270	FREE_UNIT_ID	NUMBER [20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 270th to 284th fields record the ninth group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups of fields
271	FREE_UNIT_TYPE	NUMBER [20]	Free unit type.	
272	BONUS_AMOUNT	NUMBER [20]	Rewarded free unit amount.	
273	CURRENT_AMOUNT	NUMBER [20]	Current free unit amount.	
274	OPER_TYPE	NUMBER [10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
275	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
276	FU_OWN_ID	NUMBER [20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
277	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
278	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
279	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
280	FU_MEASURE_ID	NUMBER [10]	Free unit measurement unit ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
281	CONTENT_PROD_ID	NUMBER[20]	Content type ID.	are left empty.
282	EXCHANGE_SRV_AMT	NUMBER[20]	Traffic length.	
283	SRV_TYPE	NUMBER[10]	Traffic type.	
284	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
285	FREE_UNIT_ID	NUMBER[20]	Free unit ID.	The 150th to 299th fields record 10 groups of free unit reward details. The 285th to 299th fields record the tenth group of free unit reward details. If *N* free unit reward details are involved, the first *N* groups of free unit reward details fields are recorded and other groups
286	FREE_UNIT_TYPE	NUMBER[20]	Free unit type.	
287	BONUS_AMOUNT	NUMBER[20]	Rewarded free unit amount.	
288	CURRENT_AMOUNT	NUMBER[20]	Current free unit amount.	
289	OPER_TYPE	NUMBER[10]	Operation type. The options are as follows: • **3**: Roll over free units. • **4**: Add a free unit instance. • **5**: Add free units to an existing free unit instance.	
290	FU_OWN_TYPE	VARCHAR2[1]	Free unit owner type. The options are as follows: • **S**: subscriber • **G**: subscriber group • **C**: customer	
291	FU_OWN_ID	NUMBER[20]	Free unit owner ID. Set this field based on the **FU_OWN_TYPE** value.	
292	PRE_APPLY_TIME	DATE[14]	Original effective time of free units.	
293	PRE_EXPIRE_TIME	DATE[14]	Original expiration time of free units.	
294	CUR_EXPIRE_TIME	DATE[14]	Current expiration time of free units.	
295	FU_MEAS	NUMBER	Free unit measurement unit ID.	

 Copyright © Huawei Technologies Co., Ltd.

SN	Field Name	Field Type	Description	Field Category
	URE_ID	[10]		of fields are left empty.
296	CONTENT_PROD_ID	NUMBER [20]	Content type ID.	
297	EXCHANGE_SRV_AMT	NUMBER [20]	Traffic length.	
298	SRV_TYPE	NUMBER [10]	Traffic type.	
299	RESERVED_FLAG	VARCHAR2[4]	Reserved.	
300	ADDITIONAL_INFO	VARCHAR2[2048]	Additional information. Format: *owner_cust_id*,*billcycleid*,*SP_ID* Fields must be separated with a comma (,).	

4.4 BM CDR Files

This topic describes the CDR file template provided in the baseline version for BM. Each site can customize CDR files based on the template.

4.4.1 BeepCallOpt CDR

When a subscriber is registered or the ChangeSubInfo interface is invoked to modify the subscriber attribute **C_BEEP_CALL_SERVICE**, the BeepCallOpt CDR is generated.

Cdr file name: BeepCallOpt_CDR_YYYYMMDDhhmmss_BMPNode_Seqno.unl.

Cdr file name example: BeepCallOpt_CDR_20190716100024_101_136128.unl

Table 4-18 describes fields in BeepCallOpt CDR.

Table 4-18 BeepCallOpt CDR

SN	Field Name	Field Type	Description
1	TimeStamp	DATE[14]	The time of CBS modify subscriber property **C_SUB_BEEP_SERVICE**. Format: YYYYMMDDHHMMSS.
2	MSISDN	VARCHAR2[64]	Number of a subscriber.
3	OptedInOut	NUMBER[10]	Opt-in or opt-out flag. The options are as follows:

SN	Field Name	Field Type	Description
			• **1**: Opt in flag • **0**: Opt out flag

4.5 Daily Dump Files

This section describes the dump files contents for loan.

4.5.1 Loan Daily Dump

The CBS provides dump files every day for the RA to audit the loan of the CBS.

The format of the exported file is as follows:

- File name: cbs_rb_loaninfo_#flow.LastDay#_#flow.data_source#_#flow.be_id#_#fileIndexFormat#.unl
- Fields in the file are separated by ",", and no separator is added at the end of each record.

Table 4-19 describes the fields in loan daily dump files.

Table 4-19 loan daily dump

Columns	DATA Type	Description
MSISDN	Number	Mobile number. 8-20 digits
Sub_ID	String	Unique ID of the customer in CBS 10-24 digits
LoanTransID	String	Unique transactions ID generated by CBS internally. 10-24 digits
Loan_Occur_Date	DATA	When Loan is given to the customer. Date and time in format YYYYMMDDHHMMSS
initial_loanAmt	Number	Initial Loan given end customer. 1 to 10 digits
initial_loanPoundage	Number	Initial service charges to be paid by the end customer. 1-10 digits
PaidAmount	Number	Amount paid (Loanamt+ Loan Poundage) 1-10 digits
RemainingAmount	Number	Amount to be paid (Loanamt+ Loan

Columns	DATA Type	Description
		Poundage) 1-10 digits
GraceDate	DATA	Final to clear the loan. Date and time in format YYYYMMDDHHMMSS
LoanStatus	Char	Loan status. • O: Open • C: Closed