SQL

→ DB

→ DBMS

→ SQL

→ Command - DDL | DML | DQL | DCL | TCL

→ database

↳ 5 tables

CREATE

Constraints

Primary key & foreign key

data type

1] Data types

```
CREATE TABLE students (
    id int,
    name varchar(50),
    age int,
    fees decimal (10,2),
    admission_date date
```

1) int → numbers → +ve, -ve } whole numbers

2) Varchar → text → (size)

3) decimal – 10.5, 2.6] floating

(10,2)

10 . 2

4) date – format

Mob

10 → 12 → invalid

constraints rules

constraints are the rules applied on column.

1. not null → value must be present
2. unique → no duplicate
3. default → its add default value

pune

S_id	name	city
1	A	pune
2	B	
3	C	pune

city varchar(50) default 'pune'

4. check – apply condition

voter | >=18

age int check (age>=18)

age int check (age>=18)

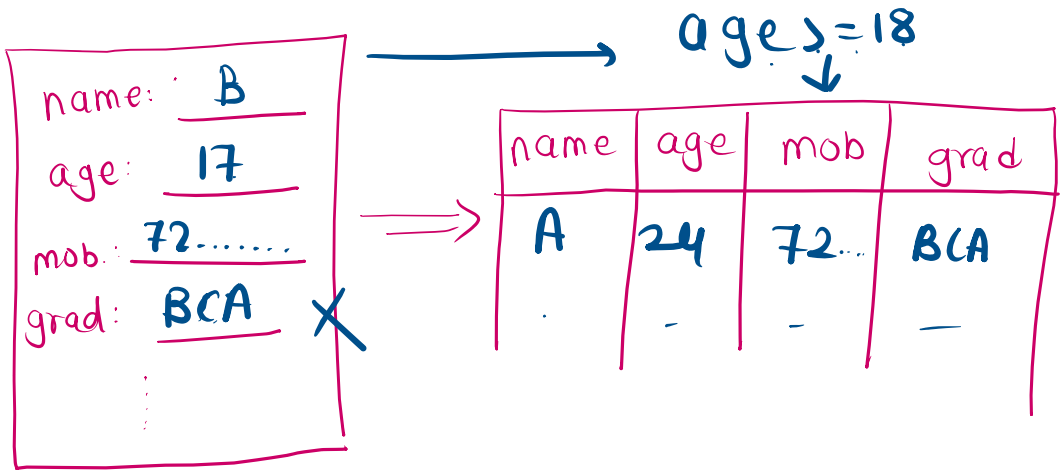

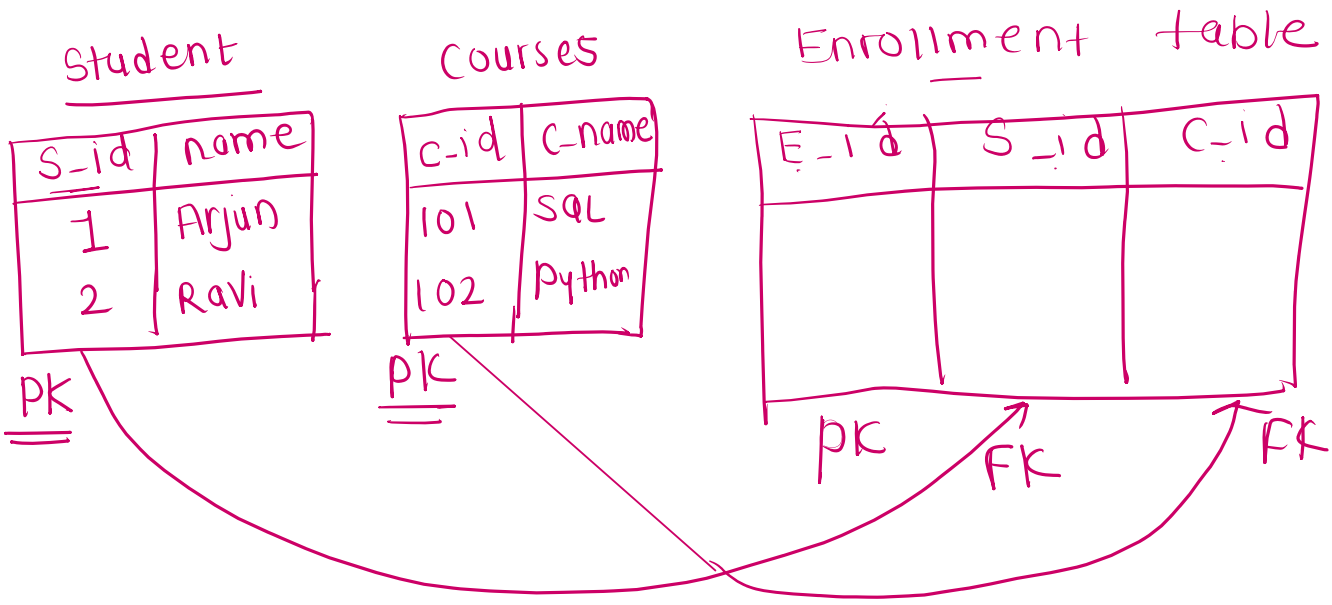

PK → comb^n of not null & unique constraint

FK → That connects two tables
Refers pk of another table
↳ prevent invalid data.

1. CREATE (DDL)
   ↳ db / table

2. Insert (DML)
   ↳ data insert into created table

3. SELECT - (DQL)
   ↳ data fetch

(*)
↓
all records