SELAH

Volunteer & ProPresenter Guide

How to install Selah, present lyrics, add background and foreground media, and feed transparent lyrics into ProPresenter over NDI or Syphon.

Version 0.1.0 · For Sunday volunteers and tech teams · macOS Apple Silicon

1. Install from the DMG

1. Open **Selah_0.1.0_aarch64.dmg** from the GitHub Release.
2. Drag **Selah** into **Applications**.
3. Open **Selah-Volunteer-Guide.pdf** from the same disk image (or this printed copy) and keep it near the booth laptop.
4. First launch may ask to allow an unsigned app: System Settings → Privacy & Security → Open Anyway.



Figure 1. Install Selah into Applications and keep the volunteer guide handy.

2. Volunteer quick start — present a song

1. Open Selah. Your last service restores automatically.
2. In **Present**, click a lyric block to put it on air.
3. Press `→` / `Space` for next, `←` for previous, `Esc` to clear.
4. Use **Add content** for songs, paste, OpenLyrics, or Scripture.

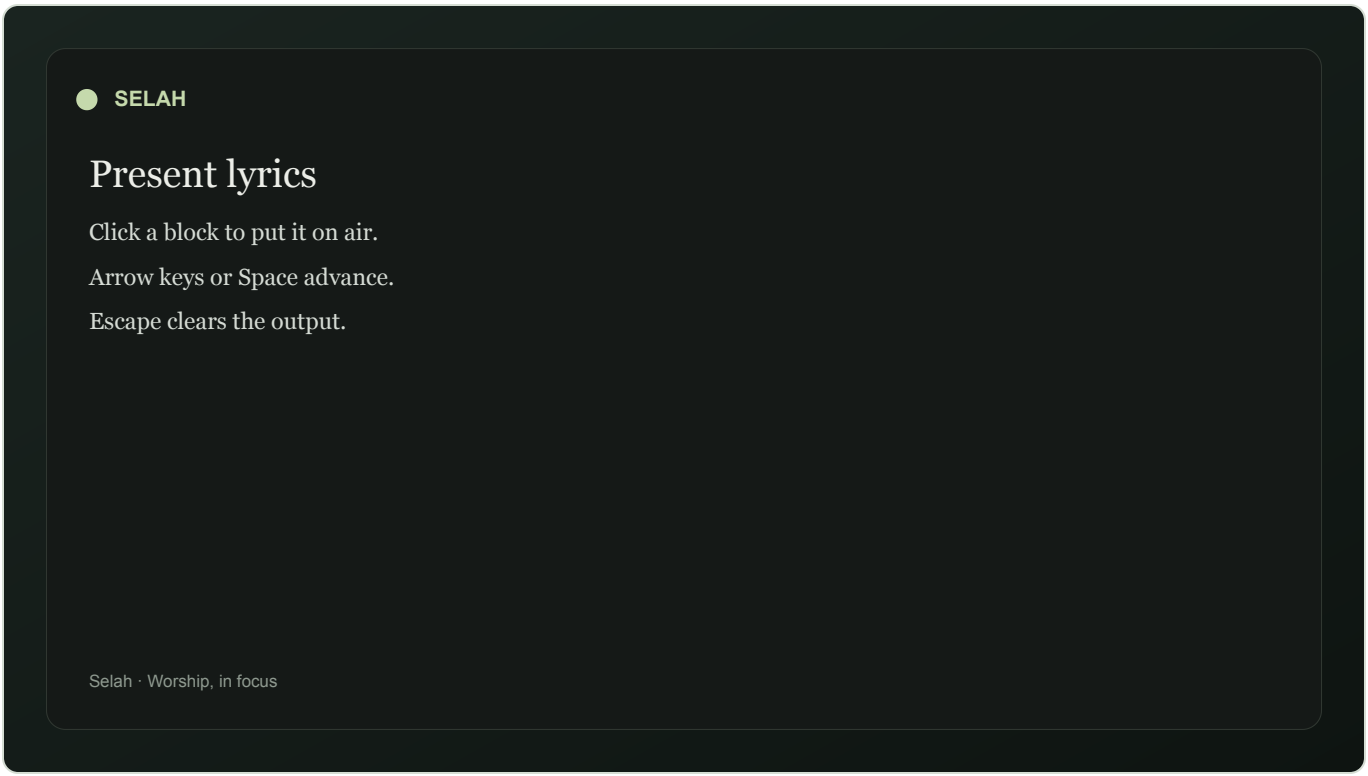


Figure 2. Click a block to go live; clear with Escape.

Golden rule: Nothing goes to the congregation until you click a block (or start a test pattern). Browsing the library does not put lyrics on air.

3. Layout — where lyrics sit

1. Open **Layout**.
2. Choose a preset (centered, lower-third, bilingual) or drag regions.
3. Click **Apply**. Live items keep the previous layout until you present again.



Figure 3. Place lyric regions; apply before the next present action.

4. Background & foreground media (standalone look)

Selah can show an image or video *behind* lyrics and another *in front* of lyrics. The physical display always shows this composite. NDI/Syphon only include media when you turn that on in Settings.

1. In **Layout**, use **Add background media** or **Add foreground media**.
2. Pick an image (PNG/JPEG/WebP) or video (MP4/MOV/WebM).
3. Adjust opacity, fit (cover / contain / fill), and for video: mute and audio output device.
4. Apply the layout. Start **Display output** in Settings for a full-screen standalone screen.



Figure 4. Background under lyrics, foreground over lyrics, with optional video audio routing.

5. ProPresenter integration (NDI / Syphon)

Selah does not remote-control ProPresenter. It sends a lyric video feed that ProPresenter (or any NDI/Syphon receiver) can use as an input source.

1. In Selah **Settings → Output**, leave **Send media on NDI / Syphon** *unchecked* for transparent lyrics (recommended with ProPresenter).
2. Set the feed name (default `Selah Lyrics`).
3. Click **Start** on NDI (network) and/or Syphon (same Mac).
4. In ProPresenter, add an NDI or Syphon input / source and select the Selah feed.
5. Layer that source over your ProPresenter look, or key on alpha if your workflow supports it.

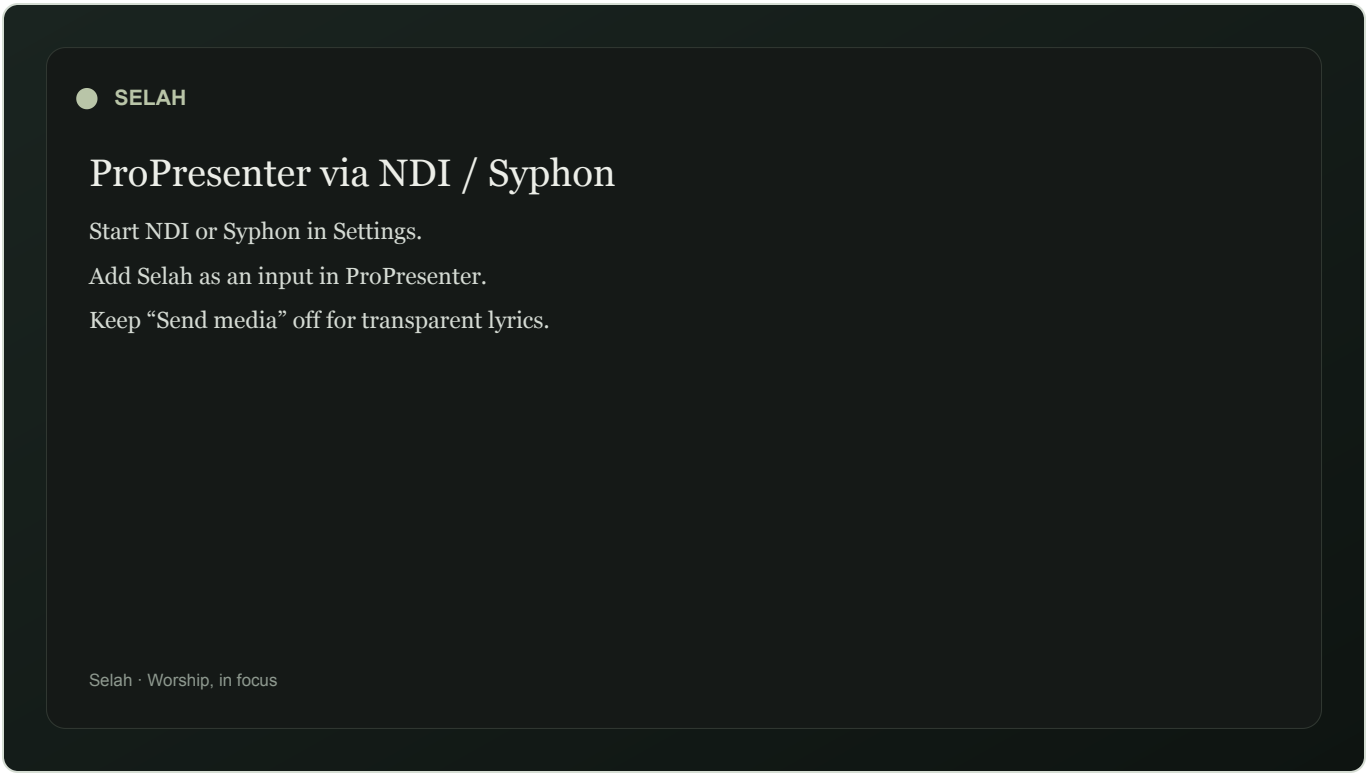


Figure 5. Transparent lyric feed into ProPresenter; enable media on the stream only when you want a full composite.

When to enable “Send media on NDI / Syphon”: Use it for a portable standalone output (media + lyrics baked together). Leave it off when ProPresenter or a switcher should supply the background.

6. Volunteer cheat sheet

Go live
Click a lyric block

Next / previous
`→` `Space` / `←`

Clear
`Esc`

Toggle motion
`T`

Outputs
Settings → Start NDI / Syphon

Standalone screen
Settings → Start display output

Media
Layout → Add background / foreground

ProPresenter
Transparent feed → NDI/Syphon input

7. Troubleshooting

- **NDI missing:** Install the NDI runtime, then restart Selah.
- **Syphon missing:** Install Syphon.framework in `/Library/Frameworks` (macOS only).
- **No lyrics in ProPresenter:** Confirm Selah shows LIVE, the feed is Started, and the feed name matches.
- **Video has no sound:** Unmute the media layer and pick an audio output device.
- **Unsigned app blocked:** Privacy & Security → Open Anyway.