

LAPORAN RESMI
PRAKTEK PACKET DAN SIRCUIT SWITCHING



Disusun untuk Memenuhi Tugas

Mata Kuliah:

PRAKTEK KONSEP JARINGAN

Oleh:

JUNDIAH INDIRA MILKA TSAURI

3122521020


PROGRAM STUDI D3 TEKNIK INFORMATIKA

PSDKU LAMONGAN

POLITEKNIK ELEKTRONIKA NEGERI SURABAYA


2023

GAMBAR HASIL AKHIR PERCOBAAN:

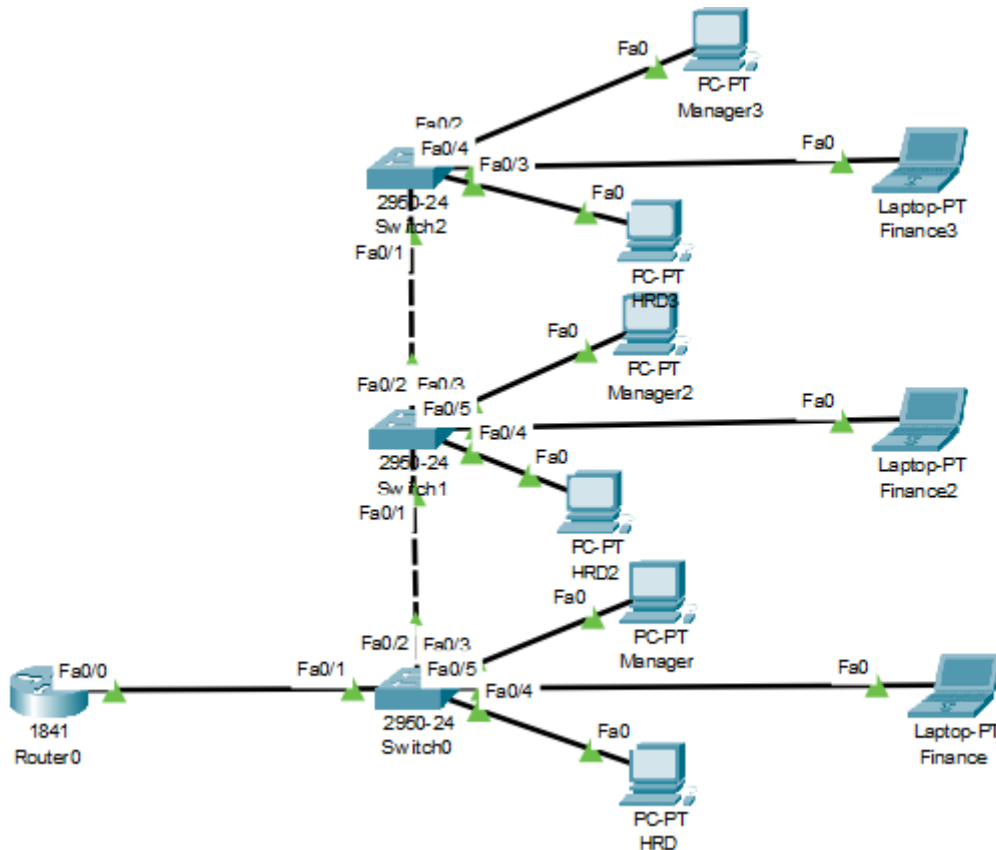

Langkah-langkah:

1. Langkah pertama dari praktek ini, kita membuat desain jaringan di aplikasi Cisco Packet Tracer

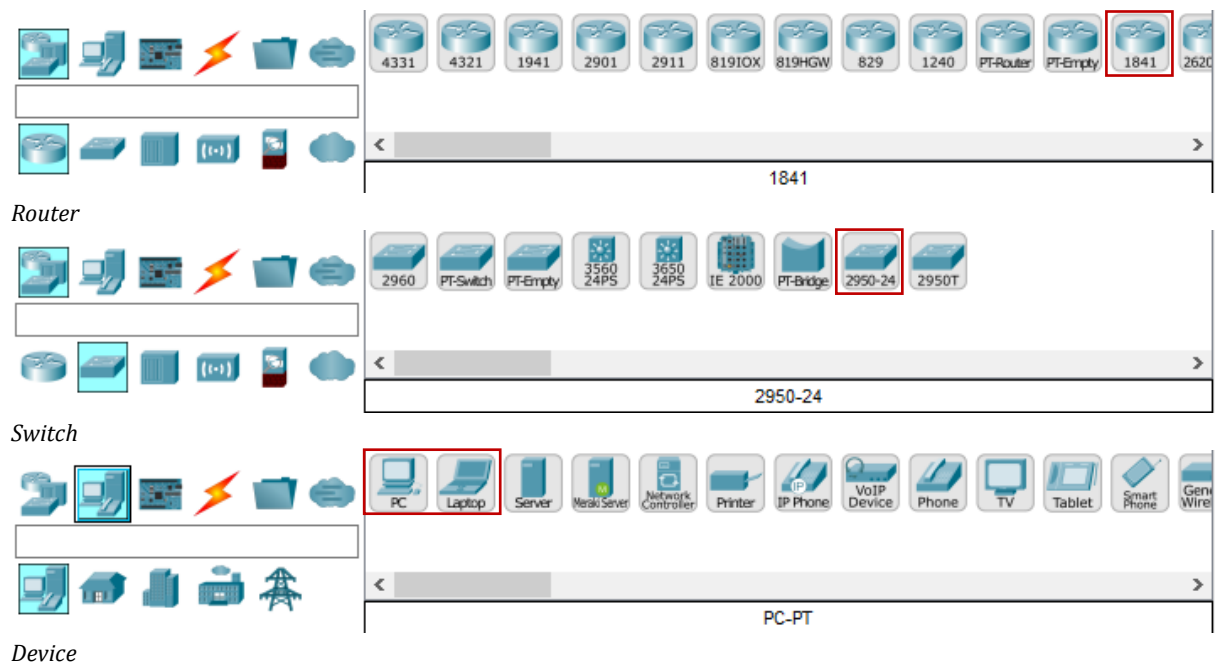

2. Menghubungkan komponen-komponen dengan kabel Copper



Kabel straight untuk menyambungkan router ke switch, dan switch ke device



Kabel cross untuk menyambungkan switch ke switch

3. Konfigurasi router

```
Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fastEthernet 0/0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to
up

Router(config-if)#exit
Router(config)#interface fastEthernet 0/0.1
Router(config-subif)#
%LINK-5-CHANGED: Interface FastEthernet0/0.1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0.1, changed state to
up

Router(config-subif)#no shutdown
Router(config-subif)#encapsulation dot1Q 10
Router(config-subif)#ip address 192.168.0.1 255.255.255.240
Router(config-subif)#no shutdown
Router(config-subif)#exit
Router(config)#interface fastEthernet 0/0.2
Router(config-subif)#
%LINK-5-CHANGED: Interface FastEthernet0/0.2, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0.2, changed state to
up

Router(config-subif)#encapsulation dot1Q 20
Router(config-subif)#ip address 192.168.1.1 255.255.255.224
Router(config-subif)#no shutdown
Router(config-subif)#exit
Router(config)#interface fastEthernet 0/0.3
Router(config-subif)#
%LINK-5-CHANGED: Interface FastEthernet0/0.3, changed state to up
```

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0.3, changed state to up

```
Router(config-subif)#encapsulation dot1Q 30
Router(config-subif)#ip address 192.168.2.1
% Incomplete command.
Router(config-subif)#ip address 192.168.2.1 255.255.255.128
Router(config-subif)#no shutdown
Router(config-subif)#exit
Router(config)#ip dhcp pool vlan10
Router(dhcp-config)#default-router 192.168.0.1
Router(dhcp-config)#network 192.168.0.0 255.255.255.240
Router(dhcp-config)#exit
Router(config)#ip dhcp pool vlan20
Router(dhcp-config)#default-router 192.168.1.1
Router(dhcp-config)#network 192.168.1.0 255.255.255.224
Router(dhcp-config)#exit
Router(config)#ip dhcp pool vlan30
Router(dhcp-config)#default-router 192.168.2.1
Router(dhcp-config)#network 192.168.2.0 255.255.255.128
Router(dhcp-config)#exit
Router(config)#ip dhcp excluded-address 192.168.0.1 192.168.0.2
Router(config)#ip dhcp excluded-address 192.168.1.1 192.168.1.5
Router(config)#ip dhcp excluded-address 192.168.2.1 192.168.2.10
Router(config)#
```

Hasil konfigurasi dapat dilihat ketika kursor mengarah ke router:

Device Name: Router0					
Device Model: 1841					
Hostname: Router					
Port	Link	VLAN	IP Address	IPv6 Address	MAC Address
FastEthernet0/0	Up	--	<not set>	<not set>	000A.41B4.A601
FastEthernet0/0.1	Up	--	192.168.0.1/28	<not set>	000A.41B4.A601
FastEthernet0/0.2	Up	--	192.168.1.1/27	<not set>	000A.41B4.A601
FastEthernet0/0.3	Up	--	192.168.2.1/25	<not set>	000A.41B4.A601
FastEthernet0/1	Down	--	<not set>	<not set>	000A.41B4.A602
Vlan1	Down	1	<not set>	<not set>	0050.0F05.B287
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Router0					

4. Konfigurasi switch0

```
Switch>enable
Switch#ls
Translating "ls"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address
```

```
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#vlan 20
Switch(config-vlan)#vlan 30
Switch(config-vlan)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
```

```
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#name HRD
```

```
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name Manager
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#
Switch(config-vlan)#name Finance
Switch(config-vlan)#exit
Switch(config)#exit
Switch#
%SYS-5-CONFIG_I: Configured from console by console
```

```
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface fastEthernet 0/2
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk allowed vlan 10-30
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/5
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
```

Hasil konfigurasi dapat dilihat ketika kursor mengarah ke Switch0:

Device Name: Switch0				
Device Model: 2950-24				
Hostname: Switch				
Port	Link	VLAN	IP Address	MAC Address
FastEthernet0/1	Up	--	--	0050.0FD2.9501
FastEthernet0/2	Up	--	--	0050.0FD2.9502
FastEthernet0/3	Up	20	--	0050.0FD2.9503
FastEthernet0/4	Up	10	--	0050.0FD2.9504
FastEthernet0/5	Up	30	--	0050.0FD2.9505
FastEthernet0/6	Down	--	--	0050.0FD2.9506
FastEthernet0/7	Down	--	--	0050.0FD2.9507
FastEthernet0/8	Down	--	--	0050.0FD2.9508
FastEthernet0/9	Down	--	--	0050.0FD2.9509
FastEthernet0/10	Down	--	--	0050.0FD2.950A
FastEthernet0/11	Down	--	--	0050.0FD2.950B
FastEthernet0/12	Down	--	--	0050.0FD2.950C
FastEthernet0/13	Down	--	--	0050.0FD2.950D
FastEthernet0/14	Down	--	--	0050.0FD2.950E
FastEthernet0/15	Down	--	--	0050.0FD2.950F
FastEthernet0/16	Down	--	--	0050.0FD2.9510
FastEthernet0/17	Down	--	--	0050.0FD2.9511
FastEthernet0/18	Down	--	--	0050.0FD2.9512
FastEthernet0/19	Down	--	--	0050.0FD2.9513
FastEthernet0/20	Down	--	--	0050.0FD2.9514
FastEthernet0/21	Down	--	--	0050.0FD2.9515
FastEthernet0/22	Down	--	--	0050.0FD2.9516
FastEthernet0/23	Down	--	--	0050.0FD2.9517
FastEthernet0/24	Down	--	--	0050.0FD2.9518
Vlan1	Down	1	<not set>	0001.63BC.8617
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch0				

5. Konfigurasi switch1

```
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#vlan 20
Switch(config-vlan)#vlan 30
Switch(config-vlan)#exit
Switch(config)#vlan
% Incomplete command.
Switch(config)#vlan 10
Switch(config-vlan)#name HRD2
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name Manager2
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name Finance2
Switch(config-vlan)#exit
Switch(config)#interface fastEthernet 0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk allowed vlan 10-30
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
```

```
Switch(config)#interface fastEthernet 0/5
Switch(config-if)#switchport mode access
```

```
^
% Invalid input detected at '^' marker.
```

```
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/2
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk allowed vlan 10-30
Switch(config-if)#exit
```

Hasil konfigurasi dapat dilihat ketika kursor mengarah ke Switch1:

Device Name: Switch1				
Device Model: 2950-24				
Hostname: Switch				
Port	Link	VLAN	IP Address	MAC Address
FastEthernet0/1	Up	--	--	000C.854C.6101
FastEthernet0/2	Up	--	--	000C.854C.6102
FastEthernet0/3	Up	20	--	000C.854C.6103
FastEthernet0/4	Up	10	--	000C.854C.6104
FastEthernet0/5	Up	30	--	000C.854C.6105
FastEthernet0/6	Down	--	--	000C.854C.6106
FastEthernet0/7	Down	--	--	000C.854C.6107
FastEthernet0/8	Down	--	--	000C.854C.6108
FastEthernet0/9	Down	--	--	000C.854C.6109
FastEthernet0/10	Down	--	--	000C.854C.610A
FastEthernet0/11	Down	--	--	000C.854C.610B
FastEthernet0/12	Down	--	--	000C.854C.610C
FastEthernet0/13	Down	--	--	000C.854C.610D
FastEthernet0/14	Down	--	--	000C.854C.610E
FastEthernet0/15	Down	--	--	000C.854C.610F
FastEthernet0/16	Down	--	--	000C.854C.6110
FastEthernet0/17	Down	--	--	000C.854C.6111
FastEthernet0/18	Down	--	--	000C.854C.6112
FastEthernet0/19	Down	--	--	000C.854C.6113
FastEthernet0/20	Down	--	--	000C.854C.6114
FastEthernet0/21	Down	--	--	000C.854C.6115
FastEthernet0/22	Down	--	--	000C.854C.6116
FastEthernet0/23	Down	--	--	000C.854C.6117
FastEthernet0/24	Down	--	--	000C.854C.6118
Vlan1	Down	1	<not set>	0002.4A33.3027
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch1				

6. Konfigurasi switch2

```
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#vlan 10
Switch(config-vlan)#vlan 20
Switch(config-vlan)#vlan 30
Switch(config-vlan)#exit
Switch(config)#vlan 10
Switch(config-vlan)#name HRD3
Switch(config-vlan)#exit
Switch(config)#vlan 20
Switch(config-vlan)#name Manager3
Switch(config-vlan)#exit
Switch(config)#vlan 30
Switch(config-vlan)#name Finance3
Switch(config-vlan)#exit
```

```

Switch(config)#interface fastEthernet 0/1
Switch(config-if)#switchport mode trunk
Switch(config-if)#switchport trunk allowed vlan 10-30
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/2
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 20
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/3
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 10
Switch(config-if)#exit
Switch(config)#interface fastEthernet 0/4
Switch(config-if)#switchport mode access
Switch(config-if)#switchport access vlan 30
Switch(config-if)#exit
Switch(config)#

```

Hasil konfigurasi dapat dilihat ketika kursor mengarah ke Switch2:

Device Name: Switch2				
Device Model: 2950-24				
Hostname: Switch				
Port	Link	VLAN	IP Address	MAC Address
FastEthernet0/1	Up	--	--	000C.85BC.8B01
FastEthernet0/2	Up	20	--	000C.85BC.8B02
FastEthernet0/3	Up	10	--	000C.85BC.8B03
FastEthernet0/4	Up	30	--	000C.85BC.8B04
FastEthernet0/5	Down	1	--	000C.85BC.8B05
FastEthernet0/6	Down	--	--	000C.85BC.8B06
FastEthernet0/7	Down	--	--	000C.85BC.8B07
FastEthernet0/8	Down	--	--	000C.85BC.8B08
FastEthernet0/9	Down	--	--	000C.85BC.8B09
FastEthernet0/10	Down	--	--	000C.85BC.8B0A
FastEthernet0/11	Down	--	--	000C.85BC.8B0B
FastEthernet0/12	Down	--	--	000C.85BC.8B0C
FastEthernet0/13	Down	--	--	000C.85BC.8B0D
FastEthernet0/14	Down	--	--	000C.85BC.8B0E
FastEthernet0/15	Down	--	--	000C.85BC.8B0F
FastEthernet0/16	Down	--	--	000C.85BC.8B10
FastEthernet0/17	Down	--	--	000C.85BC.8B11
FastEthernet0/18	Down	--	--	000C.85BC.8B12
FastEthernet0/19	Down	--	--	000C.85BC.8B13
FastEthernet0/20	Down	--	--	000C.85BC.8B14
FastEthernet0/21	Down	--	--	000C.85BC.8B15
FastEthernet0/22	Down	--	--	000C.85BC.8B16
FastEthernet0/23	Down	--	--	000C.85BC.8B17
FastEthernet0/24	Down	--	--	000C.85BC.8B18
Vlan1	Down	1	<not set>	000B.BEAO.659C
Physical Location: Intercity > Home City > Corporate Office > Main Wiring Closet > Rack > Switch2				

7. Investigasi vlan dengan perintah show vlan

VLAN	Name	Status	Ports
1	default	active	Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10, Fa0/11, Fa0/12, Fa0/13 Fa0/14, Fa0/15, Fa0/16, Fa0/17 Fa0/18, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24
10	HRD	active	Fa0/4
20	Manager	active	Fa0/3
30	Finance	active	Fa0/5
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

--More--

VLAN	Name	Status	Ports
1	default	active	Fa0/6, Fa0/7, Fa0/8, Fa0/9 Fa0/10, Fa0/11, Fa0/12, Fa0/13 Fa0/14, Fa0/15, Fa0/16, Fa0/17 Fa0/18, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24
10	HRD2	active	Fa0/4
20	Manager2	active	Fa0/3
30	Finance2	active	Fa0/5
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Transl	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0

--More--

```
Switch>show vlan
```

VLAN	Name	Status	Ports
1	default	active	Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24
10	HRD3	active	Fa0/3
20	Manager3	active	Fa0/2
30	Finance3	active	Fa0/4
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

--More-- |

- Untuk mendapatkan IP Manager klik kursor ke arah PC Manager, kemudian pilih Desktop dan masuk ke IP Configuration



Pada halaman IP Configuration, ubah Static menjadi DHCP:

Manager

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.1.6

Subnet Mask 255.255.255.224

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::250:FFF:FEAE:619C

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS

Username

Password

☐ Top

Begitu pula untuk mendapatkan IP HRD

HRD

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.0.3

Subnet Mask 255.255.255.240

Default Gateway 192.168.0.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::204:9AFF:FE96:B138

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS

Username

Password

☐ Top

IP Finance

Finance

Physical Config Desktop Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.2.12

Subnet Mask 255.255.255.128

Default Gateway 192.168.2.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::201:43FF:FED7:5DC7

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

IP Manager2

Manager2

Physical Config Desktop Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.1.8

Subnet Mask 255.255.255.224

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::201:C7FF:FEDD:8141

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

IP HRD2

HRD2

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.0.4

Subnet Mask 255.255.255.240

Default Gateway 192.168.0.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::2D0:BCFF:FE46:BAAA

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

IP Finance2

Finance2

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.2.11

Subnet Mask 255.255.255.128

Default Gateway 192.168.2.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::230:F2FF:FE5B:5E9C

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

☐ Top

IP Manager3

Manager3

Physical Config Desktop Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.1.9

Subnet Mask 255.255.255.224

Default Gateway 192.168.1.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::202:16FF:FEA0:69C7

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MDS

Username

Password

☐ Top

IP HRD3

HRD3

Physical Config Desktop Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☒ DHCP ☐ Static

IPv4 Address 192.168.0.6

Subnet Mask 255.255.255.240

Default Gateway 192.168.0.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::201:C7FF:FE80:2CC8

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security


Authentication MDS

Username


Password

☐ Top

IP Finance3

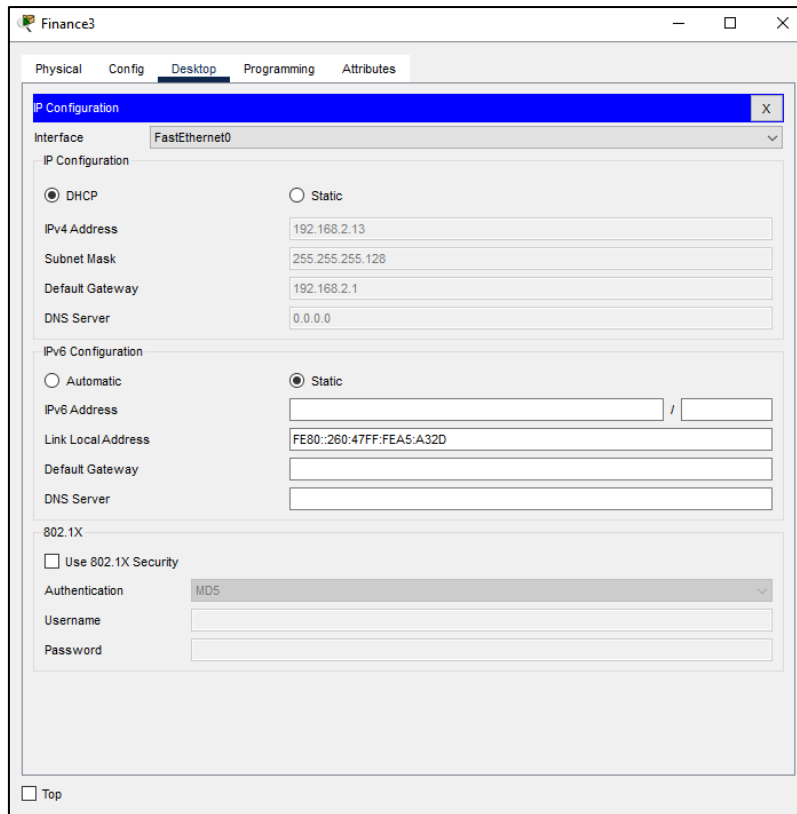

9. Untuk mengecek koneksi HRD ke HRD2, masuk ke halaman Command Prompt

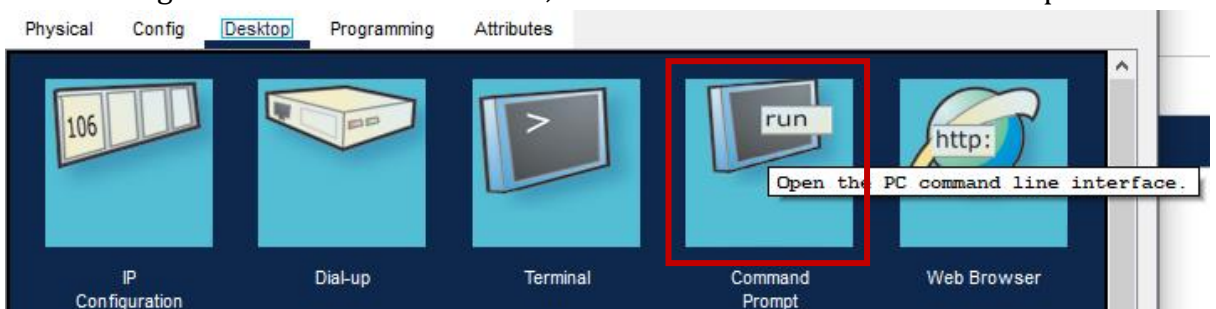

Dan ketik seperti pada gambar berikut:

```
C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time<1ms TTL=128
Reply from 192.168.0.3: bytes=32 time=1ms TTL=128
Reply from 192.168.0.3: bytes=32 time=1ms TTL=128
Reply from 192.168.0.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Cek juga koneksi Manager ke Manager2

```
C:\>ping 192.168.1.6

Pinging 192.168.1.6 with 32 bytes of data:

Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time=1ms TTL=128
Reply from 192.168.1.6: bytes=32 time<1ms TTL=128
Reply from 192.168.1.6: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Cek koneksi Finance ke Finance2

```
C:\>ping 192.168.2.12

Pinging 192.168.2.12 with 32 bytes of data:

Reply from 192.168.2.12: bytes=32 time<1ms TTL=128
Reply from 192.168.2.12: bytes=32 time=9ms TTL=128
Reply from 192.168.2.12: bytes=32 time<1ms TTL=128
Reply from 192.168.2.12: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.2.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 9ms, Average = 2ms

C:\>|
```

Cek koneksi HRD2 ke HRD3

```
C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time=1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128
Reply from 192.168.0.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

Cek koneksi Manager2 ke Manager3


```
C:\>ping 192.168.1.8

Pinging 192.168.1.8 with 32 bytes of data:

Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time<1ms TTL=128
Reply from 192.168.1.8: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

Cek koneksi Finance2 ke Finance3

```
C:\>ping 192.168.2.11

Pinging 192.168.2.11 with 32 bytes of data:

Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Reply from 192.168.2.11: bytes=32 time<1ms TTL=128
Reply from 192.168.2.11: bytes=32 time=5ms TTL=128

Ping statistics for 192.168.2.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 5ms, Average = 1ms

C:\>
```

Jika hasil ping seperti pada gambar, maka artinya sudah berhasil terkoneksi.