Informatica

Informatica® Cloud Data Integration

# OData V2 Protocol Reader Connector

Informatica Cloud Data Integration OData V2 Protocol Reader Connector
July 2025

© Copyright Informatica LLC 2022, 2025

This software and documentation are provided only under a separate license agreement containing restrictions on use and disclosure. No part of this document may be reproduced or transmitted in any form, by any means (electronic, photocopying, recording or otherwise) without prior consent of Informatica LLC.

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation is subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License.

Informatica, the Informatica logo, Informatica Cloud, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html. Other company and product names may be trade names or trademarks of their respective owners.

Portions of this software and/or documentation are subject to copyright held by third parties. Required third party notices are included with the product.

See patents at https://www.informatica.com/legal/patents.html.

DISCLAIMER: Informatica LLC provides this documentation "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of noninfringement, merchantability, or use for a particular purpose. Informatica LLC does not warrant that this software or documentation is error free. The information provided in this software or documentation may include technical inaccuracies or typographical errors. The information in this software and documentation is subject to change at any time without notice.

NOTICES

This Informatica product (the "Software") includes certain drivers (the "DataDirect Drivers") from DataDirect Technologies, an operating company of Progress Software Corporation ("DataDirect") which are subject to the following terms and conditions:

1. THE DATADIRECT DRIVERS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT.
2. IN NO EVENT WILL DATADIRECT OR ITS THIRD PARTY SUPPLIERS BE LIABLE TO THE END-USER CUSTOMER FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, CONSEQUENTIAL OR OTHER DAMAGES ARISING OUT OF THE USE OF THE ODBC DRIVERS, WHETHER OR NOT INFORMED OF THE POSSIBILITIES OF DAMAGES IN ADVANCE. THESE LIMITATIONS APPLY TO ALL CAUSES OF ACTION, INCLUDING, WITHOUT LIMITATION, BREACH OF CONTRACT, BREACH OF WARRANTY, NEGLIGENCE, STRICT LIABILITY, MISREPRESENTATION AND OTHER TORTS.

The information in this documentation is subject to change without notice. If you find any problems in this documentation, report them to us at infa_documentation@informatica.com.

Informatica products are warranted according to the terms and conditions of the agreements under which they are provided. INFORMATICA PROVIDES THE INFORMATION IN THIS DOCUMENT "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING WITHOUT ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND ANY WARRANTY OR CONDITION OF NON-INFRINGEMENT.

Publication Date: 2025-10-03

# Table of Contents


**Preface** . . . . . 4

Informatica Resources . . . . . 4

- Informatica Documentation . . . . . 4
- Informatica Intelligent Cloud Services web site . . . . . 4
- Informatica Intelligent Cloud Services Communities . . . . . 4
- Informatica Intelligent Cloud Services Marketplace . . . . . 4
- Data Integration connector documentation . . . . . 5
- Informatica Knowledge Base . . . . . 5
- Informatica Intelligent Cloud Services Trust Center . . . . . 5
- Informatica Global Customer Support . . . . . 5

**Chapter 1: Introduction to OData V2 Protocol Reader Connector** . . . . . 6

OData V2 Protocol Reader Connector assets . . . . . 6

Configure proxy settings . . . . . 7

**Chapter 2: Connections for OData V2 Protocol Reader** . . . . . 8

OData V2 Protocol Reader connection properties . . . . . 8

- Authorization code authentication . . . . . 9
- Client credential authentication . . . . . 11

Configure the Secure Socket Layer protocol . . . . . 12

**Chapter 3: Mappings and mapping tasks with OData V2 Protocol Reader Connector** . . . . . 13

OData V2 Protocol Reader sources in mappings . . . . . 13

Rules and guidelines for OData V2 Protocol Reader mappings . . . . . 15

**Appendix A: OData V2 Protocol Reader data type reference** . . . . . 17

OData V2 Protocol Reader and transformation data types . . . . . 17

**Index** . . . . . 19

# Preface

Use *OData V2 Protocol Reader Connector* to learn how to read from OData V2 applications by using Cloud Data Integration. Learn to create an OData V2 Protocol Reader connection, run mappings and mapping tasks in Cloud Data Integration.

# Informatica Resources

Informatica provides you with a range of product resources through the Informatica Network and other online portals. Use the resources to get the most from your Informatica products and solutions and to learn from other Informatica users and subject matter experts.

## Informatica Documentation

Use the Informatica Documentation Portal to explore an extensive library of documentation for current and recent product releases. To explore the Documentation Portal, visit https://docs.informatica.com.

If you have questions, comments, or ideas about the product documentation, contact the Informatica Documentation team at infa_documentation@informatica.com.

## Informatica Intelligent Cloud Services web site

You can access the Informatica Intelligent Cloud Services web site at http://www.informatica.com/cloud. This site contains information about Informatica Cloud integration services.

## Informatica Intelligent Cloud Services Communities

Use the Informatica Intelligent Cloud Services Community to discuss and resolve technical issues. You can also find technical tips, documentation updates, and answers to frequently asked questions.

Access the Informatica Intelligent Cloud Services Community at:

https://network.informatica.com/community/informatica-network/products/cloud-integration

Developers can learn more and share tips at the Cloud Developer community:

https://network.informatica.com/community/informatica-network/products/cloud-integration/cloud-developers

## Informatica Intelligent Cloud Services Marketplace

Visit the Informatica Marketplace to try and buy Data Integration Connectors, templates, and mapplets:

https://marketplace.informatica.com/

## Data Integration connector documentation

You can access documentation for Data Integration Connectors at the Documentation Portal. To explore the Documentation Portal, visit https://docs.informatica.com.

## Informatica Knowledge Base

Use the Informatica Knowledge Base to find product resources such as how-to articles, best practices, video tutorials, and answers to frequently asked questions.

To search the Knowledge Base, visit https://search.informatica.com. If you have questions, comments, or ideas about the Knowledge Base, contact the Informatica Knowledge Base team at KB_Feedback@informatica.com.

## Informatica Intelligent Cloud Services Trust Center

The Informatica Intelligent Cloud Services Trust Center provides information about Informatica security policies and real-time system availability.

You can access the trust center at https://www.informatica.com/trust-center.html.

Subscribe to the Informatica Intelligent Cloud Services Trust Center to receive upgrade, maintenance, and incident notifications. The Informatica Intelligent Cloud Services Status page displays the production status of all the Informatica cloud products. All maintenance updates are posted to this page, and during an outage, it will have the most current information. To ensure you are notified of updates and outages, you can subscribe to receive updates for a single component or all Informatica Intelligent Cloud Services components. Subscribing to all components is the best way to be certain you never miss an update.

To subscribe, on the Informatica Intelligent Cloud Services Status page, click **SUBSCRIBE TO UPDATES**. You can choose to receive notifications sent as emails, SMS text messages, webhooks, RSS feeds, or any combination of the four.

## Informatica Global Customer Support

You can contact a Global Support Center through the Informatica Network or by telephone.

To find online support resources on the Informatica Network, click **Contact Support** in the Informatica Intelligent Cloud Services Help menu to go to the **Cloud Support** page. The **Cloud Support** page includes system status information and community discussions. Log in to Informatica Network and click **Need Help** to find additional resources and to contact Informatica Global Customer Support through email.

The telephone numbers for Informatica Global Customer Support are available from the Informatica web site at https://www.informatica.com/services-and-training/support-services/contact-us.html.

CHAPTER 1

# Introduction to OData V2 Protocol Reader Connector

Use OData V2 Protocol Reader Connector to connect to the OData V2 service enabled on SAP S/4HANA applications in the cloud or on-premises.

Open Data Protocol (OData) is an OASIS standard that defines best practices to build and consume RESTful APIs. OData V2 Protocol Reader Connector communicates with the OData APIs version 2, exposed through the OData V2 protocol.

You can create an OData V2 Protocol Reader connection to read data from the OData V2 applications.

You can switch mappings to advanced mode to include transformations and functions that enable advanced functionality.

### Example

You want to read and filter sales order data from SAP S/4HANA Cloud. Use OData V2 Protocol Reader Connector to call the required sales order OData V2 API in SAP S/4HANA. You can then process the response obtained from SAP S/4HANA Cloud.

You can use the OData V2 Protocol Reader Connector to communicate with the OData V2 service APIs to read and filter data related to business partner, customer, supplier, and vendor entities. You can also use transformations on the data for better results.

## OData V2 Protocol Reader Connector assets

You can perform read and filter operations in an application source that is enabled for the OData V2 service.

You can use Source transformation in the following Data Integration assets:

- Mapping
- Mapping task

For more information about configuring assets and transformations, see *Mappings*, *Transformations*, and *Tasks* in the Data Integration documentation.

# Configure proxy settings

If your organization uses an outgoing proxy server to connect to the Internet, you can use the serverless runtime environment to connect to Informatica Intelligent Cloud Services through the proxy server.

You can use the unauthenticated or authenticated proxy server. You can configure proxy both in mappings and in mappings in advanced mode.

To configure the proxy settings for the serverless runtime environment, see *Runtime Environments* in the Administrator help.

CHAPTER 2

# Connections for OData V2 Protocol Reader

Use the OData V2 Protocol Reader connection to connect to any application that exposes data through an OData V2 protocol.

You create an OData V2 Protocol Reader connection on the Connections page. Use this connection in a Source transformation in the Mapping Designer when you create a mapping.

## OData V2 Protocol Reader connection properties

When you set up an OData V2 Protocol Reader connection, you must configure the connection properties.

The following table describes the OData V2 Protocol Reader connection properties:

| Connection property | Description |
|---|---|
| Connection Name | Name of the connection.<br>Each connection name must be unique within the organization. Connection names can contain alphanumeric characters, spaces, and the following special characters: _ . + -,<br>Maximum length is 255 characters. |
| Description | Description of the connection. Maximum length is 4000 characters. |
| Use Secret Vault | Stores sensitive credentials for this connection in the secrets manager that is configured for your organization.<br>This property appears only if secrets manager is set up for your organization.<br>When you enable the secret vault in the connection, you can select which credentials that the Secure Agent retrieves from the secrets manager. If you don't enable this option, the credentials are stored in the repository or on a local Secure Agent, depending on how your organization is configured.<br>**Note:** If you're using this connection to apply data access policies through pushdown or proxy services, you cannot use the Secret Vault configuration option.<br>For information about how to configure and use a secrets manager, see "Secrets manager configuration" in the Administrator help. |

| Connection property | Description |
|---|---|
| Runtime Environment | The name of the runtime environment where you want to run the tasks.<br>Select a Secure Agent, Hosted Agent, serverless, or elastic runtime environment.<br>For more information about how to configure and use the runtime environments, see *Runtime Environments* in the Administrator help. |
| Service Type | The service type of the OData V2 application endpoint to which you want to connect.<br>Choose one of the following service types:<br>- SAP S/4HANA Catalog. Use the SAP S/4HANA Catalog service type for endpoints such as SAP S/4HANA that exposes specialized OData V2 service to list the services present in the endpoint.<br>- Default. Use the Default service type for all other endpoints. |
| Service URL | The service URL for the selected OData V2 service type.<br>For the Default service type, enter the root URL of the service.<br>For example, enter the service URL in the following format:<br>`https://sandbox.api.sap.com/s4hanacloud/sap/opu/odata/sap/API_CHARTOFACCOUNTS_SRV`<br>You can verify if the URL is valid by appending `$metadata` to the URL.<br>For SAP S/4HANA catalog service type, enter the URL of the catalog service in SAP S/4HANA.<br>For example, to access the data from the SAP S/4HANA catalog service, enter the service URL in the following format:<br>`http://<hostname of the OData server>:<port number>/sap/opu/odata/iwfnd/CATALOGSERVICE;v=2/`<br>If the host name and port number is `inpha1.informatica.com:8001` and the service endpoint is SAP S/4HANA Catalog, enter the following URL:<br>`https://inpha1.informatica.com:8001/sap/opu/odata/iwfnd/CATALOGSERVICE;v=2/` |
| Authentication Type | The type of user authentication to connect to the OData service.<br>Choose from the following authentication types:<br>- Basic. Requires the user name and password to log in to the OData V2 application.<br>- API Key. Requires a unique API key to connect to the OData V2 application.<br>- OAuth 2.0 authorization code. Requires authorized access to connect to the OData V2 endpoint.<br>- OAuth 2.0 client credentials. Requires client credentials to connect to the OData V2 endpoint. |
| Username | Applies to basic authentication.<br>The user name to connect to the OData V2 application. |
| Password | Applies to basic authentication.<br>The password associated with the OData V2 application user name. |
| API Key | Applies to API key authentication.<br>Unique API key required to connect to the OData V2 application. |

## Authorization code authentication

To use authorization code authentication, you must first register the following Informatica redirect URL in your application:

`https://<Informatica cloud hosting facility for your organization>/ma/proxy/oauthcallback`

If the access token expires and the response returns 401 error code, Informatica redirect URL, which is outside the customer firewall, tries to connect to the endpoint and retrieve a new access token.

The following table describes the OData V2 Protocol Reader connection properties for an OAuth 2.0 authorization code authentication type connection:

| Connection property | Description |
|---|---|
| Runtime Environment | Name of the runtime environment where you want to run the tasks.<br>Specify a Secure Agent, Hosted Agent, or serverless runtime environment. |
| Auth Type | The authentication method that the connector must use to connect to the OData V2 endpoint.<br>Select **OAuth 2.0 authorization code**.<br>Default is Basic. |
| Authorization Token URL | Authorization server URL configured in your application. |
| Access Token URL | Access token URL configured in your application. |
| Client ID | The client identifier issued during the application registration process. |
| Client Secret | The client secret issued during the application registration process. |
| Scope | The scope of the access request when the OData V2 endpoint has defined custom scopes.<br>Enter space-separated scope attributes. For example:<br>`ZGWSAMPLE_BASIC_0001 /IWFND/SG_MED_CATALOG_0002 ZAPI_CHARTOFACCOUNTS_SRV_0001` |
| Access Token Parameters | Additional parameters to use with the access token URL.<br>Define parameters in the JSON format. For example:<br>`[{"Name":"resource","Value":"https://<serverName>"}]` |
| Authorization Code Parameters | Additional parameters to use with the authorization token URL.<br>Define parameters in the JSON format. For example:<br>`[{"Name":"max_age","Value":60},{"Name":"state","Value":"test"}]` |
| Client Authentication | The client authentication details for authorization.<br>Select an option to send client ID and client secret for authorization either in the request body or in the request header.<br>Default is **Send client credentials in body**. |
| Generate Access Token | Generates access token and refresh token based on the specified authentication details. |
| Access Token | The access token granted by the authorization server to access the data using a specific role.<br>Enter the access token value or click **Generate Access Token** to populate the access token value. |
| Refresh Token | Allows the Secure Agent to fetch new access token if the access token is not valid or expires.<br>Enter the refresh token value or click **Generate Access Token** to populate the refresh token value.<br>If the refresh token expires, you must either provide a valid refresh token or click **Generate Access Token** to regenerate a new refresh token. |

## Client credential authentication

The following table describes the OData V2 Protocol Reader connection properties for OAuth 2.0 client credentials authentication type connection:

| Connection property | Description |
|---|---|
| Runtime Environment | Name of the runtime environment where you want to run the tasks.<br>Specify a Secure Agent, Hosted Agent, or serverless runtime environment. |
| Auth Type | The authentication method that the connector must use to connect to the OData V2 endpoint.<br>Select **OAuth 2.0 client credentials**.<br>Default is Basic. |
| Access Token URL | Access token URL configured in your application. |
| Client ID | The client identifier issued during the application registration process. |
| Client Secret | The client secret issued during the application registration process. |
| Scope | The scope of the access request when the rest endpoint has defined custom scopes. Enter space-separated scope attributes.<br>For example:<br>`ZGWSAMPLE_BASIC_0001 /IWFND/SG_MED_CATALOG_0002 ZAPI_CHARTOFACCOUNTS_SRV_0001` |
| Access Token Parameters | Additional parameters to use with the access token URL. Define parameters in the JSON format.<br>For example:<br>`[{"Name":"resource","Value":"https://<serverName>"}]` |
| Client Authentication | The client authentication details for authorization.<br>Select an option to send client ID and client secret for authorization either in the request body or in the request header.<br>Default is **Send client credentials in body**. |
| Generate Access Token | Generates access token based on the specified authentication details. |
| Access Token | The access token granted by the authorization server to access the data using a specific role. Enter the access token value or click **Generate Access Token** to populate the access token value. |

# Configure the Secure Socket Layer protocol

You can use the OData V2 Protocol Reader connection with the Secure Socket Layer (SSL) protocol to securely read from OData V2 services.

Before you connect to an SSL-enabled OData V2 service, you need to perform the prerequisite tasks.

1. Import the `.cer` certificate into the cacerts file located in the jdk directory available at one or more of the following locations within your Secure Agent installation:
   - `<Secure Agent installation directory>/jdk/jre/lib/security`
   - `<Secure Agent installation directory>/jdk/lib/security`
   - `<Secure Agent installation directory>/jdk8/jre/lib/security`

   Ensure to add the certificate to all the available directories.
2. If there is a jdk directory within the `<Secure agent installation directory>\apps` folder, navigate to the following directory and import the `.cer` certificate into the `cacerts` file located in the jdk directory available at one or more of the following locations within your Secure Agent installation:
   - `<Secure agent installation directory>\apps\jdk\zulu8<latest_version>\jre\lib\security`
   - `<Secure agent installation directory>\apps\jdk\zulu17<latest_version>\lib\security`
3. Restart the Secure Agent.

CHAPTER 3

# Mappings and mapping tasks with OData V2 Protocol Reader Connector

Use the Data Integration Mapping Designer to create a mapping. When you create a mapping, you can configure a Source transformation to represent an OData V2 Protocol Reader object.

In advanced mode, the Mapping Designer updates the mapping canvas to include transformations and functions that enable advanced functionality.

## OData V2 Protocol Reader sources in mappings

You can use an OData V2 Protocol Reader object as a source in mappings. When you create a mapping to read data from OData V2 applications, specify the OData V2 Protocol Reader source properties.

The following table describes the source properties that you can configure in a Source transformation:

| Property | Description |
|---|---|
| Connection | Name of the source connection. |
| Source Type | Source type.<br>Select Single as the source type. |
| Object | Source object for the mapping. |

The following table describes the advanced source properties that you can configure in a Source transformation:

| Property | Description |
|---|---|
| Page Size | Determines the number of rows to read in each request.<br>Default is 1000 rows. |
| Number of Rows to Skip | Sets the number of rows you can skip.<br>For example, you can set this property to n to skip the first n rows in a source and read from the (n+1) row.<br>Default is 0. |
| Number of Rows to Fetch | Determines the number of rows you can read from the source.<br>For example, specify a value of 100 to read 100 records from the source.<br>Specify 0 to read all records from the source.<br>Default is 0. |
| Maximum Retry Attempts | The maximum number of retry attempts made to receive the response from the OData V2 endpoint.<br>Default is 1. |
| Retry Interval in seconds | The time in seconds to wait between each retry attempt.<br>Default is 5 seconds. |
| Cache Size for Web Service Response (KB) | Sets the memory available for the web service response.<br>If the web service response contains many rows or columns, you might want to increase the cache size.<br>Default is 1024 KB.<br>Applicable only for hierarchical entities. |

The following table describes the query options that you can configure in a Source transformation:

| Property | Description |
|---|---|
| Filter | Filters the source data based on the conditions you specify.<br>You can configure a simple filter or an advanced filter to filter rows from the source based on a filter condition. You can improve efficiency by filtering early in the data flow.<br>Click **Configure** to configure a filter option. You can specify the following filter conditions:<br>- Not parameterized. Uses a basic filter to specify the object, field, operator, and value to select specific records. Applies only to flat entities.<br>- Advanced. Uses an advanced filter to define a complex filter condition. Applies to flat and hierarchical entities.<br>For more information on filters and operators, follow the conventions specified in `http://www.odata.org/documentation/odata-version-2-0/uri-conventions` |

# Rules and guidelines for OData V2 Protocol Reader mappings

Consider the following rules and guidelines for mappings:

- When you read a large data set, the mapping might fail with a `Data Truncation occurred` error. To resolve this, reduce the page size in the advanced source properties. To read large sets of hierarchical data, increase the cache size in the web service response in the advanced source properties.
- When you use a Joiner transformation to join the data from multiple sources that use different authentication types to connect to an OData V2 service, the mapping fails with the following error: `[ERROR] java.io.IOException: Server returned HTTP response code: 401 for URL`
- You can configure the Secure Agent to use only the unauthenticated proxy server.
- You can use only the following filter operators in a simple filter:

  Equals


  Not Equals

  Less Than

  Less or Equals

  Greater Than

  Greater or Equals
- You cannot configure data filters on child objects for hierarchical entities.
- When you configure advanced filters, ensure that the filter condition contains only the field name, operator, and field value. You must remove any additional text that is appended to the filter condition. The following example displays the additional text that you must remove from the filter condition:

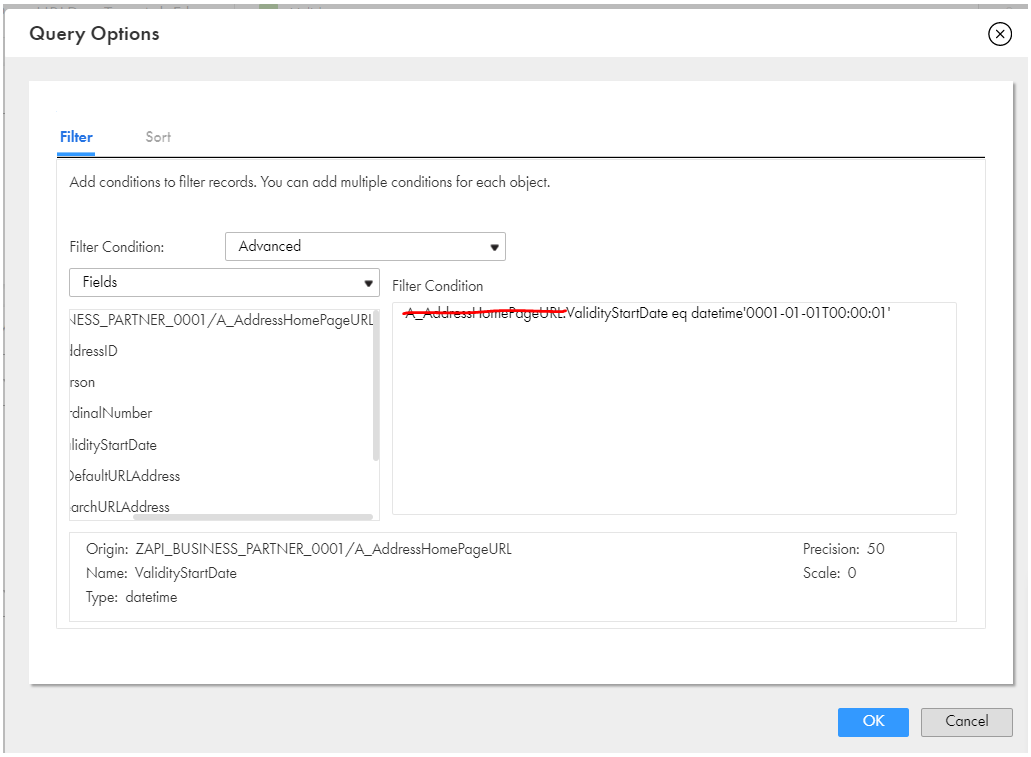

Consider the following rules and guidelines for source objects:

- Entities that have a cyclic relationship with each other are ignored and the task does not fetch the metadata for such entities. For example, if a business partner has a relationship with contact details and contact details in turn have a relationship with business partner, then the business partner details within contact fields are ignored and not displayed.

APPENDIX A

# OData V2 Protocol Reader data type reference

Data Integration uses the following data types in mappings and mapping tasks with OData V2 Protocol Reader Connector:

**Native data types**

OData V2 data types appear in the **Fields** tab for Source transformation when you choose to edit metadata for the fields.

**Transformation data types**

Set of data types that appear in the transformation. They are internal data types based on ANSI SQL-92 generic data types, which Data Integration uses to move data across platforms. Transformation data types appear in all remaining transformations in a mapping, or mapping task.

When Data Integration reads source data, it converts the native data types to the comparable transformation data types before transforming the data. When Data Integration writes to a target, it converts the transformation data types to the comparable native data types.

## OData V2 Protocol Reader and transformation data types

The following table lists the OData V2 data types that OData V2 Protocol Reader Connector supports along with the corresponding transformation data types:
Data types for hierarchical data fields:

| OData V2 Protocol Reader Data Type | Transformation Data Type | Description |
|---|---|---|
| String | String | - |
| Boolean | String | - |
| GUID | String | - |
| Int32 | Integer | - |
| Int16 | Integer | - |

| OData V2 Protocol Reader Data Type | Transformation Data Type | Description |
|---|---|---|
| DateTime | String | For example, /Date(1592956800000)/ |
| DateTimeOffset | String | For example, /Date(1592956800000)/ |
| Decimal | Decimal | - |
| Byte | Integer | - |
| Time | String | - |

**Note:** You must manually edit the precision and scale of the data types if they do not match the required metadata.

Data types for flat data fields:

| OData V2 Protocol Reader Data Type | Transformation Data Type | Description |
|---|---|---|
| String | String | - |
| Boolean | String | - |
| Int64 | Integer | - |
| Int32 | Integer | - |
| Int16 | Integer | - |
| DateTime | String | Dates earlier than 1752-09-14 or pre-Gregorian calendar dates are not read accurately. |
| DateTimeOffset | String | Dates earlier than 1752-09-14 or pre-Gregorian calendar dates are not read accurately. |
| Decimal | Decimal | - |
| Byte | Integer | - |
| Time | String | - |

# INDEX


## A

authentication
  OAuth 2.0 authorization code 9
  OAuth 2.0 client credentials 11

## C

Cloud Application Integration community
  URL 4
Cloud Developer community
  URL 4
connections
  OData V2 Protocol Reader 8

## D

Data Integration community
  URL 4
data types
  OData V2 applications 17

## I

Informatica Global Customer Support
  contact information 5
Informatica Intelligent Cloud Services
  web site 4

## M

maintenance outages 5

## O

OData V2 Protocol Reader
  connection properties 8
  data types 17
OData V2 Protocol Reader Connector
  overview 6

## R

rules and guidelines 15

## S

status
  Informatica Intelligent Cloud Services 5
system status 5

## T

trust site
  description 5

## U

upgrade notifications 5

## W

web site 4