How-To Library

Informatica

Configuring PowerExchange for SAP NetWeaver in a Load Balancing SAP BW Environment

© Copyright Informatica LLC , 2022. Informatica, the Informatica logo, and PowerCenter are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https:// www.informatica.com/trademarks.html.

Abstract

Configure PowerExchange for SAP NetWeaver and the SAP BW environment to extract data from a load balancing SAP BW environment.

Supported Versions

- PowerExchange for SAP NetWeaver 10.2 or later

Table of Contents

PowerExchange for SAP NetWeaver in a SAP BW Load Balancing Environment. 2
SAP BW Configurations. 2
Logon Group. 3
External Source System Configuration. 3
PowerExchange for SAP NetWeaver Configurations. 4
SAP BW Service Configuration. 4
SAP BW-OHS Reader Connection Configuration. 4
SAP Reader Session Configuration. 4

PowerExchange for SAP NetWeaver in a SAP BW Load Balancing Environment

You must configure the SAP BW environment and the Informatica Services to extract data from the load balancing SAP BW environment.

You can configure SAP BW servers to create a load balancing environment. If one of the servers is offline, the backup servers provide the backup as well as sharing the system load.

You can use PowerExchange for SAP NetWeaver to extract data from a load balancing SAP BW environment. The SAP BW Service in the Informatica domain connects to the SAP gateway host and waits for a request to extract data.

SAP BW Configurations

You must configure the following components in the load balancing SAP BW environment to enable data extraction with PowerExchange for SAP NetWeaver:

- Logon Group with the different SAP BW servers
- External source system in the SAP BW server

Logon Group

Create a logon group with the SAP BW application server instances that you want to add in the system.

The following figure shows a sample configuration of a logon group:


Logon Group	Instance	Status
Asia_pacific	INBQA28SAP73_S73_00	■
ILABS	INBQA28SAP73_S73_00	■
ILABS	INV28PERS6_S73_00	
ILABS	INVR28PERS31_S73_09	■

From the logon group, you can view the status of the different servers in the SAP BW environment.

External Source System Configuration

Configure the external source system in the SAP BW server to point to the desired SAP BW application server.

The following figure shows a sample configuration of an external source system:

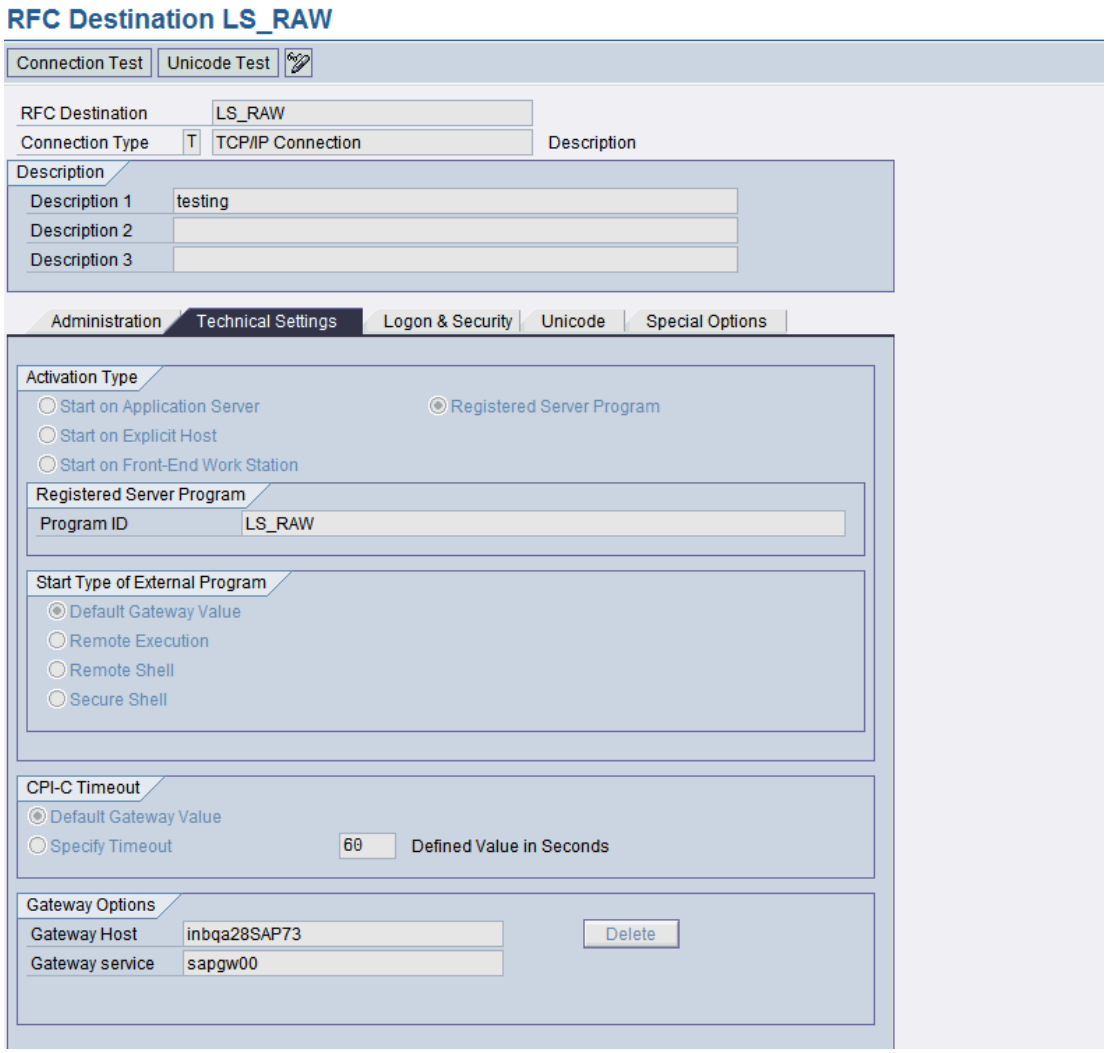

PowerExchange for SAP NetWeaver Configurations

Configure the following components of PowerExchange for SAP NetWeaver to enable data extraction from a load balancing SAP BW environment:

- TYPE R entry in the saprfc.ini file for the SAP BW Service
- TYPE B entry in the saprfc.ini file for the SAP BW-OHS connection
- Session properties in the SAP reader session

SAP BW Service Configuration

When you create an SAP BW Service in the Administrator tool, configure the TYPE R entry in the saprfc.ini file to point to the desired SAP BW application server.

The following entry shows a sample TYPE R entry:

```
-----------------------------------
TYPE R entry
-----------------------------------
DEST=LS_RAW
TYPE=R
PROGID=LS_RAW
GWHOST=inbqa28sap73
GWSERV=sapgw00
RFC_TRACE=0
-----------------------------------
```

Enter the SAP BW application server host name in the GWHOST field.

SAP BW-OHS Reader Connection Configuration

When you create and SAP BW-OHS reader connection, configure the TYPE B entry in the saprfc.ini file with the message server details and the logon group.

The following entry shows a sample TYPE B entry

```
----------------------------------------
TYPE B entry
----------------------------------------
DEST=s73_B
TYPE=B
R3NAME=S73
MSHOST=INVR28PERS35
GROUP=ILABS
RFC_TRACE=0
```

Enter the message server host name in the MSHOST field and the logon group name in the GROUP field.

SAP Reader Session Configuration

Configure the SAP reader session to enable data extraction from a load balancing SAP BW environment.

Configure the following session properties:

- Enable raw data transfer.
- Set log lock re-try count to 10000.

Authors

Narayan Sivaramakrishnan

Acknowledgements

The author would like to acknowledge Raghu Rajanna for his technical assistance.