How-To Library

Informatica

Single Sign-on Using Okta in Axon Data Governance

© Copyright Informatica LLC 2013, 2021. Informatica and the Informatica logo are trademarks or registered trademarks of Informatica LLC in the United States and many jurisdictions throughout the world. A current list of Informatica trademarks is available on the web at https://www.informatica.com/trademarks.html

Abstract

This document describes the steps to enable Single Sign-On (SSO) in a cloud or on-premises deployment of Axon Data Governance using the Okta identity management tool.

Supported Versions

- Informatica Axon 6.2 or later

Table of Contents

Overview. 2
Create a New Application in Okta. 3
Configure Axon Details in Okta. 3
Advanced Settings. 4
Attribute Statements. 4
Profile Editor. 4
Generate SAML Metadata Assertion. 6
Configure Axon to Use Okta. 6
Clear the Axon Cache and Restart Services. 7


Overview

When you enable SSO, users with an account in the Identity Provider (IDP) of your organization can log in to the Axon web interface without entering a username and password. Axon uses Security Assertion Markup Language (SAML) 2.0 to authenticate users based on the IDP credentials.

Okta is an enterprise IDP tool. If your organization uses Okta, you can set up Axon as the service provider and enable SSO using SAML. SAML is an XML-based open-standard data format for authorization and authentication between the IDP and the service provider.

To enable SSO, you must configure Axon as an application in Okta. Axon supports any IDP that uses SAML 2.0 authentication.

The following image show the steps to configure SSO for Axon:

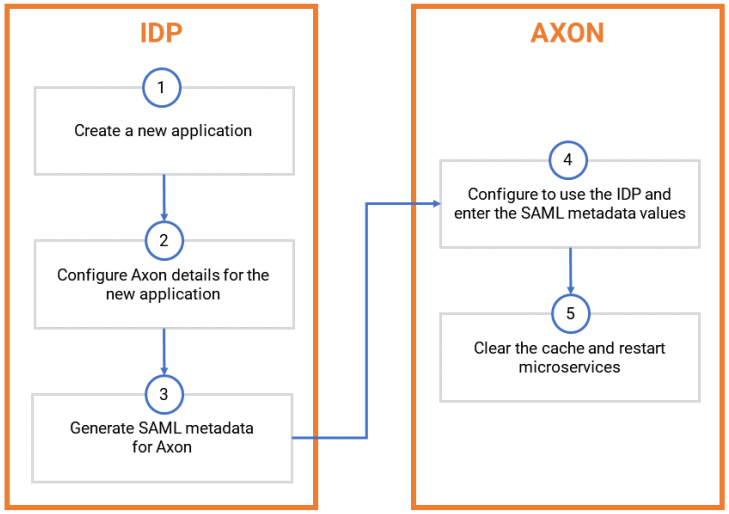

Create a New Application in Okta

Perform the following steps to set up Axon as an application in Okta:

1. Log in to Okta, and add a new SAML 2.0 application.
2. Type in the application name as `Axon`.

Configure Axon Details in Okta

To configure Axon as a SAML application, perform the following tasks in Okta:

1. In the **Single Sign on URL** field, enter the following value:

   `http(s)://<Axon_URL>/saml/acs`
2. Select the **Use this for Recipient and Destination URL** check box.
3. In the **Audience URI (SP Entity ID)** field, enter the following value:

   `http(s)://<Axon_URL>/saml/metadata`

   Note: Do not specify a value for the **Default Relay State** field.
4. In the **Name ID Format** field, select `EmailAddress` from the drop-down list.
5. In the **Application Username** field, select `Email` from the drop-down list.
6. Configure the advanced settings, attribute statements, and mandatory values.

Advanced Settings

The following table lists the advanced settings that you must configure in Okta:

Property	Value
Response	Signed
Assertion Signature	Signed
Signature Algorithm	RSA-SHA256
Digest Algorithm	SHA256
Assertion Encryption	Unencrypted
Enable Single Logout	Unchecked
Authentication context class	PasswordProtectedTransport
Honor Force Authentication	Yes
SAML User ID	www.okta.com/$[org.externalKey]

Attribute Statements

The following table lists the attribute statements that you must configure in Okta:

Property	Format	Value
orgunit	Basic	appuser.orgunit
status	Unspecified	appuser.statusID
firstName	Basic	user.firstName
lastName	Basic	user.lastName
orgunitDescription	Unspecified	appuser.orgunitDescription
orgunitTitle	Unspecified	appuser.orgunitTitle
email	Basic	user.email
profile	Unspecified	You can provide an appropriate metadata except for the value "appuser.profile". For example, you can provide the value "appuser.role".

Profile Editor

To enable SSO, you must configure Okta to send the mandatory values required by Axon.

1. Open **Profile Editor** under **Directory**.
2. Click **Profile** against the Axon application that you created.
3. Edit the Okta attribute configuration.

The following table describes the Okta configuration for mandatory values required by Axon:

Display Name	Variable Name	Data Type
Username	userName	string
Organization Unit	orgunit	string
First Name	firstname	string
Last Name	lastname	string
Org Unit Title	orgunitTitle	string

The following table describes optional values that you can enter:

Display Name	Variable Name	Data Type
Status ID	statusID	integer
Organization Unit Description	orgunitDescription	string
Profile	Any variable name except for "profile" and it should match the value that you provide in the Attribute statements for the Profile parameter. For example, you can set the variable to "role".	string


Note: Axon assigns the following default values to the **statusID**, **orgunitDescription**, and **profile** fields:

- If you do not select the **statusID** property, or if you select the **statusID** property and do not assign a default value, Axon assigns the `Active` value to all the users.
- If you do not select the **orgunitDescription** property, or if you select the **orgunitDescription** property and do not assign a default value, Axon assigns a blank value to all organization units.
- If you do not select the **profile** property, or if you select the **profile** property and do not assign a default value, Axon assigns the WebUser profile to the user.
- If you configure the default value for the **profile** property to "5" or "6", specify the value as "appuser.profile", and set the variable as "profile", Axon assigns the WebUser profile to the user instead of Admin or SuperAdmin. To resolve this issue, it is recommended that you use any value except for "profile".

Generate SAML Metadata Assertion

After you configure Axon in Okta, perform the following steps in Okta to obtain the SAML metadata assertion:

1. In the **Sign On** tab, click the **View Setup Instructions** button.

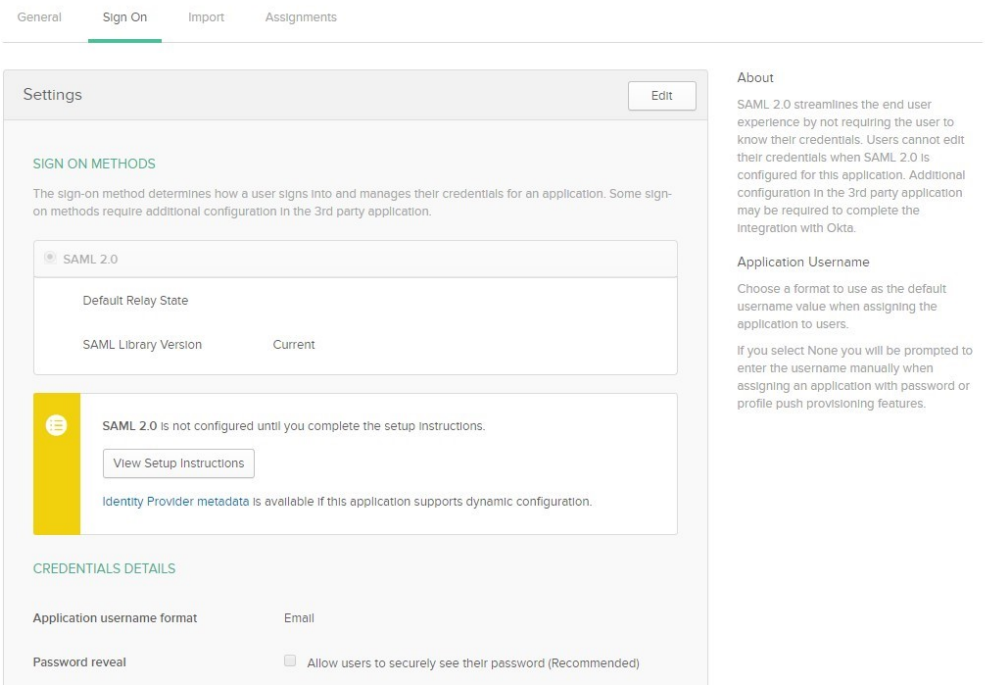

2. Record the values for the following parameters that you see:
   - Identity Provider Single Sign-On URL
   - Identity Provider Issuer
   - X.509 Certificate

   You must enter these values when you configure Axon.

   Note: The SAML metadata is based on the configuration parameters that you have entered in Okta. If you modify any of the parameters in Okta, you must perform the above steps again to get the new SAML metadata values.

Configure Axon to Use Okta

After you create Axon as an application in Okta, you must configure Axon to authorize and authenticate the data that is exchanged with Okta. You must have the Super Admin profile to perform this task.

Perform the following configuration steps in Axon to use SSO:

1. From the Axon toolbar, click the **Admin Panel** menu item under your user name.
2. In the menu on the left, under the **Customize & Configure** category, click **Configure Axon**.
3. In the **Group** dropdown, select **SAML Configuration**.
4. Click **Edit**.

5. Enter the following values:

Field	Value
SSO URL	`http(s)://<Axon_URL>:<port_number>/saml/login`
IDP Endpoint	Identity Provider Single Sign-On URL that you recorded.
IDP Entity ID	Identity Provider Issuer value that you recorded.
IDP X.509 Certificate	X.509 Certificate that you recorded. **Note:** Enter this value in a single line without line breaks.

6. Click **Save**.

Clear the Axon Cache and Restart Services

After you have configured Axon in the IDP and configured the Axon SAML files, you must update the Axon cache with the new configuration values.

1. In the Linux environment, run the following command to clear the contents of the cache directory:

```
rm -rf <INSTALLATION_DIRECTORY>/axonhome/axon/app/cache/*
```

2. Run the following commands to restart the Memcached and HTTPD services:

```
<INSTALLATION_DIR>/axonhome/third-party-app/scripts/memcached restart
service httpd restart
```

Authors

Abhilash Scariya

Vinita Arun

Acknowledgements

Pradeep G.N.