OCI EXACS Patching Run Books.

Potential Issues with Infrastructure Patching:

The following error codes may indicate specific problems during the patching process:

Understanding QMR and SMR Failures:

ERROR Code	ERROR Description	Possible Reasons for ERROR	Steps to mitigate the issue	CN Details
0x030C0000	ASM Deactivation outcome is not set to yes on cells.	1. Patching pre-check failed due to this issue because of ASM disks are offline from customer end. 2. Cell node Patching may not completed successfully and will observe this issue during post patch, we need to check the status of griddisk and need to activate. 3. ASM Deactivation outcome is not set to yes during the patching and it is due to HDD or Flash disk fault.we need to check replace the faulty during the patching window. 4. We will observe this ASM Deactivation outcome is not set to yes issue if ASM rebalance is running long time and we need to check and inform the customer.	**Case/Issue type 1: For QMR and SMR pre-check:** **Sample Ticket** **DBAASOPS-329173** step 1 Step 1: Check the patch operation Login to ECRA Run below commands to check patch operation. c=<interclustername> ecraDBTool.sh showops -c $c	For QMR precheck failure : Exadata-3ac For SMR precheck failure : Exadata-100368

step 2

step 2: check the logs from Workflow uuid and identify the ERROR like below.

```
ecraDBTool.sh showops -c $c -u 082df184-4680-11f0-8f58-02001707d682
```

Log files like below:

```
Exacloud workflow log files for operation uuid='082df184-4680-11f0-8f58-02001707d682'
=====================================================================
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/082df184-4680-
11f0-8f58-02001707d682_cluctrl.patch_prereq_check_cell.err
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/082df184-4680-
11f0-8f58-02001707d682_cluctrl.patch_prereq_check_cell.log
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/082df184-4680-
11f0-8f58-02001707d682_cluctrl.patch_prereq_check_cell.trc
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/082df184-4680-
11f0-8f58-02001707d682_cluctrl.patch_prereq_check_cell.xml
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/082df184-4680-11f0-8f58-
02001707d682_infrapatch_patch_prereq_check_time_stats.log
```

```
cat /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/082df184-
4680-11f0-8f58-02001707d682_cluctrl.patch_prereq_check_cell.log | grep erorr
```

ERROR:
2025-06-11 04:55:30,686 - dfltlog - INFO - 12804 - Error Action is FAIL_DONTSHOW_PAGE_ONCALL for Error Code 0x030C0000
2025-06-11 04:55:30,694 - dfltlog - INFO - 12804 - Error description is ASM Deactivation outcome is not set to yes on cells. Please refer MOS Note 2829056.1 for more details or contact Oracle support for assistance.
2025-06-11 04:55:30,701 - dfltlog - INFO - 12804 - Infra Patching error is 0x030C0000 and error_str is ASM Deactivation outcome is not set to yes on cells. Please refer MOS Note 2829056.1 for more details or contact Oracle support for

Identify the which cell node has issue using below command.

c=<interclustername>
ecraEXATool.sh execcmd -c $c -w cell -x "cellcli -e list griddisk attributes name,asmmodestatus,asmdeactivationoutcome"

Refernce and output is trimmed:

```
[oracle@phx2ecraweb2 ~]$ ecraEXATool.sh execcmd -c $c  -w cell -x "cellcli -e list griddisk attributes name,asmmodestatus,asmdeactivationoutcome"
phx210540exdcl04.phx10x1xx0141qf.adminphx2.oraclevcn.com

     DATAC2_CD_03_phx210540exdcl04     ONLINE     "Cannot deactivate because some ASM Partner Status Table (PST) data is not online"

     RECOC2_CD_05_phx210540exdcl04     ONLINE     "Cannot deactivate because some ASM Partner Status Table (PST) data is not online"

#######################################################################
phx210540exdcl05.phx10x1xx0141qf.adminphx2.oraclevcn.com

     DATAC2_CD_02_phx210540exdcl05     ONLINE     "Cannot deactivate because some ASM Partner Status Table (PST) data is not online"

     RECOC2_CD_04_phx210540exdcl05     ONLINE     "Cannot deactivate because some ASM Partner Status Table (PST) data is not online"

#######################################################################
phx210540exdcl06.phx10x1xx0141qf.adminphx2.oraclevcn.com

     DATAC2_CD_09_phx210540exdcl06     ONLINE     "Cannot deactivate because some ASM Partner Status Table (PST) data is not online"

     RECOC2_CD_04_phx210540exdcl06     ONLINE     "Cannot deactivate because some ASM Partner Status Table (PST) data is not online"

#######################################################################
```

step 3

Step3:

Check Cell nodes healthy and inform the customer that precheck failed due to ASM issue.
If cell nodes not in healthy state check any HDD faults or any other faults take action accordingly.
Please file a EXADATA bug if issue not fixed after tried all the possible ways.

Step 4

Step 4: Reschedule:

Please check the cluster health script and reschedule the QMR after 14days.
Note: For SMR, please send CN and do not reschedule the MR

0x0305000F	CRS services down on VM. Refer MOS Note 2829056.1 for more details.	As per Error code , it complain due stating CRS service are not running on VMs . CRS issue are fixed by customer , we only need to make sure there is not issue at dom0 level
		
		Possible causes could be
		• domU startup issue
		• domUFile -system corruption
		• CRS startup issue on domU
		
		We need to validate below before send CN and Rescheduling
		• Validate Error Code at ECRA level
		• Verify if we are able to see Heartbeat in Cell node alert log file
		• Verify we see domU Login prompt at dom0 Side
		• Verify if DscPing is working (This verify that domU is accessible while CRS has issues)
			Sample Ticket are as below
			
			DBAASOPS-404449
			DBAASOPS-382041
			
			We have to verify if ECRA code from Exacloud is also pointing to same issue
			
			Login to ECRA and check ERROR Code
			
			1. Login to ECRA and check ERROR Code
			
			`ecraDBTool.sh showops -c arn100802exd-d0-01-02-cl-01-03-clu01`
			
			`DBaaS Control Plane Operations :`
			`==========`
			
			`Exacloud Operations for cluster 'arn100802exd-d0-01-02-cl-01-03-clu01':`
			`==========`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  9a9e50b6-e575-11ef-8dfa-0200170084ba  Done  2025-02-07T17:04:33 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  d12237e6-e63e-11ef-8dfa-0200170084ba  Done  2025-02-08T17:04:54 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  21899832-e6a3-11ef-8dfa-0200170084ba  Done  2025-02-09T05:02:58 cluctrl.patch_prereq_check  0  True:100:patch_prereq_check_done-dom0`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  030b87f0-e6a6-11ef-8dfa-0200170084ba  Done  2025-02-09T05:23:36 cluctrl.patch_prereq_check  0  True:100:patch_prereq_check_done-cell`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  0f7910c2-e708-11ef-8dfa-0200170084ba  Done  2025-02-09T17:05:27 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  1d58a1a2-e7d1-11ef-8dfa-0200170084ba  Done  2025-02-10T17:04:39 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  4dd0f4f0-e89a-11ef-8dfa-0200170084ba  Done  2025-02-11T17:04:49 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  99f1e352-e963-11ef-8dfa-0200170084ba  Done  2025-02-12T17:05:46 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  ac798a16-e963-11ef-8dfa-0200170084ba  Done  2025-02-12T17:06:17 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  a7238106-ea2c-11ef-8dfa-0200170084ba  Done  2025-02-13T17:04:57 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  a752d80c-ea2c-11ef-8dfa-0200170084ba  Done  2025-02-13T17:04:57 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  b3a63f86-ea90-11ef-8dfa-0200170084ba  Done  2025-02-14T05:01:08 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  cefa1280-ea90-11ef-8dfa-0200170084ba  Done  2025-02-14T05:01:54 cluctrl.vm_tmpkey_op  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  212f0754-ea91-11ef-8dfa-0200170084ba  Done  2025-02-14T05:04:11 cluctrl.checkcluster  0  000:: No status info available`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  3ad3cb7c-ea91-11ef-8dfa-0200170084ba  Done  2025-02-14T05:04:54  cluctrl.patch  0x03030008  True:100:patch_done-dom0`
			`  arn100802exd-d0-01-02-cl-01-03-clu01  b5a0dfd6-ea94-11ef-8dfa-0200170084ba  Done  2025-02-14T05:29:49 cluctrl.vm_tmpkey_op  0  000:: No status info available`
			
			ecraDBTool.sh showops -u 3ad3cb7c-ea91-11ef-8dfa-0200170084ba

```
ECRA WorkFlow UUID (WF_UUID) : 9cd31acf-4d7f-485a-ba31-0618d17d44b5

Exacloud Operation :'3ad3cb7c-ea91-11ef-8dfa-0200170084ba'
==========================================================
arn100802exd-d0-01-02-cl-01-03-clu01        Done        2025-02-14T05:04:54        Done        2025-02-14T05:26:
44        cluctrl.patch        0x03030008        True:100:patch_done-dom0

OEDA logs available in '/u01/app/oracle/admin/exacloud/oeda/requests.bak//*3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log
/*'
====================================================================
-rw-r--r-- 1 oracle oinstall   102 Feb 14 05:05 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-
0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log/log_588721.out
-rw-r--r-- 1 oracle oinstall   102 Feb 14 05:05 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-
0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log/log_588777.out
-rw-r--r-- 1 oracle oinstall   102 Feb 14 05:05 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-
0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log/log_588820.out
-rw-r--r-- 1 oracle oinstall 97434 Feb 14 05:05 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-
0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log/oedacli.out
-rw-r--r-- 1 oracle oinstall     0 Feb 14 05:05 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-
0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log/log_588915.out
-rw-r--r-- 1 oracle oinstall  3633 Feb 14 05:05 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-
0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log/log_588967.out
-rw-r--r-- 1 oracle oinstall  2375 Feb 14 05:26 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-
0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log/3ad3cb7c-ea91-11ef-8dfa-0200170084ba_exacloud_patch_error.json

/u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba/log
/patchmgr_logs:
total 0

Exacloud workflow log files for operation uuid='3ad3cb7c-ea91-11ef-8dfa-0200170084ba'
=====================================================================
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/3ad3cb7c-ea91-
11ef-8dfa-0200170084ba_cluctrl.patch_dom0.err
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/3ad3cb7c-ea91-
11ef-8dfa-0200170084ba_cluctrl.patch_dom0.log
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/3ad3cb7c-ea91-
11ef-8dfa-0200170084ba_cluctrl.patch_dom0.trc
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/3ad3cb7c-ea91-
11ef-8dfa-0200170084ba_cluctrl.patch_dom0.xml
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/3ad3cb7c-ea91-11ef-8dfa-
0200170084ba_infrapatch_patch_time_stats.log
```

ERROR in log

```
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/3ad3cb7c-ea91-
11ef-8dfa-0200170084ba_cluctrl.patch_dom0.log



2025-02-14 05:26:44,616 - dfltlog - INFO - 37393 - Error Action is FAIL_DONTSHOW_PAGE_ONCALL for Error Code
0x03030008
2025-02-14 05:26:44,629 - dfltlog - INFO - 37393 - Error description is Unable to establish Heartbeat on the
cells. Not all CRS/DB services are up on DomU.
2025-02-14 05:26:44,641 - dfltlog - INFO - 37393 - Infra Patching error is 0x03030008 and error_str is Unable to
establish Heartbeat on the cells. Not all CRS/DB services are up on DomU.
2025-02-14 05:26:44,729 - dfltlog - INFO - 37393 - *** Moving OEDA requests directory to archive path succeeded.
Request /u01/app/oracle/admin/exacloud/oeda/requests/0000-0000-0000-0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba
moved to /u01/app/oracle/admin/exacloud/oeda/requests.bak/0000-0000-0000-0000_3ad3cb7c-ea91-11ef-8dfa-0200170084ba.
2025-02-14 05:26:44,742 - dfltlog - INFO - 37393 - *** mArchiveOEDARequests completed Successfully!
```

Ideally Heatbeat is not present for CRS down issue. we need to verify

---

Verify Heartbeat

Execute on ECRA server

```
c=arn100802exd-d0-01-02-cl-01-03-clu01
ecraEXATool.sh execcmd -c $c -w cell -x 'cat $CELLTRACE/alert.log|grep -B 2  "Heartbeat with diskmon"| tail -12'
```

OutPut is as below

```
#######################################################################
Warning: This system is restricted to authorized users for business purposes only.
arn100802exdcl03.arn1xx1xx0041qf.adminarn1.oraclevcn.com
--
CELLSRV Server startup complete
2024-10-13T11:42:12.596765+00:00
Heartbeat with diskmon (pid 61444) started on emexa-cq7zy2
--
CELLSRV Server startup complete
2024-12-04T22:31:37.095292+00:00
Heartbeat with diskmon (pid 61444) started on emexa-cq7zy2
--
PMEM Log PML-PM_01_arn100802exdcl03 guid=b11cc851-858f-433b-b1b7-918413ecc83d (3764846940)
cdisk=PM_01_arn100802exdcl03 is being recovered
2025-01-22T22:11:51.345095+00:00
Heartbeat with diskmon (pid 61444) started on emexa-cq7zy2
#######################################################################
```

DcsPing should be working , if DcsPing is not working then we need to check further to understand if domU is really up

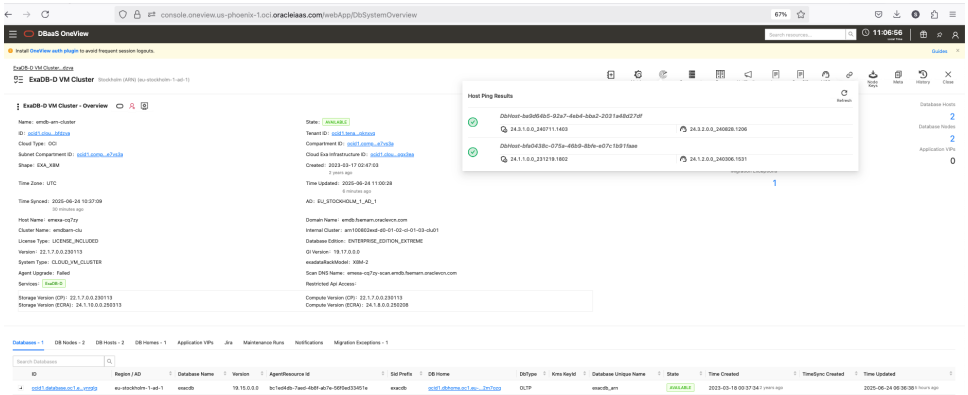

Once we are able to establish domU is up (DcsPing is GREEN) , we can send CN to check CRS and Reschedule MR after 14 days

0x03030008	Unable to establish Heartbeat on the cells. Not all CRS/DB services are up on DomU.	This Error code complains about CRS service are not running on VMs after patching. CRS issue are fixed by customer , we only need to make sure there is no issues at dom0 level. Possible Reasons for this ERROR. • CRS could not be started • DomU is not properly up (Hung state) Please validate and send CN, reschedule the MR.	**Sample ticket : DBAASOPS-395346** We have to check the ERROR code from Exacloud **Step 1:** **Login ECRA server:** Check the patch operation c=<interclustername> ecraDBTool.sh showops -c $c Example: c=ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01 ecraDBTool.sh showops -c $c DBaaS Control Plane Operations : ========== Exacloud Operations for cluster 'ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01': ========== checkcluster 0 000:: No status info available ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01 37cc7438-1e5d-11f0-a8d9-02001700c8ba Done 2025-04-21T03:03:36 cluctrl. patch_prereq_check 0 True:100:patch_prereq_check_done-dom0 ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01 1f2c3eb0-1e60-11f0-a8d9-02001700c8ba Done 2025-04-21T03:24:23 cluctrl. patch_prereq_check 0 True:100:patch_prereq_check_done-cell checkcluster 0 000:: No status info available ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01 d739ad2e-224a-11f0-b576-02001700c8ba Done 2025-04-26T03:02:08 cluctrl. vm_tmpkey_op 0 000:: No status info available ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01 45943604-224b-11f0-b576-02001700c8ba Done 2025-04-26T03:05:13 cluctrl. checkcluster 0 000:: No status info available ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01 60ebd10a-224b-11f0-b576-02001700c8ba Done 2025-04-26T03:05:59 cluctrl. patch 0x03030008 True:100:patch_done-dom0 ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01 107d0eae-2251-11f0-b576-02001700c8ba Done 2025-04-26T03:46:41 cluctrl. vm_tmpkey_op 0 000:: No status info available **Step 2: Check the logs from workflow uuid and identify the ERROR like below.** ecraDBTool.sh showops -u 60ebd10a-224b-11f0-b576-02001700c8ba ECRA WorkFlow UUID (WF_UUID) : 063d83ba-2dfa-457c-be56-137aff24d10c Exacloud Operation :'60ebd10a-224b-11f0-b576-02001700c8ba' ========== ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01 Done 2025-04-26T03:05:59 Done 2025-04-26T03:43:09 cluctrl. patch 0x03030008 True:100:patch_done-dom0 OEDA logs available in '/u01/app/oracle/admin/exacloud/oeda/requests.bak//*60ebd10a-224b-11f0-b576-02001700c8ba/log/*' ========== -rw-r--r-- 1 oracle oinstall 102 Apr 26 03:06 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/log_190584.out -rw-r--r-- 1 oracle oinstall 102 Apr 26 03:06 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/log_190653.out -rw-r--r-- 1 oracle oinstall 102 Apr 26 03:06 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/log_190699.out -rw-r--r-- 1 oracle oinstall 97613 Apr 26 03:06 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/oedacli.out -rw-r--r-- 1 oracle oinstall 0 Apr 26 03:06 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/log_191088.out -rw-r--r-- 1 oracle oinstall 3633 Apr 26 03:06 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/log_191242.out -rw-r--r-- 1 oracle oinstall 2730 Apr 26 03:43 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/60ebd10a-224b-11f0-b576-02001700c8ba_exacloud_patch_error.json /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/patchmgr_logs: total 0 Exacloud workflow log files for operation uuid='60ebd10a-224b-11f0-b576-02001700c8ba' ========== /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/60ebd10a-224b-11f0-b576-02001700c8ba_cluctrl.patch_dom0.err /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/60ebd10a-224b-11f0-b576-02001700c8ba_cluctrl.patch_dom0.log /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/60ebd10a-224b-11f0-b576-02001700c8ba_cluctrl.patch_dom0.trc /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/60ebd10a-224b-11f0-b576-02001700c8ba_cluctrl.patch_dom0.xml /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/60ebd10a-224b-11f0-b576-02001700c8ba_infrapatch_patch_time_stats.log

ERROR:

```
oracle@ams1edcsecra1 ~]$ grep -i error /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000
/60ebd10a-224b-11f0-b576-02001700c8ba_cluctrl.patch_dom0.log
2025-04-26 03:06:04,399 - dfltlog - ERROR - 15199 - cp: cannot open '../../properties/es.properties.CHANGE-2970438' for reading: Permission denied
2025-04-26 03:06:04,420 - dfltlog - ERROR - 15199 - mkdir: cannot create directory 'WorkDir': File exists
2025-04-26 03:07:37,384 - dfltlog - ERROR - 197948 - CrsHelper - crs checks failed. crs check cluster output: CRS-4639: Could not contact Oracle High
Availability Services
2025-04-26 03:07:37,684 - dfltlog - WARNING - 197948 - CrsHelper - Unable to check crs Init deamons status on odsa-0lwgz1.customersubnet1.cvcn.
oraclevcn.com. Error : []
2025-04-26 03:12:43,978 - dfltlog - ERROR - 197948 - CrsHelper - crs checks failed. crs check cluster output: CRS-4639: Could not contact Oracle High
Availability Services
2025-04-26 03:22:50,273 - dfltlog - ERROR - 197948 - CrsHelper - crs checks failed. crs check cluster output: CRS-4639: Could not contact Oracle High
Availability Services
2025-04-26 03:32:56,781 - dfltlog - ERROR - 197948 - CrsHelper - crs checks failed. crs check cluster output: CRS-4639: Could not contact Oracle High
Availability Services
2025-04-26 03:43:03,178 - dfltlog - ERROR - 197948 - CrsHelper - crs checks failed. crs check cluster output: CRS-4639: Could not contact Oracle High
Availability Services
2025-04-26 03:43:03,280 - dfltlog - INFO - 197948 - Error Action is FAIL_DONTSHOW_PAGE_ONCALL for Error Code 0x0305000F
2025-04-26 03:43:03,301 - dfltlog - INFO - 197948 - Error description is CRS services down on VM. Refer MOS Note 2829056.1 for more details.
2025-04-26 03:43:03,371 - dfltlog - INFO - 197948 - Dom0Handler - Master request uuid for error status 5f29d27c-224b-11f0-b576-02001700c8ba
2025-04-26 03:43:03,425 - dfltlog - INFO - 197948 - Dom0Handler - mAddError - Output
    "error_code": "0x0305000F",
    "error_message": "CRS services down on VM. Refer MOS Note 2829056.1 for more details.",
    "error_detail": "Unable to startup CRS on DomU : (odsa-0lwgz1.customersubnet1.cvcn.oraclevcn.com).",
    "error_action": "FAIL_DONTSHOW_PAGE_ONCALL",
2025-04-26 03:43:03,489 - dfltlog - ERROR - 197948 - CrsHelper - CRS did not startup on DomU : odsa-0lwgz1.customersubnet1.cvcn.oraclevcn.com
running on Dom0
2025-04-26 03:43:03,566 - dfltlog - ERROR - 15199 - CrsHelper - Unable to startup CRS on DomU during dom0 patching.
2025-04-26 03:43:03,599 - dfltlog - ERROR - 15199 - CrsHelper - CRS services were supposed to be running on at least 2 VMs.It is currently down on
[('Nat Hostname :ams103504exddu0301.ams3xx3xx0221qf.adminams1.oraclevcn.com', 'Customer Hostname :odsa-0lwgz1.customersubnet1.cvcn.
oraclevcn.com')] for the cluster : ams1-d2-cl3-ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01.
2025-04-26 03:43:03,625 - dfltlog - INFO - 15199 - Error Action is FAIL_DONTSHOW_PAGE_ONCALL for Error Code 0x03030008
2025-04-26 03:43:03,641 - dfltlog - INFO - 15199 - Error description is Unable to establish Heartbeat on the cells. Not all CRS/DB services are up on DomU.
2025-04-26 03:43:03,741 - dfltlog - INFO - 15199 - Dom0Handler - Master request uuid for error status 5f29d27c-224b-11f0-b576-02001700c8ba
2025-04-26 03:43:03,785 - dfltlog - INFO - 15199 - Dom0Handler - mAddError - Output
    "error_code": "0x03030008",
    "error_message": "Unable to establish Heartbeat on the cells. Not all CRS/DB services are up on DomU.",
    "error_detail": "CRS services are supposed to be running on atleast 2 VMs. It is currently down on the given list of clusters and VMs : {'ams1-d2-cl3-
ebc6daf4-9165-48ec-9913-40764a76d2ee-clu01': ['odsa-0lwgz1.customersubnet1.cvcn.oraclevcn.com']}. Please startup CRS services on required VMs
and retry patch operations.",
    "error_action": "FAIL_DONTSHOW_PAGE_ONCALL",
2025-04-26 03:43:08,312 - dfltlog - ERROR - 15199 - PatchHandler - Operation patch Failed
2025-04-26 03:43:08,832 - dfltlog - INFO - 15199 - PatchHandler - Exacloud patch operation failed and an error json will be generated.
2025-04-26 03:43:08,847 - dfltlog - INFO - 15199 - PatchHandler - Generating a JSON file for the exacloud patch failure at /u01/app/oracle/admin/exacloud
/oeda/requests/0000-0000-0000-0000_60ebd10a-224b-11f0-b576-02001700c8ba/log/60ebd10a-224b-11f0-b576-02001700c8ba_exacloud_patch_error.
json
2025-04-26 03:43:09,719 - dfltlog - INFO - 15199 - Error Action is FAIL_DONTSHOW_PAGE_ONCALL for Error Code 0x03030008
2025-04-26 03:43:09,730 - dfltlog - INFO - 15199 - Error description is Unable to establish Heartbeat on the cells. Not all CRS/DB services are up on DomU.
2025-04-26 03:43:09,740 - dfltlog - INFO - 15199 - Infra Patching error is 0x03030008 and error_str is Unable to establish Heartbeat on the cells. Not all
CRS/DB services are up on DomU.
[oracle@ams1edcsecra1 ~]$
```

Step 3: Check the uptime of DOM0 server and validate imageinfo status and the VM's are up on on the cluster level:

Login DOM0 on problemtic node:
Run below commands:
uptime;imageinfo;

Example:

```
[root@ams103504exdd003 ~]# uptime
 06:10:57 up 264 days, 17 min,  1 user,  load average: 0.33, 0.46, 0.46
[root@ams103504exdd003 ~]#
[root@ams103504exdd003 ~]# imageinfo

Kernel version: 5.4.17-2136.330.7.5.el8uek.x86_64 #3 SMP Mon May 27 12:51:19 PDT 2024 x86_64
Uptrack kernel version: 5.4.17-2136.333.5.el8uek.x86_64 #3 SMP Thu Jun 20 01:03:41 PDT 2024 x86_64
Image kernel version: 5.4.17-2136.330.7.5.el8uek
Image version: 24.1.2.0.0.240727
Image activated: 2024-08-05 05:56:29 +0000
Image status: success
Exadata software version: 24.1.2.0.0.240727
Node type: KVMHOST
System partition on device: /dev/mapper/VGExaDb-LVDbSys1
```

VM status to check:

Command: ecraEXATool.sh execcmd -c $c -w dom0 -x "virsh list --all"

if KVM :

```
ecraEXATool.sh execcmd -c $c -w dom0 -x "virsh list --all"
ams103504exdd003.ams3xx3xx0221qf.adminams1.oraclevcn.com
 Id   Name                                          State
----------------------------------------------------------
 1    odsa-0lwgz1.customersubnet1.cvcn.oraclevcn.com   running

##########################################################################
ams103504exdd004.ams3xx3xx0221qf.adminams1.oraclevcn.com
 Id   Name                                          State
----------------------------------------------------------
 1    odsa-0lwgz2.customersubnet1.cvcn.oraclevcn.com   running

##########################################################################
```

If Xen: run this command:

ecraEXATool.sh execcmd -c $c -w dom0 -x 'uptime ; xm list'

Step 4: Once VM is up verfiy console login prompt whether VM's are fully up or not using ops_console.sh script

Command: **/opt/exacloud/vmconsole/scripts/ops_console.sh odsa-0lwgz1.customersubnet1.cvcn.oraclevcn.com**

Example:

			[root@ams103504exdd003 ~]# /opt/exacloud/vmconsole/scripts/ops_console.sh odsa-0lwgz1.customersubnet1.cvcn.oraclevcn.com vm console script - Version: 1.3 WARNING: You are using Serial Console on customer's behalf. Customer should allow explicit this access as customer can use and repair their VMs themselves with Serial Console feature! odsa-0lwgz1 login: [root@ams103504exdd003 ~]# date Sat Apr 26 06:13:37 UTC 2025 [root@ams103504exdd003 ~]# We can confirm that VM is fully up if we are able to get the login prompt like above. **Step 5:** **Verify the Hearbeat of cluster using below command:** Command: ecraEXATool.sh execcmd -c $c -w cell -x 'tail -n 200 $CELLTRACE/alert.log \| grep Heartbeat -b1 \|tail -10' Example : Heartbeat with diskmon not found for VM : odsa-0lwgz1 ## Warning: This system is restricted to authorized users for business purposes only. ams103408exdcl06.ams3xx3xx0221qf.adminams1.oraclevcn.com -- [RS] Started Service CELLSRV with pid 101609 2024-12-12T22:57:24.869077+00:00 Heartbeat with diskmon (pid 48041) started on odsa-0lwgz2 -- CELLSRV Server startup complete 2025-02-04T21:45:33.135163+00:00 Heartbeat with diskmon (pid 48041) started on odsa-0lwgz2 -- CELLSRV Server startup complete 2025-04-06T21:47:00.514725+00:00 Heartbeat with diskmon (pid 48041) started on odsa-0lwgz2 ## [oracle@ams1edcsecra1 ~]$ date Sat Apr 26 04:14:23 UTC 2025 [oracle@ams1edcsecra1 ~]$ **Step 6: Verify the DCS ping from oneview, if DCS ping is not working then we have verify the VM is fully up or not.** **DCS ping is working fine:** 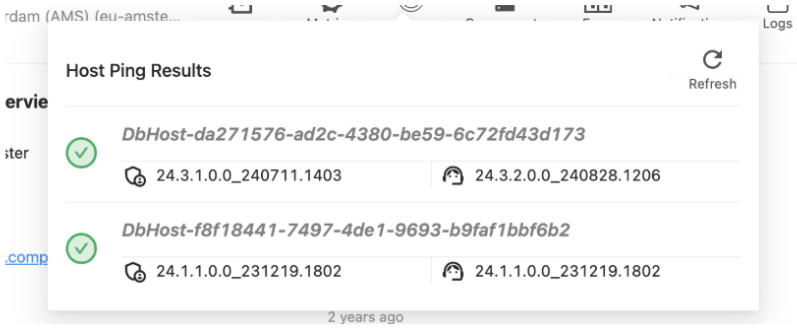 **Step 7: Run the health check script for cluster level.** **Step 8: Please file a EXADATA bug or involve linux team if issue not fixed after tried all the possible ways.** **Step 9: Reschedule:** Please check the cluster health script and reschedule the QMR after 14days. Note: For SMR, please send CN and do not reschedule the MR.	
0x03030027	CRS is disabled on DomU and further crs validations will be skipped.	• Customer is disabled their CRS to auto-start on VM level.	**Sample Ticket: DBAASOPS-369690** • We have to check the ERROR code from Exacloud **Step: 1** Login ECRA server: Check the patch operation c=<interclustername> ecraDBTool.sh showops -c $c	Exadata-3h:

step 2

```
Example:
 c=gru103505exd-d0-03-04-cl-04-06-clu01
 [oracle@gru1edcsecra2 ~]$ ecraDBTool.sh showops -c $c

DBaaS Control Plane Operations :
================================

Exacloud Operations for cluster 'gru103505exd-d0-03-04-cl-04-06-clu01':
=======================================================================
  gru103505exd-d0-03-04-cl-04-06-clu01   e93edb0e-becf-11ef-b41b-
020017009df3   Done   2024-12-20T12:42:45   cluctrl.
patch_prereq_check            0   True:100:patch_prereq_check_done-dom0
  gru103505exd-d0-03-04-cl-04-06-clu01   14f68a6a-bed2-11ef-b41b-
020017009df3   Done   2024-12-20T12:58:17   cluctrl.
patch_prereq_check            0   True:100:patch_prereq_check_done-cell
  gru103505exd-d0-03-04-cl-04-06-clu01   ac7bc61e-bee3-11ef-b41b-
020017009df3   Done   2024-12-20T15:04:13         cluctrl.
checkcluster            0   000:: No status info available
  gru103505exd-d0-03-04-cl-04-06-clu01   78e105b4-bf45-11ef-b41b-
020017009df3   Done   2024-12-21T02:44:17         cluctrl.
checkcluster            0   000:: No status info available
  gru103505exd-d0-03-04-cl-04-06-clu01   9a5bdf5c-bf45-11ef-b41b-
020017009df3   Done   2024-12-21T02:45:13         cluctrl.
vm_tmpkey_op            0   000:: No status info available
  gru103505exd-d0-03-04-cl-04-06-clu01   d0053fb8-bf45-11ef-b41b-
020017009df3   Done   2024-12-21T02:46:43         cluctrl.
checkcluster            0   000:: No status info available
  gru103505exd-d0-03-04-cl-04-06-clu01   f150e2ee-bf45-11ef-b41b-
020017009df3   Done   2024-12-21T02:47:39                cluctrl.
patch   0x03030027   True:100:patch_done-dom0
  gru103505exd-d0-03-04-cl-04-06-clu01   89b1226a-bf46-11ef-b41b-
020017009df3   Done   2024-12-21T02:51:55         cluctrl.
vm_tmpkey_op            0   000:: No status info available

[oracle@gru1edcsecra2 ~]$
```

Step 2: Check the logs from workflow uuid and identify the ERROR like below.

Command: ecraDBTool.sh showops -c $c -u f150e2ee-bf45-11ef-b41b-020017009df3

step 3

```
Example:
[oracle@gru1edcsecra2 ~]$ ecraDBTool.sh showops -c $c -u f150e2ee-bf45-11ef-
b41b-020017009df3

ECRA WorkFlow UUID (WF_UUID) : abfb9c1f-64e4-4948-ad91-60b6c82672f4

Exacloud Operation :'f150e2ee-bf45-11ef-b41b-020017009df3'
==========================================================
gru103505exd-d0-03-04-cl-04-06-clu01    Done    2024-12-21T02:47:
39    Done    2024-12-21T02:49:05    cluctrl.patch    0x03030027    True:100:
patch_done-dom0

OEDA logs available in '/u01/app/oracle/admin/exacloud/oeda/requests.bak
//*f150e2ee-bf45-11ef-b41b-020017009df3/log/*'
=====================================================================
-rw-r--r-- 1 oracle oinstall    102 Dec 21 02:47 /u01/app/oracle/admin
/exacloud/oeda/requests.bak//0000-0000-0000-0000_f150e2ee-bf45-11ef-b41b-
020017009df3/log/log_22237.out
-rw-r--r-- 1 oracle oinstall    102 Dec 21 02:47 /u01/app/oracle/admin
/exacloud/oeda/requests.bak//0000-0000-0000-0000_f150e2ee-bf45-11ef-b41b-
020017009df3/log/log_22283.out
-rw-r--r-- 1 oracle oinstall    102 Dec 21 02:47 /u01/app/oracle/admin
/exacloud/oeda/requests.bak//0000-0000-0000-0000_f150e2ee-bf45-11ef-b41b-
020017009df3/log/log_22321.out
-rw-r--r-- 1 oracle oinstall 160938 Dec 21 02:47 /u01/app/oracle/admin
/exacloud/oeda/requests.bak//0000-0000-0000-0000_f150e2ee-bf45-11ef-b41b-
020017009df3/log/oedacli.out
-rw-r--r-- 1 oracle oinstall      0 Dec 21 02:47 /u01/app/oracle/admin
/exacloud/oeda/requests.bak//0000-0000-0000-0000_f150e2ee-bf45-11ef-b41b-
020017009df3/log/log_22470.out
-rw-r--r-- 1 oracle oinstall   3633 Dec 21 02:47 /u01/app/oracle/admin
/exacloud/oeda/requests.bak//0000-0000-0000-0000_f150e2ee-bf45-11ef-b41b-
020017009df3/log/log_22496.out

/u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-
0000_f150e2ee-bf45-11ef-b41b-020017009df3/log/patchmgr_logs:
total 0

Exacloud workflow log files for operation uuid='f150e2ee-bf45-11ef-b41b-
020017009df3'
=====================================================================
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-
0000-0000-000000000000/f150e2ee-bf45-11ef-b41b-020017009df3_cluctrl.
patch_dom0.err
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-
0000-0000-000000000000/f150e2ee-bf45-11ef-b41b-020017009df3_cluctrl.
patch_dom0.log
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-
0000-0000-000000000000/f150e2ee-bf45-11ef-b41b-020017009df3_cluctrl.
patch_dom0.trc
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-
0000-0000-000000000000/f150e2ee-bf45-11ef-b41b-020017009df3_cluctrl.
patch_dom0.xml
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/f150e2ee-bf45-
11ef-b41b-020017009df3_infrapatch_patch_time_stats.log

[oracle@gru1edcsecra2 ~]$
```

grep the ERROR from exacloud logfiles:

Command:

```
oracle@ams1edcsecra1 ~]$grep -i error /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/f150e2ee-bf45-11ef-b41b-020017009df3_cluctrl.patch_dom0.log
```

Example:

step 3

```
oracle@ams1edcsecra1 ~]$ grep -i error /u01/app/oracle/admin/exacloud/log
/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/f150e2ee-
bf45-11ef-b41b-020017009df3_cluctrl.patch_dom0.log
2024-12-21 02:49:01,446 - dfltlog - WARNING - 35696 - ebCluPatchHealthCheck -
crsctl config output:
 ['CRS-4621: Oracle High Availability Services autostart is disabled.\n']
2024-12-21 02:49:01,457 - dfltlog - WARNING - 35696 - ebCluPatchHealthCheck -
Auto startup of CRS is disabled on gru103505exddu0301.gru1xx3xx0151qf.
admingru1.oraclevcn.com, CRS check and startup will be skipped.
2024-12-21 02:49:01,833 - dfltlog - WARNING - 35696 - ebCluPatchHealthCheck -
crsctl config output:
 ['CRS-4621: Oracle High Availability Services autostart is disabled.\n']
2024-12-21 02:49:01,845 - dfltlog - WARNING - 35696 - ebCluPatchHealthCheck -
Auto startup of CRS is disabled on gru103505exddu0401.gru1xx3xx0151qf.
admingru1.oraclevcn.com, CRS check and startup will be skipped.
2024-12-21 02:49:01,855 - dfltlog - INFO - 35696 - Dom0Handler - List of VMs
where CRS auto startup is currently enabled : [].
2024-12-21 02:49:01,865 - dfltlog - INFO - 35696 - Dom0Handler - CRS auto
startup must be enabled on atleast 2 VMs for the CRS validations to be
performed.
```

Also we can see the exception details from CP workflow:

Exception detail
#Z#Z#:Last seen at time: 2024-12-21T02:51:50.424Z step: DOM0_CHECK_PATCH_STATUS: SourceComponent:FPE ExceptionType: AutoFailWorkflowException ErrorAction:FAIL_AND_SHOW ErrorCode:0x03030027 ErrorMessage:Failed to complete infra patching operation. CRS is disabled on DomU and further crs validations will be skipped. CRS is disabled on DomU and further crs validations will be skipped#Z#Z#:

Step 3: Check the uptime of DOM0 server and validate imageinfo status and the VM's are up on on the cluster level:

Login DOM0 on problematic node:
Run below commands:
uptime;imageinfo;

Example:

example

```
[root@ams103504exdd003 ~]# uptime
 06:10:57 up 264 days, 17 min,  1 user,  load average: 0.33, 0.46, 0.46
[root@ams103504exdd003 ~]#
[root@ams103504exdd003 ~]# imageinfo

Kernel version: 5.4.17-2136.330.7.5.el8uek.x86_64 #3 SMP Mon May 27 12:51:19
PDT 2024 x86_64
Uptrack kernel version: 5.4.17-2136.333.5.el8uek.x86_64 #3 SMP Thu Jun 20 01:
03:41 PDT 2024 x86_64
Image kernel version: 5.4.17-2136.330.7.5.el8uek
Image version: 24.1.2.0.0.240727
Image activated: 2024-08-05 05:56:29 +0000
Image status: success
Exadata software version: 24.1.2.0.0.240727
Node type: KVMHOST
System partition on device: /dev/mapper/VGExaDb-LVDbSys1
```

VM status to check:

Command: ecraEXATool.sh execcmd -c $c -w dom0 -x "virsh list --all"

if KVM :

example

```
Example:

[oracle@gru1edcsecra2 ~]$ ecraEXATool.sh execcmd -c $c -w dom0 -x "virsh list
--all"
gru103505exdd003.gru1xx3xx0151qf.admingru1.oraclevcn.com
 Id   Name                                                        State
----------------------------------------------------------------------
 1    ocspdbmprd02-sx1ct1.snetcli02.vcnexaprod01.oraclevcn.com   running

#######################################################################
gru103505exdd004.gru1xx3xx0151qf.admingru1.oraclevcn.com
 Id   Name                                                        State
----------------------------------------------------------------------
 1    ocspdbmprd02-sx1ct2.snetcli02.vcnexaprod01.oraclevcn.com   running

#######################################################################

[oracle@gru1edcsecra2 ~]$
```

If Xen: run this command:

ecraEXATool.sh execcmd -c $c -w dom0 -x 'uptime ; xm list'

Step 4: Once VM is up verfiy console login prompt whether VM's are fully up or not using ops_console.sh script

Command: /opt/exacloud/vmconsole/scripts/ops_console.sh ocspdbmprd02-sx1ct1.snetcli02.vcnexaprod01.oraclevcn.com

example

```
Example:

[root@ams103504exdd003 ~]# /opt/exacloud/vmconsole/scripts/ops_console.sh
ocspdbmprd02-sx1ct1.snetcli02.vcnexaprod01.oraclevcn.com
vm console script - Version: 1.3
WARNING: You are using Serial Console on customer's behalf. Customer should
allow explicit this access as customer can use and repair their VMs
themselves with Serial Console feature!


ocspdbmprd02-sx1ct1 login:
```

We can confirm that VM is fully up if we are able to get the login prompt like above.

Step 5:

Verify the Hearbeat of cluster using below command:

Command: ecraEXATool.sh execcmd -c $c -w cell -x 'tail -n 200 $CELLTRACE/alert.log | grep Heartbeat -b1 |tail -10'

Example : Heartbeat with diskmon should be fine for all VM's : (output trimmed)

example

```
[oracle@gru1edcsecra2 ~]$ ecraEXATool.sh execcmd -c $c -w cell -x 'tail -n
200 $CELLTRACE/alert.log | grep Heartbeat -b1 |tail -5'
gru103505exdcl04.gru1xx3xx0151qf.admingru1.oraclevcn.com
4500-2024-12-16T04:51:01.541664+00:00
--
6646-Flash Log ENABLED on FL-FD_02_gru103505exdcl04 guid=34ddce6e-89ff-4635-
b7f2-471aa389f609 ( 885387044) size=128MB cdisk=FD_02_gru103505exdcl04
6788:Heartbeat with diskmon (pid 88628) started on ocspdbmprd02-sx1ct1
6854-2024-12-16T04:51:01.645194+00:00
######################################################################
gru103505exdcl05.gru1xx3xx0151qf.admingru1.oraclevcn.com
4482-2024-12-16T09:56:29.011944+00:00
--
6566-PMEM Log PML-PM_01_gru103505exdcl05 guid=ad8bb18a-a46c-404e-bf33-
2f1fa99c967c (2861058484) cdisk=PM_01_gru103505exdcl05 is being recovered
6705:Heartbeat with diskmon (pid 25691) started on ocspdbmprd02-sx1ct2
6771-2024-12-16T09:56:29.159376+00:00
######################################################################
gru103505exdcl06.gru1xx3xx0151qf.admingru1.oraclevcn.com
4655-2024-12-16T07:46:48.204980+00:00
--
6251-Flash Log ENABLED on FL-FD_03_gru103505exdcl06 guid=d68be557-d623-4201-
a582-ec5ce0fa9382 (  22924356) size=128MB cdisk=FD_03_gru103505exdcl06
6393:Heartbeat with diskmon (pid 88628) started on ocspdbmprd02-sx1ct1
6459-2024-12-16T07:46:48.372223+00:00


[oracle@gru1edcsecra2 ~]$
```

Step 6: Verify the DCS ping from oneview, if DCS ping is not working then we have verify the VM is fully up or not.

Step 7: Run the health check script for cluster level.

			DCS ping is working fine: 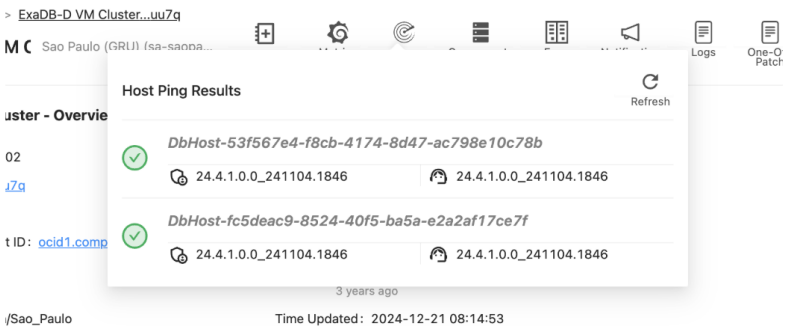 **Step 8: Reschedule:** Please send CN (Exadata 3h)and reschedule the QMR after 14days.	
0x030B0003	Execution of custom plugin script for Guest VM failed. Refer MOS Note 2829056.1 for more details.			
0x03070008	Critical cell services not running	* Cell server not came up after patching * Hardware issue * Software configuration issue * image is not applied properly	Login ECRA server: Check the patch operation c=<interclustername> ecraDBTool.sh showops -c $c	Send 4a after patc failure. send 4b after patching retry

Step 1

We have to check the ERROR code from Exacloud

Login ECRA server:

Check the patch operation
c=<interclustername>
ecraDBTool.sh showops -c $c

Example:
c=cwl1-d2-cl3-fe548446-bf1c-421b-be35-8ecd697c4cc9-clu01

```
[oracle@cwl1edcsecra1 ~]$ ecraDBTool.sh showops -c cwl1-d2-cl3-fe548446-bf1c-421b-be35-8ecd697c4cc9-clu01 -u 0420b22e-1a8f-11f0-aa99-
020017002001

ECRA WorkFlow UUID (WF_UUID) : b490d5df-2e3b-46fd-b66d-5268b0fdc58c

Exacloud Operation :'0420b22e-1a8f-11f0-aa99-020017002001'
=========================================================
cwl1-d2-cl3-fe548446-bf1c-421b-be35-8ecd697c4cc9-clu01    Done    2025-04-16T06:50:00    Done    2025-04-16T06:51:44    cluctrl.
patch    0x03070008    True:100:patch_done-cell

OEDA logs available in '/u01/app/oracle/admin/exacloud/oeda/requests.bak//*0420b22e-1a8f-11f0-aa99-020017002001/log/*'
=====================================================================
-rw-r--r-- 1 oracle oinstall    102 Apr 16 06:50 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_0420b22e-1a8f-11f0-aa99-
020017002001/log/log_1289451.out
-rw-r--r-- 1 oracle oinstall    102 Apr 16 06:50 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_0420b22e-1a8f-11f0-aa99-
020017002001/log/log_1289491.out
-rw-r--r-- 1 oracle oinstall    102 Apr 16 06:50 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_0420b22e-1a8f-11f0-aa99-
020017002001/log/log_1289631.out
-rw-r--r-- 1 oracle oinstall 135967 Apr 16 06:50 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_0420b22e-1a8f-11f0-aa99-
020017002001/log/oedacli.out
-rw-r--r-- 1 oracle oinstall      0 Apr 16 06:50 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_0420b22e-1a8f-11f0-aa99-
020017002001/log/log_1289903.out
-rw-r--r-- 1 oracle oinstall   4939 Apr 16 06:50 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_0420b22e-1a8f-11f0-aa99-
020017002001/log/log_1289937.out
-rw-r--r-- 1 oracle oinstall   4423 Apr 16 06:51 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_0420b22e-1a8f-11f0-aa99-
020017002001/log/0420b22e-1a8f-11f0-aa99-020017002001_exacloud_patch_error.json

/u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_0420b22e-1a8f-11f0-aa99-020017002001/log/patchmgr_logs:
total 0

Exacloud workflow log files for operation uuid='0420b22e-1a8f-11f0-aa99-020017002001'
=====================================================================
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/0420b22e-1a8f-11f0-aa99-
020017002001_cluctrl.patch_cell.err
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/0420b22e-1a8f-11f0-aa99-
020017002001_cluctrl.patch_cell.log
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/0420b22e-1a8f-11f0-aa99-
020017002001_cluctrl.patch_cell.trc
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/0420b22e-1a8f-11f0-aa99-
020017002001_cluctrl.patch_cell.xml
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/0420b22e-1a8f-11f0-aa99-020017002001_infrapatch_patch_time_stats.log

[oracle@cwl1edcsecra1 ~]$
```

Step 2

ERROR:

```
[oracle@cwl1edcsecra1 ~]$grep -i error /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000
/0420b22e-1a8f-11f0-aa99-020017002001_cluctrl.patch_cell.log

    "error_code": "0x03070008",
     "error_message": "Critical cell services not running.",
     "error_detail": "Cell services seems to be not up on cell cwl100714exdcl01.cwl1xx1xx0061qf.admincwl1.oraclevcn.com. Please verify the cell service
functionality.",
     "error_action": "FAIL_DONTSHOW_PAGE_ONCALL",
     "node_progressing_status": {
```

Step 3

```
[root@cwl100714exdcl01 ~]# uptime
 11:02:56 up  4:57,  1 user,  load average: 3.42, 3.74, 4.12
[root@cwl100714exdcl01 ~]# cellcli -e list cell attributes cellsrvStatus,msStatus,rsStatus detail
     cellsrvStatus:          running
     msStatus:               running
     rsStatus:               running
[root@cwl100714exdcl01 ~]# cellcli -e list alerthistory | grep -v AIDE
     29_1     2025-01-09T13:26:39+00:00     warning     "Failed to create LUN on Data hard disk.  Status        :
WDC  Manufacturer  :     W7214A520ORA014T  Model Number  : SAS  Size          : 014TB  Serial Number : 2206NHHBVG  Firmware      : A420  Slot
Number   : 10"
     29_2     2025-01-09T13:30:41+00:00     clear       "Data hard disk status changed to normal.  Status        : NORMAL  Manufacturer  : WDC  Model
Number  :     W7214A520ORA014T  Size          : 14TB  Serial Number : 2206NHHBVG  Firmware      : A420  Slot Number   : 10  Cell Disk     : Not
configured  Grid Disk     : Not configured"
     30_1     2025-01-09T13:26:39+00:00     warning     "Failed to create LUN on Data hard disk.  Status        :
WDC  Manufacturer  :     W7214A520ORA014T  Model Number  : SAS  Size          : 014TB  Serial Number : 2206NHPUDG  Firmware      : A420  Slot
Number   : 11"
     30_2     2025-01-09T13:30:46+00:00     clear       "Data hard disk status changed to normal.  Status        : NORMAL  Manufacturer  : WDC  Model
Number  :     W7214A520ORA014T  Size          : 14TB  Serial Number : 2206NHPUDG  Firmware      : A420  Slot Number   : 11  Cell Disk     : Not
configured  Grid Disk     : Not configured"
     32       2025-02-16T19:05:21+00:00     critical    "RS-7445 [CELLSRV failed heartbeat] [It will be restarted] [] [] [] [] [] [] [] [] []"
     34_1     2025-02-26T08:17:08+00:00     warning     " Network interfaces [re0pf, stre0] are down. "
     34_2     2025-02-26T08:31:08+00:00     clear       " Network interfaces are all up. "
     36_1     2025-03-26T02:06:00+00:00     critical    "A fault occurred.  Fault class    : fault.chassis.power.ext-fail  Fault message  : http://support.oracle.com
/msg/SPX86A-8003-EL"
     36_2     2025-03-26T03:41:32+00:00     clear       "A fault has been cleared.  Fault class    : fault.chassis.power.ext-fail"
     37_1     2025-03-27T09:59:27+00:00     critical    "A fault occurred.  Fault class    : fault.chassis.power.ext-fail  Fault message  : http://support.oracle.com
/msg/SPX86A-8003-EL"
     37_2     2025-03-27T13:57:38+00:00     clear       "A fault has been cleared.  Fault class    : fault.chassis.power.ext-fail"
     38_1     2025-04-14T09:24:33+00:00     critical    "A fault occurred.  Fault class    : fault.chassis.power.ext-fail  Fault message  : http://support.oracle.com
/msg/SPX86A-8003-EL"
     38_2     2025-04-14T12:12:21+00:00     clear       "A fault has been cleared.  Fault class    : fault.chassis.power.ext-fail"
[root@cwl100714exdcl01 ~]# date
Wed Apr 16 11:03:25 UTC 2025
[root@cwl100714exdcl01 ~]# uptime
 11:03:27 up  4:58,  1 user,  load average: 4.61, 3.95, 4.18
[root@cwl100714exdcl01 ~]#
```

Step 4

Once services are up and running and check the status of applied patch using below commands:
uptime;imageinfo;imagehistory | tail
cellnode level:
cellcli -e list cell detail

FromECRA to check cluster level:

ecraEXATool.sh execcmd -c cwl1-d2-cl3-fe548446-bf1c-421b-be35-8ecd697c4cc9-clu01 -w cell -x 'cellcli -e list cell attributes rsStatus, msStatus, cellsrvStatus detail'

Validate the hardware or software configuration.
cellcli -e alter cell validate configuration;

check the version from cluster level:

getversion gru102903exd-d0-01-02-cl-01-03-clu01

Step 5

Once fixed the issue atcivate the griddisks
cellcli -e list physicaldisk;
cellcli -e list griddisk;
cellcli -e alter griddisk all active;
Griddisks sync is completed then retry the MR.
cellcli -e list griddisk attributes name, asmModeStatus,asmdeactivationoutcome,size;

Retry the MR using oneview maintainance run page.

0x03030024	Invalid CRS HOME on DomU.		**Check the ERROR:** We have to check the ERROR code from Exacloud and oneview exception: **Exception from oneview:** "#Z#Z#:Last seen at time: 2025-04-26T06:41:16.213128436Z step: DOM0_CHECK_PATCH_STATUS: SourceComponent:FPE ExceptionType: AutoFailWorkflowException ErrorAction:FAIL_DONTSHOW_PAGE_ONCALL ErrorCode:0x03030024 ErrorMessage:Failed to complete infra patching operation. Invalid CRS HOME on DomU. Invalid CRS HOME on emdb-q77kl4.data3.vcn.oraclevcn.com. ExaCloud master request uuid: c943d122-2268-11f0-a563-00001702bb2e. child request uuid: cab65bce-2268-11f0-a563-00001702bb2e. Check ExaCloud logs: $EXACLOUD_HOME/log/threads/0000-0000-0000-0000/*<master_or_child_uuid>*#Z#Z#:" **Verify the ERROR from exacloud end:**

- Check if the CRS software is installed correctly in the specified CRS_HOME directory. Look for the presence of essential CRS files and directories, such as configuration files, libraries, and executables.

Step 1

Login ECRA server:

Check the patch operation
c=<interclustername>
ecraDBTool.sh showops -c $c

Example:
c=phx300816exd-d0-05-08-cl-07-12-clu01

Ecra logs

```
{noformat}
[oracle@phx3edcsecra1 ~]$ ecraDBTool.sh showops -c phx300816exd-d0-05-08-cl-07-12-clu01
NOTE :
You are running ecraDBTool.sh from an active-active ECRA installation

DBaaS Control Plane Operations :
================================

Exacloud Operations for cluster 'phx300816exd-d0-05-08-cl-07-12-clu01':
========================================================================
  phx300816exd-d0-05-08-cl-07-12-clu01   7f376232-1e09-11f0-9506-00001702bb2e   Done   2025-04-20T17:04:18         cluctrl.
checkcluster           0   000:: No status info available
  phx300816exd-d0-05-08-cl-07-12-clu01   d3d0ddac-1e7a-11f0-9506-00001702bb2e   Done   2025-04-21T06:35:33   cluctrl.
patch_prereq_check           0   True:100:patch_prereq_check_done-dom0
  phx300816exd-d0-05-08-cl-07-12-clu01   e4c74498-1e7f-11f0-9506-00001702bb2e   Done   2025-04-21T07:11:49   cluctrl.
patch_prereq_check           0   True:100:patch_prereq_check_done-cell
  phx300816exd-d0-05-08-cl-07-12-clu01   9d000eb2-1ed2-11f0-9506-00001702bb2e   Done   2025-04-21T17:03:57         cluctrl.
checkcluster           0   000:: No status info available
  phx300816exd-d0-05-08-cl-07-12-clu01   7fdf55f6-2268-11f0-a563-00001702bb2e   Done   2025-04-26T06:34:26         cluctrl.
vm_tmpkey_op           0   000:: No status info available
  phx300816exd-d0-05-08-cl-07-12-clu01   bcc74dca-2268-11f0-a563-00001702bb2e   Done   2025-04-26T06:36:08         cluctrl.
checkcluster           0   000:: No status info available
  phx300816exd-d0-05-08-cl-07-12-clu01   cab65bce-2268-11f0-a563-00001702bb2e   Done   2025-04-26T06:36:32                cluctrl.
patch   0x03030024   True:100:patch_done-dom0
  phx300816exd-d0-05-08-cl-07-12-clu01   75888ae0-2269-11f0-a563-00001702bb2e   Done   2025-04-26T06:41:18         cluctrl.
vm_tmpkey_op           0   000:: No status info available

[oracle@phx3edcsecra1 ~]$
```

Step 2

```
[oracle@phx3edcsecra1 ~]$ ecraDBTool.sh showops -u cab65bce-2268-11f0-a563-00001702bb2e
NOTE :
You are running ecraDBTool.sh from an active-active ECRA installation

ECRA WorkFlow UUID (WF_UUID) : 07b36407-86fb-441c-800b-f2a7a1d54873

Exacloud Operation :'cab65bce-2268-11f0-a563-00001702bb2e'
==========================================================
phx300816exd-d0-05-08-cl-07-12-clu01    Done    2025-04-26T06:36:32    Done    2025-04-26T06:38:17    cluctrl.patch    0x03030024    True:100:
patch_done-dom0

OEDA logs available in '/u01/app/oracle/admin/exacloud/oeda/requests.bak//*cab65bce-2268-11f0-a563-00001702bb2e/log/*'
===================================================================
-rw-r--r-- 1 oracle oinstall    0 Apr 26 06:36 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_cab65bce-2268-11f0-a563-
00001702bb2e/log/log_1970943.out
-rw-r--r-- 1 oracle oinstall 4855 Apr 26 06:36 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_cab65bce-2268-11f0-a563-
00001702bb2e/log/log_1971056.out
-rw-r--r-- 1 oracle oinstall 2366 Apr 26 06:38 /u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_cab65bce-2268-11f0-a563-
00001702bb2e/log/cab65bce-2268-11f0-a563-00001702bb2e_exacloud_patch_error.json

/u01/app/oracle/admin/exacloud/oeda/requests.bak//0000-0000-0000-0000_cab65bce-2268-11f0-a563-00001702bb2e/log/patchmgr_logs:
total 0

Exacloud workflow log files for operation uuid='cab65bce-2268-11f0-a563-00001702bb2e'
======================================================================
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/cab65bce-2268-11f0-a563-
00001702bb2e_cluctrl.patch_dom0.err
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/cab65bce-2268-11f0-a563-
00001702bb2e_cluctrl.patch_dom0.log
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/cab65bce-2268-11f0-a563-
00001702bb2e_cluctrl.patch_dom0.trc
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/cab65bce-2268-11f0-a563-
00001702bb2e_cluctrl.patch_dom0.xml
/u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/cab65bce-2268-11f0-a563-00001702bb2e_infrapatch_patch_time_stats.log

[oracle@phx3edcsecra1 ~]$
```

Step 3

ERROR:

[oracle@phx3edcsecra1 ~]$grep -i error /u01/app/oracle/admin/exacloud/log/threads/0000-0000-0000-0000/00000000-0000-0000-0000-000000000000/cab65bce-2268-11f0-a563-00001702bb2e_cluctrl.patch_dom0.log

Exacloud logs error

```
 ],
      "operation_type": "patch",
      "operation_style": "rolling",
      "target_version": "24.1.8.0.0.250208",
      "cluster_less": "no",
      "exaunit_id": "2300523",
      "exa_ocid": "ocid1.cloudexadatainfrastructure.oc1.phx.anyhqljtlqc6n6yapjmfnx4jzvvtua7z5dlwsb5xoaude2emudny4s2bbhcq",
      "exa_splice": "no",
      "topic": "",
      "error_code": "0x03030024",
      "error_message": "Invalid CRS HOME on DomU.",
      "error_detail": "Invalid CRS HOME on emdb-q77kl4.data3.vcn.oraclevcn.com",
      "error_action": "FAIL_DONTSHOW_PAGE_ONCALL",
      "node_progressing_status": {},
      "child_request_uuid": "cab65bce-2268-11f0-a563-00001702bb2e",
      "master_request_uuid": "c943d122-2268-11f0-a563-00001702bb2e"
   }
}
2025-04-26 06:38:11,248 - dfltlog - INFO - 2368727 - Dom0Handler -
```

Step 4

Check all VM's are up and running:

```
{noformat}
[oracle@phx3edcsecra1 ~]$ ecraEXATool.sh execcmd -c phx300816exd-d0-05-08-cl-07-12-clu01 -w dom0 -x "uptime; imageinfo -version; imageinfo -status; imageinfo -activated;xm list"
phx300816exdd005.exacab3.adminphx3.oraclevcn.com
 06:56:35 up 182 days,  2:01,  0 users,  load average: 0.63, 0.62, 0.68
24.1.2.0.0.241002
success
2024-10-26 05:01:01 +0000
Name                                      ID   Mem VCPUs      State   Time(s)
Domain-0                                   0  9162     4     r----- 10817561.1
emdb-q77kl1.data3.vcn.oraclevcn.com        1 737283    22     -b---- 5270910.5
##########################################################################
phx300816exdd006.exacab3.adminphx3.oraclevcn.com
 06:56:42 up 182 days, 21 min,  0 users,  load average: 0.62, 0.78, 0.84
24.1.2.0.0.241002
success
2024-10-26 06:40:57 +0000
Name                                      ID   Mem VCPUs      State   Time(s)
Domain-0                                   0  9144     4     r----- 12633064.8
emdb-q77kl2.data3.vcn.oraclevcn.com        1 737283    22     r----- 43091251.7
##########################################################################
phx300816exdd007.exacab3.adminphx3.oraclevcn.com
 06:56:51 up 181 days, 23:00,  0 users,  load average: 0.66, 0.75, 0.79
24.1.2.0.0.241002
success
2024-10-26 08:02:20 +0000
Name                                      ID   Mem VCPUs      State   Time(s)
Domain-0                                   0  9179     4     r----- 10418992.1
emdb-q77kl3.data3.vcn.oraclevcn.com        1 737283    22     -b---- 2933367.4
##########################################################################
phx300816exdd008.exacab3.adminphx3.oraclevcn.com
 06:56:58 up 181 days, 21:22,  0 users,  load average: 0.93, 0.89, 0.92
24.1.2.0.0.241002
success
2024-10-26 09:40:33 +0000
Name                                      ID   Mem VCPUs      State   Time(s)
Domain-0                                   0  9150     4     r----- 12507957.1
emdb-q77kl4.data3.vcn.oraclevcn.com        1 737283    22     r----- 58402482.5
##########################################################################

[oracle@phx3edcsecra1 ~]$
```

Step 5

Check the console output:

h3. Console output
{noformat}
[root@phx3edcsmgmt1 ~]# ssh phx300816exdd006.exacab3.adminphx3.oraclevcn.com
Last login: Sat Apr 26 06:56:42 UTC 2025 from phx3edcsecra1.ecramgmt.adminphx3.oraclevcn.com on ssh
Last login: Sat Apr 26 06:57:52 2025 from phx3edcsmgmt1.mgmt.adminphx3.oraclevcn.com
[root@phx300816exdd006 ~]# uptime
 06:57:56 up 182 days, 22 min, 1 user, load average: 0.81, 0.80, 0.84
[root@phx300816exdd006 ~]# xm list
Name ID Mem VCPUs State Time(s)
Domain-0 0 9144 4 r----- 12633110.0
emdb-q77kl2.data3.vcn.oraclevcn.com 1 737283 22 r----- 43091325.7
[root@phx300816exdd006 ~]# /opt/exacloud/vmconsole/scripts/ops_console.sh emdb-q77kl2.data3.vcn.oraclevcn.com
vm console script - Version: 1.3
WARNING: You are using Serial Console on customer's behalf. Customer should allow explicit this access as customer can use and repair their VMs themselves with Serial Console feature!

emdb-q77kl2.data3.vcn.oraclevcn.com login: [root@phx300816exdd006 ~]#
[root@phx300816exdd006 ~]#
[root@phx300816exdd006 ~]# imageinfo

Kernel version: 4.14.35-2047.532.3.1.el7uek.x86_64 #2 SMP Tue Jan 2 13:26:56 PST 2024 x86_64
Uptrack kernel version: 4.14.35-2047.540.4.1.el7uek.x86_64 #2 SMP Thu Sep 5 12:06:13 PDT 2024 x86_64
Image kernel version: 4.14.35-2047.532.3.1.el7uek
Image version: 24.1.2.0.0.241002
Image activated: 2024-10-26 06:40:57 +0000
Image status: success
Exadata software version: 24.1.2.0.0.241002
Node type: DOM0
System partition on device: /dev/mapper/VGExaDb-LVDbSys3

[root@phx300816exdd006 ~]#

Step 6

Verify the DCS ping:

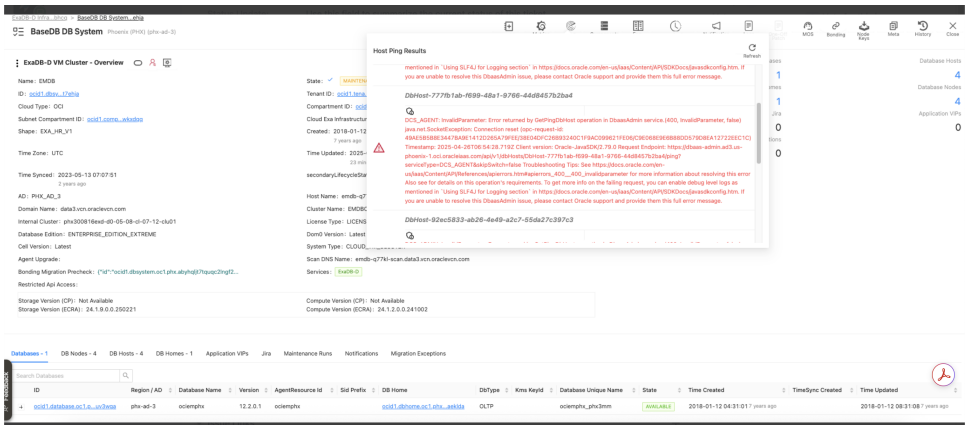

ecraEXATool.sh execcmd -r $r -w all -x 'imageinfo -ver; imageinfo -status; imageinfo -activated;uptime'

check the version from cluster level:

getversion phx300816exd-d0-05-08-cl-07-12-clu01

[oracle@gru1edcsecra2 ~]$

Step 7: Verify the DCS ping from oneview, if DCS ping is not working then we have verify the VM is fully up or not.

Step 8:

Run the health check script for cluster level.

Step 9: Reschedule:

Please check the cluster health script and reschedule the QMR after 14days.