

Connectivity Manual

Contents

0.1 Revision History	2
1. Overview	3
2. Connectivity Methods	3
2.1 Local Cross-Connect	3
2.2 Telco Circuit	3
2.3 Extranet Providers	3
2.4 VPN/Cloud	4
3. Latency Equalization	4
4. Network Protocols	5
5. Multicast Market Data	6
5.1 Multicast Service for Market Data	6
5.2 TCP Market Data Rewind	7
5.3 SILO Snapshot Service	8
6. Network Access Caveats	9

0.1 Revision History

Date	Version	Notes
10/1/2025	V 1.0	Initial version
2/24/2026	V 1.1	Add multicast market data information
6/16/2026	V 1.2	Update feed identifiers and notes on relation to stream ID and matching engine ID values
8/25/2026	V 1.3	Update title Add TCP market data rewind information Update latency equalization distances Clarify use of short/long equalization pathing
9/1/2026	V 1.4	Add SILO Snapshot Service information

1. Overview

The Texas Stock Exchange LLC (TXSE) operates from Equinix NY6 in Secaucus, NJ as its primary facility. TXSE's Disaster Recovery (DR) facility is located in Equinix DA11 in Dallas, TX. Firms can also connect to the to the DR facility through a Point of Presence (POP) at 350 E. Cermak in Chicago, IL . Connectivity via POP is not available to the primary facility.

Connectivity to both production and DR environments is available through cross-connects, circuits, or approved extranet providers. Cross-connects are limited to customers within the respective Equinix campuses, must terminate in a customer cage and cannot connect directly to rooftop infrastructure.

2. Connectivity Methods

Firms may connect to TXSE via local cross-connect, telco circuit, or extranet providers.

2.1 Local Cross-Connect

Cross-connects are only available for firms with a presence on the Equinix campuses (local firms) in Secaucus, NJ (Primary) or Dallas, TX (DR). All cross-connects are 10Gb Ethernet via single mode fiber (SMF). Both Long Range (LR) and Extended Range (ER) optics are supported. Firms requiring ER optics will have their TXSE side optics purchased on their behalf with charges passed through to the firm.

TXSE recommends redundant physical port connectivity to both primary and DR data centers.

2.2 Telco Circuit

TXSE supports telco carrier circuit connections from carriers with a presence on the Equinix campuses noted above. Circuits will be cross-connected from the local carrier facility to TXSE via the same process used by local firms. Firms using circuits will therefore experience higher latency than firms connected via local cross-connect.

2.3 Extranet Providers

TXSE also supports approved extranet providers.¹ Extranet providers seeking approval should contact noc@txse.com. As with telco circuit connections, extranet providers will be cross-connected from the local carrier facility to TXSE via the same process used by local firms. Firms using extranet providers will therefore experience higher latency than firms connected via local cross-connect.


¹ Extranet providers can be found here: <https://www.txse.com/trading#connectivity>

2.4 VPN/Cloud

Virtual Private Network (VPN) and/or Cloud-based connectivity is available exclusively for test/certification traffic. Firms may not access production or DR environments via VPN or cloud.

3. Latency Equalization

TXSE has committed to latency equalization within its Primary Facility to ensure all firms have equal access, implementing equal-length fiber optic cables between TXSE's location in NY6 and firms connected to the Exchange through NY4, NY5 and NY6. Latency equalization is not used in the DR facility.

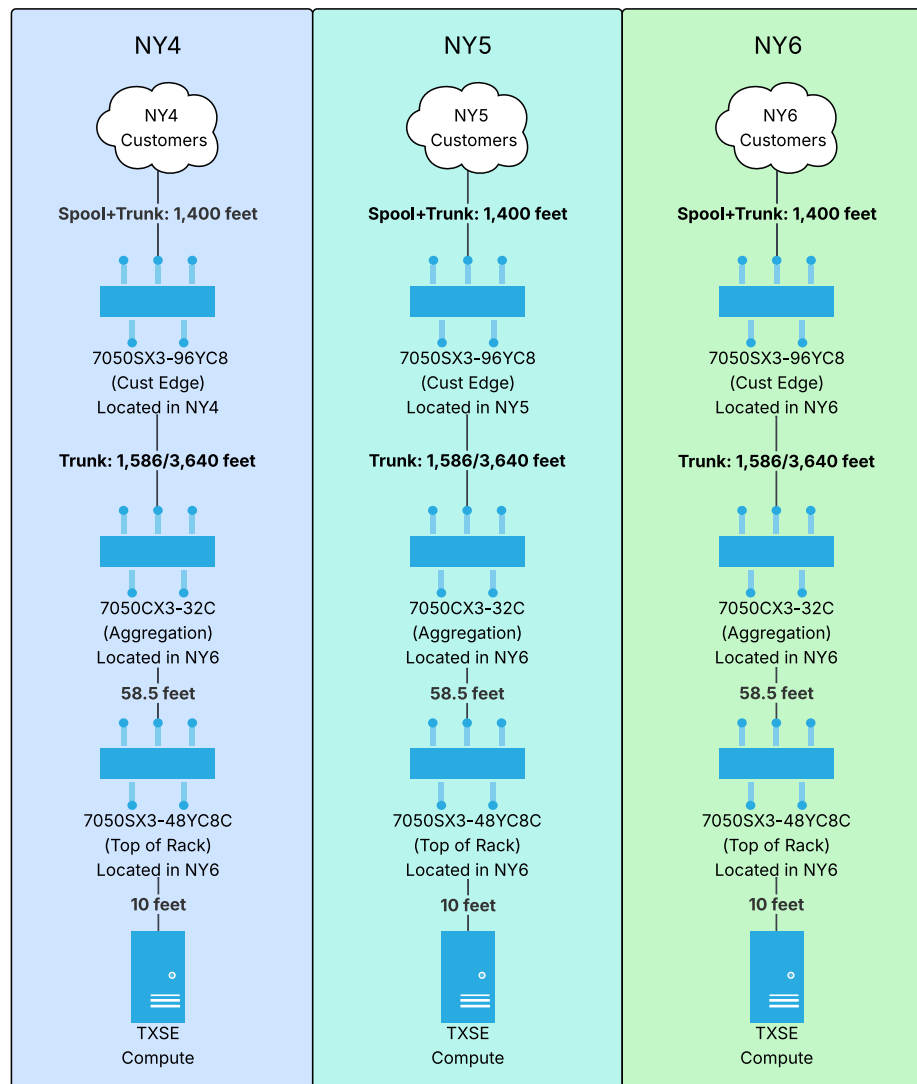

Equalization normally uses the shorter 1,586' trunk; if a partial or full failure of this path occurs, traffic will automatically switch to the longer 3,640' trunk.

4. Network Protocols

- **Layer 3 (IP) protocol:** TXSE uses IPv4 as its exclusive layer 3 transport protocol. IPv6 is not supported. To avoid potential address conflicts, it is recommended that firms use public/registered address space to communicate with TXSE systems. Private address space will be assigned to members upon request, but members may not specify a particular private range. Members are responsible for mitigating any conflicts between their private address space and the TXSE-assigned private space.
 - **Unicast routing protocol:** TXSE uses Border Gateway Protocol (BGP) as its exclusive dynamic unicast routing protocol. Static routing is available for members who are unable to use BGP, but this is not recommended. In the event of routing/failover issues involving static routes, TXSE will not compromise the reliability of its network by reconfiguring static customer routing intra-day.

To avoid potential Autonomous System Number (ASN) conflicts, it is recommended that members use public/registered ASNs. Private ASNs will be assigned to members upon request, but members may not specify a particular ASN. Members are responsible for mitigating any conflicts between their private ASNs and the TXSE-assigned private ASN.
 - **Multicast routing protocol:** TXSE uses PIM-SM as its exclusive dynamic multicast routing protocol. Static IGMP group configurations are available for members who are unable to use PIM-SM, but this is not recommended. In the event of unwanted or missing multicast traffic due to static IGMP, TXSE will not compromise the reliability of its network by reconfiguring static IGMP groups intraday.
-

5. Multicast Market Data

Note: Feed identifiers are logical multicast feed designations used for connectivity purposes only and are independent of internal `matchingEngineId` and `streamId` values.

Clients should obtain `matchingEngineId` and `streamId` assignments from the daily reference data and should not assume any relationship between feed numbers and engine or stream identifiers.

5.1 Multicast Service for Market Data

Production				
	A Side (233.118.66.8/29)		B Side (233.118.66.16/29)	
	RP: 162.120.42.224		RP: 162.120.42.225	
	Sources: 162.120.42.128/28		Sources: 162.120.42.144/28	
Unit ID	Group	Port	Group	Port
BALE	233.118.66.8	18008	233.118.66.16	18016
FEED 1	233.118.66.9	18009	233.118.66.17	18017
FEED 2	233.118.66.10	18010	233.118.66.18	18018
FEED 3	233.118.66.11	18011	233.118.66.19	18019
FEED 4	233.118.66.12	18012	233.118.66.20	18020
FEED 5	233.118.66.13	18013	233.118.66.21	18021

Disaster Recovery				
	C Side (233.118.66.24/29)		D Side (233.118.66.32/29)	
	RP: 162.120.42.232		RP: 162.120.42.233	
	Sources: 162.120.42.160/28		Sources: 162.120.42.176/28	
Unit ID	Group	Port	Group	Port
BALE	233.118.66.24	18024	233.118.66.32	18032
FEED 1	233.118.66.25	18025	233.118.66.33	18033
FEED 2	233.118.66.26	18026	233.118.66.34	18034
FEED 3	233.118.66.27	18027	233.118.66.35	18035
FEED 4	233.118.66.28	18028	233.118.66.36	18036
FEED 5	233.118.66.29	18029	233.118.66.37	18037

User Acceptance Testing				
	A Side (233.118.66.40/29)		B Side (233.118.66.48/29)	
	RP: 162.120.42.232		RP: 162.120.42.233	
	Sources: 162.120.43.22/32		Sources: 162.120.43.30/32	
Unit ID	Group	Port	Group	Port
BALE	233.118.66.40	18040	233.118.66.48	18048
FEED 1	233.118.66.41	18041	233.118.66.49	18049
FEED 2	233.118.66.42	18042	233.118.66.50	18050
FEED 3	233.118.66.43	18043	233.118.66.51	18051
FEED 4	233.118.66.44	18044	233.118.66.52	18052
FEED 5	233.118.66.45	18045	233.118.66.53	18053

5.2 TCP Market Data Rewind

Production				
A Side				
Unit ID	User	Token	IP	Port
BALE	BALEEXTA	BALEEXTA	162.120.42.132	18199
FEED 1	FEEDEX1A	FEEDEX1A	162.120.42.132	18111
FEED 2	FEEDEX2A	FEEDEX2A	162.120.42.132	18112
FEED 3	FEEDEX3A	FEEDEX3A	162.120.42.132	18113
FEED 4	FEEDEX4A	FEEDEX4A	162.120.42.132	18114
FEED 5	FEEDEX5A	FEEDEX5A	162.120.42.132	18115
B Side				
Unit ID	User	Token	IP	Port
BALE	BALEEXTB	BALEEXTB	162.120.42.151	18199
FEED 1	FEEDEX1B	FEEDEX1B	162.120.42.151	18111
FEED 2	FEEDEX2B	FEEDEX2B	162.120.42.151	18112
FEED 3	FEEDEX3B	FEEDEX3B	162.120.42.151	18113
FEED 4	FEEDEX4B	FEEDEX4B	162.120.42.151	18114
FEED 5	FEEDEX5B	FEEDEX5B	162.120.42.151	18115

Disaster Recovery				
A Side				
Unit ID	User	Token	IP	Port
BALE	BALEEXTA	BALEEXTA	162.120.42.166	18199
FEED 1	FEEDEX1A	FEEDEX1A	162.120.42.166	18111
FEED 2	FEEDEX2A	FEEDEX2A	162.120.42.166	18112
FEED 3	FEEDEX3A	FEEDEX3A	162.120.42.166	18113
FEED 4	FEEDEX4A	FEEDEX4A	162.120.42.166	18114
FEED 5	FEEDEX5A	FEEDEX5A	162.120.42.166	18115
B Side				
Unit ID	User	Token	IP	Port
BALE	BALEEXTB	BALEEXTB	162.120.42.180	18199
FEED 1	FEEDEX1B	FEEDEX1B	162.120.42.180	18111
FEED 2	FEEDEX2B	FEEDEX2B	162.120.42.180	18112
FEED 3	FEEDEX3B	FEEDEX3B	162.120.42.180	18113
FEED 4	FEEDEX4B	FEEDEX4B	162.120.42.180	18114
FEED 5	FEEDEX5B	FEEDEX5B	162.120.42.180	18115

User Acceptance Testing				
	A Side			
Unit ID	User	Token	IP	Port
BALE	BALEEXTA	BALEEXTA	162.120.43.22	18199
FEED 1	FEEDEX1A	FEEDEX1A	162.120.43.22	18111
FEED 2	FEEDEX2A	FEEDEX2A	162.120.43.22	18112
FEED 3	FEEDEX3A	FEEDEX3A	162.120.43.22	18113
FEED 4	FEEDEX4A	FEEDEX4A	162.120.43.22	18114
FEED 5	FEEDEX5A	FEEDEX5A	162.120.43.22	18115
	B Side			
Unit ID	User	Token	IP	Port
BALE	BALEEXTB	BALEEXTB	162.120.43.30	18199
FEED 1	FEEDEX1B	FEEDEX1B	162.120.43.30	18111
FEED 2	FEEDEX2B	FEEDEX2B	162.120.43.30	18112
FEED 3	FEEDEX3B	FEEDEX3B	162.120.43.30	18113
FEED 4	FEEDEX4B	FEEDEX4B	162.120.43.30	18114
FEED 5	FEEDEX5B	FEEDEX5B	162.120.43.30	18115

5.3 SILO Snapshot Service

Production				
	A Side			
Unit ID	User	Token	IP	Port
FEED 1	FEXTSA11	FEXTSA11	162.120.42.133	18121
FEED 2	FEXTSA12	FEXTSA12	162.120.42.133	18122
FEED 3	FEXTSA13	FEXTSA13	162.120.42.133	18123
FEED 4	FEXTSA14	FEXTSA14	162.120.42.133	18124
FEED 5	FEXTSA15	FEXTSA15	162.120.42.133	18125
	B Side			
Unit ID	User	Token	IP	Port
FEED 1	FEXTSB11	FEXTSB11	162.120.43.102	18121
FEED 2	FEXTSB12	FEXTSB12	162.120.43.102	18122
FEED 3	FEXTSB13	FEXTSB13	162.120.43.102	18123
FEED 4	FEXTSB14	FEXTSB14	162.120.43.102	18124
FEED 5	FEXTSB15	FEXTSB15	162.120.43.102	18125

Disaster Recovery				
	A Side			
Unit ID	User	Token	IP	Port
FEED 1	FEXTSC11	FEXTSC11	162.120.42.180	18121
FEED 2	FEXTSC12	FEXTSC12	162.120.42.180	18122
FEED 3	FEXTSC13	FEXTSC13	162.120.42.180	18123
FEED 4	FEXTSC14	FEXTSC14	162.120.42.180	18124
FEED 5	FEXTSC15	FEXTSC15	162.120.42.180	18125
	B Side			
Unit ID	User	Token	IP	Port
FEED 1	FEXTSD11	FEXTSD11	162.120.42.166	18121
FEED 2	FEXTSD12	FEXTSD12	162.120.42.166	18122
FEED 3	FEXTSD13	FEXTSD13	162.120.42.166	18123
FEED 4	FEXTSD14	FEXTSD14	162.120.42.166	18124
FEED 5	FEXTSD15	FEXTSD15	162.120.42.166	18125

User Acceptance Testing				
Unit ID	User	Token	IP	Port
FEED 1	FEXTSI11	FEXTSI11	162.120.43.22	18121
FEED 2	FEXTSI12	FEXTSI12	162.120.43.22	18122
FEED 3	FEXTSI13	FEXTSI13	162.120.43.22	18123
FEED 4	FEXTSI14	FEXTSI14	162.120.43.22	18124
FEED 5	FEXTSI15	FEXTSI15	162.120.43.22	18125

6. Network Access Caveats

- In order to maintain fair and orderly markets, TXSE reserves the right to shut down, without notice, any connection to the Exchange (including logical ports) which disrupts normal exchange operations.
- TXSE reserves the right to capture traffic traversing firms' physical ports for troubleshooting or other purposes.
- TXSE reserves the right to filter inbound and outbound traffic and/or route advertisements on firm physical ports to prevent unnecessary or unauthorized traffic from entering TXSE's network.