
ACL Logical Diagram

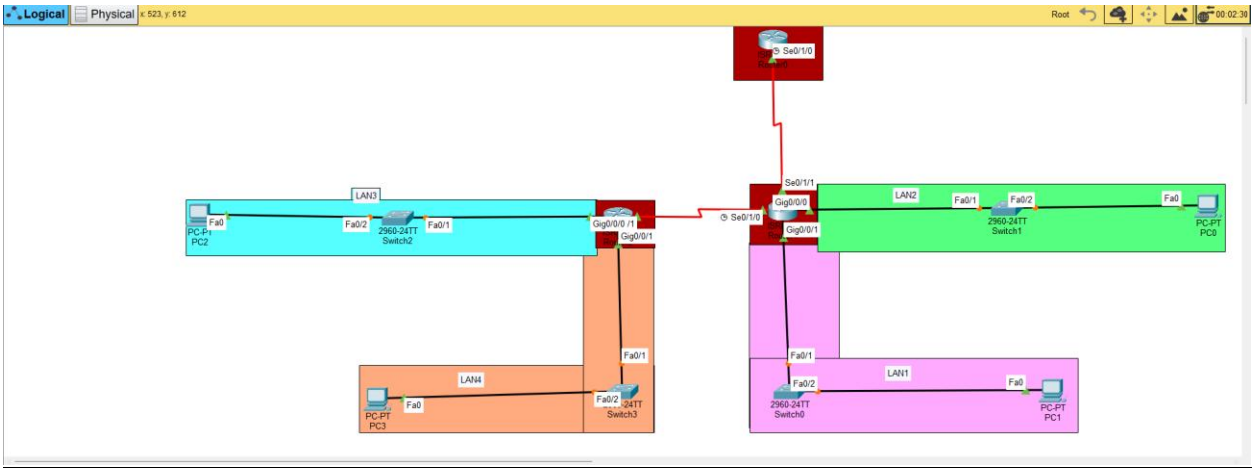

IP Addressing

Router	Interface	IP Address	Subnet Mask	Connected Network
R0_AnupRaj7985	Serial0/1/0	10.0.0.1	255.255.255.252	Point-to-Point Serial Link 1 (to R1 Se0/1/1)
R1_AnupRaj7985	Serial0/1/1	10.0.0.2	255.255.255.252	Point-to-Point Serial Link 1 (to R0 Se0/1/0)
R1_AnupRaj7985	Serial0/1/0	10.0.0.6	255.255.255.252	Point-to-Point Serial Link 2 (to R2 Se0/1/1)
R1_AnupRaj7985	GigabitEthernet0/0/1	192.168.10.1	255.255.255.0	Default Gateway for LAN 1
R1_AnupRaj7985	GigabitEthernet0/0/0	192.168.20.1	255.255.255.0	Default Gateway for LAN 2
R2_AnupRaj7985	Serial0/1/1	10.0.0.5	255.255.255.252	Point-to-Point Serial Link 2 (to R1 Se0/1/0)
R2_AnupRaj7985	GigabitEthernet0/0/0	192.168.30.1	255.255.255.0	Default Gateway for LAN 3
R2_AnupRaj7985	GigabitEthernet0/0/1	192.168.40.1	255.255.255.0	Default Gateway for LAN 4

End Hosts (PCs) IP Addressing

Host Name	Network	IP Address	Subnet Mask	Default Gateway
PC1	LAN 1	192.168.10.10	255.255.255.0	**192.168.10.1**
PC0	LAN 2	192.168.20.10	255.255.255.0	**192.168.20.1**
PC2	LAN 3	192.168.30.10	255.255.255.0	**192.168.30.1**
PC3	LAN 4	192.168.40.10	255.255.255.0	192.168.40.1


o Configured ACL statements. o Justification of ACL placement


116	Router2	R2_AnupRaj7985(config)#	access-list 10 deny 192.168.10.0 0.0.0.255	access-list 10 deny 192.168.10.0 0.0.0.255
117	Router2	R2_AnupRaj7985(config)#	access-list 10 permit any	access-list 10 permit any
118	Router2	R2_AnupRaj7985(config)#	interface GigabitEthernet0/0/0	interface GigabitEthernet0/0/0
119	Router2	R2_AnupRaj7985(config-if)#	ip access-group 10 out	ip access-group 10 out
120	Router2	R2_AnupRaj7985(config-if)#	exit	exit
121	Router2	R2_AnupRaj7985(config)#	access-list 20 deny host 192.168.20.10	access-list 20 deny host 192.168.20.10
122	Router2	R2_AnupRaj7985(config)#	access-list 20 permit any	access-list 20 permit any
123	Router2	R2_AnupRaj7985(config)#	interface GigabitEthernet0/0/1	interface GigabitEthernet0/0/1
124	Router2	R2_AnupRaj7985(config-if)#	ip access-group 20 out	ip access-group 20 out
125	Router2	R2_AnupRaj7985(config-if)#	exit	exit

```
R2_AnupRaj7985#show ip access-lists
Standard IP access list 10
    10 deny 192.168.10.0 0.0.0.255 (2 match(es))
    20 permit any
Standard IP access list 20
    10 deny host 192.168.20.10
    20 permit any (2 match(es))

R2_AnupRaj7985#show ip interface GigabitEthernet0/0/0 | include access list
  Outgoing access list is 10
  Inbound  access list is not set
R2_AnupRaj7985#show ip interface GigabitEthernet0/0/1 | include access list
  Outgoing access list is 20
  Inbound  access list is not set
R2_AnupRaj7985#show running-config | include (interface|access-group|access-list)
interface GigabitEthernet0/0/0
 ip access-group 10 out
interface GigabitEthernet0/0/1
 ip access-group 20 out
interface GigabitEthernet0/0/2
interface Serial0/1/0
interface Serial0/1/1
access-list 10 deny 192.168.10.0 0.0.0.255
access-list 10 permit any
access-list 20 deny host 192.168.20.10
access-list 20 permit any
R2_AnupRaj7985#
```

Before ACL

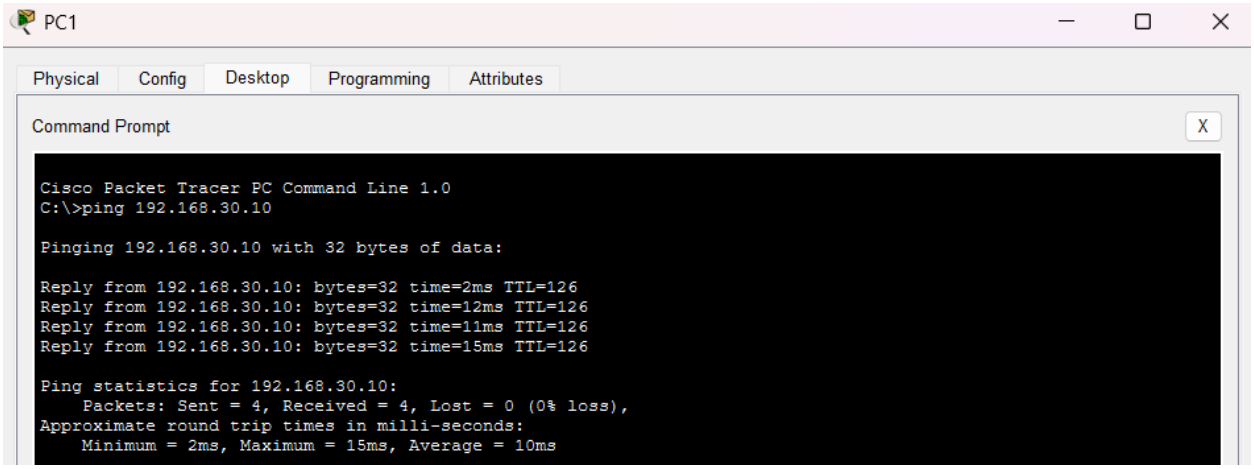

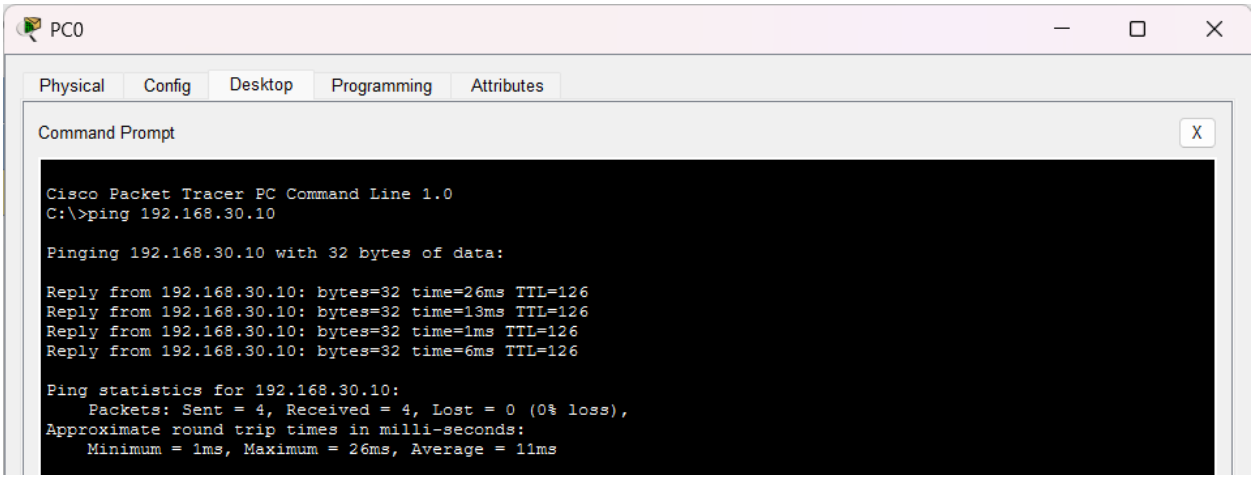

After ACL

