Modal Presentation

	- iPhone 6 - iPhone 6 / iOS 8.1 (12B41)	1)
Carrier 🗢	9:35 AM	
Show Modal		
-0		


Present a Modal


```
@IBAction func showBlueVC(sender: AnyObject) {
    if let vc = self.storyboard?.instantiateViewControllerWithIdentifier("BlueViewController")
        as? UIViewController {
        self.presentViewController(vc as UIViewController , animated: true, completion: nil)
    }
}
```


Dismiss a Modal


```
@IBAction func dismissAction(sender: AnyObject) {
    self.dismissViewControllerAnimated(true, completion: nil)
}
```

UITabBarController

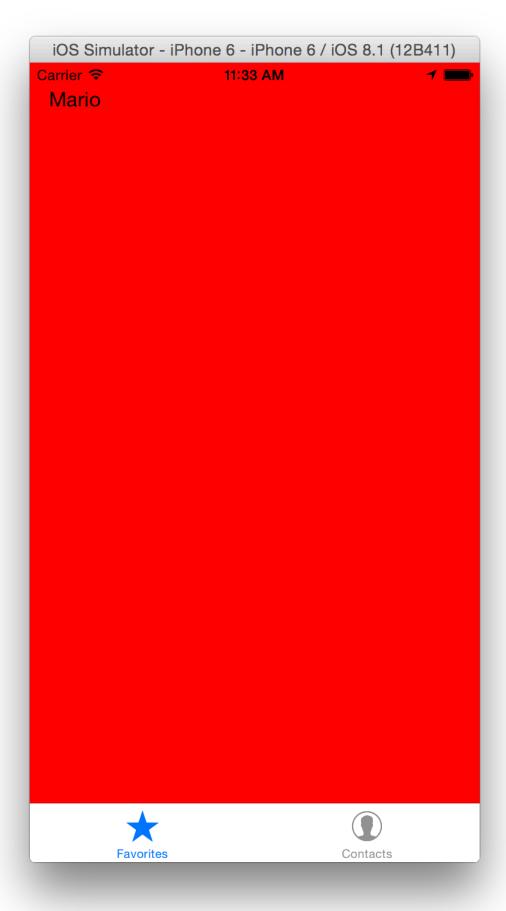

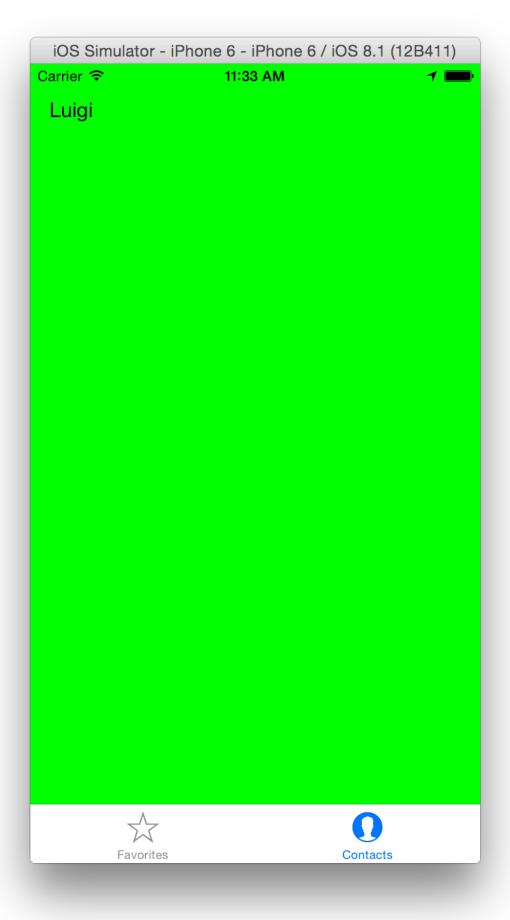

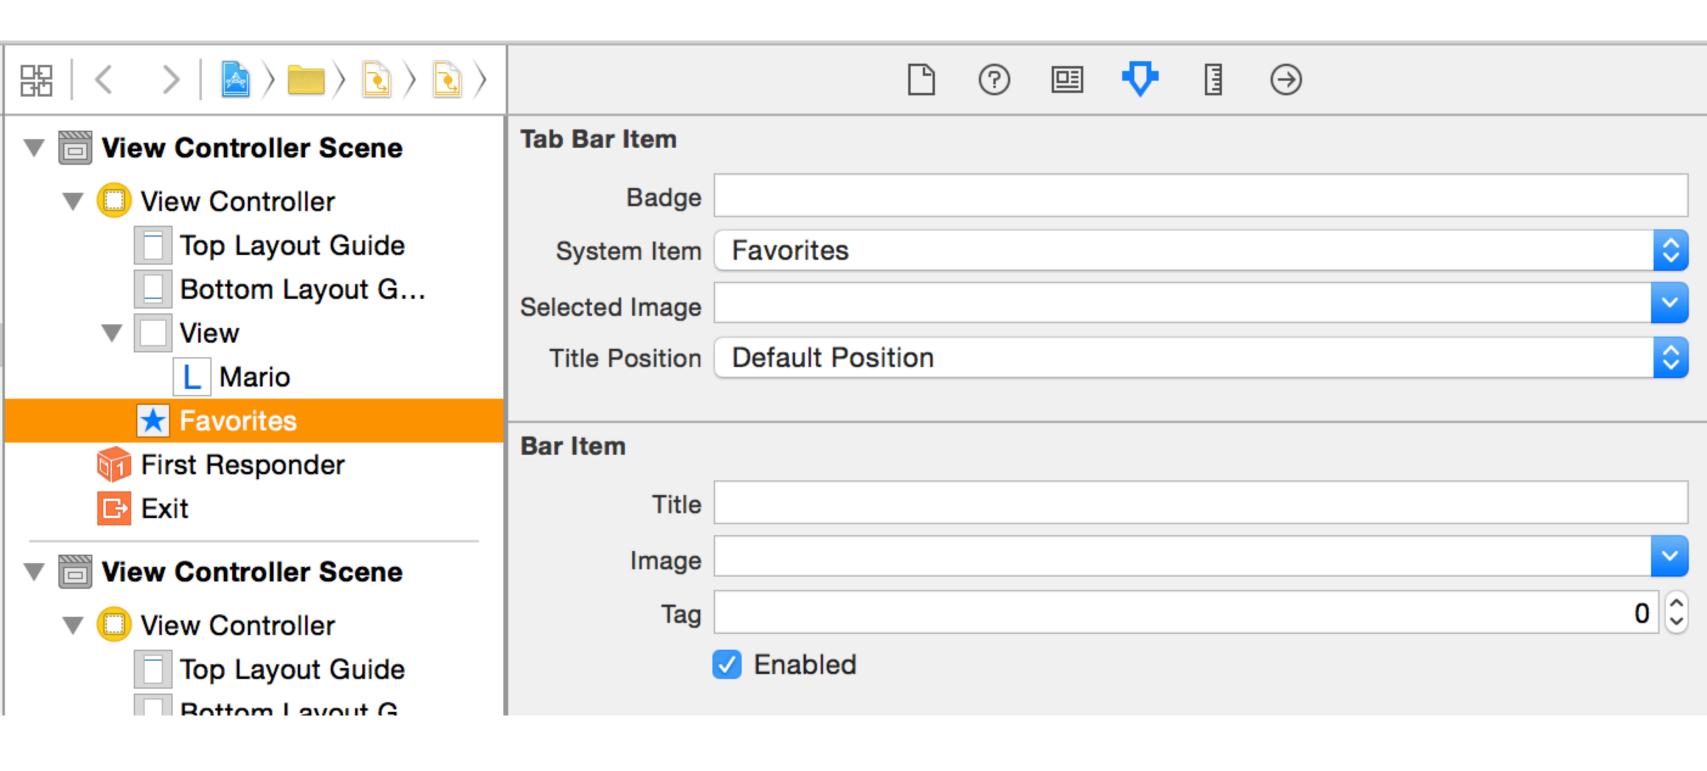

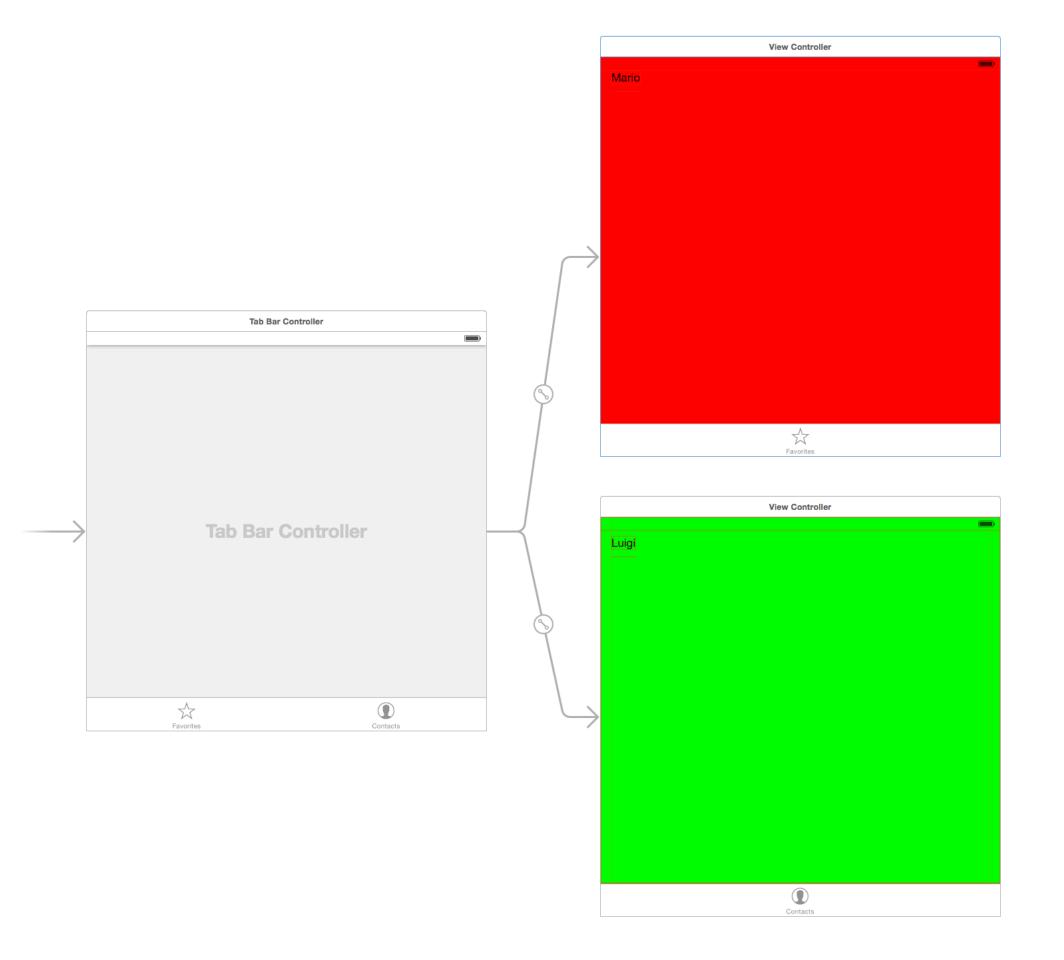

UlNavigationController


iOS Simulator - iPhone 6 - iPhone 6 / iOS 8.1 (12B411)


Carrier

11:39 AM

✓

View Menu

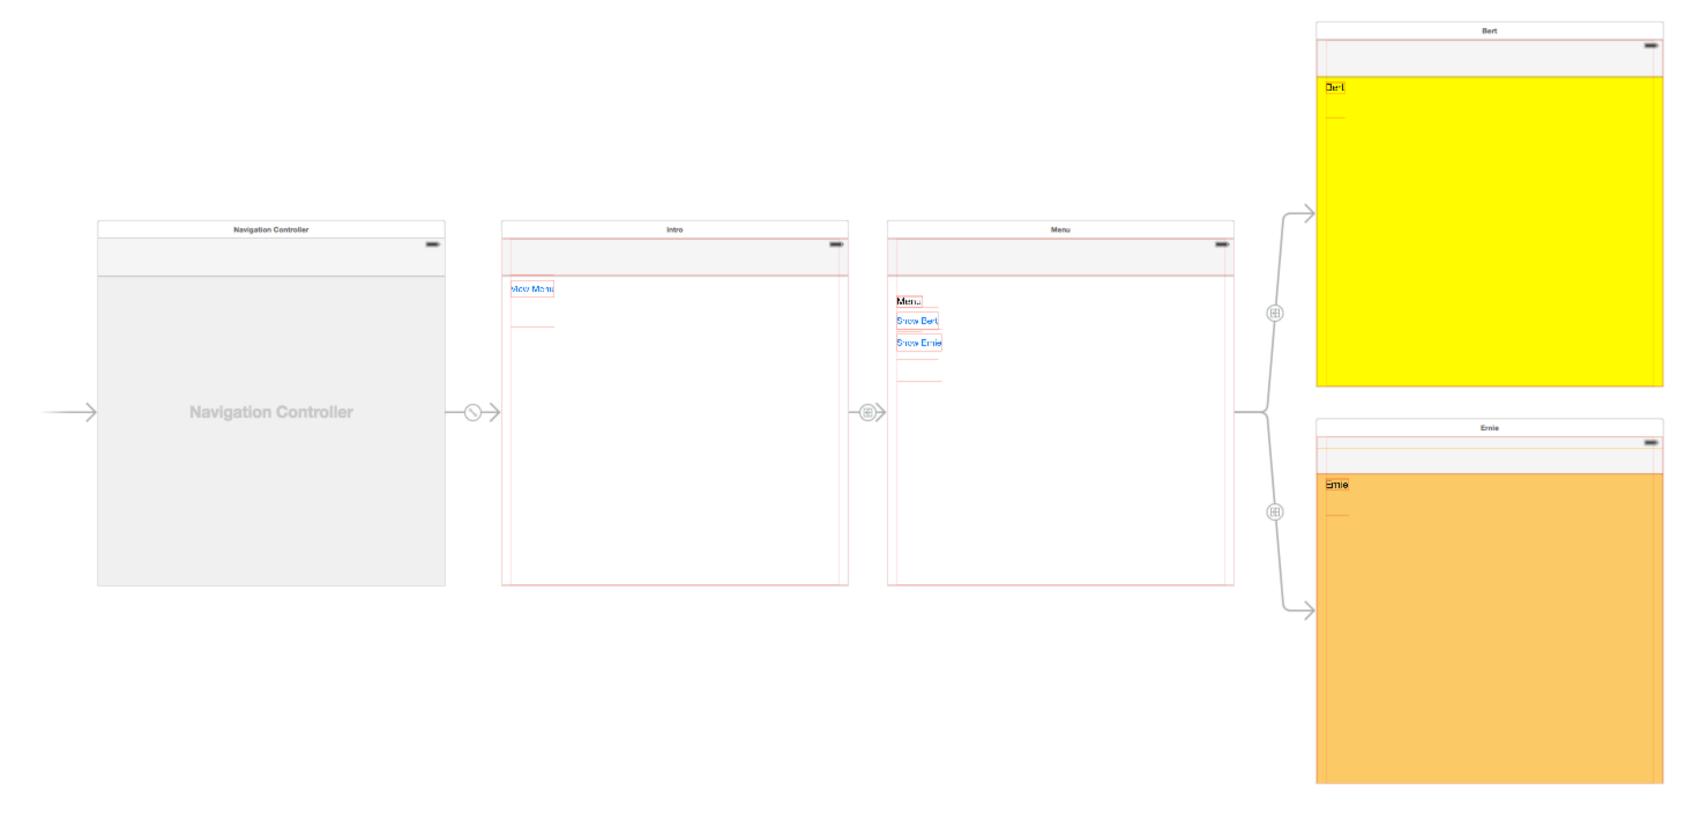

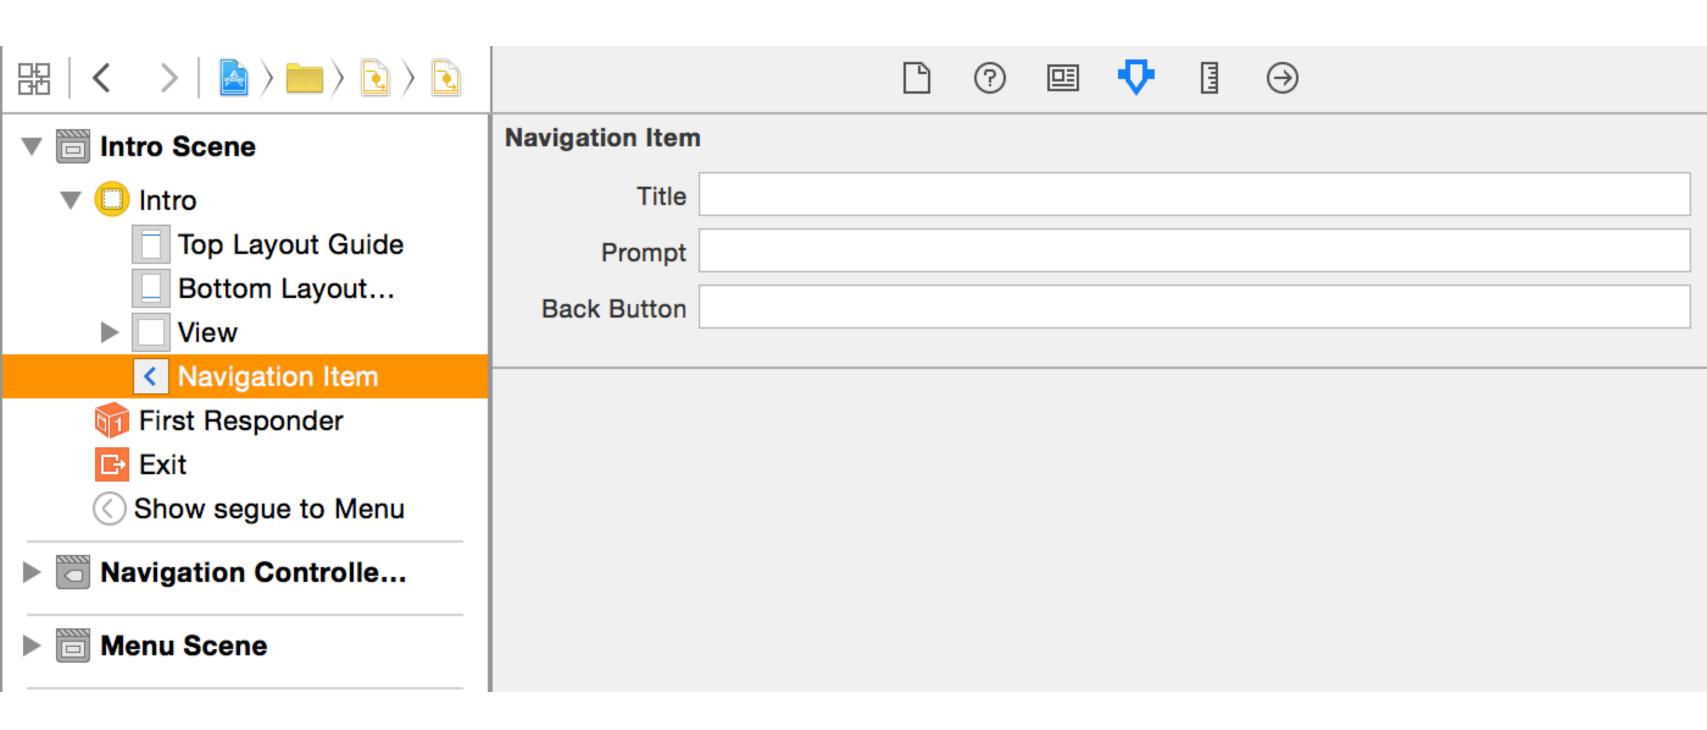

Pushing and Popping in code

```
func pushViewController(_ viewController: UIViewController, animated animated: Bool)
func popViewControllerAnimated(_ animated: Bool) -> UIViewController?
```

Challenge

In the Navigation Controller sample we just wrote, create a view controller class to back up Bert or Ernie. Add a button to bert or ernie that when tapped jump the navigation controller stack back to the first view controller show.

There is a property on view controller that can help you access the navigationController it is inside. There is also a method on navigation controller that can help you "pop to root".

Don't be afraid to look in the docs.